

TooQ TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower **Case Instruction Manual**

Home » TooQ » TooQ TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower Case Instruction Manual



Contents


- 1 TooQ TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower Case
- **2 OVERVIEW**
- **3 Product Information**
- **4 Product Usage Instructions**
- **5 INSTRUCTION**
- 6 Documents / Resources
 - **6.1 References**
- **7 Related Posts**




TooQ TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower Case



OVERVIEW

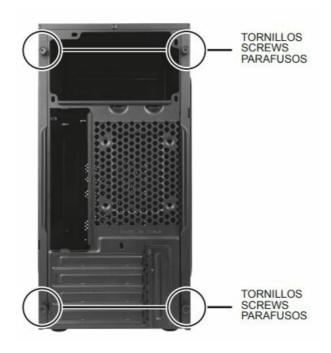

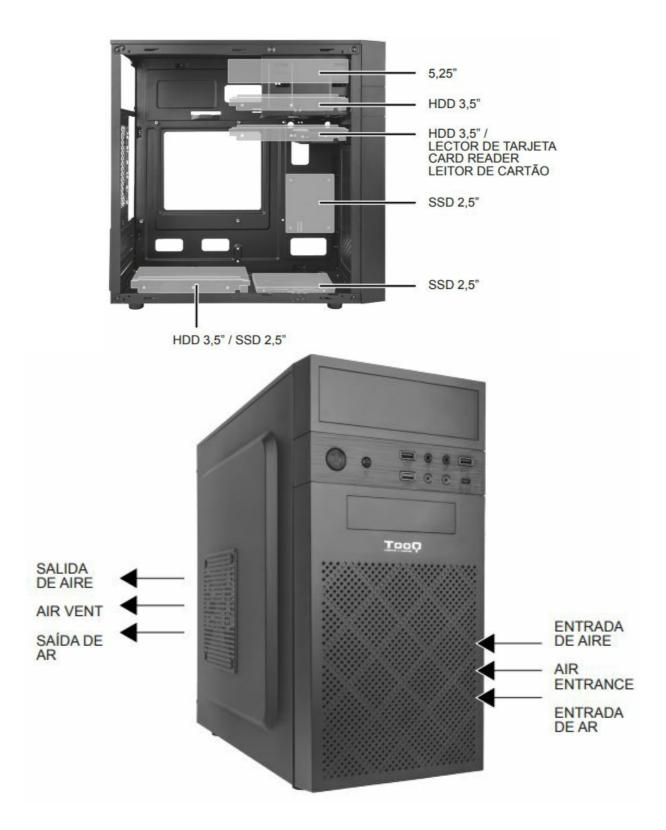

Product Information

Product Name: MinitorreForm Factor: Micro-ATX

• Model Number: TQC-4701U3C-B

· Manufacturer: Tooq

• Website: www.tooq.com

Product Usage Instructions

1. To remove the side panels, unscrew the screws at the rear and slide the panels out.

- 2. You can install up to 2 x 3.5 hard disks in the available slots. Align the holes of the hard disk and secure them with the 4 screws.
- 3. You can install up to 3 x 2.5 hard disks in the available slots. Align the holes of the hard disk and secure them with the 4 screws.
- 4. You can install a 5.25 hard disk by aligning the holes of the hard disk and securing them with the 4 screws.
- 5. A card reader can be installed on the front.

INSTRUCTION

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Product color and bundled software versions are subject to change without notice. Brand and product names mentioned are trademarks of their respective companies.

- 1. To remove the side panels, unscrew the screws at the rear and slide the panels out.
- 2. You can install up to 2 x 3.5" hard disks in the available slots. By aligning the holes of the hard disk and securing them with the 4 screws.
- 3. You can install up to 3 x 3.5" hard disks in the available slots.

 By aligning the holes of the hard disk and securing them with the 4 screws.
- 4. You can install a 5.25" hard disk by aligning the holes of the hard disk and securing them with the 4 screws
- 5. A card reader can be installed on the front.
- 6. Ventilation system
 - Front: 1 x 120 mm (including 4 pin MOLEX).
 - Side: 1 x 120 mm (not included).
 - Rear: 1 x 80 mm (not included).

Supports CPU cooler up to 145mm in height.

Support GPU max 310mm long.

7. Front USB I/O connectors

2 x USB3.0 / 1 x USB2.0 / HD Audio / Card Reader.

Manuals available at: www.toog.com

Documents / Resources



TooQ TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower Case [pdf] Instruction Manual TQC-4701U3C-B, TQC-4701U3C-B Micro ATX and Mini ITX Mini Tower Case, Micro ATX and Mini ITX Mini Tower Case, Mini ITX Mini Tower Case, Case

References

 • ☐ TooQ Technology

Manuals+,