



Home » TOP-TECH » TOP-TECH HZ-LY22BUV1.0 High Performance Integrated Wireless and Bluetooth Module User Manual 75


Contents [hide]

- 1 TOP-TECH HZ-LY22BUV1.0 High Performance Integrated Wireless and Bluetooth Module
- 2 General Specifications
- 3 System Block Diagram
- 4 Module configurations
- **5 CAD DIMENSIONS**
- 6 Pin definition
- 7 Matters Need Attention
- 8 FCC Statement
- 9 Frequently Asked Questions
- 10 Documents / Resources
 - 10.1 References

TOP-TECH

TOP-TECH HZ-LY22BUV1.0 High Performance Integrated Wireless and Bluetooth Module





General Specifications

- HZ-LY22BUV1.0 is a high-performance integrated wireless and Bluetooth module with USB 2.0 interface. It is based on Realtek RTL8822CU-VB-CG. It supports IEEE802.11 a/b/g/n/ac and BT5.0. It also support 2T2R MIMO.
- The module MAC supports 802.11e for multimedia applications, 802.11i and WAPI for security, and 802.11n/802.11ac for enhanced MAC protocol efficiency.

WIFI Specifications

Protocol	IEEE 802.11 a/b/g/n/ac		
Interface	USB 2.0		
Bandwidth	20/40/80 MHz		
	802.11b(2.4G 11M): 17±2dBm @ EVM<-20dB;		
2.4G	802.11g(2.4G 54M): 15±2dBm @ EVM<-28dB;		
Transmit Power	802.11n (2.4G HT20 MCS7): 14±2dBm @ EVM<-28dB;		
	802.11a(5G 54M): 15±2dBm @ EVM<-28dB;		
5G	802.11n (5G HT20 MCS7): 14±2dBm @ EVM<-28dB;		
Transmit Power	802.11n (5G HT40 MCS7): 14±2dBm @ EVM<-28dB;		
	802.11ac (5G VHT20 MCS8): 13±2dBm @ EVM<-30dB;		
	802.11ac (5G VHT40 MCS9): 12±2dBm @ EVM<-32dB;		
	802.11ac (5G VHT80 MCS9): 12±2dBm @ EVM<-32dB.		
Frequency Error	<±20ppm/802.11 a/b/g/n/ac		
2.4G	802.11b(2.4G 1M): -95dBm,typical;		

Receive Sensitiv ity	802.11b(2.4G 11M): -85dBm,typical;		
@ PER<10%	802.11g(2.4G 6M): -89dBm,typical;		
	802.11g(2.4G 54M): -75dBr	m,typical;	
	802.11n (2.4G HT20 MCS0) -88dBm,typical;		
	802.11n (2.4G HT20 MCS7): -72dBm,typical;		
	802.11n (2.4G HT40 MCS0):	-88dBm,typical;	
	802.11n (2.4G HT40 MCS7):	-69dBm,typical.	
5G	802.11g (5G 6M):	-88dBm, typical;	
Receive Sensitiv ity	802.11g (5G 54M):	-74dBm, typical;	
@ PER<10%	802.11n (5G HT20 MCS0):	-88dBm, typical;	
	802.11n (5G HT20 MCS7):	-72dBm, typical;	
	802.11n (5G HT40 MCS0):	-88dBm, typical;	
	802.11n (5G HT40 MCS7):	-69dBm, typical;	
	802.11ac (5G VHT20 MCS0):	-89dBm, typical;	
	802.11ac (5G VHT20 MCS8):	-67dBm, typical;	
	802.11ac (5G VHT40 MCS0):	-87dBm, typical;	
	802.11ac (5G VHT40 MCS9):	-64dBm, typical;	
	802.11ac (5G VHT80 MCS0):	-85dBm, typical;	
	802.11ac (5G VHT80 MCS9):	-60dBm, typical.	


BT Specifications

Protocol	BTv2.1+EDR/BTv3.0/BTv3.0+HS/BT v5.0	
Interface	USB2.0	
Frequency	2400 MHz ~ 2483.5 MHz (79 channels)	
Modulation	GFSK,π/4-DQPSK, 8-DPSK	
PHY Rate	1Mbps for Basic Rate; 2 3 Mbps for Enhance Data Rate; 1 2 Mbps for BLE	
PHY Rate Trans mit Power	6dBm, typical	
Receive Sensitiv	<-89dBm @ BER=0.1% for GFSK (1Mbps); <-86dBm @ BER=0.01% for π/4-DQPSK (2Mbps); <-83dBm @ BER=0.01% for 8-DPSK (3Mbps); <-90dBm @ PER=30.8% forBLE	
Maximum Input I evel	GFSK(1Mbps):-20dBm; π/4-DQPSK(2Mbps): -20dBm; 8-DPSK(3Mbps):-20dBm.	

Power specifications

Symbol	Parameter	Min.	Typical	Max.	Unit
VDD_3.3V	3.3V Supply Voltage	3.0	3.3	3.6	V
VDD_3.3V	3.3V Rating Current	1	_		Α

System Block Diagram

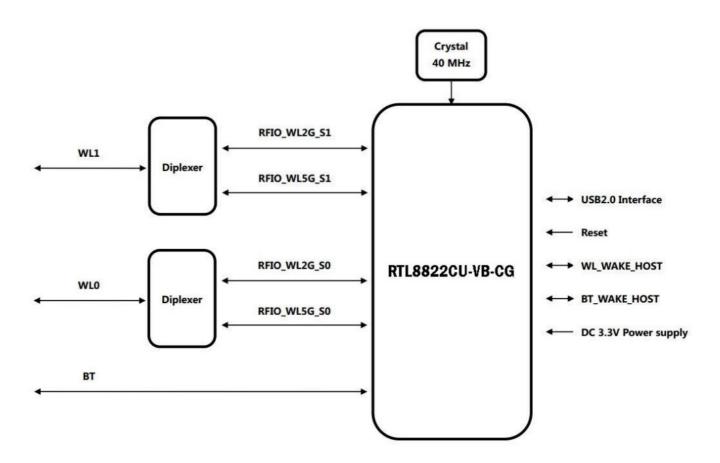

Module configurations

All of pictures below are only for reference. Please take the actual objects as a standard.




*The silk-screen at the bottom of the module is produced and controlled by the PCB supplier, and the silk-screen may vary among different board factories.

CAD DIMENSIONS


• PCB thickness 1.0mm

• Module overall thickness: 2.6 mm

• With buckle thickness: 3.4 mm

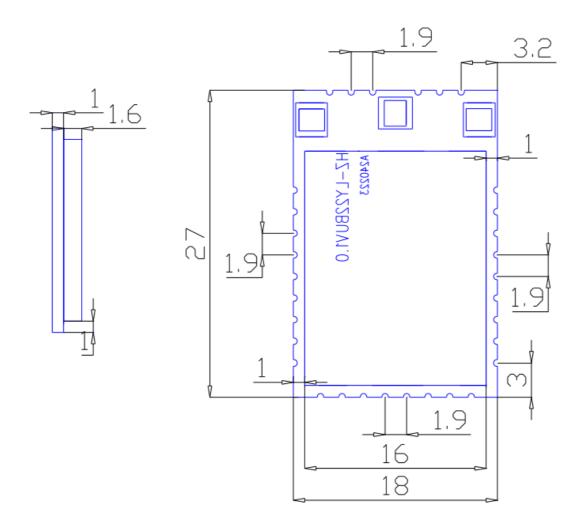

Pin definition

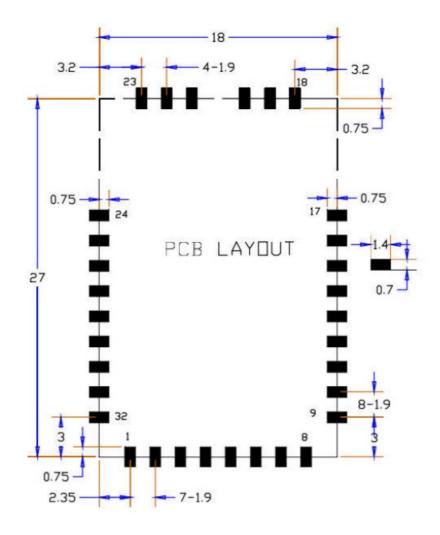

PIN	SYMBOL	DESCRIPTION	TYPE
1	NC	Not Connect	1
2	NC	Not Connect	1
3	NC	Not Connect	1
4	NC	Not Connect	1
5	GND	GND	1
6	WL_USB_DP	USB D+	I/O
7	WL_USB_DN	USB D-	I/O
8	GND	GND	/

9	NC	Not Connect	/
10	NC	Not Connect	/
11	GND	GND	/
12	NC	Not Connect	/
13	GND	GND	/
14	BT_WAKE_HOS T	BT CHIP WAKES UP HOST	0
15	HOST _WAKE_BT	HOST WAKES UP BT CHIP	I
16	NC	Not Connect	/
17	NC	Not Connect	/

16	NC	Not Connect	/
17	NC	Not Connect	1
18	GND	GND	1
19	NC	Not Connect	1
20	GND	GND	1
21	GND	GND	1
22	NC	Not Connect	/
23	GND	GND	/
24	GND	GND	/
25	GND	GND	/

26	WLAN_WAKE_HO ST	WLAN CHIP WAKES UP HOST	0
27	NC	Not Connect	/
28	CHIP_EN	Shutdown CHIP Internal 47K Ω pull up to 3.3V low level active	1
29	GND	GND	/
30	VDD33	3.3V	1
31	GPIO5	General Purpose Input/Output Pin	I/O
32	GND	GND	/

Matters Need Attention

- * Storage period of vacuum packaging module:
- 1. Storage period: 12 months, storage environment conditions: temperature: <40°C, relative humidity: <90%R.H.
- 2. After the module packaging is removed, the SMT assembly time limit:
- 3. Check the humidity card: the displayed value should be less than 30% (blue), such as: 30% to 40%(pink) or greater than 40%(red) indicates that the module has absorbed moisture.
 - 1. Factory ambient temperature and humidity control: ≤30%°C, ≤60% R.H.
 - 2. After unpacking, the storage life of the workshop is 168 hours.
- 4. If it is not used within 168 hours after unpacking, it needs to be baked, and the baking conditions are as follows:
 - 1. The module must be re-baked to remove the module moisture absorption problem.
 - 2. Baking temperature: 125°C, 8 hours.
 - 3. After baking, put appropriate amount of desiccant and seal the package.

5. The number of vacuum packaging modules shall be subject to the actual number of packaging required by customers.

Note: The above packing method is subject to the customer's requirements, and the packing is subject to actual shipment.

FCC Statement

FCC Modular Usage Statement

The requirement for KDB 996369 D03:

List of applicable FCC rules

FCC CFR Title 47 Part 15 Subpart C Section 15.247 and 15.407

Summarize the specific operational use conditions

The module has been certified for Fix, Mobile, Portable applications. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Limited module procedures

Not applicable

Trace antenna designs

Not applicable

RF exposure considerations

This modular complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This modular must be installed and operated with a minimum distance of 20 cm between the radiator and user body.

Antennas

The antenna is permanently attached,

BT

Antenna Type: Copper tube Antenna

• Antenna gain: 1.86dBi

WIFI

• Antenna Type: Double copper tube Antenna

• Antenna gain: WIFI 2.4G ANT: 2.31dBi

• WIFI 5G ANT: 2.52dBi @Band I, 3.51dBi @Band II-2A, 5.57dBi @Band II-2C

4.61dBi@Band III

Label and compliance information

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1. this device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed andused in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains Transmitter Module FCC ID: 2BGY7-HZ01"

Information on test modes and additional testing requirements

The modular transmitter is only FCC authorized for the specific rule parts (FCC Part 15.247) list on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed when contains digital circuity.

Additional testing, Part 15 Subpart B disclaimer

When testing host product, the host manufacturer should follow FCC KDB Publication 996369 D04 Module Integration Guide for testing the host products. The host manufacturer may operate their product during the measurements.

Frequently Asked Questions

- Q: How do I update the drivers for the HZ-LY22BUV1.0 module?
 - A: You can visit the manufacturer's website or use driver update software to ensure you have the latest drivers installed for optimal performance.
- Q: Can I use this module with both Windows and Mac operating systems?
 - A: Yes, the HZ-LY22BUV1.0 module is compatible with both Windows and Mac operating systems, provided the necessary drivers are installed.
- Q: What is the range of the wireless signal for this module?

A: The range of the wireless signal may vary depending on environmental factors,
 but typically, it can cover a standard home or office space effectively.

Documents / Resources



TOP-TECH HZ-LY22BUV1.0 High Performance Integrated Wireless and B

luetooth Module [pdf] User Manual

HZ-LY22BUV1.0 High Performance Integrated Wireless and Bluetooth Module, HZ-LY22BUV1.0, High Performance Integrated Wireless and Bluetooth Module, Integrated Wireless and Bluetooth Module, Wireless and Bluetooth Module, Bluetooth Module, Module

References

- User Manual
- TOP-TECH

Email

▶ Bluetooth Module, High Performance Integrated Wireless and Bluetooth Module, HZ-LY22BUV1.0, HZ-LY22BUV1.0 High Performance Integrated Wireless and Bluetooth Module, Integrated Wireless and Bluetooth Module, Module, TOP-TECH, Wireless and Bluetooth Module

Leave a comment

Your email address will not be published. Required fields are marked*				
Comment *				
Name				

Website		

Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.