

ToSee SAS-695WB Battery WiFi Camera User Guide

Home » ToSee » ToSee SAS-695WB Battery WiFi Camera User Guide 1






Battery WiFi Camera Quick Operation Guide

*Please read the Quick Operation Guide carefully before using the product and keep it properly. NO.006


Contents

- 1 Appearance Introduction
- **2 Installation Instructions**
- 3 Feature
- **4 Device Connection**
- **5 Technical Parameters**
- 6 Q&A
- 7 Documents / Resources
- **8 Related Posts**

Appearance Introduction

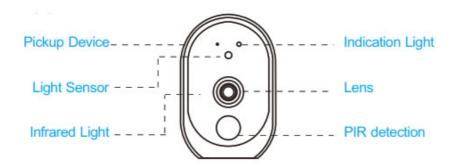


Name	Description
Infrared Light	When the ambient light is not enough, enable the infrared light to increase the brightness of the environment
Light Se nsor	Used for collecting the ambient brightness value; when the illumination is below 2Lux, enable the inf rared light
Pickup D evice	Used for collecting the environment sound and the voice intercom
PIR dete ction	When the human body moves in front of the device, it can generate a trigger signal to the mobile ph one
Lens	Used for collecting the image video
Indicatio n Light	Red Light Flashing Slowly: System waits for WiFi configuration Blue Light Flashing Slowly: System is in normal working condition Red and Blue Lights Flashing Alternately: System WiFi connection faile

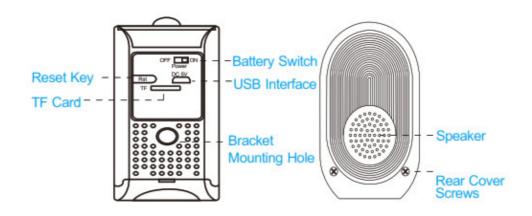

Name	Description
Reset Key	Device working status; press and hold for 5 seconds to restore factory settings
TF Card	Install the TF card to support local video
The Battery Switch	Turn off and turn on the device battery power through the switch key
USB Interface	Charge the device battery through the USB interface
Bracket Mounting Hol e	Mounting on the wall using accessory brackets
Speaker	Used for sending system alert tones and the voice intercom
Rear Cover Screws	Install the battery to power the device by opening the rear cover

Installation Instructions

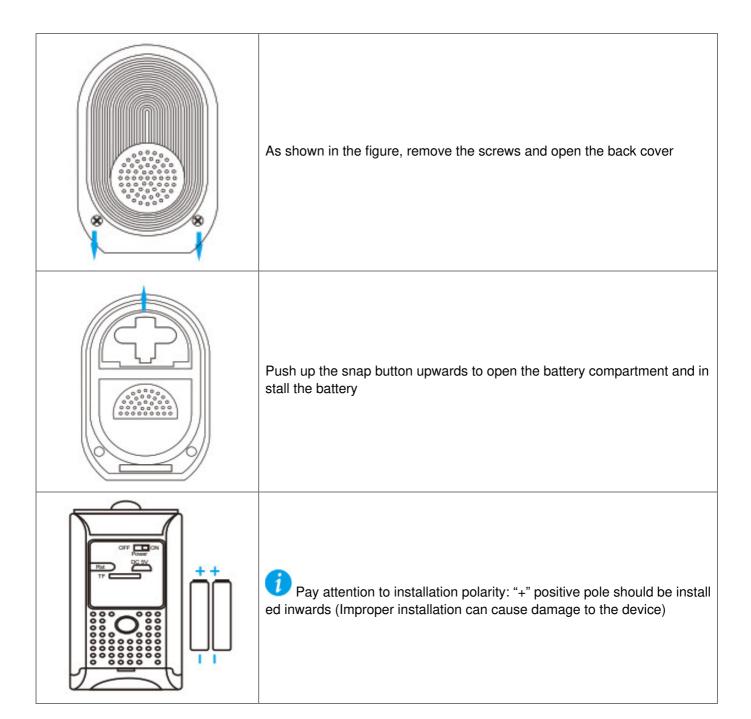

Installation:

- 1. The human body induction effective distance is 3-5 meters, so please adjust the monitoring angle according to the actual situation.
- 2. Please avoid the installation position where the temperature changes too much, such as heat source, airoutlet, etc. which will cause frequent alarms to the device.

Alarm Adjustment: The device defaults 10 seconds to trigger alarm. If you need to adjust the sensitivity, please go to the Device Settings page.

Feature

Image: Control of the	Two 3400mAh original 18650 batteries can be used for 2-3 months
HD	Full HD resolution
	Support the phone wake-up device
?	Support the 2.4G wireless connection
Q	Two-way Audio
文	Support the PIR human body infrared detection, when someone lingers in the doorway,immediatel y send alarm information to the smartphone APP
	ay and night mode switches automatically. The clear and distinct image will help to ensure the saf ety of you and your family

http://www.camapp365.com/tosee/battery-wifi-camera


Device Connection

1. Download "**Tosee**" in the mobile application market and open the APP software.(For a better user experience, please allow all notification permissions to avoid not getting notifications)



http://app.keeper.cn/yapi/api.php?op=appcodetosee


2. Click the + at the top right corner of the APP to add device, select Add Device and go to next step.

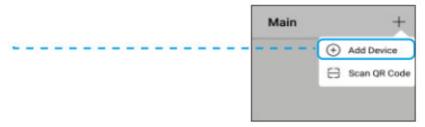

3. Enter the **WiFi** setting page of the mobile phone system according to the prompt. Connect the WIFI sent by the device **ToSee**, return to APPand continue to the **next step**.



4. On the **Network Configuration** page, fill in your home WiFi account and password, and start the configuration.

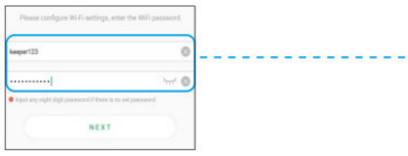

5. Set the device administrator password for sharing and management



6. Device added successfully, please change the name of the device.



If you need to reconfigure your WiFi network, press and hold the reset key for 5 seconds, The red light will flash slowly and you can follow the instructions again to connect

Technical Parameters

Visual Angle	Diagonal 104°
Infrared Light	850mm 6pcs
WIFI	Support 802.11b/g/n
Audio	Two-way intercom with echo cancellat
Video	TF card (15 seconds each time)
Storage	8G/16G/32G
Battery	2 pcs of 18650 batteries
Push	Speed Push in 2 Seconds
Wake-up Duration	Within 600ms
Wake-up Method	PIR human body induction wake-up Phone Active Wake-up
Power Consumption	Standby current 300uA Working current 250mA



It can be used for 2-3 months if working 30 minutes a day with 2 pcs of 18650 batteries (6800mAh).

Q&A

Q: The device cannot connect to WiFi.

A:

- 1. Please confirm that the wireless network to be connected is the 2.4G protocol
- 2. Make sure that the indication light is in the red light flashing slowlystate
- 3. Check if the account password is correct and whether there are extra spaces

Q: The device is online and there is a triggering event, but the phone does not receive push information.

A: Turn on the "Self-Starting" on APP and turn on the notification function on the "Apply Permissions", Turn off the "Battery Optimization" and aslo the "End the APP at Background and Reset Screen" (Different mobile phone manufacturers have different optimization methods, please refer to the actual situation)

Q: What power supply methods does the device support?


A:

- 1. The device can work alone with 18650 batteries
- 2. Possible to charge the device through USB

Q: What storage methods does the device support?

The device can use the TF card for video storage, or it can use the real-time recording and capture functions of the mobile phone for storage

Documents / Resources



<u>ToSee SAS-695WB Battery WiFi Camera</u> [pdf] User Guide SAS-695WB, Battery WiFi Camera

Manuals+,