Home » Support » A3002RU MAC filter settings

A3002RU MAC filter settings

Contents

- 1 A3002RU MAC filter settings
- 2 DOWNLOAD
- **3 Related Posts**

A3002RU MAC filter settings

It is suitable for: N100RE, N150RH, N150RT, N151RT, N200RE, N210RE, N300RT, N301RT, N300RH, N302R Plus, A702R, A850R, A3002RU

Application introduction: Solution about how to configure Wireless MAC Filtering on TOTOLINK router

STEP-1:

Connect your computer to the router by cable or wireless, then login the router by entering http://192.168.0.1 into the address bar of your browser.


5bda589a05f36.png

Note:The default access address varies depending on the actual situation. Please find it on the bottom label of the product.

STEP-2:

User Name and Password are required, by default both are admin in lowercase letter. Click LOGIN.


USER LOGIN



STEP-3:

Please go to Firewall ->MAC filtering page, and check which you have selected.


Select Deny list, then Input MAC Address you want to restrain, then Click Apply.

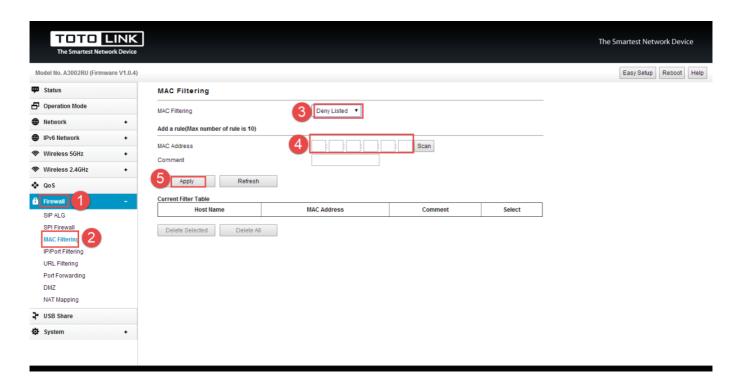

STEP-4:

Please go to Firewall ->MAC filtering page, and check which you have selected.

Select **Allow list**, then Input **MAC Address** you want to allow to surf the Internet and those you do not fill in will be restrained, then Click **Apply**.

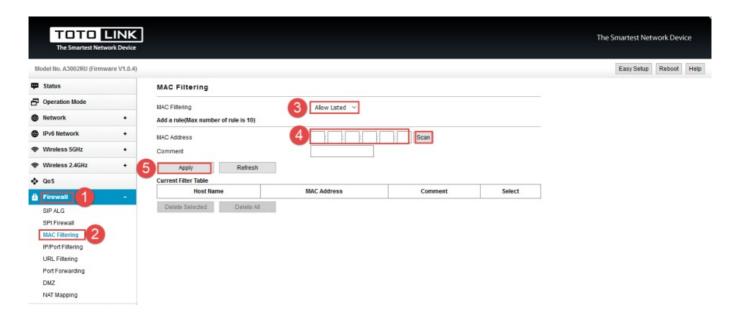

Note: You need add items in this way one by one.

A3002RU MAC filter settings – [Download PDF]							
∥anuals+,							