

How to change SSID of EX200

Contents

- [1 How to change SSID of EX200?](#)
- [2 Application introduction:](#)
- [3 Diagram](#)
- [4 Set up steps](#)
- [5 Download PDF](#)
- [6 Related Posts](#)


How to change SSID of EX200?

It is suitable for: **EX200**

Application introduction:

The wireless extender is a repeater (Wi-Fi signal amplifier), which relays a WiFi signal, expands the original wireless signal, and extends the WiFi signal to other places where there is no wireless coverage or where the signal is weak.

Diagram

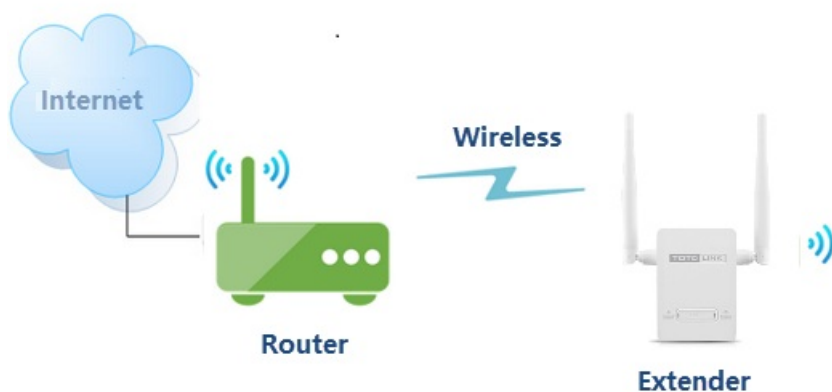

Set up steps

STEP-1 Configure the extension

Please reset the extender first by pressing the reset button/hole on the extender.

Connect to the extender's LAN port with a network cable from a computer network port (or to search for and connect the expander's wireless signal)

Note:

The default Wi-Fi Name and Password are printed on the Wi-Fi Info Card to connect to the extender.

STEP-2 Login to the management page

Open the browser, clear the address bar, enter **192.168.0.254** to the management page, Then check **Repeater Setting**.

STEP-3 View or modify the wireless parameters

Click ①Show,->②Choose your router's 2.4GHz SSID->③Enter your router's wireless password, ④Change the **SSID and password** for extended 2.4GHz wireless network, ⑤click **Connet**.

TOTO LINK

The Smartest Network Device

EX200 (Firmware V5.2.3c.6956)

Auto

Help

System Status

Repeater Setting

Management

Repeater Setting

This page is used to set repeater function.

Scan ①

Channel	Network Name(SSID)	MAC Address	Encryption	Signal	Mode
11	TOTOLINK_Emily	14:4D:67:41:1E:60	WPAPSK/WPA2PSK	High	B/G/N
13	TOTOLINK_T20	F4:28:53:72:8B:30	WPAPSK/WPA2PSK	High	B/G/N
3	iptime_357	70:5D:CC:AB:CD:0C	NONE	High	B/G/N
9	iptime_MT	64:E5:99:F4:23:74	WPAPSK/WPA2PSK	High	B/G/N
10	MAA01_A950RG	F4:28:53:D9:33:94	WPAPSK/WPA2PSK	Medium	B/G/N
11	future	F4:28:53:4F:1D:08	WPAPSK/WPA2PSK	Medium	B/G/N
11	TOTOLINK_4	F4:28:53:19:A5:FB	WPAPSK/WPA2PSK	Medium	B/G/N
10	TOTOLINK_5	F4:28:53:19:A6:1B	WPAPSK/WPA2PSK	Medium	B/G/N
6	totolink_jm	90:9F:33:93:20:50	WPAPSK/WPA2PSK	Medium	B/G/N
8	TOTOLINK_1	F4:28:53:19:A5:C3	WPAPSK/WPA2PSK	Medium	B/G/N
7	TOTOLINK_2	F4:28:53:19:A6:83	WPAPSK/WPA2PSK	Medium	B/G/N
1	TOTOLINK_A3002RH	14:4D:67:03:D8:1C	NONE	Medium	B/G/N

Copyright © 2018 TOTOLINK Ltd., All Rights Reserved

TOTO LINK

The Smartest Network Device

The Smartest Network Device

EX200 (Firmware V5.2.3c.6956)AutoHelp

System Status

Repeater Setting

Management

Repeater Setting

This page is used to set repeater function.

Network Name(SSID)

TOTOLINK_T20

Password

.....

3

☐ Keep SSID & Password of extended Wi-Fi the same as Primary Network

☒ Modify SSID & Password of extended Wi-Fi

Network Name(SSID)

TOTOLINK_EX200

Password

12345678

4

Back

Connect

5

change the SSID and Password

Copyright © 2018 TOTOLINK Ltd., All Rights Reserved

STEP-4 Extender position display

Move the Extender to a different location for a best Wi-Fi access.

Download PDF

How to change SSID of EX200 – [[Download PDF](#)]