



TOWODE 90dB Adjustable Audio Alarm Sensor User Manual

[Home](#) » [TOWODE](#) » TOWODE 90dB Adjustable Audio Alarm Sensor User Manual 

Contents

- [1 TOWODE 90dB Adjustable Audio Alarm Sensor](#)
- [2 Product Details](#)
- [3 Product Parameters](#)
- [4 Recharge batteries](#)
- [5 Warranty](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

TOWODE


TOWODE 90dB Adjustable Audio Alarm Sensor



Product Details



Product front

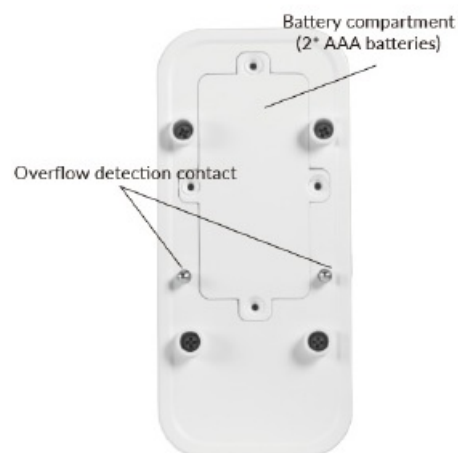

Product back

Please note

1. The Drip detection contact & Overflow detection contact will sound an alarm if it touches water, and the alarm will stop when the water is removed.
2. Temperature and humidity will affect the life of the battery, please try to keep the battery dry.

Product Parameters

Product Name	water flood detector
Operating voltage	DC3v
Standby power consumption	<2uA
Alarm power consumption	<70mA
Alarm volume	about 90dB
Operating temperature	0-70°(
Standby time	about two years
Product Size	99'43*26mm
Tigger mode Working hum dity	drip overflow ∴95% RH
Battery Model	AAA battery (two)
Product Weight/Net Weght	

Rechange batteries

1. Step 1

Remove the 4 outer screws and open the back cover.



2. Step 2

Replace 2 AAA batteries, pay attention to the \pm poles.



3. Step 3

Close the cover and install 4 screws .



Warranty

Thank you for purchasing TOWODE products, we will provide professional service. If the product has any defect within one month of receiving the goods, we promise to send you a new one for free. If you have any questions, please let us know and we will solve them for you. We promise to get back to you within 24 hours.

Documents / Resources



[TOWODE 90dB Adjustable Audio Alarm Sensor](#) [pdf] User Manual
90dB Adjustable Audio Alarm Sensor, Adjustable Audio Alarm Sensor, Audio Alarm Sensor, Alarm Sensor, Sensor

References

- [User Manual](#)