



# tp-link Smart Temperature and Humidity Monitor User Guide

[Home](#) » [tp-link](#) » tp-link Smart Temperature and Humidity Monitor User Guide 



## Contents

- [1 tp-link Smart Temperature and Humidity Monitor](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Smart Temperature and Humidity Monitor](#)
- [5 Appearance](#)
- [6 Indicator Icons](#)
- [7 Display/Reset Button](#)
- [8 Before You Start](#)
- [9 Power Up Your Monitor](#)
- [10 Set Up Your Monitor](#)
- [11 Test Your Monitor](#)
- [12 Place Your Monitor](#)
- [13 Documents / Resources](#)
  - [13.1 References](#)
- [14 Related Posts](#)

## tp-link Smart Temperature and Humidity Monitor



### Product Information

The Smart Temperature and Humidity Monitor is a device that measures and displays the temperature and humidity levels in your environment. It has a display/reset button, indicator icons, and a vent hole for air circulation. The default comfort level for this device is temperatures between 20 (68) – 26 (78.8) while humidity is between 30% – 60%. However, you can customize the comfort level on the Tapo app. It requires a Tapo Hub for operation and uses AAA/LR03 batteries for power.

### Product Usage Instructions


1. Power up your monitor by removing the back panel and inserting the batteries. The screen will light up.
2. Open the Tapo app and tap the button. Select Sensors and then your model. Follow the app instructions to complete setup.
3. Take the monitor to your preferred location. Make sure the Connection icon on the screen is solid on. If there is no connection icon, move it closer to your hub.
4. Place your monitor according to one of the following options:
  - Option 1: Place it on a table or a shelf
  - Option 2: Attach the non-slip pad to the back and magnetically attach to metallic surfaces
  - Option 3: Stick to a clean wall with the included adhesive or 3M tape
5. Remember that the installation height should not be higher than 2 meters.
6. Use the display/reset button to switch display position as desired.
7. Keep the device away from harsh environments with high temperatures or high humidity, and do not immerse the vent hole into any liquid.
8. Remember that this monitor is designed to facilitate a healthy lifestyle, but should not be used as a measuring tool.

For technical support, user guides, and more information, please visit <https://www.tapo.com/support/>

### Smart Temperature and Humidity Monitor

Images may differ from actual products

### Appearance

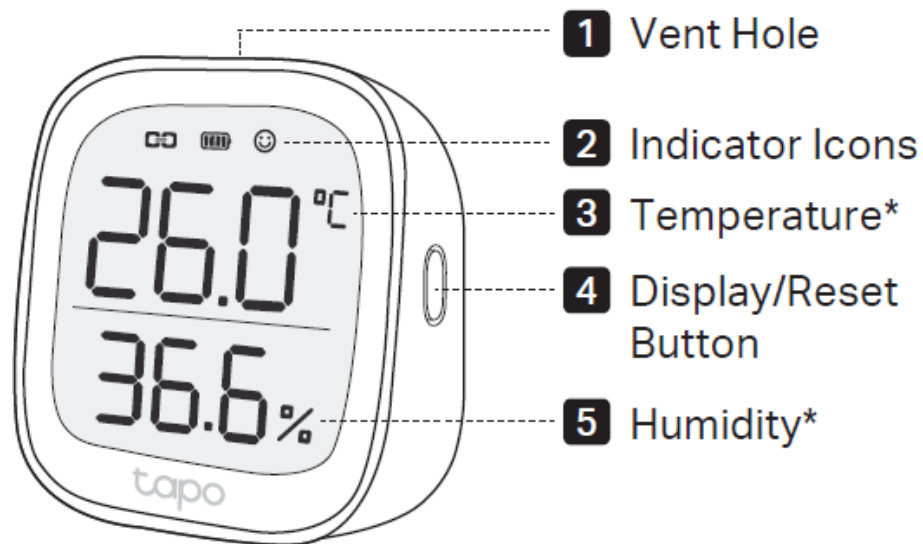

## Indicator Icons



### Connection

- Blinking: Connecting to hub
- Solid On: Connected to hub
- Off: No connection



### Battery Level



Battery level < 20%



Battery level < 5%



Inside Comfort Level



Outside Comfort Level

The default comfort level is temperatures between 20°C (68°F) – 26°C (78.8°F) while humidity is between 30% – 60%. You can customize the comfort level on the Tapo app.

## Display/Reset Button

### • Single Press

Switch the temperature unit °C/°F.

### • Double Press

Switch the display position of temperature and humidity.

### • Press and hold for 5s

Reset your monitor to enter pairing mode.


## Before You Start

A Tapo Hub is required. Make sure your Tapo Hub is successfully added via the Tapo app.



## Power Up Your Monitor


Remove the back panel and insert the batteries. The screen will light up.

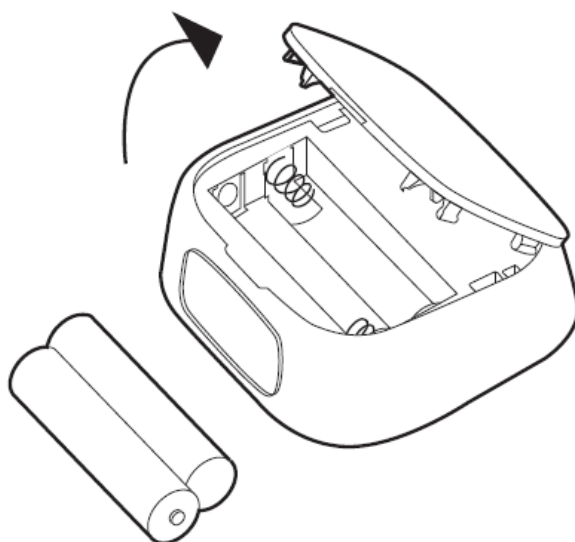

(Battery Type: AAA/LR03)

## Set Up Your Monitor

Open the Tapo app and tap the button. Select Sensors and then your model. Follow the app instructions to complete setup.

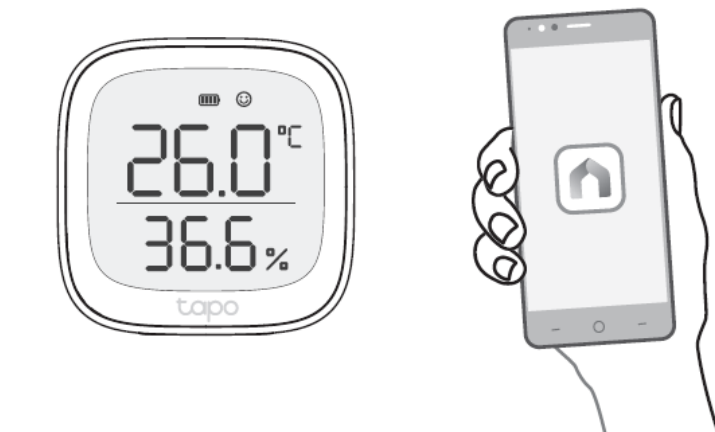

## Test Your Monitor

Take the monitor to your preferred location. Make sure the Connection icon on the screen is solid on. If there is no connection icon, move it closer to your hub.



## Place Your Monitor

### Option 1

Place it on a table or a shelf



(The installation height should not be higher than 2 meters.)

### Option 2

Attach the non-slip pad to the back and magnetically attach to metallic surfaces





### Option 3

Stick to a clean wall with the included adhesive



For technical support, the user guide and more information, please visit <https://www.tapo.com/support/>

### CAUTION!

Risk of explosion if the battery is replaced by an incorrect type.

### CAUTION!

- Avoid replacement of a battery with an incorrect type that can defeat a safeguard.
- Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can

result in an explosion.

- Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
- Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas. Operating
- Temperature: 0°C (32°F) – 50°C (122°F)
- Please keep it away from harsh environments with high temperatures or high humidity.
- Do not immerse the vent hole into any liquid.
- This monitor is designed to facilitate a healthy lifestyle, but should not be used as a measuring tool.
- Do not ingest battery, Chemical Burn Hazard

## Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- Please read and follow the above safety information when operating the device.
- We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.
- TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2011/65/EU and (EU) 2015/863.

The original EU declaration of conformity may be found at

<https://www.tapo.com/en/support/ce/>

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.


The original UK declaration of conformity may be found at

<https://www.tapo.com/support/ukca/>

**For EU/UK Region:**

- Operating Frequency / Nominal Operating Frequency / Max Output Power: 863~865MHz / 863.35MHz / 25mW (e.r.p)
- 863~865MHz / 864.35MHz / 25mW (e.r.p)
- 868~868.6MHz / 868.35MHz / 25mW (e.r.p)

## Documents / Resources

	<a href="#">tp-link Smart Temperature and Humidity Monitor</a> [pdf] User Guide T315 EU, Smart Temperature and Humidity Monitor, Smart Temperature Monitor, Smart Humidity Monitor, Temperature and Humidity Monitor, Temperature Monitor, Humidity Monitor, Monitor
---	---

## References

-  [Regulatory Compliance | Tapo](#)

- [Tapo Support | Tapo](#)
- [Tapo UKCA | Tapo](#)

Manuals+.