



tp-link T1600G Series Jetstream Smart Switch Installation Guide

[Home](#) » [tp-link](#) » [tp-link T1600G Series Jetstream Smart Switch Installation Guide](#) 



Business Networking Solution
Installation Guide
Jetstream Smart Switch

About this Installation Guide

This Installation Guide describes the hardware characteristics, installation methods, and the points that should be attended to during the installation. This Installation Guide is structured as follows:

Chapter 1 Introduction

This chapter describes the external components of the switch.

Chapter 2 Installation

This chapter illustrates how to install the switch.

Chapter 3 Connection

This chapter illustrates how to do the physical connection of the switch.

Chapter 4 Configuration

This chapter illustrates how to configure the switch.

Appendix A Troubleshooting

Appendix B Hardware Specifications

Audience

This Installation Guide is for:

Network Engineer
Network Administrator

Conventions

- Some models featured in this guide may be unavailable in your country or region. For local sales information, visit <https://www.tp-link.com>.
- The figures in Chapter 2, Chapter 3, and Chapter 4 are for demonstration purposes only. Your switch may differ in appearance from that depicted.
- PoE budget calculations are based on laboratory testing. The actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

- This guide uses specific formats to highlight special messages. The following table lists the notice icons that are used throughout this guide.



Remind to be careful. Caution indicates a potential that may result in device damage.



Remind to take notice. The note contains helpful information for better use of the product.

Related Document

The User Guide and CLI Reference Guide of the product are provided on Download Center. To obtain the latest product information, visit the official website: <https://www.tp-link.com>.

Contents

- 1 Chapter 1 Introduction
- 2 Chapter 2 Installation
- 3 Chapter 3 Connection
- 4 Chapter 4 Configuration
- 5 Appendix A Troubleshooting
- 6 Appendix B Specifications
- 7 Documents / Resources
- 8 Related Posts

Chapter 1 Introduction

1.1 Product Overview

Designed for workgroups and departments, TP-Link JetStream Smart Switch provides wire-speed performance and abundant L2 management features. It provides a variety of service features and multiple powerful functions with high security.

The EIA-standardized framework and smart configuration capacity can provide flexible solutions for a variable scale of networks. QoS and IGMP snooping/filtering optimize voice and video applications.

Link aggregation increases aggregated bandwidth, optimizing the transport of business-critical data.

SNMP, RMON, WEB, and CLI Login bring abundant management policies. TP-Link JetStream Smart Switch integrates multiple functions with excellent performance and is friendly to manage, which can fully meet the need of the users demanding higher networking performance.

T1600G-52PS (TL-SG2452P)/TL-SG2210MP/TL-SG2428P/TL-SL2428P is also a Power Sourcing Equipment (PSE*). Some of the RJ45 ports on the switch support Power over Ethernet (PoE*) function, which can automatically detect and supply power to those powered devices (PDs*) complying with IEEE 802.3af and IEEE 802.3at.

*PSE: a device (switch or hub for instance) that provides power through an Ethernet cable.

*PoE: a technology describes a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet.


*PD: a device powered by a PSE and thus consumes energy. Examples include powering network cameras, wireless LAN access points, IP telephones, network hubs, embedded computers, etc.

1.2 Appearance

- Front Panel


The front panel of T1600G-18TS (TL-SG2216) is shown in the following figure.

Figure 1-1
Front Panel of T1600G-18TS (TL-SG2216)

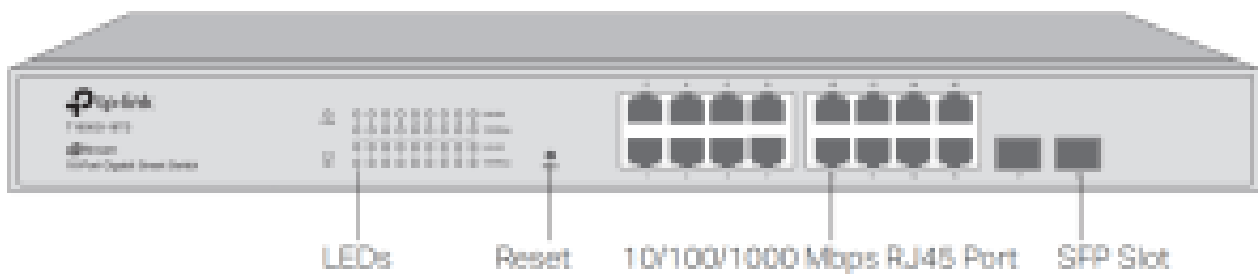


The front panel of T1600G-52TS (TL-SG2452) is shown in the following figure.

Figure 1-2
Front Panel of T1600G-52TS (TL-SG2452)

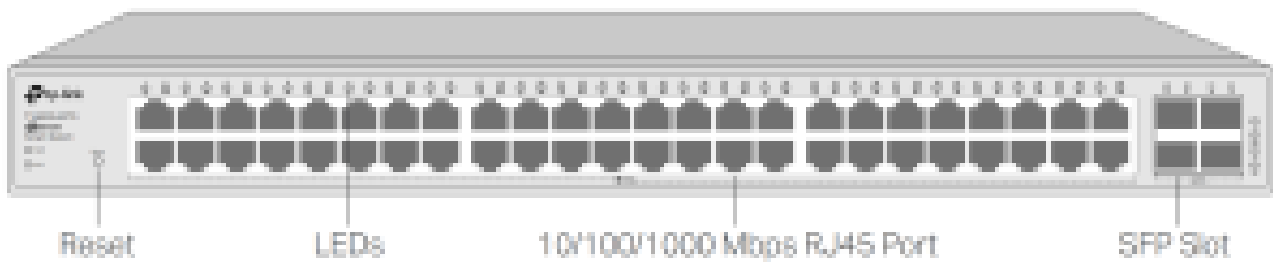


The front panel of T1600G-52PS (TL-SG2452P) is shown in the following figure.

Figure 1-3
Front Panel of T1600G-52PS (TL-SG2452P)

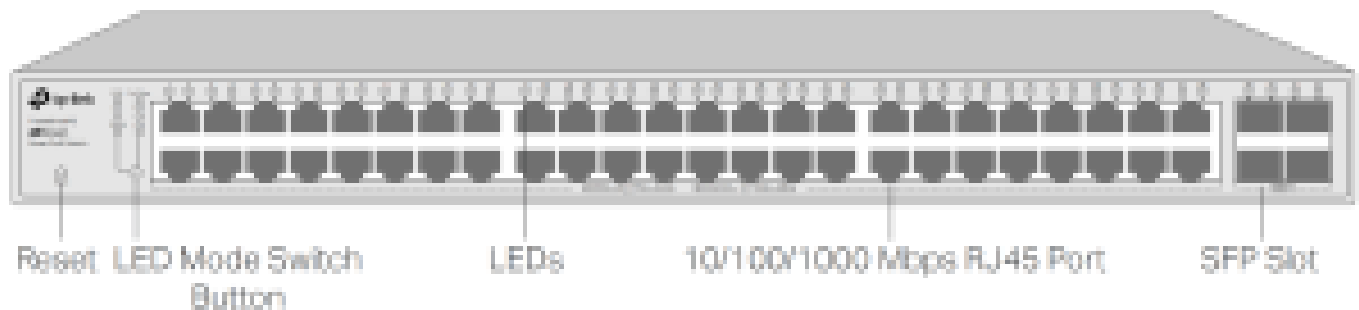


The front panel of T1700G-28TQ is shown in the following figure.

Figure 1-4
Front Panel of T1700G-28TQ

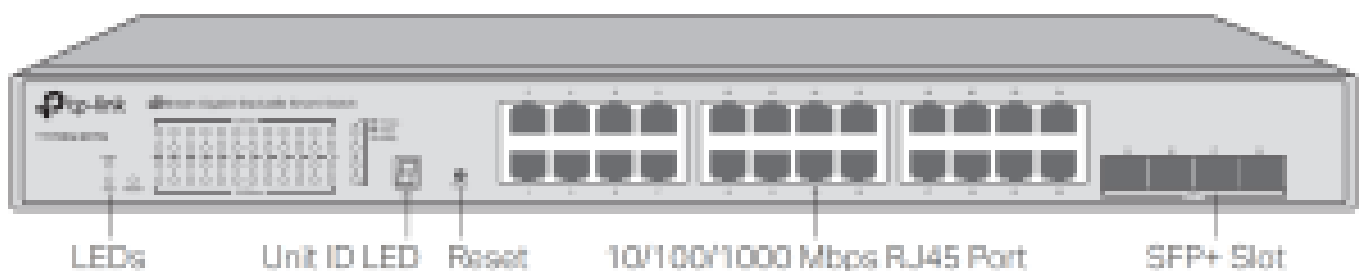


The front panel of T1700X-16TS is shown in the following figure.

Figure 1-5
Front Panel of T1700X-16TS

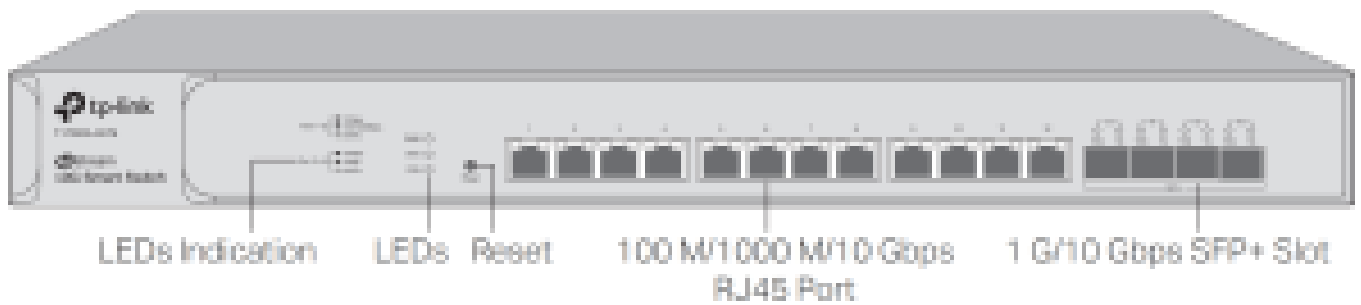


The front panel of TL-SG2218 is shown in the following figure.

Figure 1-6
Front Panel of TL-SG2218

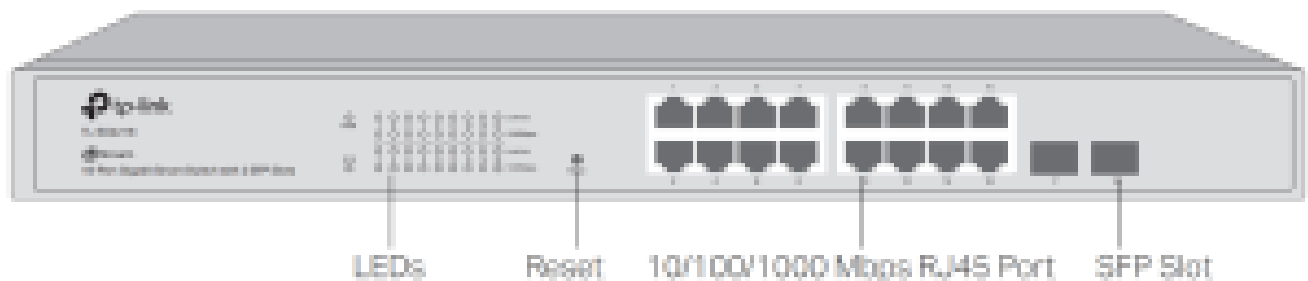


The front panel of TL-SG2210MP is shown in the following figure.

Figure 1-7
Front Panel of TL-SG2210MP

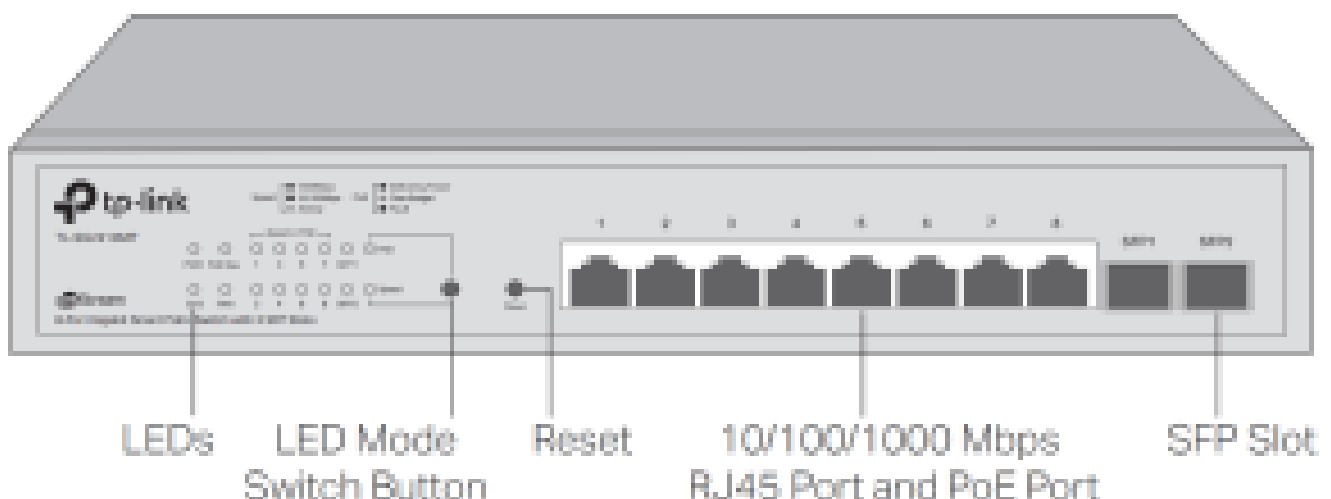


The front panel of TL-SG2428P is shown in the following figure.

Figure 1-8
Front Panel of TL-SG2428P

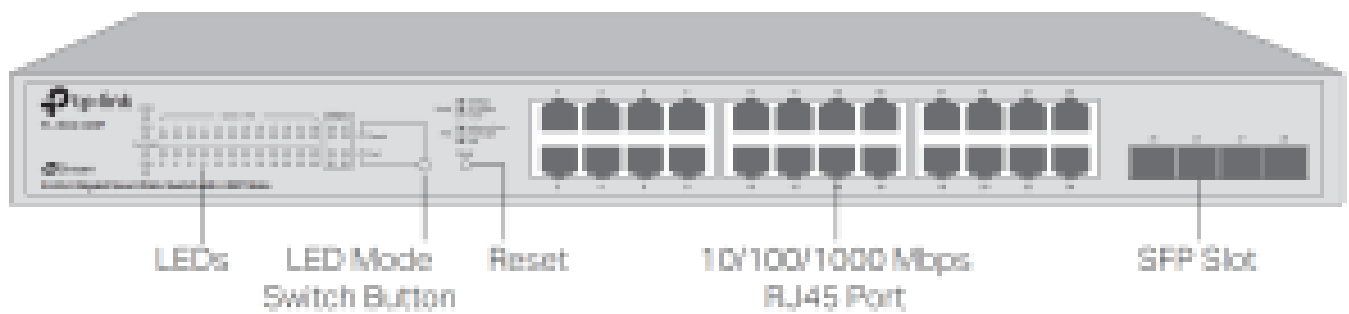

The front panel of TL-SL2428P is shown in the following figure.

Figure 1-9
Front Panel of TL-SL2428P

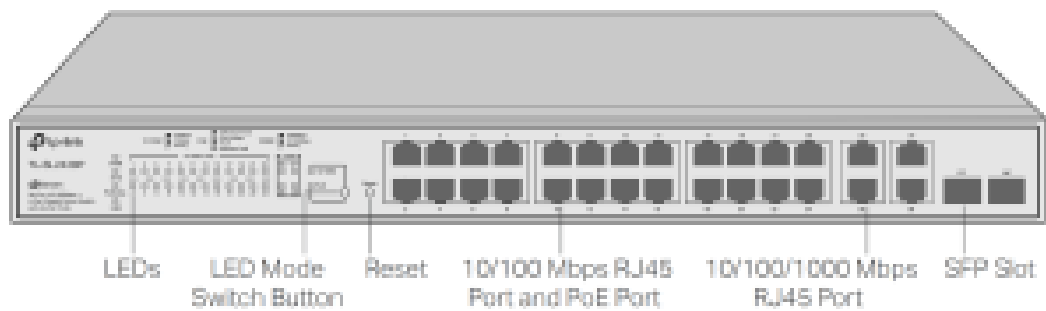

LEDs

For T1600G-18TS (TL-SG2216)/T1600G-52TS (TG-SG2452)/T1700G-28TQ/T1700X-16TS/TL-SG2218.

LED	Indication
PWR	On: The switch is powered on. Off: The switch is powered off or the power supply is abnormal. Flashing: The power supply is abnormal.
SYS	Flashing: The switch works properly. On or Off: The switch works improperly.
10/100M Link/Act	On: A device is connected to the corresponding port but no activity. Flashing: Data is being transmitted or received. Off: No device is connected to the corresponding port. Note: Link/Act for T1600G-18TS (TL-SG2216)/T1700G-28TQ/TL-SG2218.

1000Mbps	On: Running at 1000 Mbps. Off: Running at 10/100 Mbps or no device is linked to the corresponding port. Note: For T1600G-18TS (TL-SG2216)/1700G-28TQ/TL-SG2218.
1000M 10/100/1000Mbps	Green On: Running at 1000 Mbps, but no activity. Green Flashing: Running at 1000 Mbps and is transmitting or receiving data. Yellow On: Running at 10/100 Mbps, but no activity. Yellow Flashing: Running at 10/100 Mbps and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: 10/100/1000Mbps for port 1–48 of T1600G-52TS (TL-SG2452).
100Base-FX 1000Base-X	Green On: A 1000 Mbps device is connected to the corresponding port but no activity. Green Flashing: A 1000 Mbps device is linked to the corresponding port and data is being transmitted or received. Yellow On: A 10/100 Mbps device is connected to the corresponding port but no activity. Yellow Flashing: A 10/100 Mbps device is linked to the corresponding port and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: 100Base-FX/1000Base-X for port 49–52 of T1600G-52TS (TL-SG2452). Port 49–52 of T1600G-52TS (TL-SG2452) doesn't support 10 Mbps devices.
25–28 Link/Act	Green On: Running at 10 Gbps, but no activity. Green Flashing: Running at 10 Gbps and is transmitting or receiving data. Yellow On: Running at 1000 Mbps, but no activity. Yellow Flashing: Running at 1000 Mbps and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: 25–28 for T1700G-28TQ. Link/Act for port 13–16 of T1700X-16TS.
Link/Act	Green On: Running at 10 Gbps, but no activity. Green Flashing: Running at 10 Gbps and is transmitting or receiving data. Yellow On: Running at 100/1000 Mbps, but no activity. Yellow Flashing: Running at 100/1000 Mbps and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: Only for ports 1–12 of T1700X-16TS.
Master	On: The switch works as a master in the stack system, or does not join any stack system. Off: The switch works as a stack member in the stack system. Note: Only for T1700G-28TQ.

Fan	Green: All the fans work properly. Yellow: Not all the fans work properly. Off: The switch is working abnormally. Note: Only for T1700X-16TS.
T1600G-52PS (TL-SG2452P)/TL-SG2210MP/TL-SG2428P/TL-SL2428P has an LED mode switch button which is used to switch the LED status indication. When the Speed LED is on, the port LED is indicating the data transmission rate. When the PoE LED is on, the port LED is indicating the power supply status. By default, the Speed LED is on. Pressing the mode switch button, the Speed LED will turn off and the PoE LED will light up. Then the PoE LED will turn off after being on for 60 seconds and the Speed LED will light up again.	
PWR	On: The switch is powered on. Off: The switch is powered off or the power supply is abnormal. Flashing: The power supply is abnormal.
SYS	Flashing: The switch works properly. On or Off: The switch works improperly.
FAN	Green: All the fans work properly. Yellow: Not all the fans work properly.
PoE Max	On: The remaining PoE power is ≤ 7 W. Flashing: The remaining PoE power keeps ≤ 7 W after this LED is on for 2 minutes. Off: The remaining PoE power is > 7 W.
10/100M or PoE (When the Speed LED is on)	Green On: Running at 100 Mbps, but no activity. Green Flashing: Running at 100 Mbps and is transmitting or receiving data. Yellow On: Running at 10 Mbps, but no activity. Yellow Flashing: Running at 10 Mbps and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: Only for TL-SL2428P.

1000M Speed or PoE (When the Speed LED is on)	Green On: Running at 1000 Mbps, but no activity. Green Flashing: Running at 1000 Mbps and is transmitting or receiving data. Yellow On: Running at 10/100 Mbps, but no activity. Yellow Flashing: Running at 10/100 Mbps and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: 1000M for TL-SL2428P. Speed or PoE for TL-SG2210MP, port 1–24 of TL-SG2428P, and port 1–48 of T1600G-52PS (TL-SG2452P)
10/100M or PoE Speed or PoE (When the PoE LED is on)	Green On: The port is supplying power normally. Green Flashing: The supply power exceeds the corresponding port's maximum power. Yellow On: Overload or short circuit is detected. Yellow Flashing: Power-on self-test failed. Off: Not providing PoE power on the port. Note: 10/100M or PoE for TL-SL2428P. Speed or PoE for TL-SG2210MP, port 1–24 of TL-SG2428P, and port 1–48 of T1600G-52PS (TL-SG2452P)
100Base-FX 1000Base-X SFP1, SFP2	Green On: A 1000 Mbps device is linked to the corresponding port, but no activity. Green Flashing: A 1000 Mbps device is linked to the corresponding port and data is being transmitted or received. Yellow On: A 10/100 Mbps device is linked to the corresponding port, but no activity. Yellow Flashing: A 10/100 Mbps device is linked to the corresponding port and is transmitting or receiving data. Off: No device is linked to the corresponding port. Note: 1000Base-X for port 25–28 of TL-SG2428P. 100Base-FX/1000Base-X for port 49–52 of T1600G-52PS (TL-SG2452P). SFP1/SFP2 for TL-SG2210MP. 100Base-FX and 1000Base-X ports don't support 10 Mbps devices.

LED Mode Switch Button

Press this button to switch the LED status indication between Speed and PoE.

Reset

With the switch powered on, press the Reset button for 5 seconds to reset the switch to its factory default settings.

Unit ID LED

Designed to display the stack Unit ID of the switch. For the switch that does not join any stack system, it displays its default Unit ID. To modify the default unit number, please log on to the GUI of the switch and go to the **Stack→Stack Management→Stack Config** page and configure the New Unit ID. The new Unit ID will take effect after you reboot the switch.

10/100 Mbps RJ45 Port

Designed to connect to the device with a bandwidth of 10 Mbps or 100 Mbps.

10/100/1000 Mbps RJ45 Port

Designed to connect to the device with a bandwidth of 10 Mbps, 100 Mbps, or 1000 Mbps.

SFP Slot

Designed to install the SFP module. For products except for T1700X-16TS, the switch features some slots that are shared with the associated RJ45 ports. The associated two ports are referred to as a “Combo” port, which means they cannot be used simultaneously, otherwise, only the SFP slot works.

SFP+ Slot

Designed to install the SFP module. For T1700G-28TQ and T1700X-16TS, the switch supports 1G SFP or 10G SFP+ module connection.


Port Feature

Model	100M/1000 M/10GbpsRJ4 5 Port	10/100/1000 Mbps RJ45 Port	10/1
T1600G-18TS	/	16	/
T1600G-52TS	/	48	/
T1600G-52PS	/	48	/
T1700G-28TQ	/	24	/
T1700X-16TS	12	/	/
TL-SG2218	/	16	/
TL-SG2210MP	/	8	/
TL-SG2428P	/	24	/
TL-SL2428P	/	4	24

• Rear Panel

The rear panel is shown in the following figure. Here we take TL-SG2428P as an example.

Figure 1-10
Rear Panel

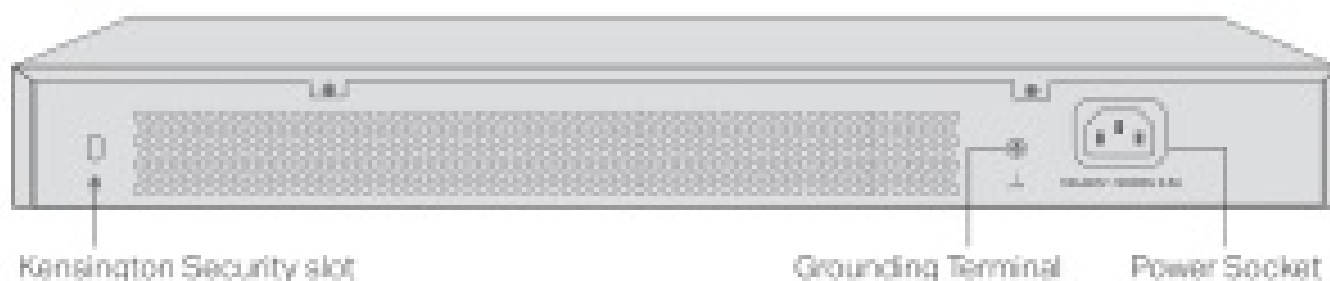

Kensington Security Slot

Secure the lock (not provided) into the security slot to prevent the device from being stolen.

Grounding Terminal

The switch already comes with a lightning protection mechanism. You can also ground the switch through the PE (Protecting Earth) cable of the AC cord or with Ground Cable. For detailed lightning protection measures, go to <https://www.tp-link.com/support>, search the model number of your switch and go to the Product Support web page, refer to the Lightning Protection Guide from the Related Documents: https://www.tp-link.com/us/configuration-guides/lightning_protection_guide/.

Power Socket

Connect the female connector of the power cord here, and the male connector to the AC power outlet. Make sure that the voltage of the power supply meets the requirement of the input voltage (100–240 V~ 50/60 Hz).



Caution:


You should use the provided power cord.

Chapter 2 Installation


2.1 Package Contents

Make sure that the package contains the following items. If any of the listed items are damaged or missing, please contact your distributor.

One Switch

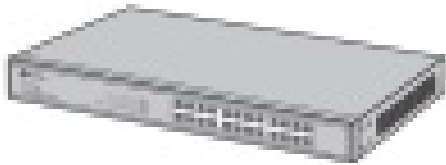


One Power Cord



Installation Guide



Two mounting brackets, eight screws and four rubber feet



2.2 Safety Precautions


To avoid any device damage and bodily injury caused by improper use, you should observe the following rules.

Safety Precautions

- Keep the power off during the installation.
- Wear an ESD-preventive wrist strap, and make sure that the wrist strap has good skin contact and is well-grounded.
- Use only the power cord provided with the switch.
- Make sure that the supply voltage matches the specifications indicated on the rear panel of the switch.
- Ensure that the switch is installed in a well-ventilated environment and its ventilation hole is not blocked.
- Do not open or remove the cover of the switch.
- Before cleaning the device, cut off the power supply. Do not clean it with a waterish cloth, and never use any other liquid cleaning method.
- Place the device with its bottom surface downward.

Site Requirements



Temperature/Humidity

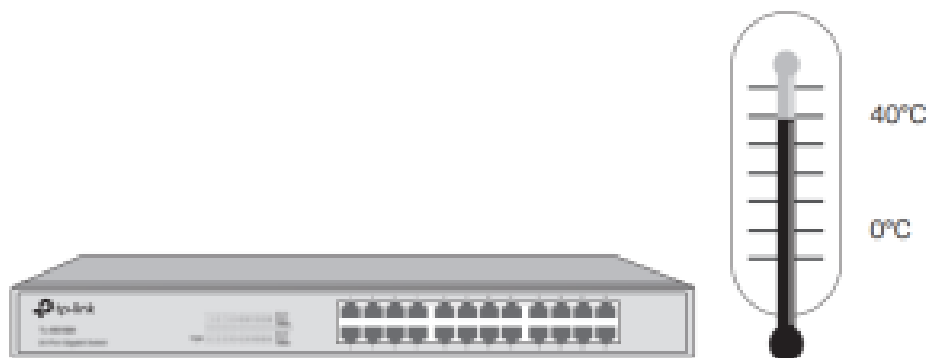

Keep the equipment room at an appropriate level of temperature and humidity. Too much or too little humidity may lead to bad insulation, leakage of electricity, mechanical property changes, and corrosion. High temperatures may accelerate the aging of the insulation materials, significantly shortening the service life of the device. To find out the best temperature and humidity conditions for the device, check the following table.

Environment	Temperature	Environment
Operating	0 °C to 50 °C (for TL-SG2210MP/TL-SG2428P/TL-SL2428P) 0 °C to 40 °C (for other switches)	Operating
Storage	-40 °C to 70 °C	Storage

Clearness

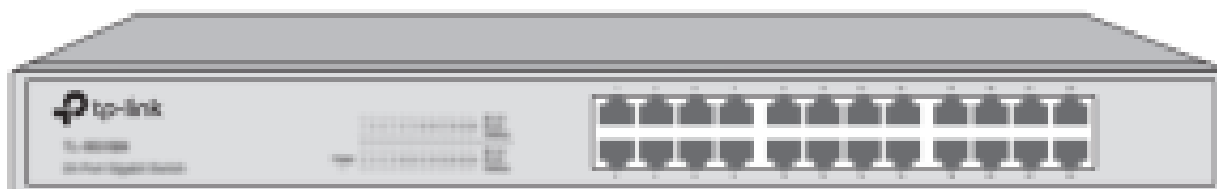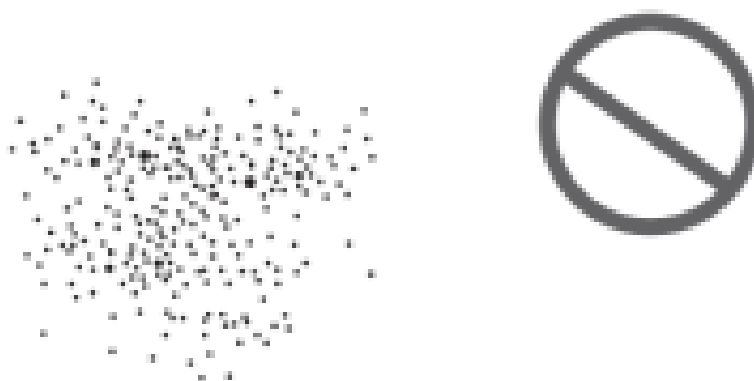

The dust accumulated on the switch can be absorbed by static electricity and result in poor contact of metal contact points. Some measures have been taken for the device to prevent static electricity, but too strong static electricity can cause deadly damage to the electronic elements on the internal circuit board. To avoid the effect of static electricity on the operation of the switch, attach much importance to the following items:

- Dust the device regularly, and keep the indoor air clean.
- Keep the device well-grounded and ensure that the static electricity has been transferred.

Electromagnetic Interference



Electronic elements including capacitance and inductance on the device can be affected by external interferences, such as conducted emission by capacitance coupling, inductance coupling, and impedance coupling. To decrease the interferences, make sure to take the following measures:

- Use the power supply that can effectively filter interference from the power grid.
- Keep the device far from high-frequency and strong-current devices such as radio transmitting stations.
- Use electromagnetic shielding when necessary.

Lightning Protection



Extremely high voltage currents can be produced instantly when lightning occurs and the air in the electric discharge path can be instantly heated up to 20,000 °C. As this instant current is strong enough to damage electronic devices, more effective lightning protection measures should be taken.


- Ensure that the rack and the device are well earthed.
- Make sure the power socket has good contact with the ground.
- Keep a reasonable cabling system and avoid induced lightning.

- Use the signal SPD (Surge Protective Device) when wiring outdoor.



Note: For detailed lightning protection measures, go to <https://www.tp-link.com/support>, search the model number of your switch and go to the Product Support web page, refer to the Lightning Protection Guide from the Related Documents: https://www.tp-link.com/us/configuration-guides/lightning_protection_guide/.

Installation Site

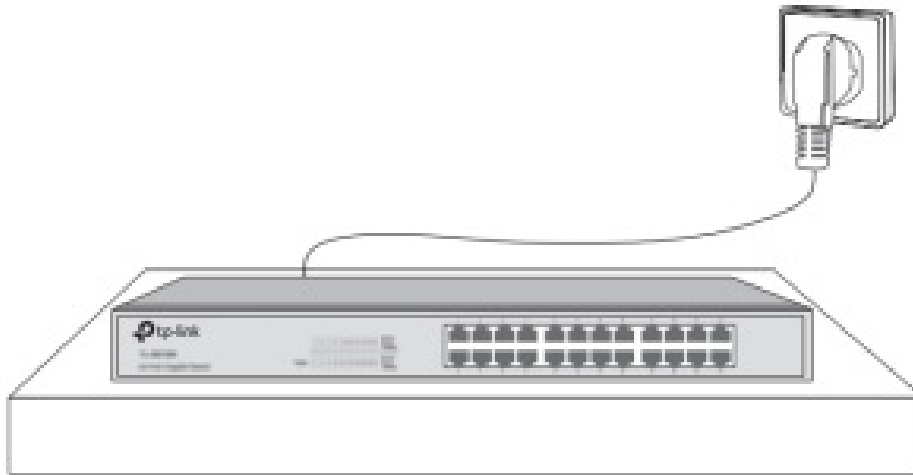

When installing the device on a rack or a flat workbench, attach much importance to the following items:

- The rack or workbench is flat, stable, and sturdy enough to support the weight of 5.5 kg at least.
- The rack or workbench has a good ventilation system. The equipment room is well ventilated.
- The rack is well-grounded. Keep the device less than 1.5 meters away from the power socket.

2.3 Installation Tools

- Phillips screwdriver
- ESD-preventive wrist wrap
- Cables



Note:

These tools are not included in our product. If needed, you can purchase them separately.


2.4 Product Installation

• Desktop Installation

To install the device on the desktop, follow the steps:

1. Set the device on a flat surface that is strong enough to support the entire weight of the device with all fittings.
2. Remove the adhesive backing papers from the rubber feet.
3. Turn over the device and attach the supplied rubber feet to the recessed areas on the bottom at each corner of the device.

Figure 2-1
Desktop Installation

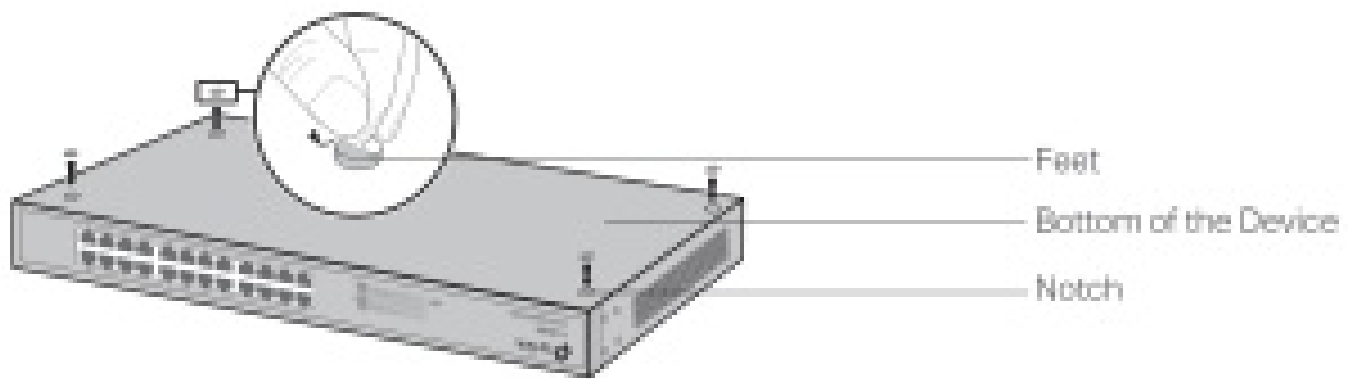


- **Rack Installation**

To install the device in an EIA standard-sized, 19-inch rack, follow the instructions described below:

1. Check the efficiency of the grounding system and the stability of the rack.
2. Secure the supplied rack-mounting brackets to each side of the device with supplied screws, as illustrated in the following figure.

Figure 2-2


Bracket Installation

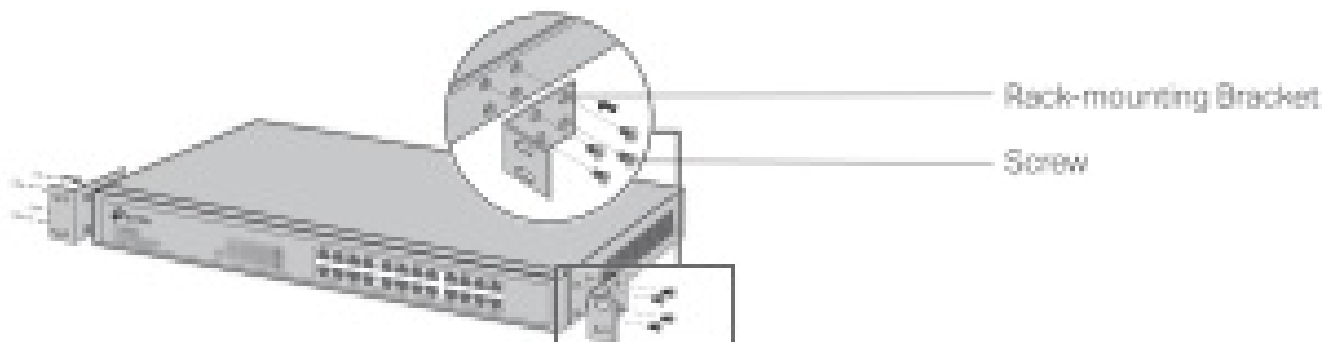

3. After the brackets are attached to the device, use suitable screws (not provided) to secure the brackets to the rack, as illustrated in the following figure.

Figure 2-3

Rack Installation

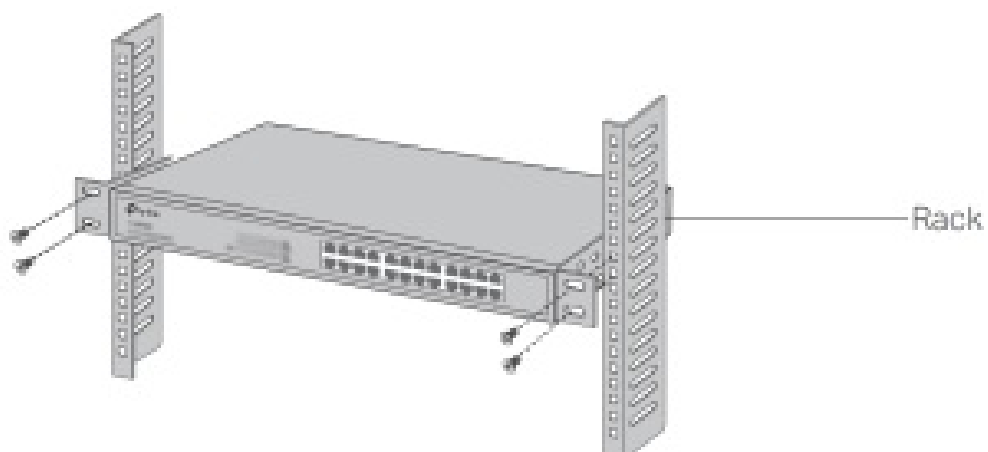



Caution:


- Leave 5 to 10 cm gaps around the devices for air circulation.
- Avoid placing heavy things on the device.
- Place the device with its bottom facing downwards.
- Mount devices in sequence from the bottom to the top of the rack and ensure a certain clearance between devices for the purpose of heat dissipation.

Chapter 3 Connection

3.1 Ethernet Port

Connect an Ethernet port of the switch to the computer by RJ45 cable as the following figure shows.


Figure 3-1
Connecting the RJ45 Port

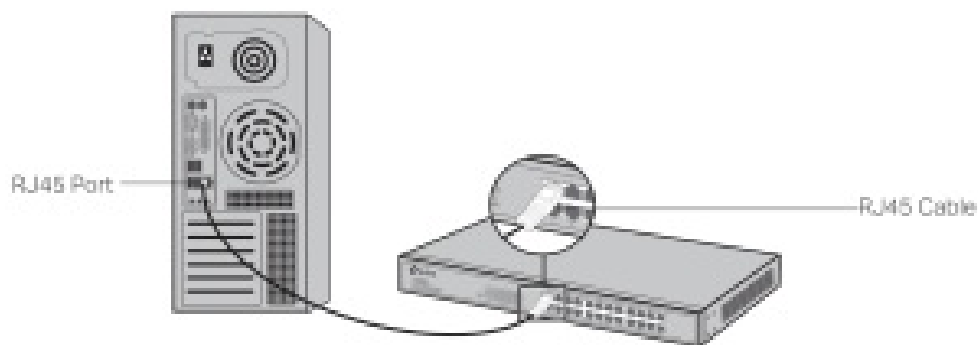

3.2 SFP/SFP+ Slot

The following figure demonstrates the connection of the SFP slot to an SFP module.

Figure 3-2
Inserting the SFP Module

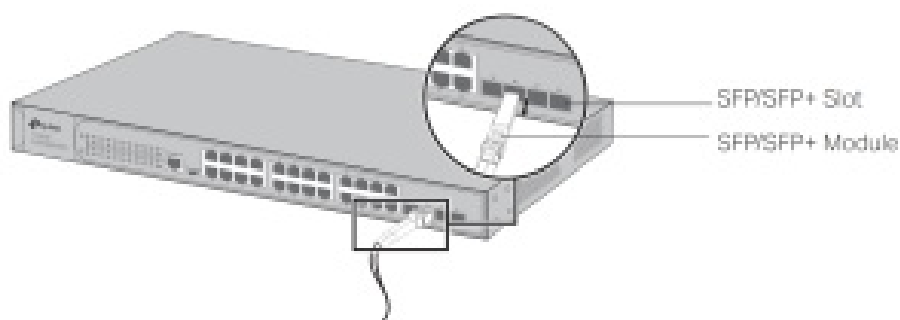

3.3 Verify Installation

After completing the installation, verify the following items:


- There should be 5 to 10 cm of clearance around the device for ventilation and make sure the airflow is adequate.
- The voltage of the power supply meets the requirement of the input voltage of the device.
- The power socket, device, and rack are well-grounded.

- The device is correctly connected to other network devices.

3.4 Power On

Plug the negative connector of the provided power cord into the power socket of the device and plug the positive connector into a power outlet as the following figure shows.

Figure 3-3 C
Connecting to Power Supply

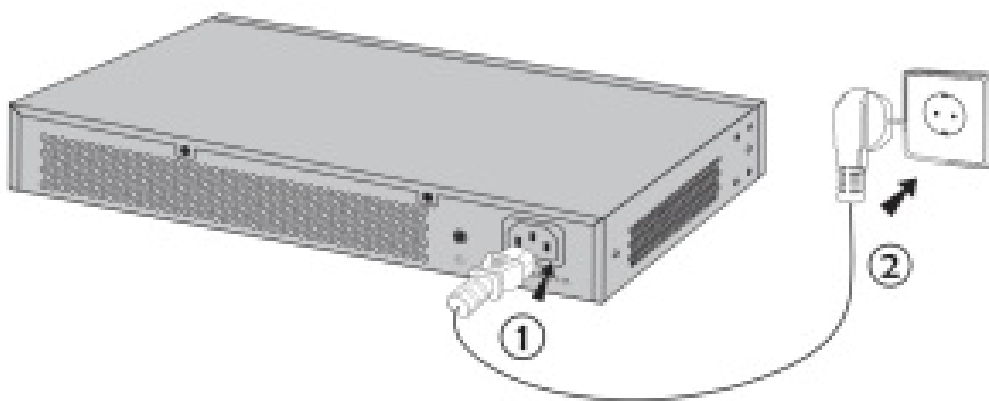

Note:

The figure is to illustrate the application and principle. The provided plug and the socket in your region may differ from the figures above.

3.5 Initialization

After the device is powered on, it begins the Power-On Self-Test. A series of tests run automatically to ensure the device functions properly. During this time, its LED indicators will respond in the following order:

1. The PWR LED indicator lights are on all the time. The SYS LED and the LED indicators of all the ports keep off.
2. (For TL-SG2210MP/TL-SG2428P/TL-SL2428P) After about one minute, all LED indicators will turn green, and then the FAN indicator and LED indicators of all the ports will turn yellow momentarily.
Subsequently, all LED indicators except the PWR LED will turn off. (For other switches) After about one minute, the SYS LED and LED indicators of all the ports will flash momentarily and then turn off.
3. Several seconds later, the SYS LED indicator will flash, which represents a successful initialization.

Chapter 4 Configuration

4.1 Configuration Overview

The switch supports two configuration options:

- Standalone Mode: Configure and manage the switch singly.
- Controller Mode: Configure and manage the network devices centrally. It is recommended in the large-scale network, which consists of mass devices such as access points, switches, and gateways.




Note:

Only TL-SG2428P, TL-SL2428P, TL-SG2210MP, and TL-SG2218 support Controller Mode. When the switch is changed from Standalone Mode to Controller Mode, you should reconfigure the switch.

4.2 Standalone Mode

In Standalone Mode, use a computer to configure and manage the switch.

Figure 4-1
Topology for Standalone Mode

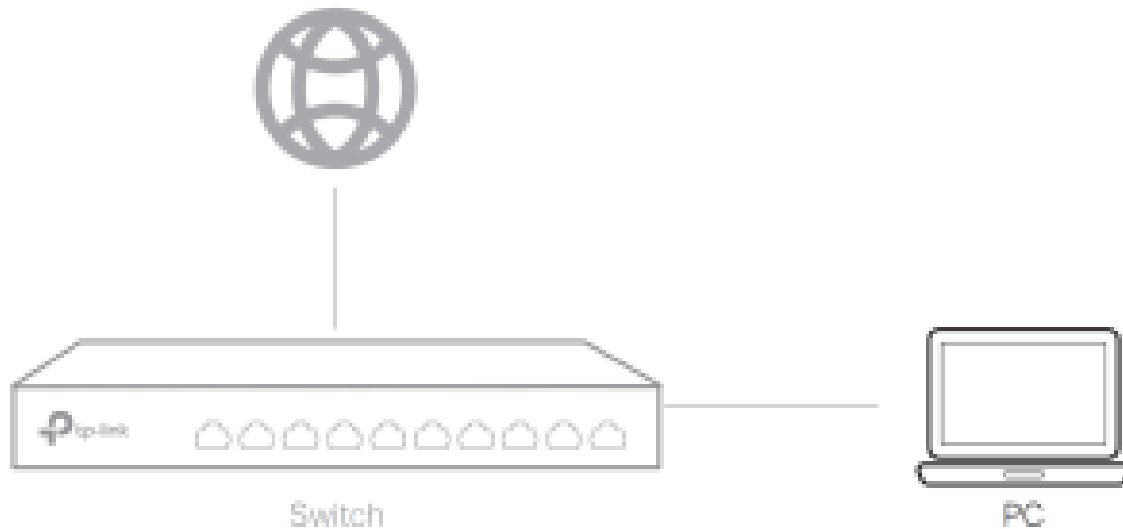

Using the GUI

1. To access the management page of the switch, make sure the switch and computer are in the same subnet. Open a browser and type the switch's IP address in the address field, then press the Enter key.
 - If the switch obtains an IP address from the DHCP server (typically a router), find the switch's IP address on the DHCP server.
 - If not, use the default IP address [192.168.0.1](#) to launch the switch's management page.
2. Enter admin for both the username and password in the lower case letters to log in. The first time you log in, change the password to better protect your network and devices.
3. After a successful login, the main page will appear. You can click the menus on the top side and left side to configure the corresponding functions.

For the detailed configurations, refer to the User Guide and CLI Guide. The guides can be found on the download center of our official website: <https://www.tp-link.com/support/download/>.

Using the CLI

- Set up a Telnet or SSH connection to access the switch via CLI (command-line interface).

For the detailed configurations, refer to the User Guide and CLI Guide. The guides can be found on the download center of our official website: <https://www.tp-link.com/download-center.html>



Note:

For certain devices, you may need to change the password the first time you log in, which will better protect your network and devices.

4.3 Controller Mode

Controller Mode applies to the large-scale network with mass devices. All devices can be centrally configured and


monitored via Omada Software Controller, Omada Hardware Controller, or Omada Cloud-Based Controller.



Note:

Before the following configurations, make sure the switch can access the internet. When using Omada Software/Hardware Controller, make sure the switch and the controller are in the same subnet. Typically, the switch obtains an IP address from the DHCP server. You can check the switch's IP address on the DHCP server.

Via Omada Software/Hardware Controller

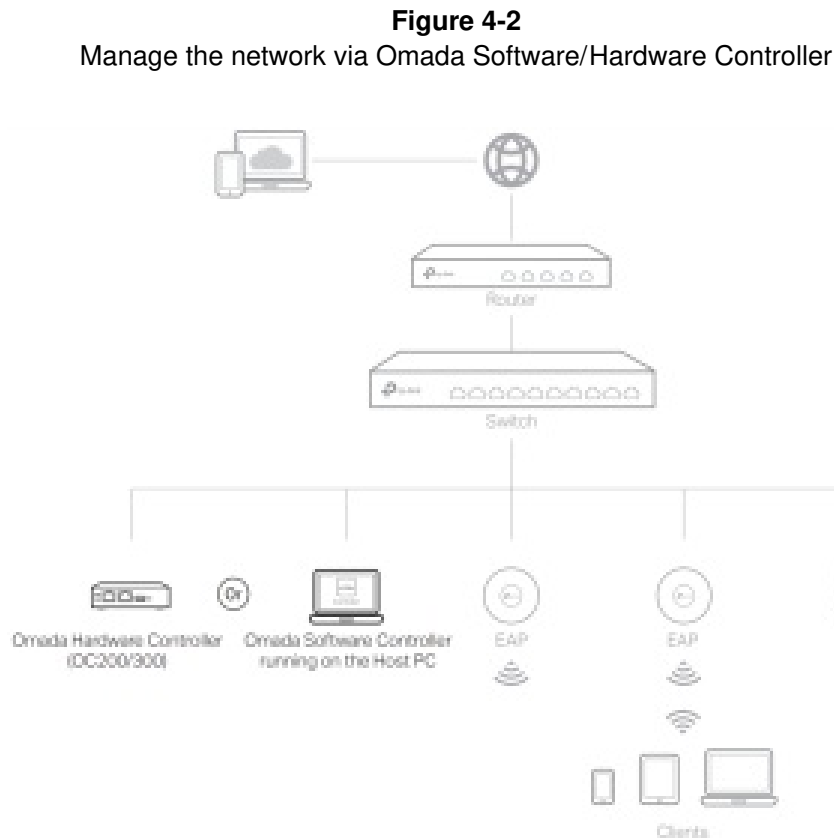

Via Omada Software Controller

1. On the PC with Windows OS or Linux OS, download the Omada Software Controller installation file from <https://www.tp-link.com/support/download/omada-software-controller/>.
2. Run the file and follow the wizard to install the Omada Software Controller.
3. Launch the Omada Software Controller and follow the step-by-step instructions to complete the Quick Setup.
After the wizard is finished, a login screen will appear.
4. Enter the username and password you created and click Log in. Then you can further configure the controller.

Via Omada Hardware Controller (OC200/OC300)

Omada Hardware Controller (OC200/OC300), which is pre-installed with Omada Software Controller, is a good alternative if you have no spare PC to keep running Omada Software Controller in the network. It needs to be purchased additionally. For more details, refer to the Installation Guide of Omada Hardware Controller.

* Omada Cloud Service

After installing Omada Software/Hardware Controller, you can remotely access and configure the controller through Omada Cloud Service. Follow the steps below.

1. Enable Cloud Access on the setting page on the controller and bind a TP-Link ID to your controller.


If you have configured this in the setup wizard, skip the step.

2. Launch a web browser and enter <https://omada.tplinkcloud.com> in the address bar.
3. Enter your TP-Link ID and password to log in. A list of controllers that have been bound with your TP-Link ID will appear. Then you can click Launch to further configure the controller.

Via Omada Cloud-Based Controller

Figure 4-3

Manage the network via Omada Cloud-Based Controller

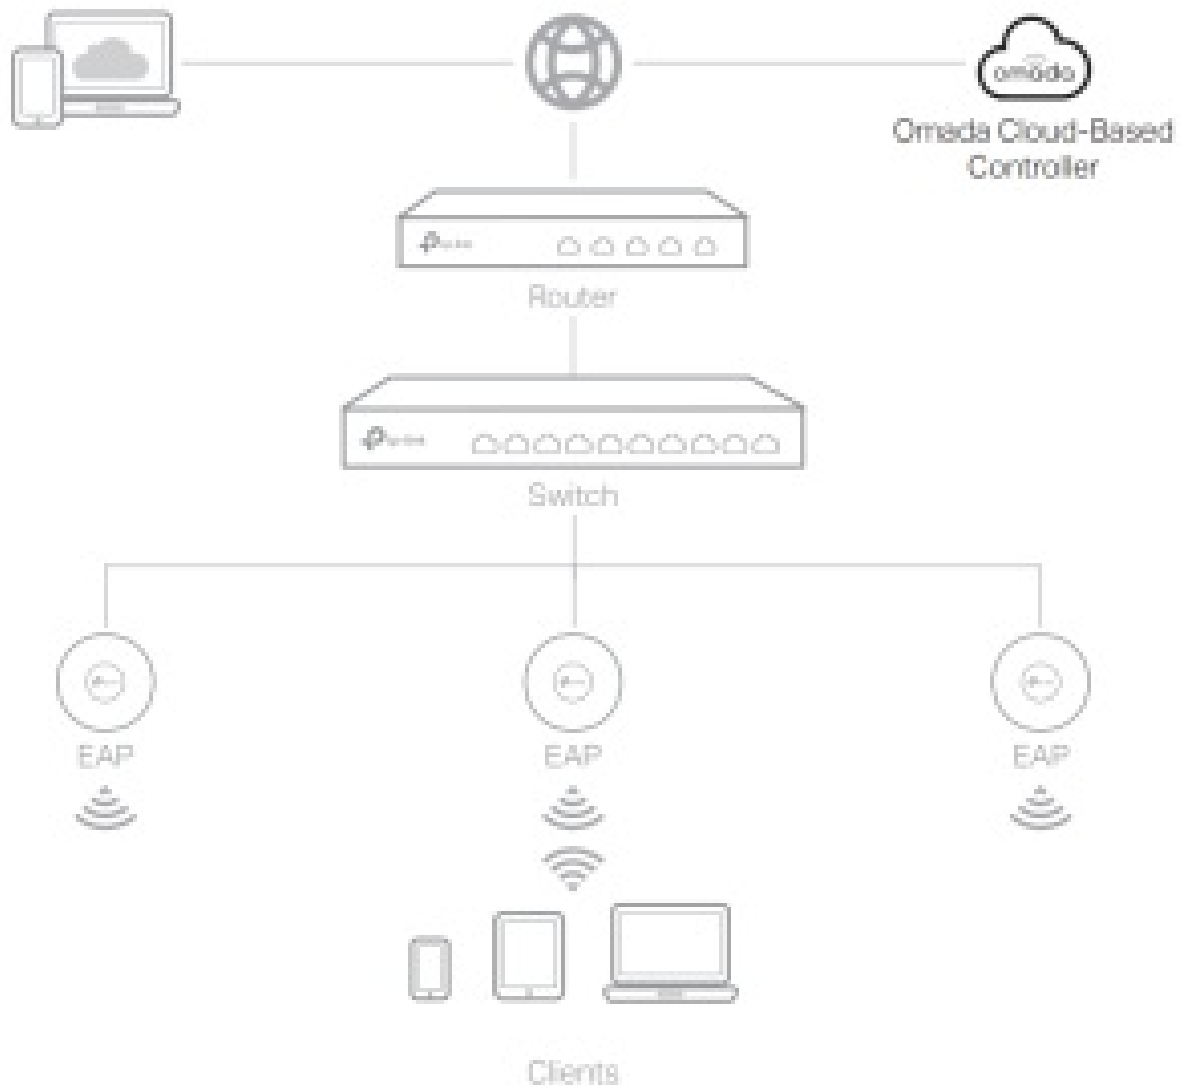

Before managing the switch via Omada Cloud-Based Controller, make sure the devices can access the internet.

1. Launch a web browser and enter <https://omada.tplinkcloud.com> in the address bar. Enter your TPLink ID and password to log in.
2. Click Add Controller and subscribe to Omada Cloud-Based Controller. Follow the instructions to choose a plan and complete the payment. Then wait until your controller is deployed.
3. The controller will appear in the list once bound with your TP-Link ID. Click Launch and follow the step-by-step instructions to complete the Quick Setup. After the wizard is finished, log in via the created username and password.
4. Click Devices on the sidebar and then click Add Devices. Then you can add devices to the controller manually

through the serial numbers at the bottom of the product.

* Omada App

With the Omada app, you can also manage your controller at a local site or a remote site via your mobile device. For the detailed configurations, refer to the User Guide of the controller. The guide can be found on the download center of our official website: <https://www.tp-link.com/support/download/>.

Appendix A Troubleshooting

Q1. What could I do if I forgot the username and password of the switch?

Press the Reset button for at least 5 seconds to reset the system. The system will be reset to the factory default settings, and the default login user name and password are both admins.

Q2. Why does the PWR/Power LED work abnormally?

The PWR/Power LED should be lit up when the power system works normally. If the PWR LED worked abnormally, try the following:

1. Make sure that the power cable is connected properly, and the power contact is normal.
2. Make sure the voltage of the power supply meets the requirement of the input voltage of the switch.

Q3. What should I do if I cannot access the web management page?

Try the following:

1. Check every port LED on the switch and make sure the Ethernet cable is connected properly.
2. Try another port on the switch and make sure the Ethernet cable is suitable and works normally.
3. Power off the switch and, after a while, power it on again.
4. Make sure the IP address of your PC is set within the subnet of the switch.
5. If you still cannot access the configuration page, please reset the switch to its factory defaults.

Then the IP address of your PC should be set as 192.168.0.x ("x" is any number from 2 to 254) and the subnet mask as 255.255.255.0.

Appendix B Specifications

Item	Content
Standards	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3z, IEEE 802.3x, IEEE 802.1p, IEEE 802.1q, IEEE 802.1x, IEEE 802.1d, IEEE 802.1s, IEEE 802.1w
	IEEE 802.3ae (For T1700G-28TQ/T1700X-16TS)
	IEEE 802.3af, IEEE 802.3at (For T1600G-52PS/TL-SG2210MP/TL-SG2428P/ TL-SL2428P)
	10Base-T: UTP/STP of Cat. 3 or above

Transmission Medium	100Base-TX: UTP/STP of Cat. 5 or above
	100Base-FX/LX10/BX10: MMF or SMF SFP Module (For TL-SG2210MP/TL-SG2428P)
	1000Base-T: 4-pair UTP (≤ 100 m) of Cat. 5e, and Cat. 6 or above
	1000Base-SX/LX/LX10/BX10: MMF or SMF SFP Module
	10GBASE-SR/LR: MMF or SMF SFP+ Transceiver (For T1700G-28TQ/T1700X16TS)
	10GBASE-T: 4-pair UTP of Cat.6 (maximum 55 m) or Cat.6a (maximum 100 m), 4-pair STP of Cat.6/Cat. 6a/Cat.7 (maximum 100 m) (For T1700X-16TS)
LEDs	TL-SL2428P: PWR, SYS, PoE MAX, FAN, 10/100M or PoE, 1000M, 10/100M, PoE
	TL-SG2210MP: PWR, SYS, PoE MAX, FAN, Speed or PoE, SFP1, SFP2, PoE, Speed
	T1600G-18TS: PWR, SYS, 1000Mbps, Link/Act
	TL-SG2218: PWR, SYS, 1000Mbps, Link/Act
	T1600G-52TS: PWR, SYS, 10/100/1000Mbps, 100Base-TX/1000Base-X
	TL-SG2428P/T1600G-52PS: PWR, SYS, FAN, PoE MAX, Speed, PoE, 100BaseTX/1000BASE-X
	T1700G-28TQ: PWR, SYS, Master, Link/Act, 1000M, 25, 26, 27, 28, Unit ID LED
	T1700X-16TS: PWR, SYS, FAN, Link/Act
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F) (For TL-SG2210MP/TL-SG2428P/TL-SL2428P) 0 °C to 40 °C (32 °F to 104 °F) (For other switches)

Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operating Humidity	10% to 90%RH Non-condensing
Storage Humidity	5% to 90%RH Non-condensing

CE Mark Warning



This is a class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC, 2011/65/EU, and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.tp-link.com/en/ce>.



Safety Information

- Keep the device away from water, fire, humidity, or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Place the device with its bottom surface downward.
- Do not use any other chargers other than those recommended.
- Do not use a damaged charger or USB cable to charge the device.
- The adapter shall be installed near the equipment and shall be easily accessible.
- The plug on the power supply cord is used as the disconnect device, the socket-outlet shall be easily accessible.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.



To ask questions, find answers, and communicate with TP-Link users or engineers, please visit <https://community.tp-link.com> to join TP-Link Community.



For technical support, the user guide, and other information, please visit <https://www.tp-link.com/support>, or simply scan the QR code.



If you have any suggestions or needs on the product guides, welcome to email techwriter@tp-link.com.cn.



<http://www.tp-link.com/support>



© 2020 TP-Link 7106509024
REV4.6.0

Documents / Resources

 Installation Guide JETSTREAM SMART SWITCH	tp-link T1600G Series Jetstream Smart Switch [pdf] Installation Guide T1600G Series, Jetstream Smart Switch
---	--

Manuals+