


# TRAN LED WAVE-RGB Q-CAP Flexible Fixtures Instruction Manual

[Home](#) » [TRAN LED](#) » TRAN LED WAVE-RGB Q-CAP Flexible Fixtures Instruction Manual 



## WAVE-RGB Q-CAP Flexible Fixtures – MICRO 5 SERIES

### Contents


- [1 Mounting](#)
- [2 Mounting Accessories](#)
- [3 Rated](#)
- [4 Connectors/Wire](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## Mounting

### WSC-02: WHITE SNUG CLIP

- For indoor/outdoor use
- Surface mounting

- Stainless steel/corrosion resistant
- Discrete mounting
- White glossy finish

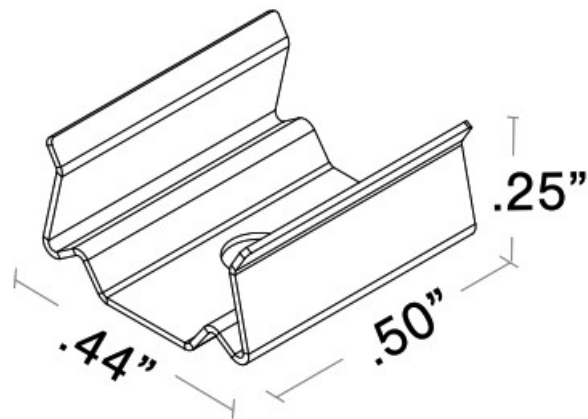


## MOUNTING HARDWARE

- #4 flat screw (one provided for each clip)
- 832 Silicone (sold separately)


## MICRO5-PPS-2: PVC MOUNT CLIP

- For indoor/outdoor use
- Surface mounting
- For joining seamless fixtures
- Wire way feature
- Off white finish
- Can be mounted with or without
- PPS-BRACKET (COVE FRIENDLY)
- RGB CON6/CON24 does not fit in wireway

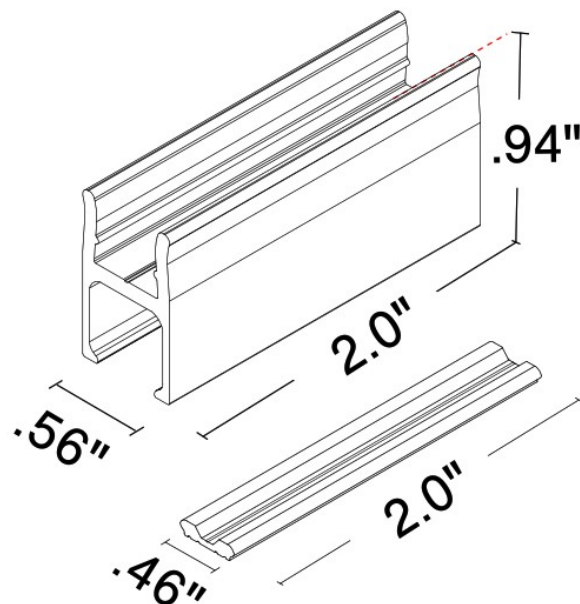


## MICRO5-PPS-96 & MICRO5-PPS-FT: PVC MOUNT CHANNEL

- 96" (PPS-96) or custom length (PPS-FT)
- For indoor/outdoor use
- Surface mounting
- Field modifications made easy
- Wire way feature
- Off white finish
- Can be mounted with or without
- PPS-BRACKET (COVE FRIENDLY)
- RGB CON6/CON24 does not fit in wireway

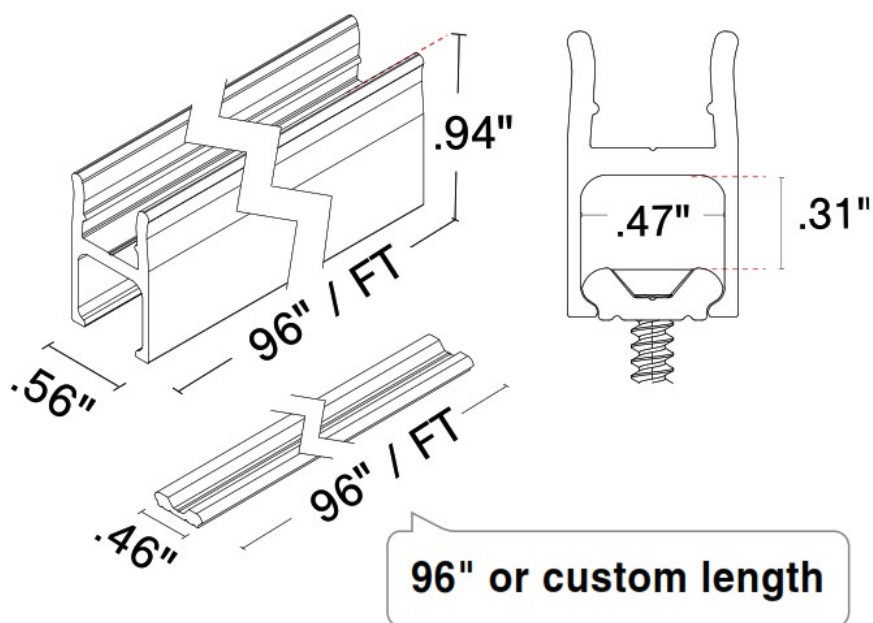

### Built in wireway:


The PPS-BRACKET allows you to create a wire way under the PPS channel without any screws interfering



## MICRO5-PPS-LP-2: PVC LOW PROFILE MOUNT CLIP


- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- For joining seamless fixtures
- No wire way

- Off white finish

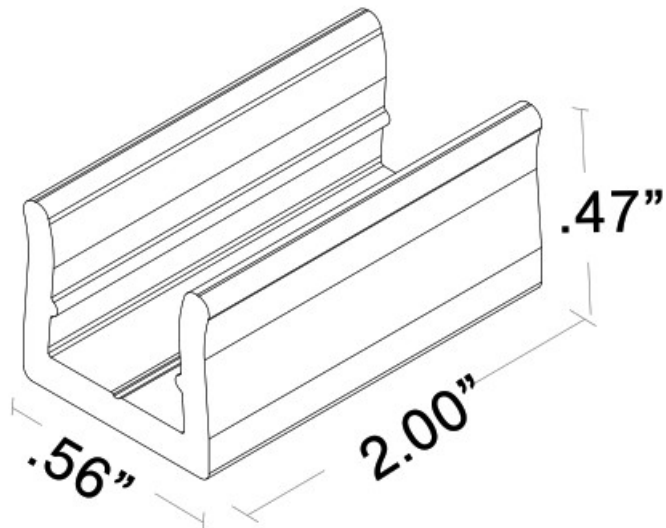

#### **MICRO5-PPS-LP-96 & MICRO5-PPS-LP-FT: PVC LOW PROFILE MOUNT CHANNEL**

- 96" (PPS-LP-96) or custom length (PPS-LP-FT)
- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- No wire way
- Off white finish

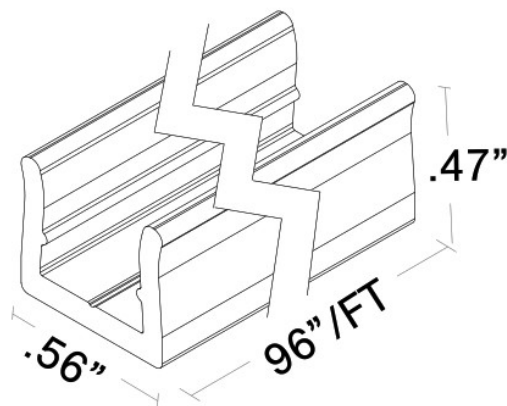


**96" or custom length**

#### **MOUNTING HARDWARE**

- #6 Flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

#### **Mounting Accessories**

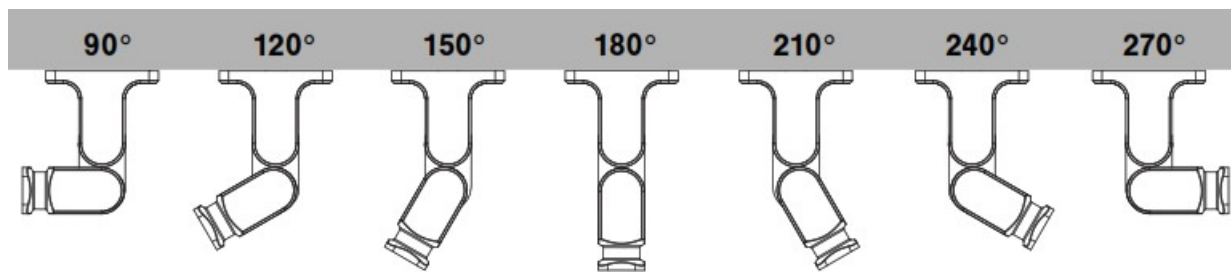


## Q-ANGLE


(Full ordering guide and installation available for this product in the [accessories](#) section of website)

- Offset lighting to illuminate signs, artwork, etc.
- For indoor/outdoor use
- Wall, ceiling, or floor mounted
- Anodized aluminum/corrosion resistant
- Free moving rotating head which can be locked into specific angles
- Preset dial notches for easy adjustments from 90° to 270°


90° BACK VIEW

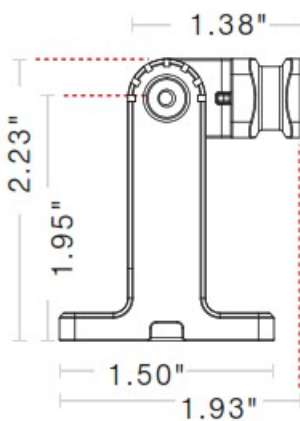

180° BACK VIEW

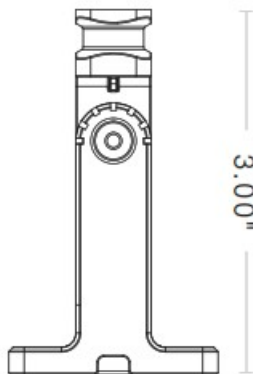


BASE; BOTTOM VIEW

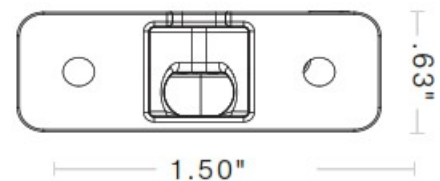

## MOUNTING HARDWARE

- Mounting Clip
- 6-32 Fillister head screw
- 4-40 Flat head screw
- Drywall anchor (not provided)
- #6- 1 1/4" wood screw




Q-ANGLE MUST BE MOUNTED EVERY 12"  
SEE [Q-ANGLE INSTALL](#) FOR MORE INFORMATION


**Rated**

## DRY

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

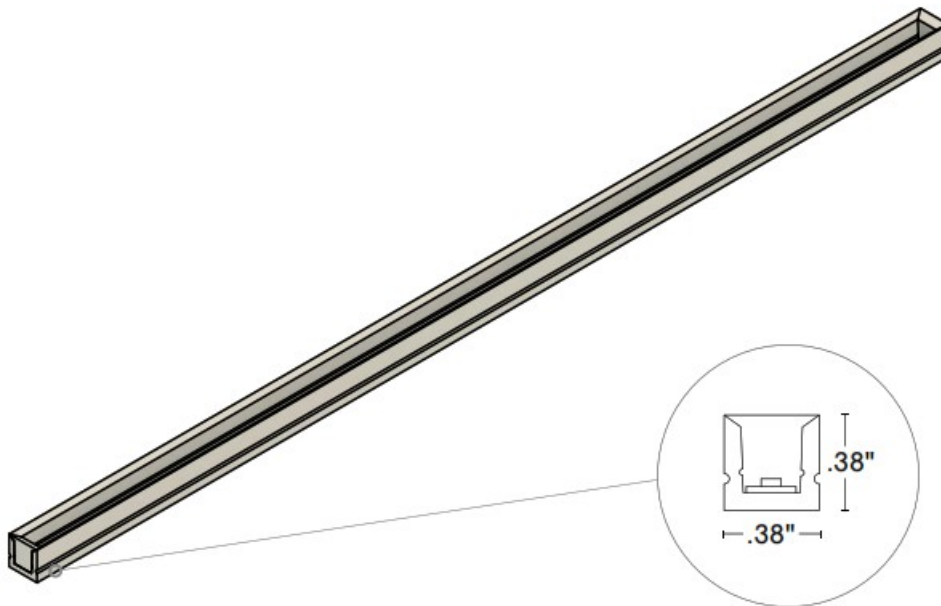


## COMPATIBLE CONNECTORS

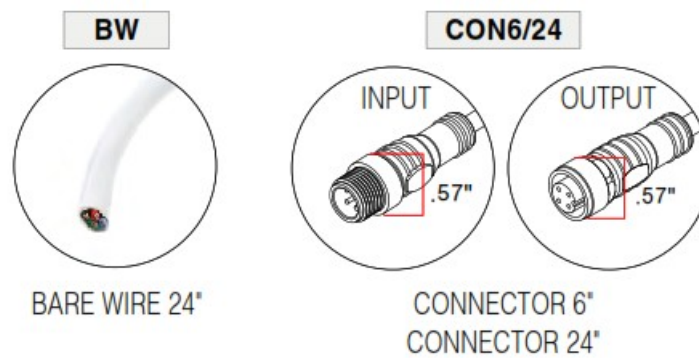

## WET

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

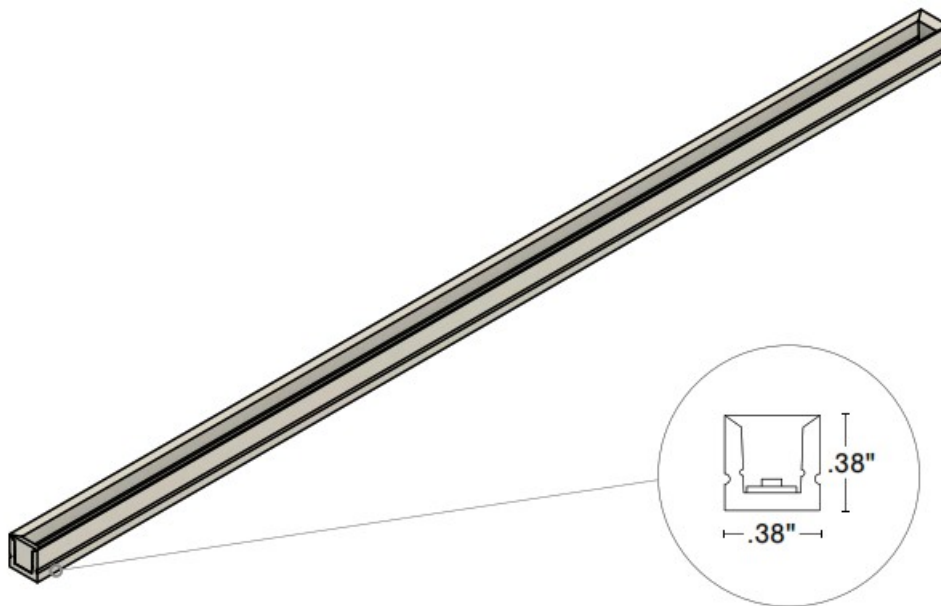


## COMPATIBLE CONNECTORS




## Lens



## Light Orientation






## Connectors

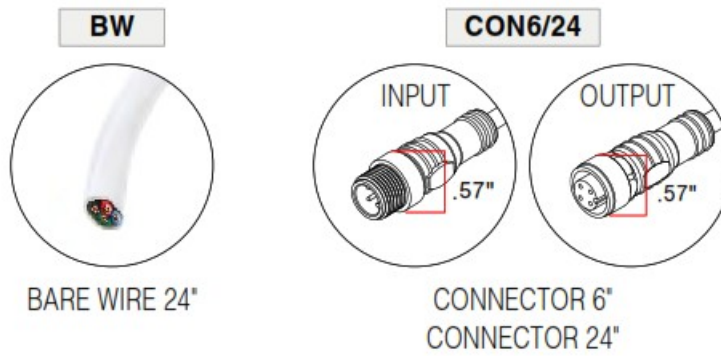


## Type



.0" added at end




.00" added at end  
.25" added to fixture height





## SEAMLESS

### MICRO5-PPS-2

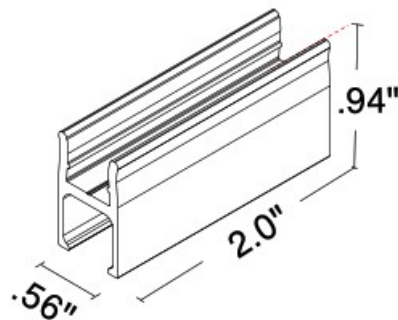


Order the PPS-2 to join two fixtures together with no visible break and order the PPS-96/PPS-FT or to support the fixtures, All seamless fixtures have CLEAR endcaps



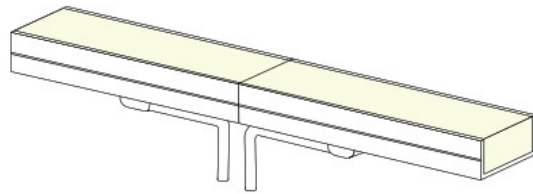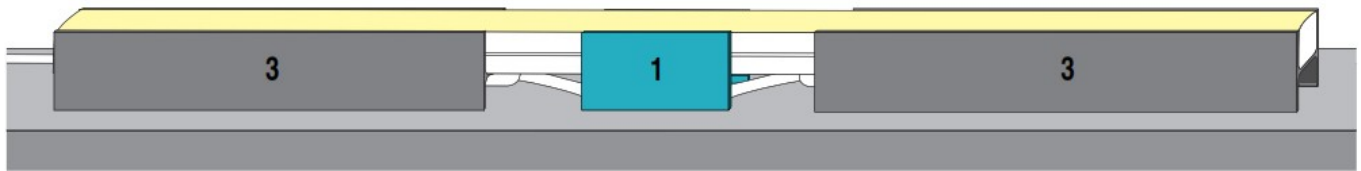


SEAMLESS WITH BARE WIRE

### MICRO5-PPS-LP-2



Order the PPS-LP-2 to support two fixtures together with no visible break and order the PPS-LP-96/PPS-LP-FT to support the fixture

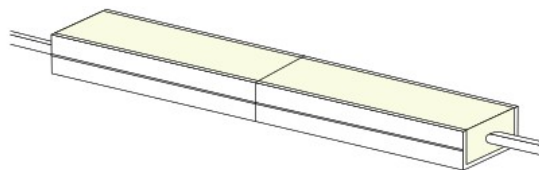

FIXTURE WITH BARE WIRE

- ❶ = PPS – 2
- ❷ = PPS – LP – 2
- ❸ = PPS – 96/PPS – FT or PPS – LP – 96/PPS – LP – FT

### Connectors/Wire

#### BARE WIRE

- 24 AWG, 4 conductor

- Outdoor rated
- 24" Standard length

**BW**




**BARE WIRE**


#### CONNECTOR 6" / CONNECTOR 24"

- 24 AWG, 4 conductor
- Indoor rated
- 6" or 24" Standard length

**CON6 / CON24**



**INPUT CONNECTOR**



**OUTPUT CONNECTOR**

© 2021 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | [sales@q-tran.com](mailto:sales@q-tran.com) |


[www.q-tran.com](http://www.q-tran.com)

Specification subject to change. Rev-09-27-21

#### Documents / Resources

	<p><b><a href="#">TRAN LED WAVE-RGB Q-CAP Flexible Fixtures</a></b> [pdf] Instruction Manual</p> <p>WAVE-RGB Q-CAP Flexible Fixtures, WAVE-RGB, WAVE-RGB Flexible Fixtures, Q-CAP Flexible Fixtures, Flexible Fixtures, Fixtures</p>
--	--

#### References

-  [RealNames | A more meaningful email address](#)
-  [LED Lighting Systems, Linear LED Lights, LED transformers | Q-Tran](#)

Manuals+.