Transcend® **DP110** Dashcam **Utilizes The** High Sensitivity **Image Sensor**





Transcend DP110 Dashcam Utilizes The High Sensitivity **Image Sensor User Manual**

Home » Transcend DP110 Dashcam Utilizes The High Sensitivity Image Sensor User Manual



Contents

- 1 Transcend DP110 Dashcam Utilizes The High Sensitivity Image **Sensor**
- 2 Getting Started
- **3 Function Buttons**
- **4 Recording Videos**
- **5 Menu Options**
- 6 Troubleshooting
- 7 Specifications
- **8 FCC Statement**
- **9 Warranty Policy**
- **10 Frequently Asked Questions**
- 11 Documents / Resources
 - 11.1 References
- 12 Related Posts



Transcend DP110 Dashcam Utilizes The High Sensitivity Image Sensor



Specifications

- Model: DrivePro 110 Dashcam
- Package Contents:
 - DrivePro 110 Dashcam
 - Suction Car Mount
 - Car Lighter Adapter
 - microSD Memory Card
 - Quick Start Guide

Package Contents

The DrivePro 110 dashcam package includes the following items:

DrivePro 110 Dashcam



Car Lighter Adapter



Suction Car Mount

microSD Memory Card





Quick Start Guide



Getting Started

Overview



Inserting a microSD Memory Card

Before you can start recording, you need to insert a microSD memory card into the DrivePro.

Insert a microSD memory card into the card slot of the DrivePro.



"WARNING"

- Always format a new memory card in the DrivePro before using it for the first time. To format a new memory card, press the Settings button during recording, and select Format Card.
- Formatting will erase all data on the memory card.
- DrivePro 110 can only support the FAT32 file system, not exFAT/NTFS. Please select FAT32 for firmware update.

To remove, push to eject the memory card out of the slot.

"WARNING"

Do not remove the memory card during shutdown to avoid damages to the memory card and loss of recorded videos.

- We recommend Transcend's High Endurance microSD cards or MLC-based memory cards to ensure the best recording performance.
 - High Endurance microSDHC card
 - High Endurance microSDXC 350V card
- For more details on the approximate recording time according to card capacity, go to FAQ on our official website.

Mounting the DrivePro

1. Insert the mount bracket into the top of the DrivePro, and slide sideways until you hear a click.



- 2. Thoroughly clean and dry the area of the windshield you intend to mount the DrivePro. If possible ,mount it in the middle of the windshield and close to the height of the rear-view mirror for the bestfield of view.
- 3. Peel off the protective film from the mount bracket's foam sticker, and firmly attach the DrivePro to the windshield.
- 4. Turn the adjustment knob anticlockwise to loosen, and then adjust the DrivePro's position.



5. After the DrivePro is in the best position, turn the adjustment knob clockwise to make sure that the DrivePro is securely locked in place.



Connecting to Power

1. Connect one end of the car lighter adapter to the DrivePro's USB connector.



2. Connect the other end of the adapter to your car power outlet.




- 3. After the car engine is switched on, the DrivePro will automatically turn on and start recording.
- 4. After the car engine is switched off, the DrivePro will automatically save the current recording and power it off.

"Note"

• Insert a microSD memory card into the DrivePro before connecting it to your car's power outlet.

- Car power outlets of some types of vehicles will still supply power after the car engine is turned off. If your car is of this type, please unplug your dashcam from the power outlet to avoid unnecessary power consumption and unexpected issues.
- Leaving the car engine switched off during long video recordings can completely drain the car's power.

Function Buttons

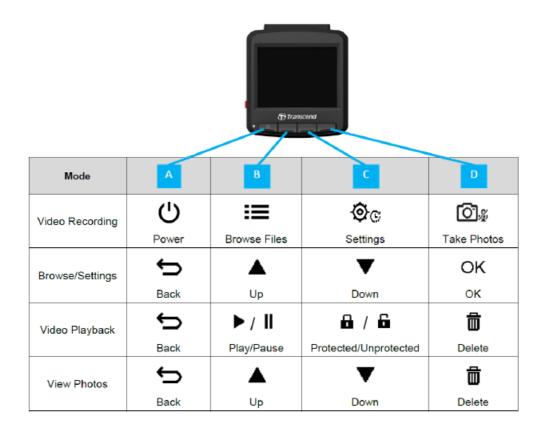

- Press and hold the Power button for 3 seconds to manually turn on/off the DrivePro in any mode.
- Long press the Snapshot button to quickly turn on/off the microphone..
- Long press the Settings button to quickly enter the Time-Lapse Video menu.


LED Indicator

LED Status	Definition
Solid Red	Standby
Flashing Red	Recording

Setting the Date and Time

Set the date and time first to ensure the recording time is right.

- 1. During video recording, press the Settings button.
- 2. Use \wedge to select Date/Time , and press OK .



- 3. Use ★/▼ to adjust values, and press OK to move to the next block.
- 4. Repeat step 3 above until the date and time settings are complete.

Recording Videos

Recording Screen



- 1. Recording status indicator
- 2. Video length
- 3. Video resolution / Frame rate
- 4. Voice record status
- 5. Battery status
- 6. Date / Time
- After the car engine is switched on, the DrivePro will automatically turn on and start recording.
- By default, one video file is saved for every 3 minutes of recording. To adjust the recording length, please go to the Settings menu.
- After the car engine is switched off, the DrivePro will automatically save the current recording and power off.

Emergency Recording

30% of the storage space will be saved for emergency video files. Video files recorded in Emergency Recording mode are protected from being overwritten. To adjust the recording length, please go to the Settings menu.



Manual Emergency Recording

During video recording, press the emergency button on the left-hand side of the DrivePro to activate Emergency Recording mode. The emergency icon will appear on the screen when activated.



G-Sensor Emergency Recording

During video recording, the DrivePro automatically activates Emergency Recording mode when detecting a collision or hit.

- If the G-Sensor sensitivity is set to "High", even minor shocks activate Emergency Recording mode.
- If the G-Sensor sensitivity is set to "Low", only significant shocks activate Emergency Recording mode.

G-Sensor sensitivity can be adjusted in the Settings menu

"Note"

Loop recording is enabled by default. The earliest emergency files will be overwritten by the latest emergency files recorded.

Low Battery

Please connect the DrivePro to the power supply immediately after the Low Battery warning pops up to avoid errors occurring with the system time. Please avoid using the built-in battery to record videos directly.



"Note"

Please fully charge the DrivePro before using it.

Browsing Photos and Playing Videos

Playing Videos / Browsing Photos

- 1. During video recording, press the Browse button.
- 2. Use to select either Normal , Emergency , or Snapshot , and press OK



3. Use ★/▼ to select the desired video file, and press OK .



4. Press to pause playback. Press again to resume playback.



5. Press to return to the video file list.


Deleting Videos

- 1. During the playback of a video file, press . The message "Delete?" will pop up.
- 2. Use ★/▼ to select Yes , and press OK to delete the file.



Protecting Videos

- 1. During the playback of a normal video file, press . The message "Lock?" will pop up.
- 2. Use ★/▼ to select Yes , and press OK to protect the file.




Settings

In the Settings menu, you can adjust video resolution, recording time and G-Sensor sensitivity. You can also set the date/time, change the interface language, format the memory card, and upgrade firmware.

- 1. During video recording, press the Settings button.
- 2. Select the preferred menu option using , and press OK.



3. Select the desired setting using



4. Press to return to the Settings menu.

Menu Options

Camera			
Icon	Feature	Function / Option	
88	Resolution	Set the resolution/quality for video recording. Note: Available options are displayed depending on your model.	
		1440P 30fps / 1080P 60fps / 1080P 30fps / 720P 60fps / 720P 30fps	
	Exposure Value	Adjust exposure composition value to lighten or darken the preview screen.	
	value	+2.0 / +1.5 / +1.0 / +0.5 / 0.0 (default) / -0.5 / -1.0 / -1.5 / -2.0	
,n	Migrophone	Turn off/on the microphone during video recording.	
Ф	Microphone	Disable / Enable (default)	
H ₂ H	Video	Set the recording length of each recorded video file.	
>	Length	1 min / 3 mins (default) / 5 mins	
H. ZH	Video	Display the recording time of the video.	
~	Stamp	Disable / Enable (default)	
© _N	Loop	Overwrite the earliest video files with new ones if the microSD card is full.	
G	Recording	Disable / Enable (default)	
HZ	Light	Select the appropriate frequency to avoid flashing A/C light.	
뿠	Frequency	50 Hz (default) / 60 Hz	
Time-lapse video mode can only be evill replace Normal recording mode. Note: To prevent the car battery from		Note: To prevent the car battery from being completely drained, the DrivePro will automatically power off after 48 consecutive hours of recording in Time-	
		Disable (default) / 1 sec/shot / 2 sec/shot / 4 sec/shot	

Driving Assistant		
Icon	Feature	Function / Option
Headlight Reminder	When the DrivePro detects poor lighting conditions, the headlight reminder will automatically activate.	
	Reminder	Disable (default) / Enable
555 V D	Driver Fatigue	Remind the driver of the need to rest after driving for a preset, driver- determined period of time.
	Alert	Disable (default) / 1 hour / 2 hours / 3 hours / 4 hours
System		
Icon	on Feature Function / Option	
烒 ን)	Volume	Set the speaker volume level.
40	volume	0 to 7 (Choose 0 to switch on Silent Mode)
(G)	101	Adjust the sensitivity of the G-Sensor.
(G) G-Sensor	G-Sensor	Disable / Low (default) / Medium / High
(¹) →	Delay	Schedule the DrivePro to shut down at a certain time.
Powe	Power Off	Disable / 10 secs (default) / 30 secs

ত্র	Auto Display Off	Set duration for display to automatically turn off after recording begins. Note: Auto Display Off is disabled when Headlight Reminder or Driver Fatigue Alert is enabled.	
		Never (default) / After 1 min / After 3 mins	
Ŀ	Date/Time	Set the date, time, and time zone.	
		Set the on-screen display menu language.	
ABC	Language	English/繁體中文/简体中文/日本語/Deutsch/Español/Français /Italiano/Русский/Português/Ελληνικά/Türkçe/한국어/ไทย	
X	Format Card	Format the microSD memory card.	
		Cancel (default) / Confirm	
[<u>↑</u>]	Upgrade Firmware	Keep your DrivePro up-to-date with the latest firmware version. Note: To prevent data loss, it is recommended that you backup your data to another location before upgrading the firmware. Download the latest version from Transcend website.	
		Cancel (default) / Confirm	
7*5	Restore	Reset all settings to their factory defaults.	
Defaults		Cancel / Confirm	
	Screen Adjustment	Adjust the position of the recording screen.	
i	Information	Display the DrivePro's current firmware version, card capacity, and model name/number.	

Firmware Upgrade

1. After downloading firmware from Transcend website, decompress it and then put the file in the "SYSTEM" folder of the microSD memory card.



- 2. Insert the microSD memory card that contains the latest firmware version into the card slot of the DrivePro.
- 3. Connect the DrivePro to an external power outlet. Select Upgrade Firmware from the Settings menu and press OK to start the firmware detection process. The DrivePro will automatically find the latest firmware file. Select Confirm to complete the firmware upgrade process.

"Note"

The firmware upgrade takes about 1 to 2 minutes. Please do not turn off the DrivePro while upgrading. The DrivePro will restart automatically after the upgrade is complete.

"WARNING"

NEVER remove the power cord or the microSD memory card while the firmware is being upgraded. If the DrivePro cannot be turned on due to firmware upgrade failure, please contact Transcend customer service for technical support.

DrivePro Toolbox Software

The DrivePro Toolbox, developed for Windows and macOS, features a user-friendly interface that allows you to select and play videos recorded on your DrivePro without the need to install separate codecs.

System requirements for connecting the DrivePro to a computer:

- · A desktop or a laptop with a working USB port
 - Microsoft Windows 10 or later
 - macOS 10.12 or later
- 1. Download the installation files.
- 2. Install DrivePro Toolbox software on your desktop or laptop.

Main Features		
Video Sorting	Sort videos by filename, recording date, or group, which allows users to search for recorded videos efficiently and to play them.	
Smooth Video Playback	Connect the DrivePro or use a microSD card reader or adapter to play back recorded video events on your computer.	
Edit and Trim Videos	Select a video, trim it and save it as a new clip immediately. You can also capture snapshots from your videos during playback.	
Map View	View the driving paths of your journey displayed on maps along with the recorded video.	
	Note: This feature works with DrivePro models with a GPS receiver. (DrivePro	
	550, DrivePro 520, DrivePro 250, DrivePro 230, and DrivePro 220)	
License Plate Recognition	Automatically identify the license plates in a video and extract footage to allow users to perform a quick search. Note: Available only on Windows 64-bit version.	
Export Merged Videos	Play videos recorded by the front and rear lens/camera simultaneously. Export and play merged videos. Note: Available only on dual lens/camera models: DP550/DP520.	

Transferring Files to a Computer

Take the microSD memory card out of the DrivePro, and insert it to a compatible card reader to transfer files to

your computer.

Troubleshooting

If a problem occurs to your DrivePro, please check the instructions below before sending your Drive Profor repair. If you cannot find any ideal solution to your questions, please consult the store where you purchased the product or the service center, or contact the local Transcend branch office. You can also visit Transcend's website for FAQ and Technical Support services. For any hardware issues, please refer to the DrivePro User's Manual.

- None of the DrivePro buttons are responding (The dashcam crashes or runs with lag.)
 - Try unplugging the car adapter from your DrivePro, and reconnecting it.
- My DrivePro cannot play videos stored in my memory card.
 - Edited videos may not be displayed on your DrivePro.
- Nothing happens when I press the "Emergency button."
 - Emergency Recording works in the Recording mode only.

Safety Cautions

These usage and safety guidelines are IMPORTANT! Please follow them carefully to ensure your safety and help protect your DrivePro from potential damages.

General Use

- For in-car use only.
- For your safety, do not operate the DrivePro or use the DrivePro App while driving.
- Avoid placing the DrivePro in an extreme temperature environment.
- Avoid splashing water or any other liquids on the DrivePro and its accessories.
- Do not use the DrivePro in an environment with strong magnetic fields or excessive vibration.
- Only use the car lighter adapter provided by Transcend. Other adapters may not be compatible with the DrivePro.
- Some vehicles have power outlets that remain active even when the engine is turned off. If your car is of this type, please unplug your dashcam from the car power outlet to avoid unnecessary power consumption and unexpected issues.

Mounting Location

- Never place the DrivePro where the driver's view or deployment of airbags is obstructed.
- Mount the DrivePro within the range of the windshield wipers to ensure clear visibility in rain.
- WARNING: If the DrivePro is mounted on a tinted window, remove it carefully to prevent damage to the tint film.

· Backing up Data

Transcend does NOT take any responsibility for data loss or damage during operation. We strongly
advise that you regularly back up data in the memory card for your dashcam to a computer or other
storage medium.

"WARNING"

Rechargeable batteries may leak under extreme conditions. Misuse or abuse can lead to the following hazards:

Overheating

- Fire
- Explosion
- Smoke emission

Specifications



DrivePro 110			
	Models produced before 2023/04	Models produced after 2023/04	
Dimensions	70.2 mm (L) × 63.1 mm (W)× 32.5 mm (H)		
Weight	71 g 69 g		
Connect Interfac e	USB 2.0		
Memory Card Su pported	Check product specifications on our official website		
Panel	2.4" color LCD		
Lens	F/2.0, 140° wide angle		
Resolution / Fra me Rate	Full HD 1920 x 1080P 60/30fps HD 1280 x 7 20P 60/30fps	2K QHD 2560 x 1440P 30fps Full HD 1920 x 1080P 60/30fps HD 1280 x 7 20P 60/30fps	
Video Formats	H.264 (MOV: up to 1920 x 1080 60fps)	H.264 (MP4: up to 2560 x 1440 30fps)	
Control buttons	4 function buttons 1 emergency button		

DrivePro 110			
	Models produced before 2023/04	Models produced after 2023/04	
	1 reset button		
Operating Tempe rature	-20°C (-4°F) to 65°C (149°F)		
Power Supply (car charger)	Input DC 12V to 24V Output DC 5V / 1A	Input DC 12V to 24V Output DC 5V / 2A	
Certificate	CE / UKCA / FCC / BSMI / KC / EAC / RCM		
Warranty	Two-year Limited Warranty		
Note	In addition to the bundled microSD card, we recommend Transcend's High Endurance micro SD cards or MLC-based memory cards to ensure the best recording performance. High Endurance micro SDHC card High Endurance micro SDXC 350V card		
	Tilgit Etidularice micro SDAC 350V card		

Recycling and Environmental Protection

For more information on recycling the product (WEEE) and battery disposal, please refer to the following link: https://www.transcend-info.com/about/green

EU Compliance Statement

Transcend Information hereby declares that all CE marked Transcend products incorporating radio equipment functionality are in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

https://www.transcend-info.com/eu_compliance

FCC Statement

Federal Communications Commission(FCC) Statement

This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference.
- 2. This device must accept any interference received including interference that may cause undesired operation.

This Equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help.

Warranty Policy

Please find the warranty period of this product on its package. For details of Warranty Terms and Conditions and Warranty Periods , please refer to the link below: https://www.transcend-info.com/warranty

GNU General Public License (GPL)Disclosure

Please visit https://www.transcend-info.com/Legal/?no=10 to view more information on open-source licensing.

End-User License Agreement (EULA)

For details of software license terms, please refer to the following link: https://www.transcend-info.com/legal/gpl-disclosure-eula

Eurasian Conformity Mark (EAC)



Frequently Asked Questions

- Q: What type of memory card should I use with DrivePro 110?
 - A: We recommend using Transcend's High Endurance microSD cards or MLC-based memory cards for best recording performance. Avoid using exFAT/NTFS formatted cards as DrivePro 110 supports only FAT32 file system.
- Q: Can I leave DrivePro 110 running with the car engine off?
 - A: Leaving the car engine switched off during long video recordings can completely drain the car battery.
 Unplug your dashcam from the power outlet if your car's power outlet still supplies power after the engine is turned off to avoid unnecessary power consumption and issues.

Documents / Resources



Transcend DP110 Dashcam Utilizes The High Sensitivity Image Sensor [pdf] User Manual DP110, DP110 Dashcam Utilizes The High Sensitivity Image Sensor, DP110, Dashcam Utilizes The High Sensitivity Image Sensor, High Sensitivity Image Sensor, Sensitivity Image Sensor, Image Sensor, Sensor

References

- Topen Source Software Disclosure Transcend Information, Inc.
- Transcend Information, Inc.
- The What is the total video recording time on micro SD cards when used with the DrivePro? Transcend

Information, Inc.

- **DrivePro 110 | Product Support Transcend Information, Inc.**
- @ Warranty Terms and Conditions Transcend Information, Inc.
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.