



## TROX ARK2-A2 Non Return Damper Installation Guide

[Home](#) » [TROX](#) » TROX ARK2-A2 Non Return Damper Installation Guide 

### TROX ARK2-A2 Non Return Damper Installation Guide



## Contents

### [1 FOR THE FAST AND SIMPLE INSTALLATION OF NONRETURN DAMPERS AND PRESSURE-RELIEF DAMPERS](#)

### [2 TECHNICAL INFORMATION](#)

### [3 Documents / Resources](#)

#### [3.1 References](#)

### [4 Related Posts](#)

## FOR THE FAST AND SIMPLE INSTALLATION OF NONRETURN DAMPERS AND PRESSURE-RELIEF DAMPERS

Installation subframe for the fast and precise installation of non-return dampers and pressure-relief dampers. Installation subframes with fixing tabs are mortared into the wall opening, then the dampers are fastened to the subframes.

- Angle sections made of galvanized steel or stainless steel
- Galvanized steel variant with screw-on fixing tabs
- Stainless steel variant with welded fixing tabs

### Application

- For the installation of non-return dampers and pressure-relief dampers in walls and ceiling slabs
- Simplified installation
- The installation subframe allows for the fast, simple and precise installation of non-return dampers and pressure-relief dampers.

### Nominal sizes

- B: 200, 400, 600, 800, 1000, 1200 mm (intermediate sizes: 201 – 1199 mm, in increments of 1 mm)
- H: 345, 675, 1005, 1335, 1665, 1995 mm (intermediate sizes 355 – 505, 685 – 835, 1015 – 1165, 1345 – 1495, 1675 – 1825 mm in increments of 1 mm)
- Any combination of B × H

### Parts and characteristics

- Installation subframe consisting of angle sections
- Threaded studs or hexagon head screws Washers
- Hexagon nuts
- Fixing tab
- Materials and surfaces

### UL-1, UL-2

- Installation subframe made of galvanised steel (angle section 35 × 35 × 3 mm)
- Welded fixing tabs with integral nuts, screws and washers made of galvanised steel

## KUL, ARK, ARK2

- Installation subframe made of galvanised steel (angle section 35 × 35 × 3 mm)
- Screw-on fixing tabs, threaded studs, screws, nuts and washers made of galvanised steel

## ARK-A2, ARK2-A2

- Installation subframe made of stainless steel, material no. 1.4301
- Welded fixing tabs, threaded studs, nuts and washers made of stainless steel, material no. 1.4301

## TECHNICAL INFORMATION

Installation subframe made of galvanised steel for non-return dampers and pressure-relief dampers


1. Threaded stud
2. Washer
3. Hexagon nut
4. Fixing tab
5. Hexagon head screw
6. Installation subframe

Description	Type
Galvanised steel	UL, KUL, ARK, ARK2
Stainless steel	ARK-A2, ARK2-A2

## Materials

Part	Damper type or variant	Material	Notes
Installation subframe	UL, KUL, ARK, ARK2	Galvanised steel	Angle section frame 35 × 35 × 3 mm
	ARK-A2, ARK2-A2	Stainless steel, material no. 1.4301	
Fixing tabs, screws, nuts and washers	UL	Galvanised steel	Welded fixing tabs
	KUL, ARK, ARK2	Galvanised steel	Screw-on fixing tabs
Fixing tabs, threaded studs, nuts and washers	ARK-A2, ARK2-A2	Stainless steel, material no. 1.4301	Welded fixing tabs

Installation subframe ready to be mortared in

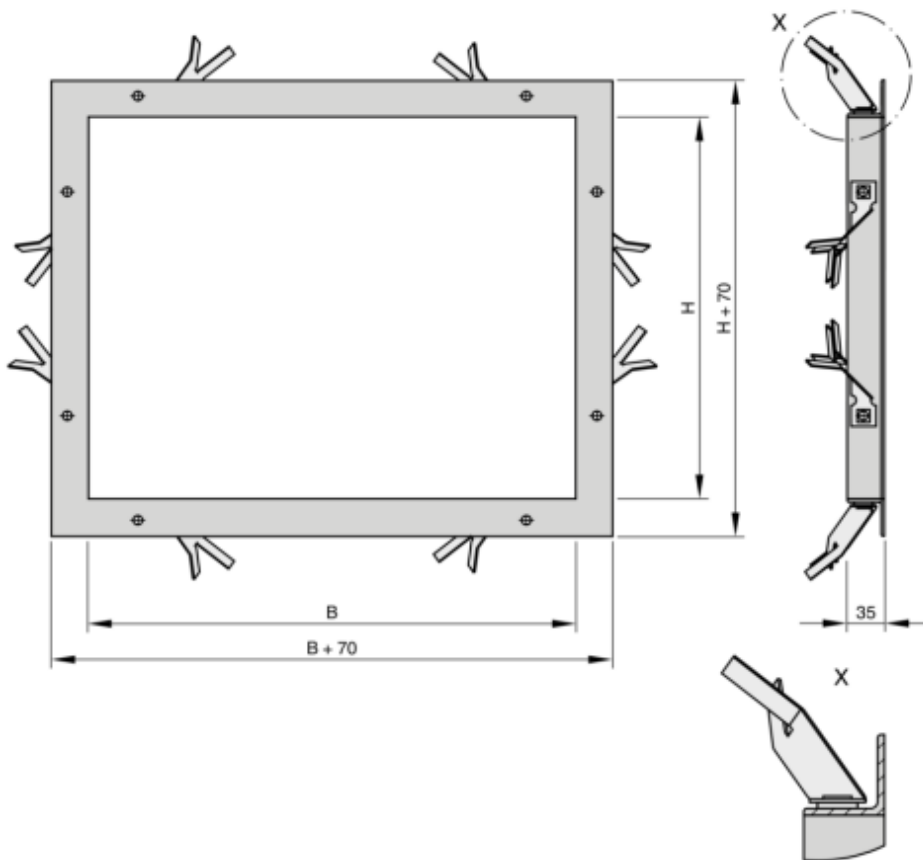

Before the subframe is mortared in, the fixing tabs must be bent and spread (by others).

### Installation details

#### Installation and commissioning

UL

Before mortaring in the installation subframe

- Bend and spread the fixing tabs

After mortaring in the installation subframe

- Align the non-return damper with the subframe and fasten it.

#### KUL, ARK, ARK2


Before mortaring in the installation subframe

- Fasten the threaded studs, washers and nuts to the installation subframe
- Fix the screw-on fixing tabs with hexagon nuts
- Fasten the remaining screw-on fixing tabs (regular spacing, about every 375 – 625 mm)

After mortaring in the installation subframe

- Unscrew the hexagon nuts
- Align the non-return damper or pressure-relief damper with the subframe and fasten it.

**Installation in front of internal wall openings.**

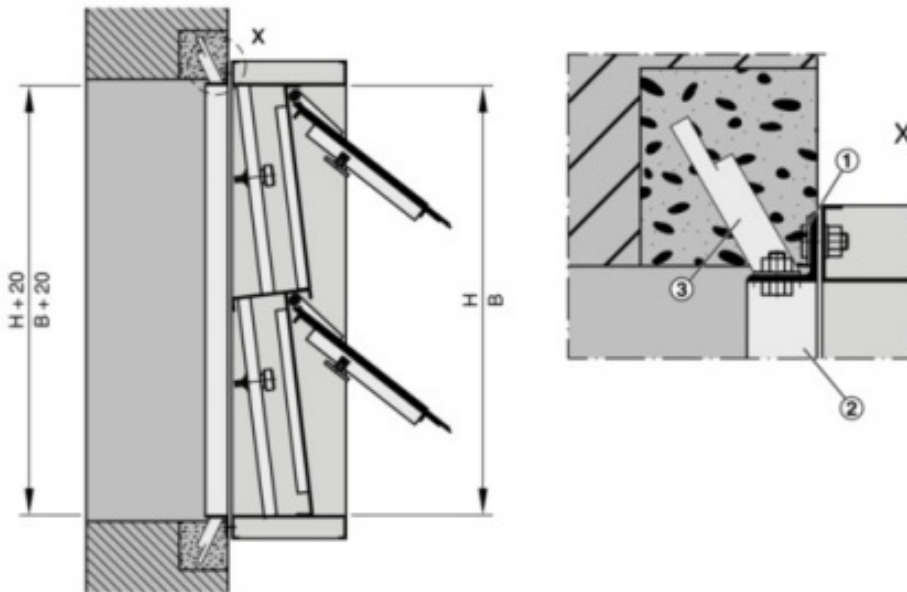

1. Threaded stud
2. instillation subframe
3. Fixing tab

**Illustration shows ARK2**

# TROX<sup>®</sup> TECHNIK

The art of handling air

[view \(1\)](#)

**Documents / Resources**

	<p><b><a href="#">TROX ARK2-A2 Non Return Damper</a></b> [pdf] Installation Guide</p> <p>ARK-A2, ARK2-A2, ARK2-A2 Non Return Damper, Non Return Damper, Return Damper, Damper</p>
---	---

## References

- [X WELKOM - BIENVENUE | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X ER – Self-powered dampers | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Contact | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Mechanically self-powered dampers | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X GENERAL PURCHASING CONDITIONS | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Accessories | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Products | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X External louvres - louver blades | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Delivery and payment terms TROX GmbH | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Disclaimer | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X Imprint | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [X OUR DATA PROTECTION POLICY | S.A. TROX Belgium/TROX Belgium N.V.](#)
- [User Manual](#)