




## Tunstall PL-969 Keysafe Instructions

[Home](#) » [Tunstall](#) » Tunstall PL-969 Keysafe Instructions 



### PL-969 Keysafe Instruction Manual

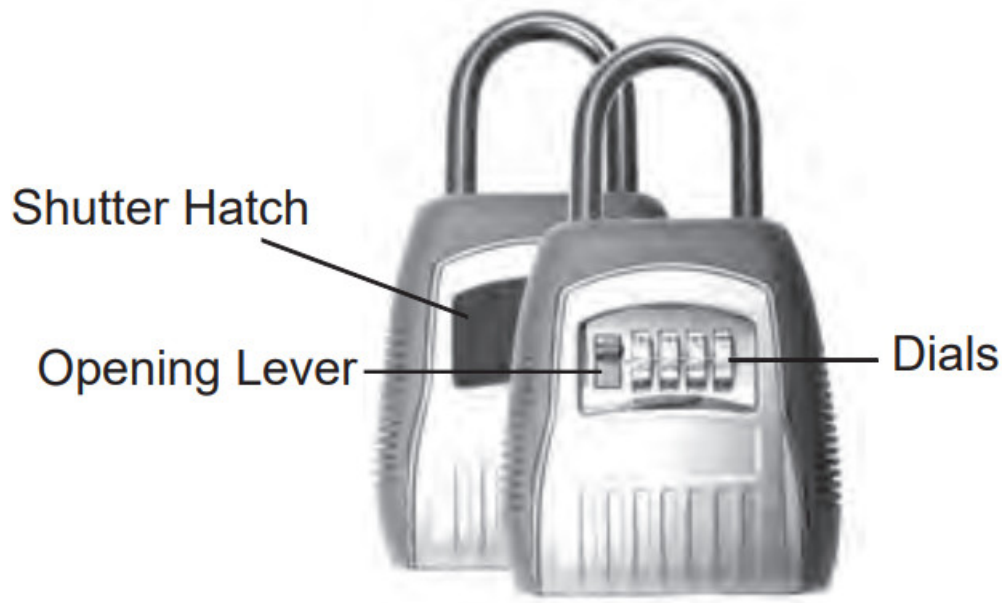


#### Contents

- [1 Opening](#)
- [2 Setting new combination](#)
- [3 Opening your shackle](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

### Opening

1. Open the shutter hatch to reveal the dial and the opening lever.
2. Dial existing combination, otherwise factory default 0.0.0.0
3. Press down on the opening lever

### Setting new combination

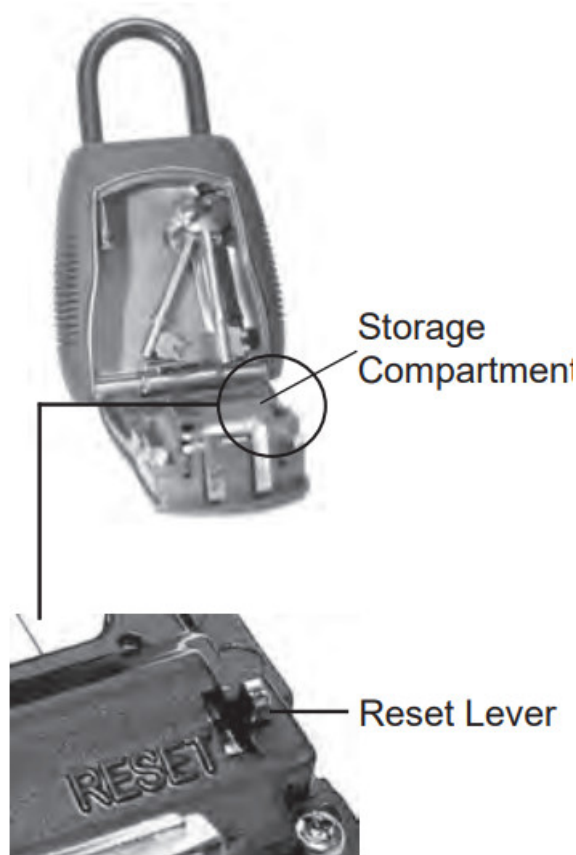

1. Open the Sentinel door to reveal the setting mechanism (refer to the above)
2. Push the reset lever left and towards you and the reset lever will stay in position.
3. Rotate dials to your preferred combination.
4. Push the reset lever up and away from you to return to the original position. Double-check your combination before closing the storage compartment door.
5. Close the storage compartment.
6. Scramble the combination dials to lock the Sentinel and conceal your combination.
7. Close the shutter hatch.

### Opening your shackle



1. Open your lock (refer to above).
2. Slide the Release Lever in direction of the arrow.
3. Open lock Shackle.
4. Then remove Shackle.
5. Affix to suitable anchor.

### **Closing your shackle**

1. Holding the Slide Lever in the direction of the arrow.
2. Relocate Shackle into the lock.
3. Then release Slide Lever.

### **NOTES:**

1. We suggest that you mount the lock in a discrete location away from direct views, such as porches, garages, or out of direct eye line.
2. Keep the shutter hatch closed to increase the weather resistance and to conceal the dials from view.

### **Documents / Resources**



## [Tunstall PL-969 Keysafe](#) [pdf] Instructions

PL-969 Keysafe, PL-969, Keysafe