



TURING TP-MRP042T-B SMART Series Network Video Recorder w/ Bridge Owner's Manual

[Home](#) » [TURING](#) » TURING TP-MRP042T-B SMART Series Network Video Recorder w/ Bridge Owner's Manual 







TURING TP-MRP042T-B SMART Series Network Video Recorder w/ Bridge Owner's Manual



Contents


- [1 Icons](#)
- [2 Fast & Easy Security Workflow with CORE AI License Attached to Cameras](#)
- [3 SPECIFICATIONS](#)
- [4 DIMENSIONS](#)
- [5 Contact Us](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Icons

	<p>Enables Turing Smart VSaaS for Turing and third-party IP cameras</p>
	<p>Up to 8MP input resolution</p>
	<p>Up to 2 SATA HDD slots</p>
	<p>Plug-and-Play POE for all cameras</p>
	<p>Supports H.265 & H.264</p>
	<p>NDAA Compliant</p>

Fast & Easy Security Workflow with CORE AI License Attached to Cameras


- People* & vehicle attribute search

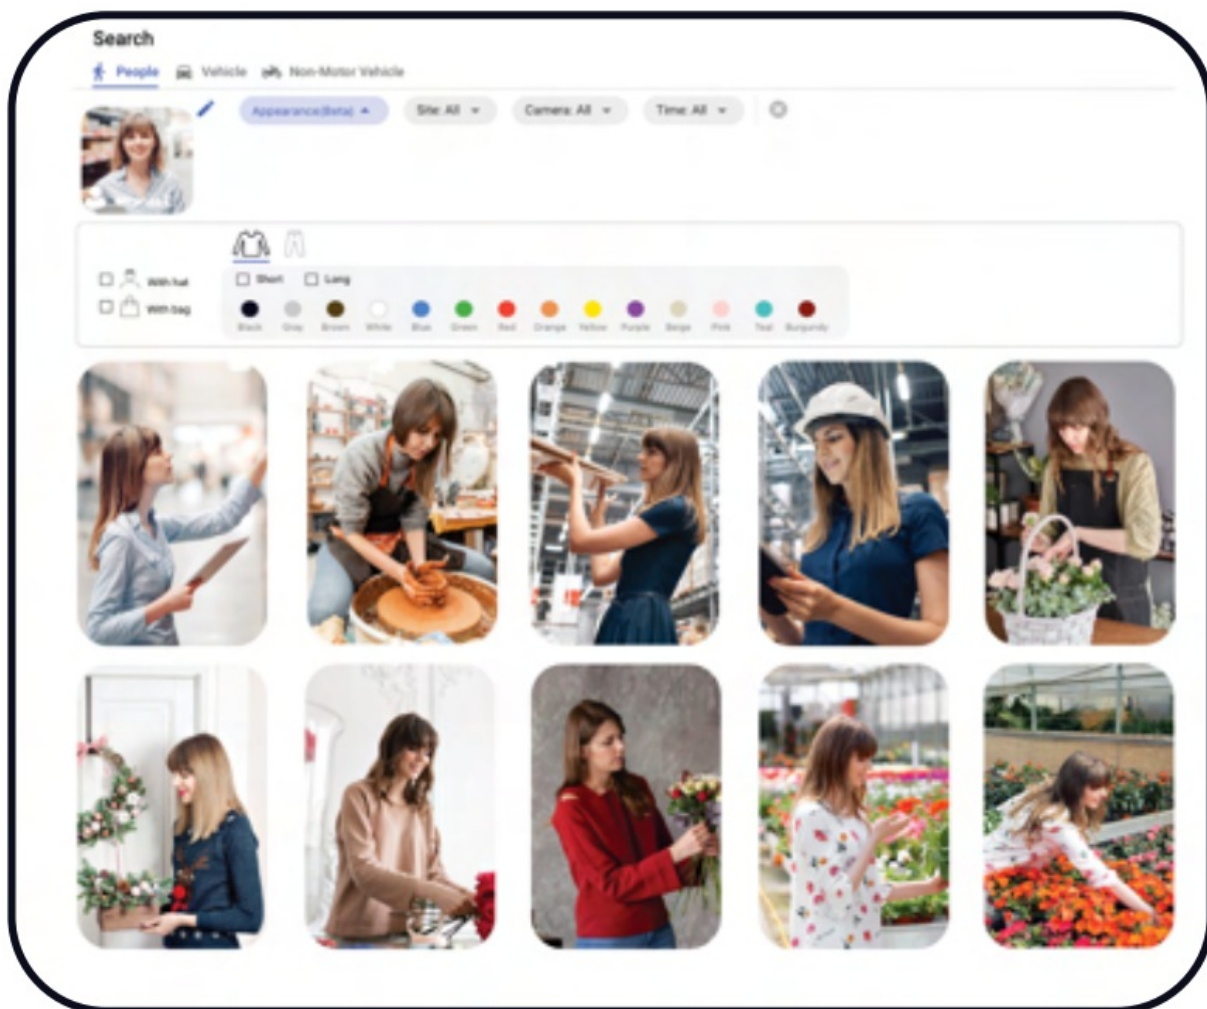

- License plate recognition with black- and whitelists



- Customized smart alerts anywhere using Vision apps

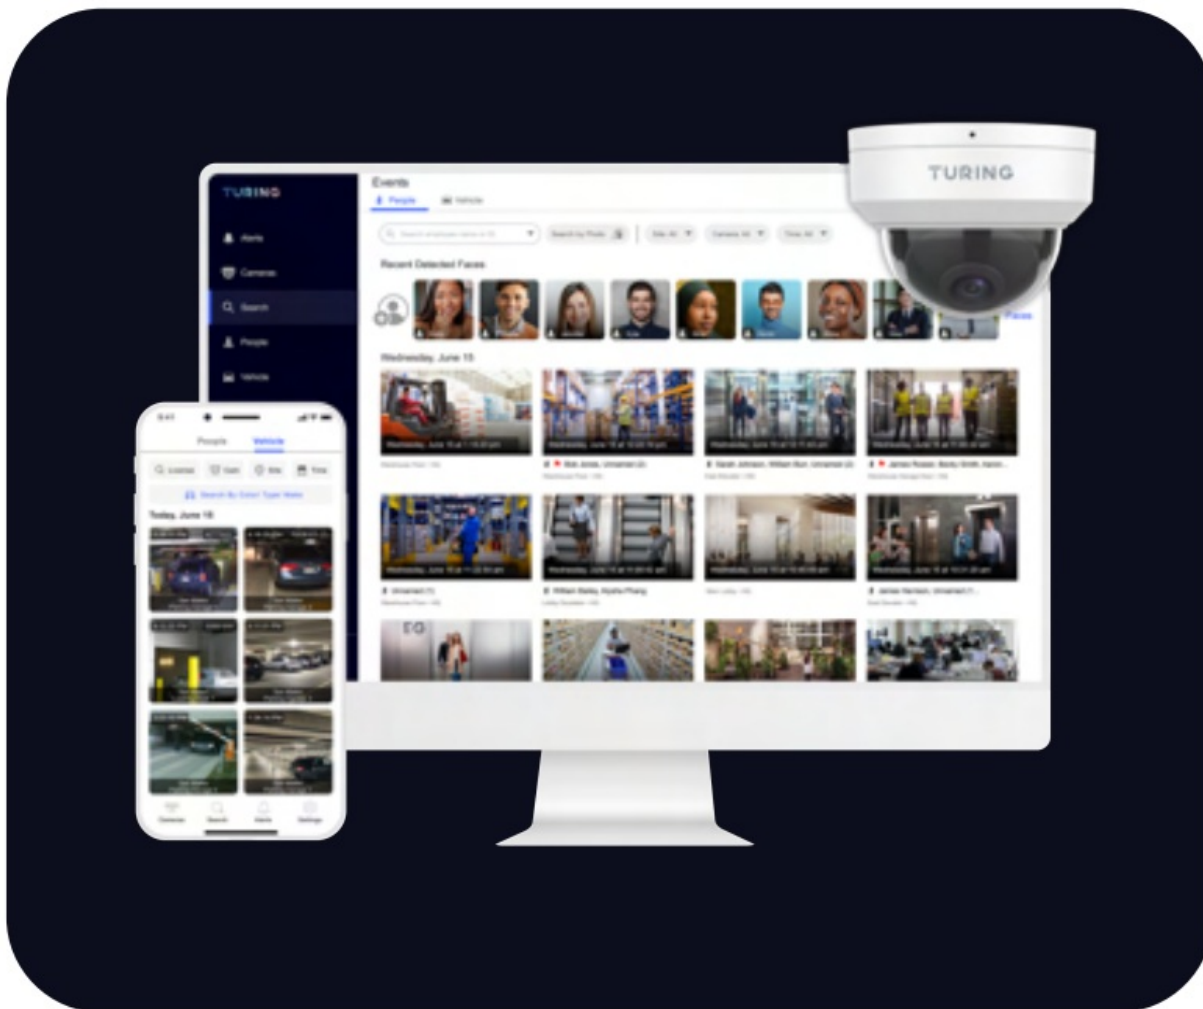

SPECIFICATIONS




Model Number	TR-MRP042T-B	TR-MRP082T-B / TR-MRP08-B	TR-MRP164T-B
Video Inputs	4	8	16
Input Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/ D1/2CIF/CIF		

HDMI/VGA Output	HDMI: 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60 VGA: 1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60		
Output Type	Simultaneous (identical between HDMI and VGA outputs)		
Decoding Capability	Ultra 265, H.265, H.264, MJPEG		
Audio I/O	Audio In: 1-ch, RCA; Audio Out: 1-ch, RCA		
Hard Disk Slots	1 SATA	2 SATA	2 SATA
Max HDD Size	6TB	14 TB	14 TB
Included HDD	2 TB	TR-MRP082T-B: 2 TB x1 T R-MRP08-B: None	4 TB
LAN Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface		
PoE Plug and Play	4 Ports; IEEE 802.3af/ at; 5 4W Max Total	8 Ports; IEEE 802.3af/at; 1 30W Max Total	16 Ports; IEEE 802.3af /at ; 240W Max Total
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0		Front panel: 1 x USB2.0, Rear panel: 1 x USB 3.0
Alarm I/O	N/A	Alarm In: 4 Ch; Alarm Out: 1 Ch	
Software Clients	Turing Vision mobile & desktop Apps; SMART Station		


ONVIF Compatibility	Profiles S, G, T	
VSaaS Compatibility	Turing Vision with included bridge device	
Power Consumption	9W Max without HDD & cameras	10W Max without HDD & cameras
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)	
Dimensions & Weight	260mm × 240mm × 47mm (10.2"×9.4"×1.9 "); 1kg (2.20 lb)	380mm ×315mm × 53 mm (14.9" × 12.4" ×2.1 "); ≤2.6kg (5.73lb)

DIMENSIONS

TP-MRP042T-B

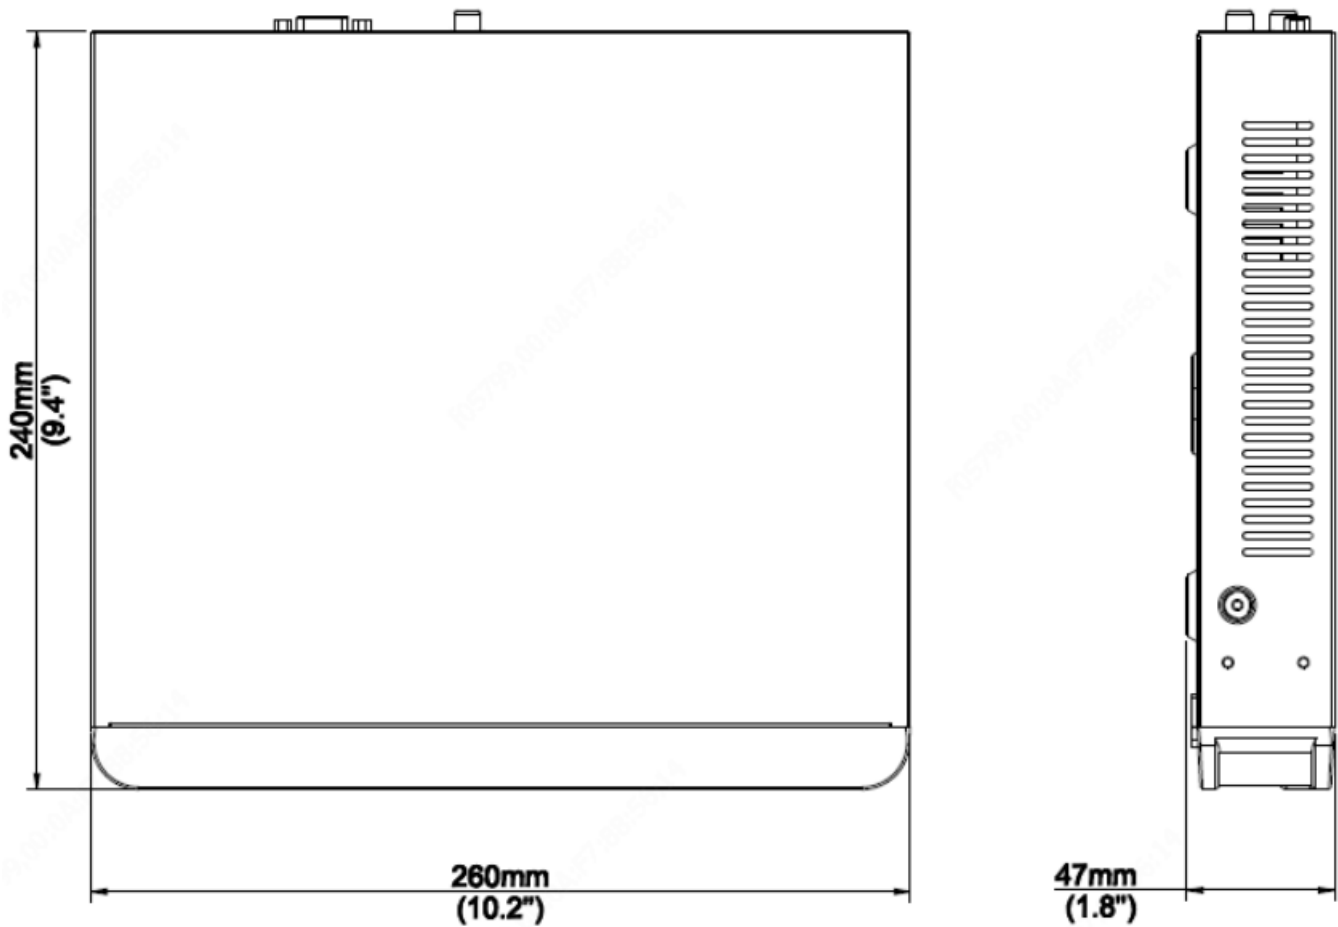

TP-MRP082T-B / TP-MRP164T-B

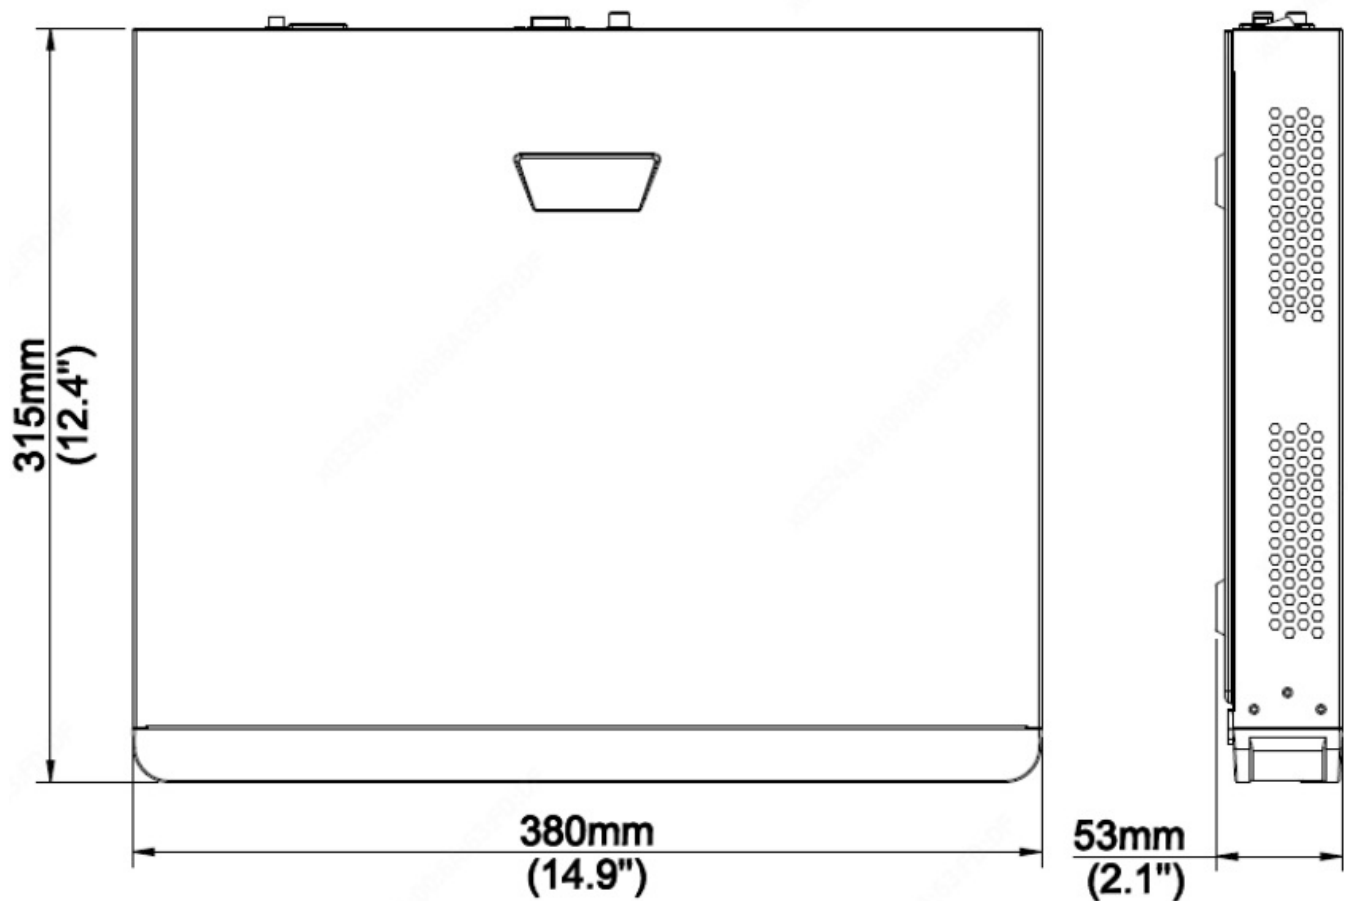


Contact Us

Visit turing.ai/get-core to know more about CORE AI



Documents / Resources

	<p>TURING TP-MRP042T-B SMART Series Network Video Recorder w/ Bridge [pdf] Owner's Manual</p> <p>TP-MRP042T-B SMART Series Network Video Recorder w, Bridge, TP-MRP042T-B, SMART Series Network Video Recorder w Bridge, Network Video Recorder w Bridge</p>
---	--

References

- [Turing Vision: AI-Powered Video Surveillance Platform](#)

