




tuya ZIGBEE Smart Sprinkler Timer User Guide

[Home](#) » [Tuya](#) » tuya ZIGBEE Smart Sprinkler Timer User Guide 

tuya ZIGBEE Smart Sprinkler Timer

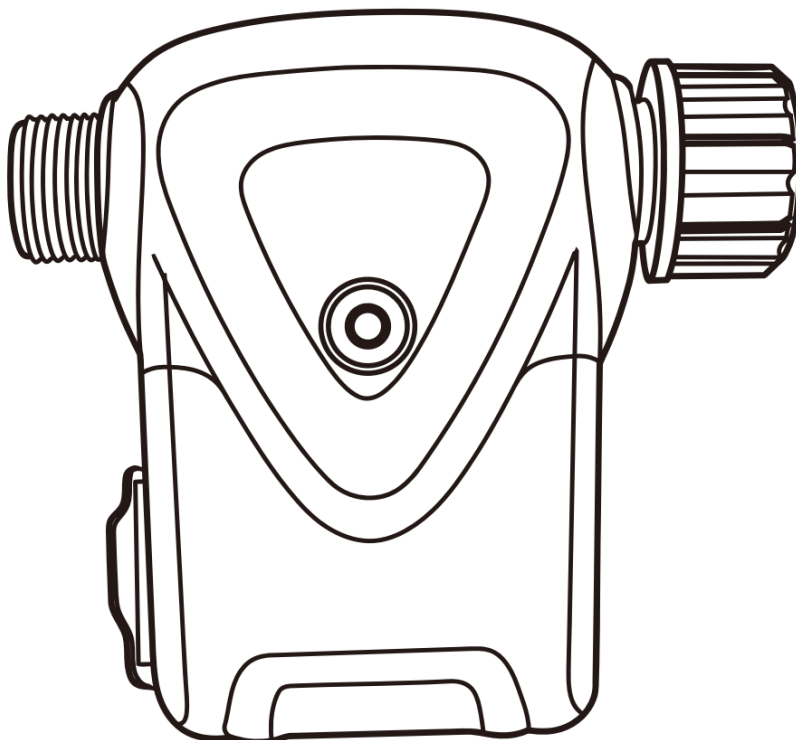

Contents

- [1 Specifications](#)
- [2 Product Configuration](#)
- [3 Installation And Use](#)
- [4 LED State](#)
- [5 Get Started](#)
- [6 Functions and Settings](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Specifications

Power supply: AA 1.5V * 4

Water pipe size: 3/4 inch

Thread specification: NPT, BSP optional

Standby power consumption: 42uA

Communication protocol: Zigbee 3.0

Wireless protocol: Zigbee IEEE 802.15.4

Wireless distance: 45M

Flow rate range: 1-35L/min

Waterproof grade: IP66

Working water pressure: 0.03MPa~0.9MPa

Working temperature: 1-60 °C (34-140 °F)


Working humidity: 1%~95% RH (non condensing)

Size: 137mm X 126mm X 54mm

Product Configuration

Water outlet

Water inlet

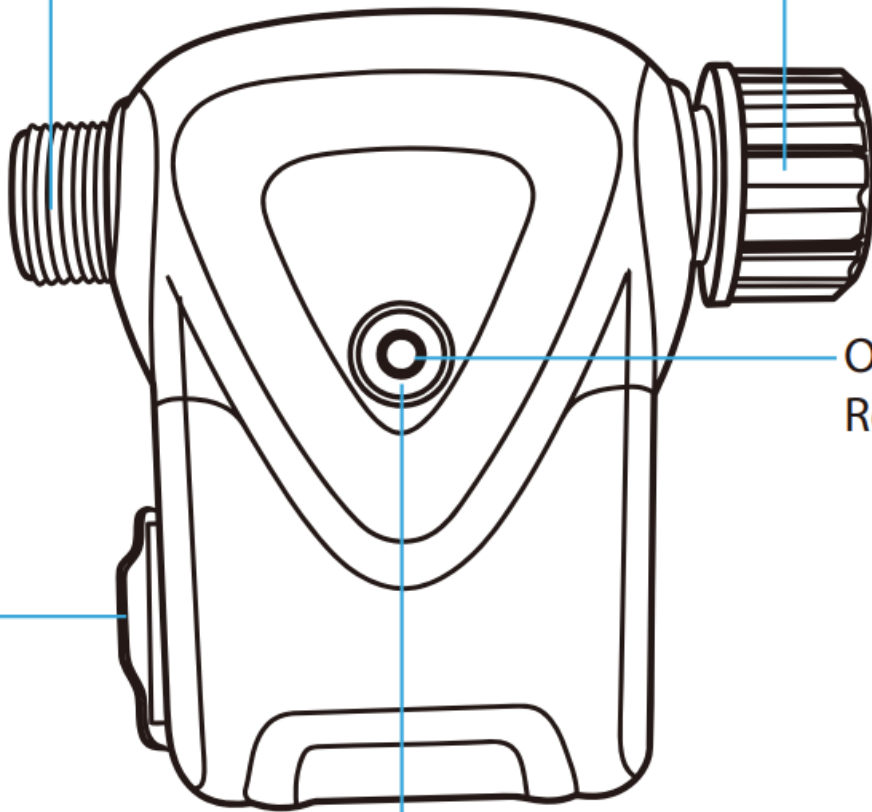

On/Off &
Reset


Indicator

Battery compartment

Installation And Use


Installation diagram

Please purchase connectors according to the actual environment.

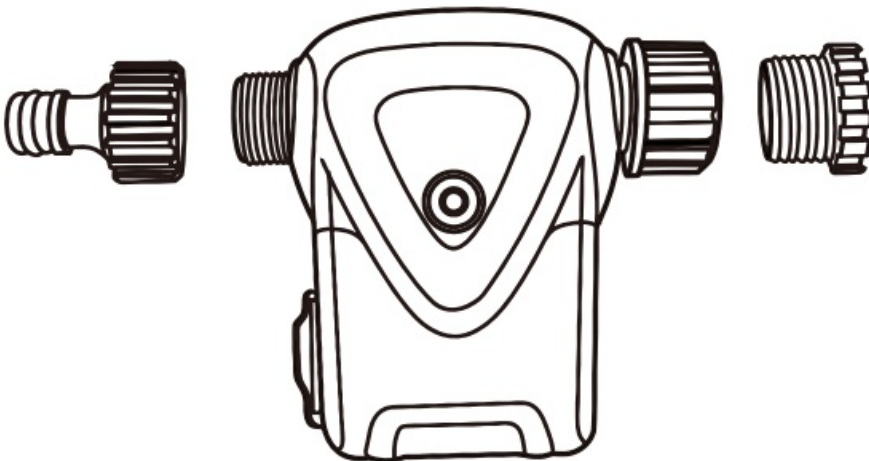


Installation Steps

1. According to the picture below to install the accessories and the device complete.

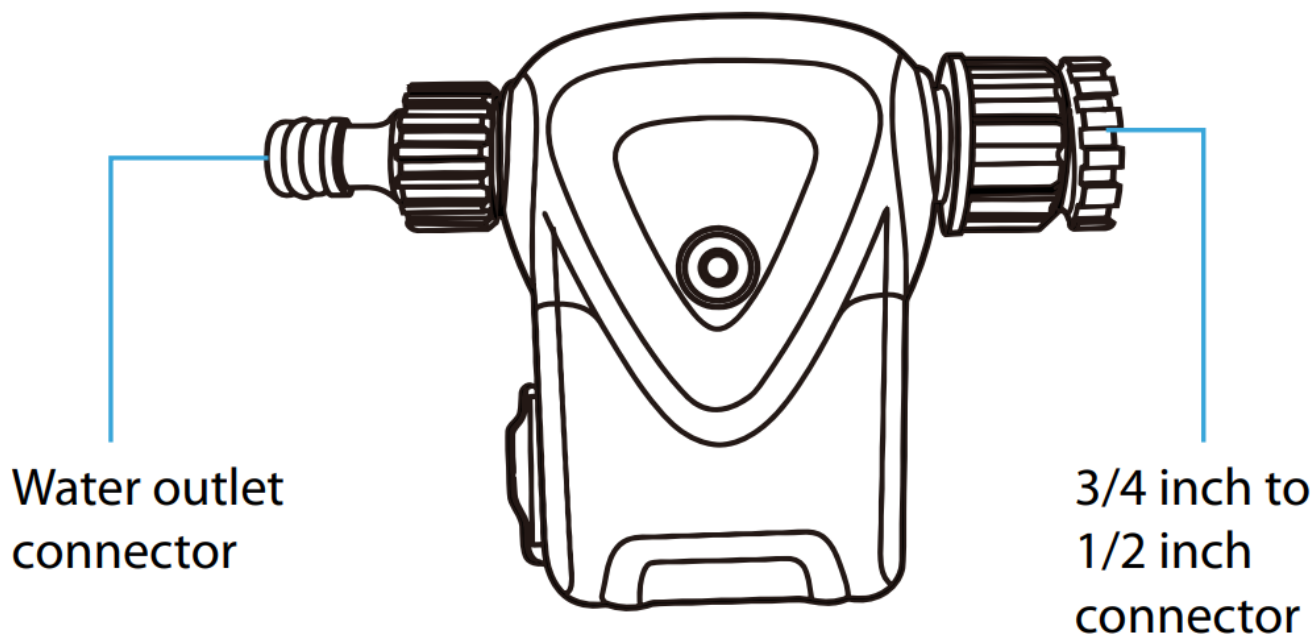

2. Close the water pipe valve and connect the equipment connected in step ① to the water valve

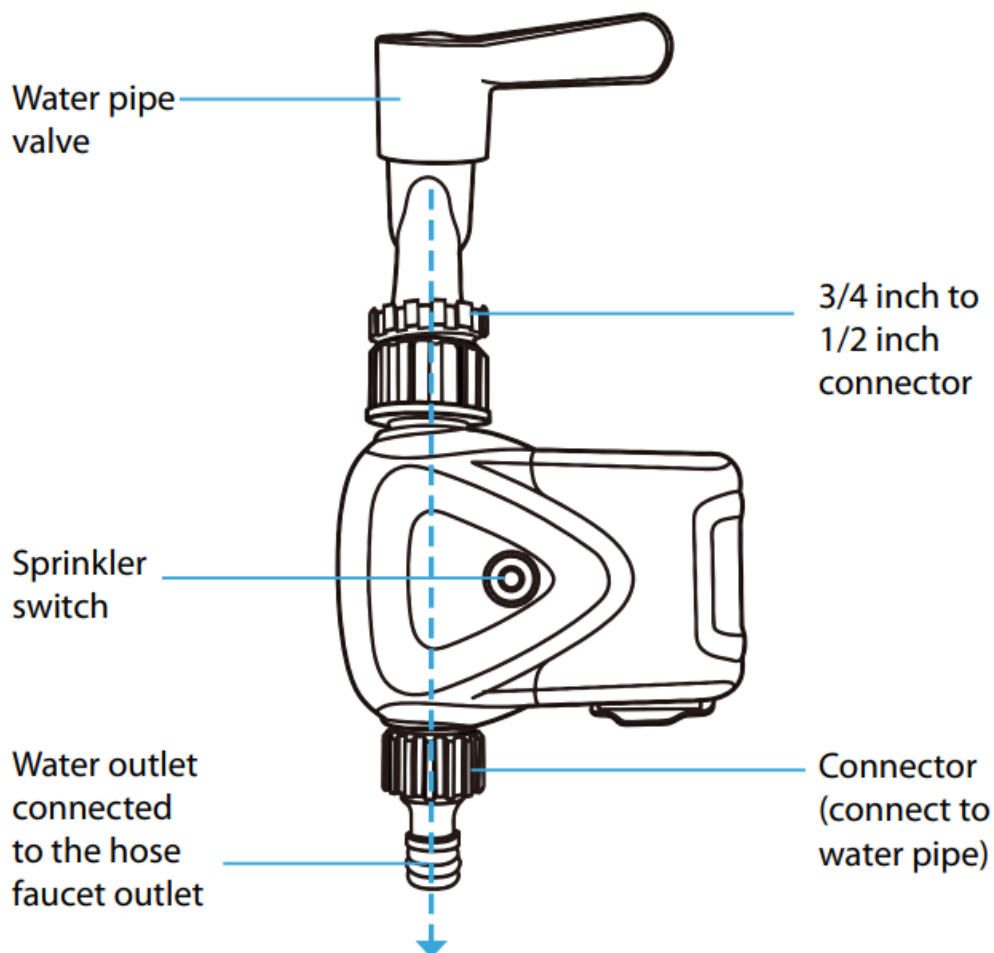


3. After installation, open the water pipe valve and pair the equipment distribution network to the APP according to the instructions to use it

Battery replacement


Note: Insert 4xAA standard alkaline batteries into the terminals.
Observe + position.

When inserting back into the battery compartment, pay attention to the direction of the shrapnel, and maintain the same orientation as the pouring switch button/indicator light


1. Remove the screw

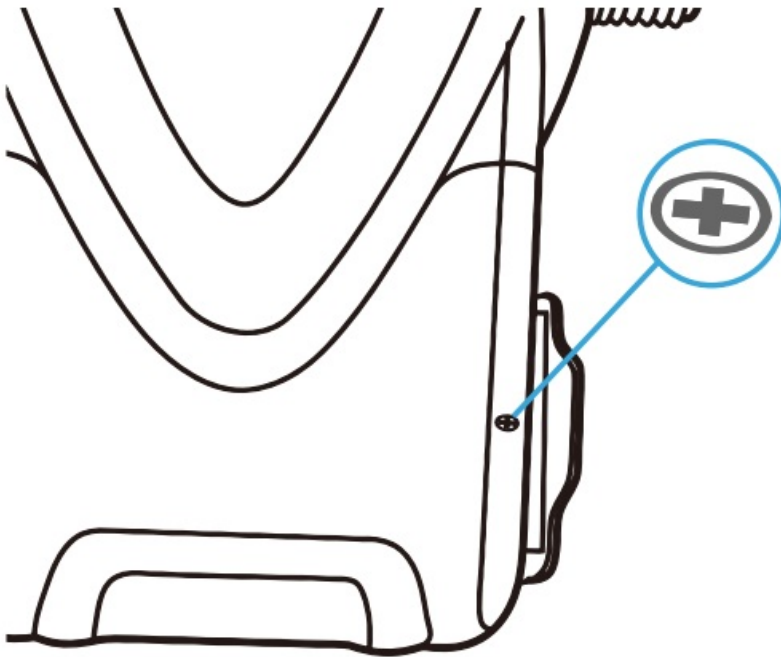

2. Take out the battery compartment

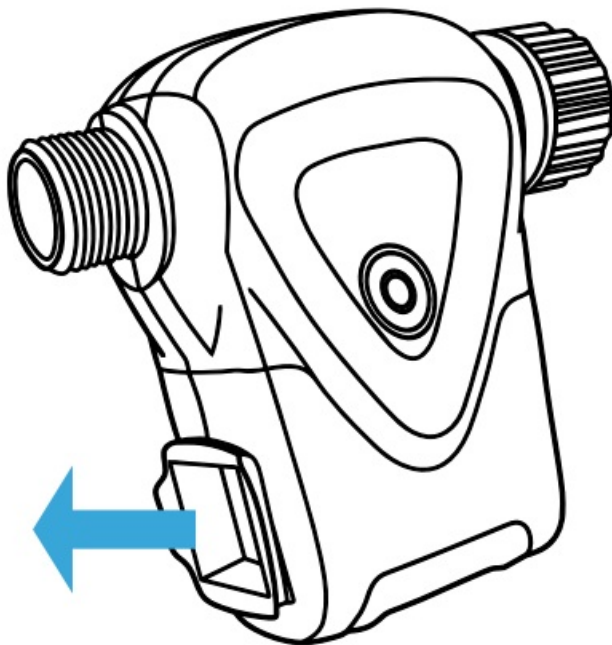

3. Install 4xAA battery, Replace the battery compartment.

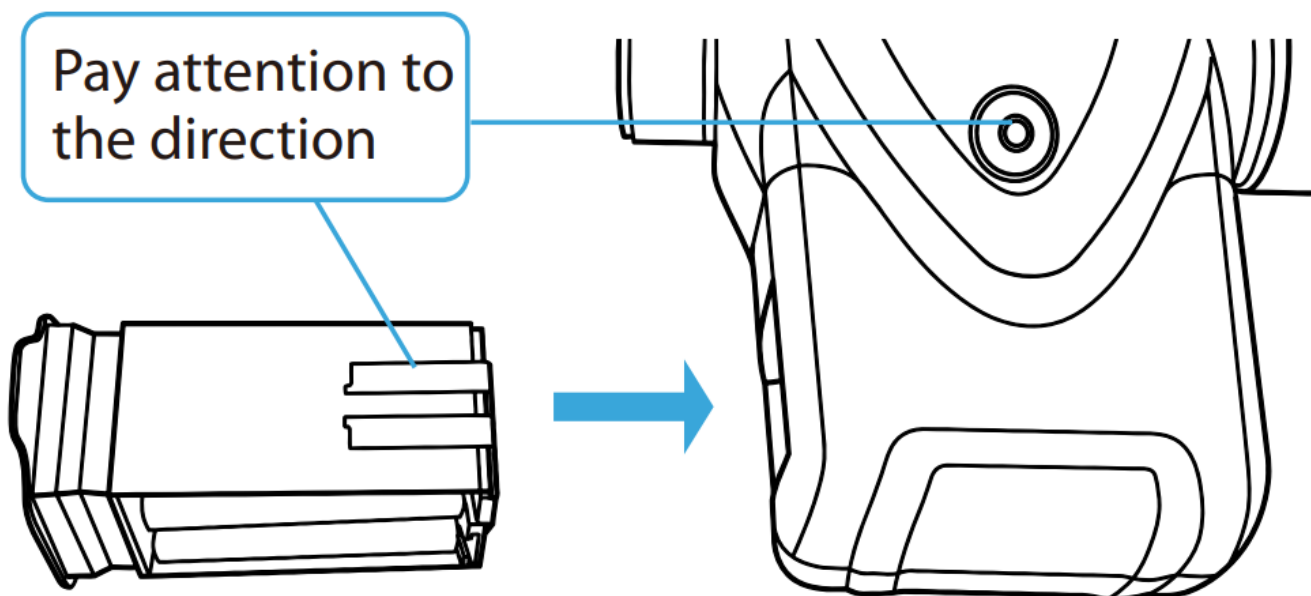

Installation cautions

1. Pay attention to the direction of the water inlet/outlet during installation and do not reverse it
2. Keep the product away from fire and heat sources. Do not expose products containing batteries to excessive heat (e.g., from storage in direct sunlight, fire, or the like).
3. Do not place magnetic materials near the equipment

LED State

Device Status	LED State
To be pairing	The indicator ashes twice per second
Resting	Long press and hold the reset button for 7 seconds

Get Started

Download APP

Android system: Download the “Smart Life” APP at Google Play;
iOS system: Download the “Smart Life” APP from the Apple Store.




Register and Login

Launch the “Smart life” app.

To register, enter your mobile phone number or email address, create a password ,then login to the app.


Login if you have an account already.

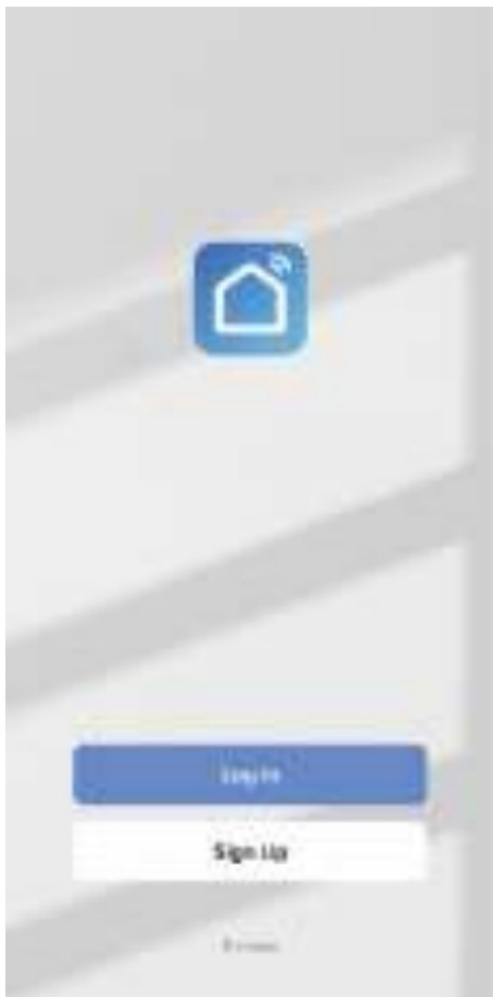

Add Devices

Add ZigBee Gateway

Add Tuya Zigbee gateway firstly, please follow the gateway instructions (distinguish wired gateway and wireless gateway).

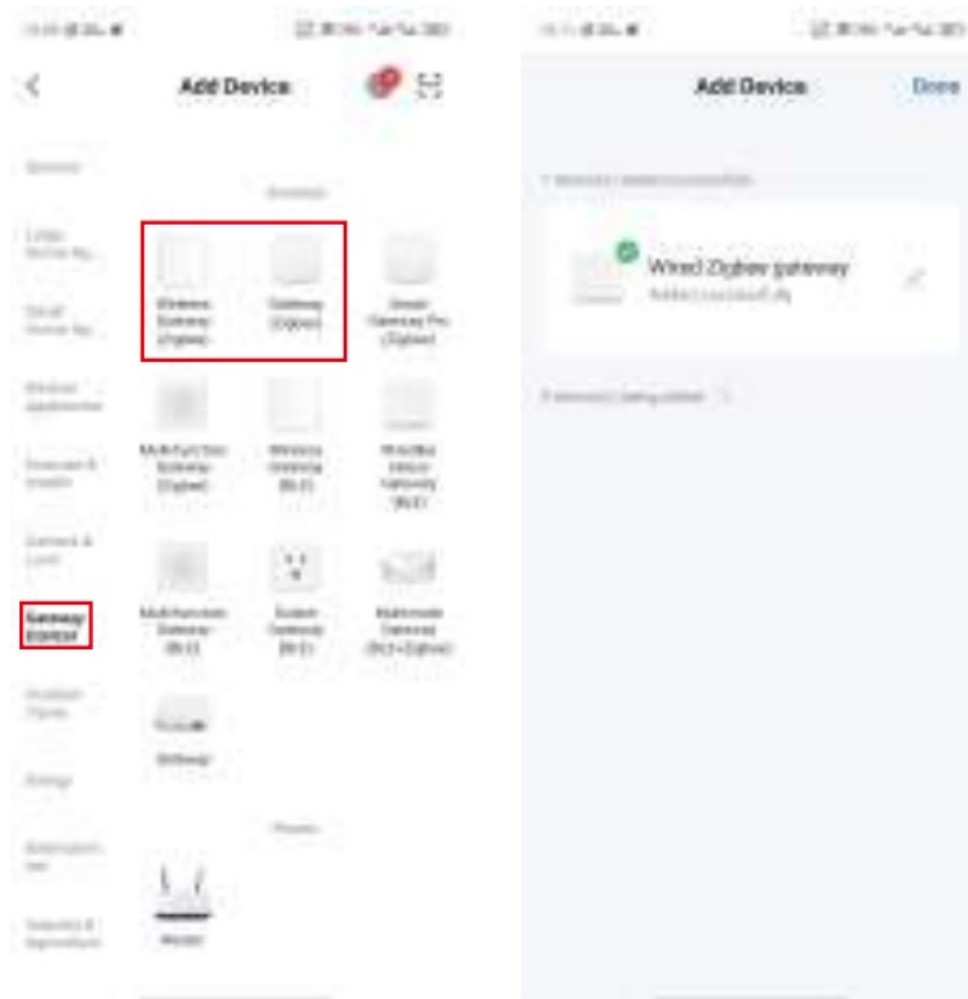


Add Sub-devices

Before adding a sub-device, ensure that the device is in the pairing state(flashy indicator). If the device is not in the pairing state, press the reset button for 7 seconds



Functions and Settings

App Main interface

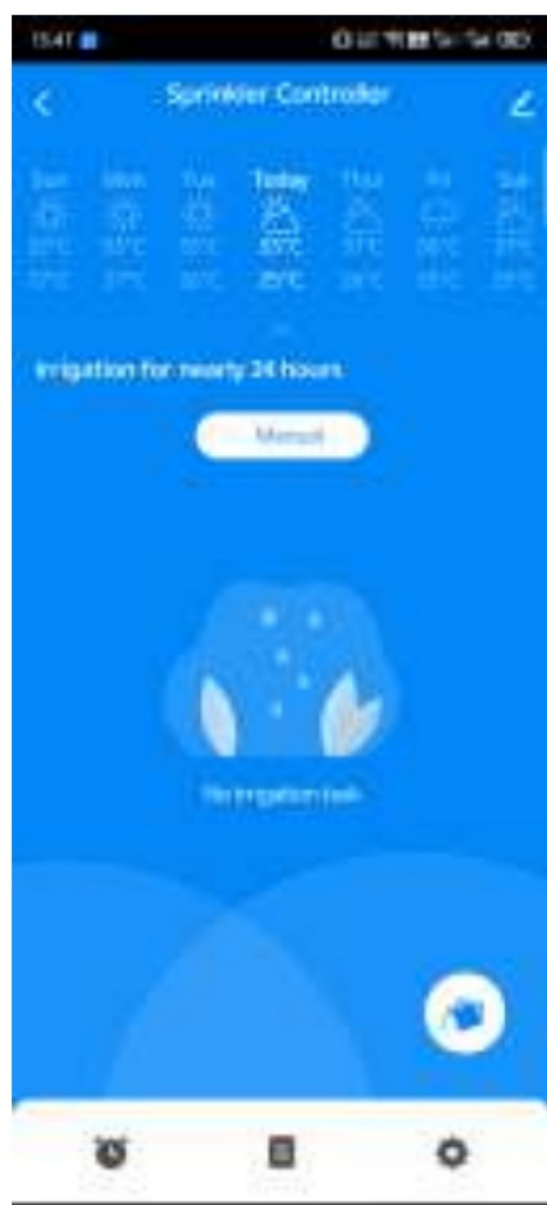


Turn on the flow meter function




Watering Switch

1. Countdown Watering (Maximum duration 4 hours)

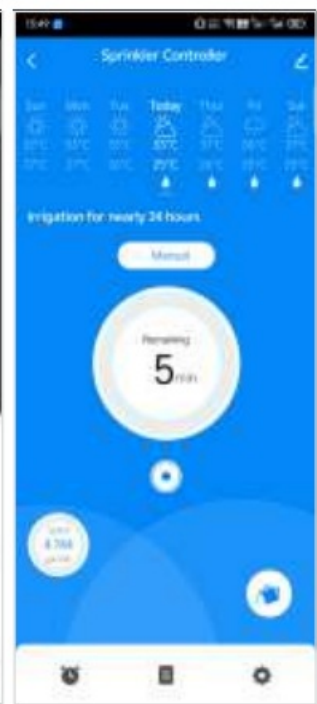


2. Quantitative watering


(this function is not displayed when the flow meter setting is not turned on)

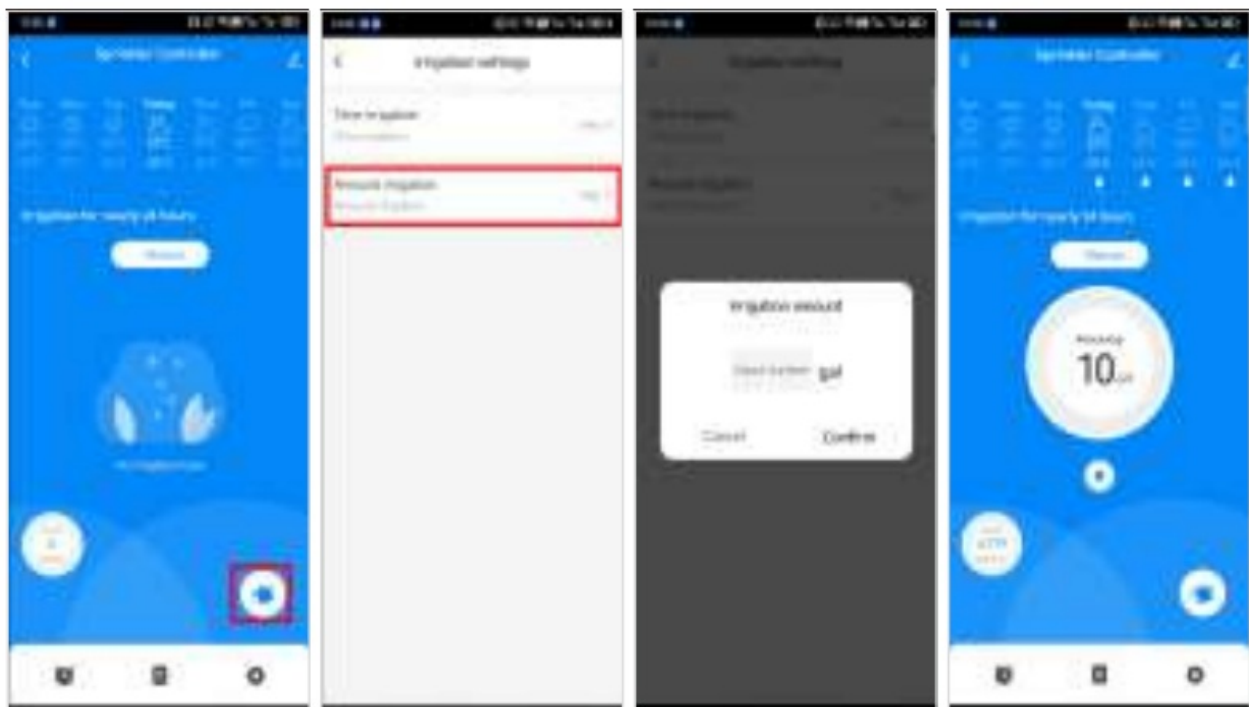

Timing watering

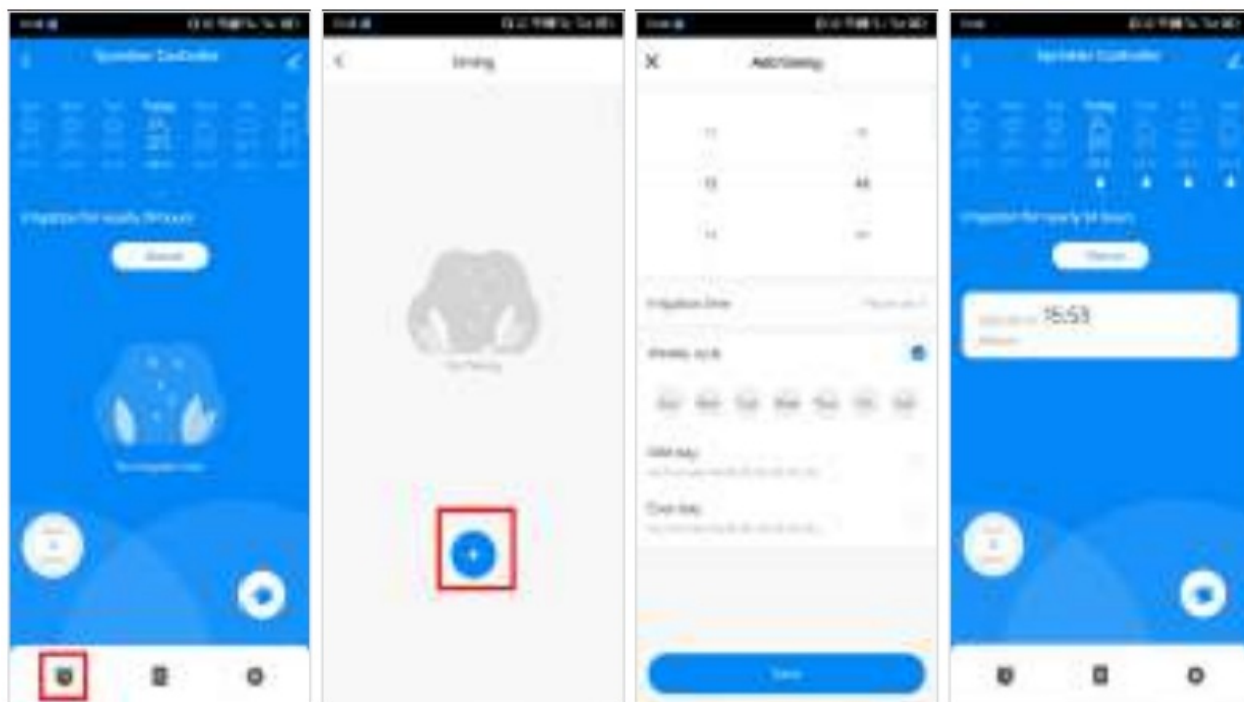

Watering records

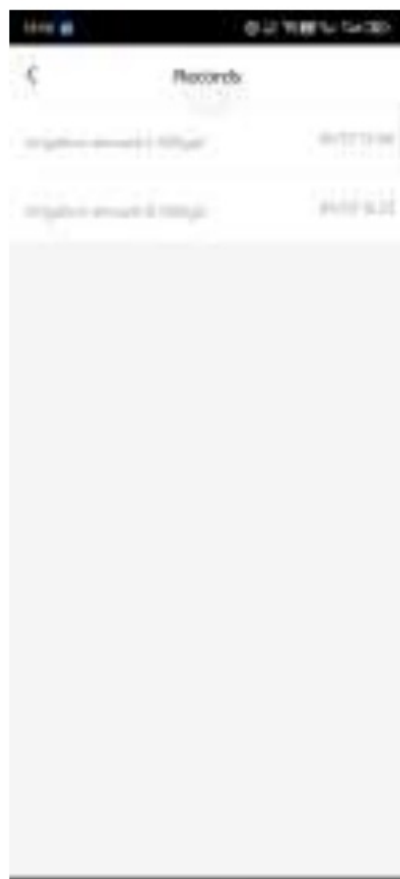

Function setting

1. Battery level




2. Flowmeter switch



3. Total water consumption
(the flow meter function needs to be turned on first)




4. Clear the total flow rate
(the flow meter function needs to be turned on first)

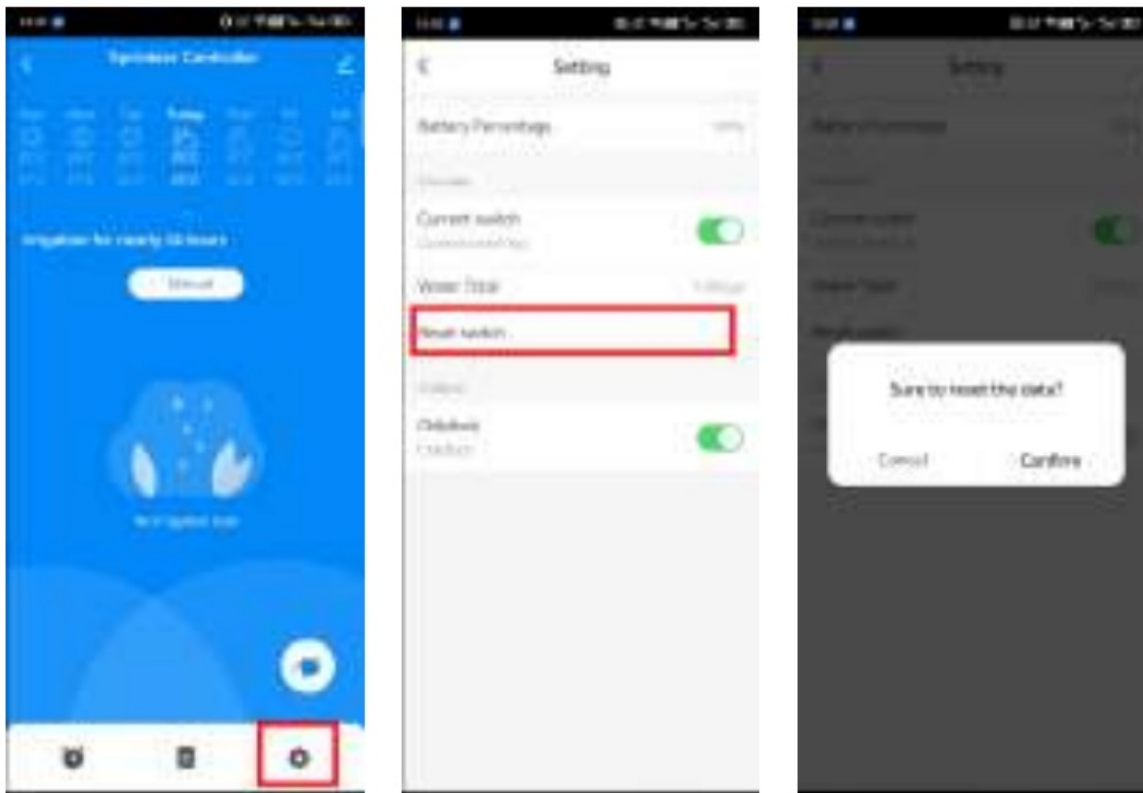

5. Child lock

(local button switch is not supported after opening the child lock)


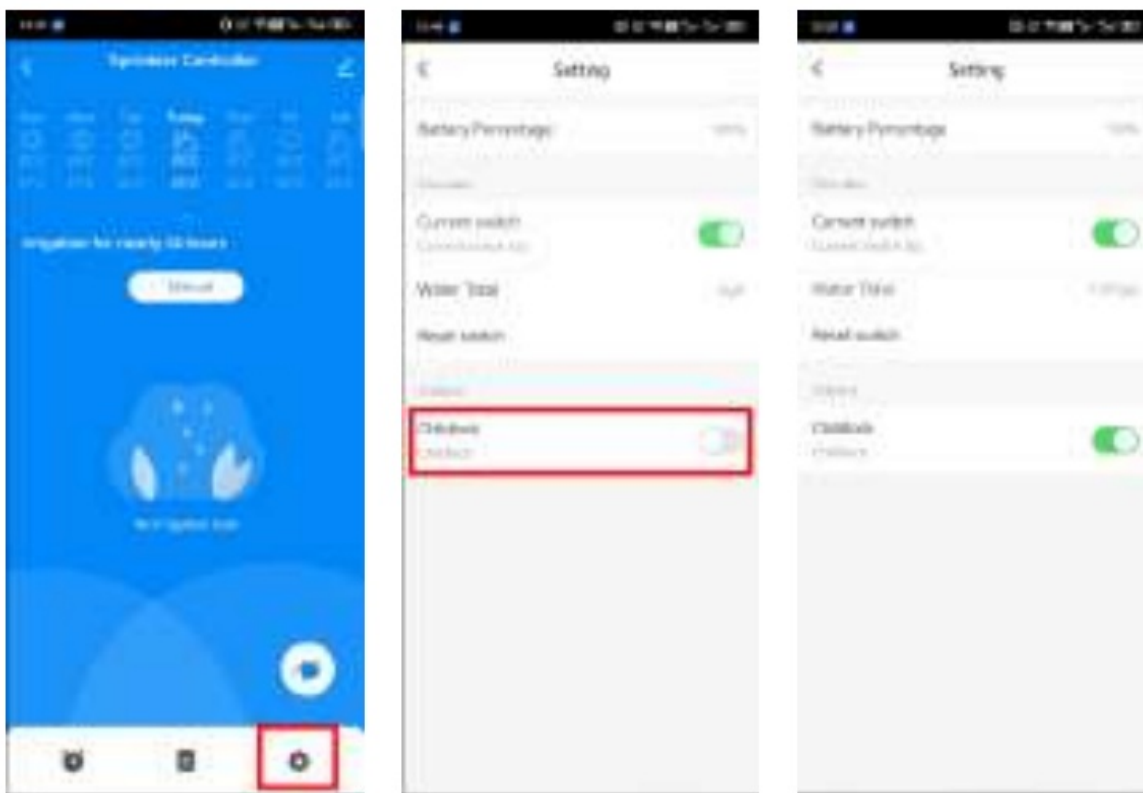


Other Function

Scenario linkage


For example: when the temperature and humidity are detected to be below 50%, the linkage opens the watering, and the countdown watering is 5 minutes

Note: The device supports LAN linkage; Two or more devices under the same gateway are set up for linkage. When the gateway is disconnected, the linkage will continue to execute

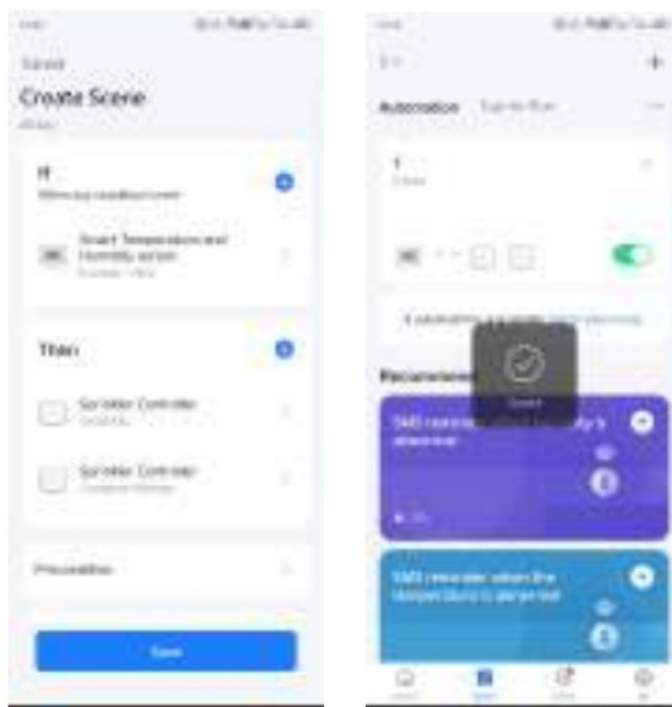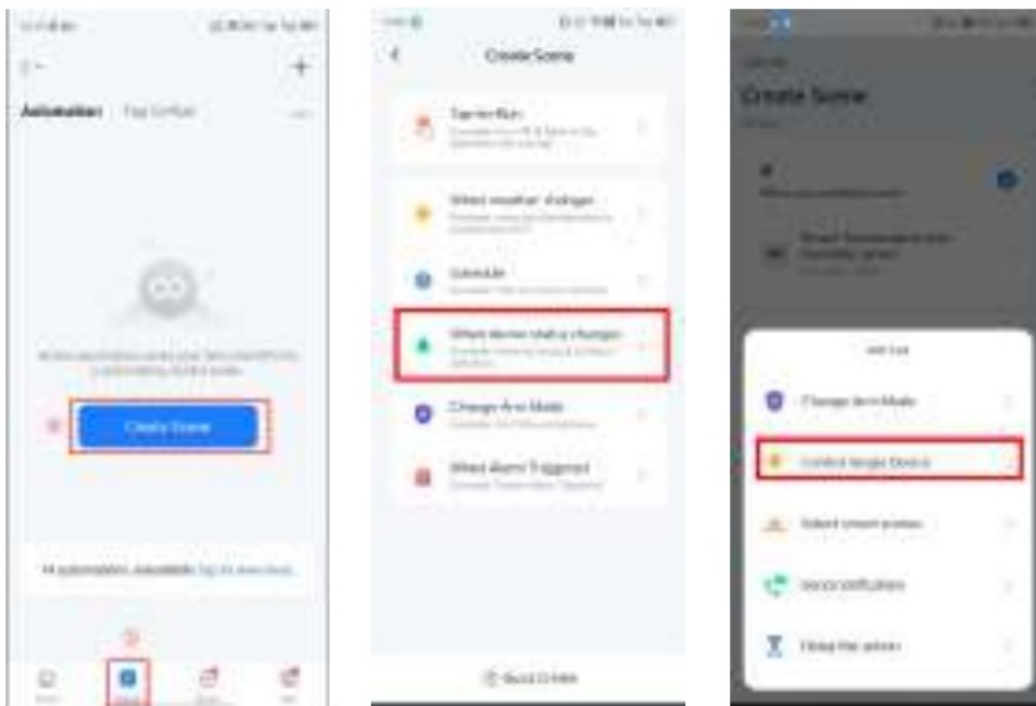


Sharing device

Zigbee device only supports homegroup sharing

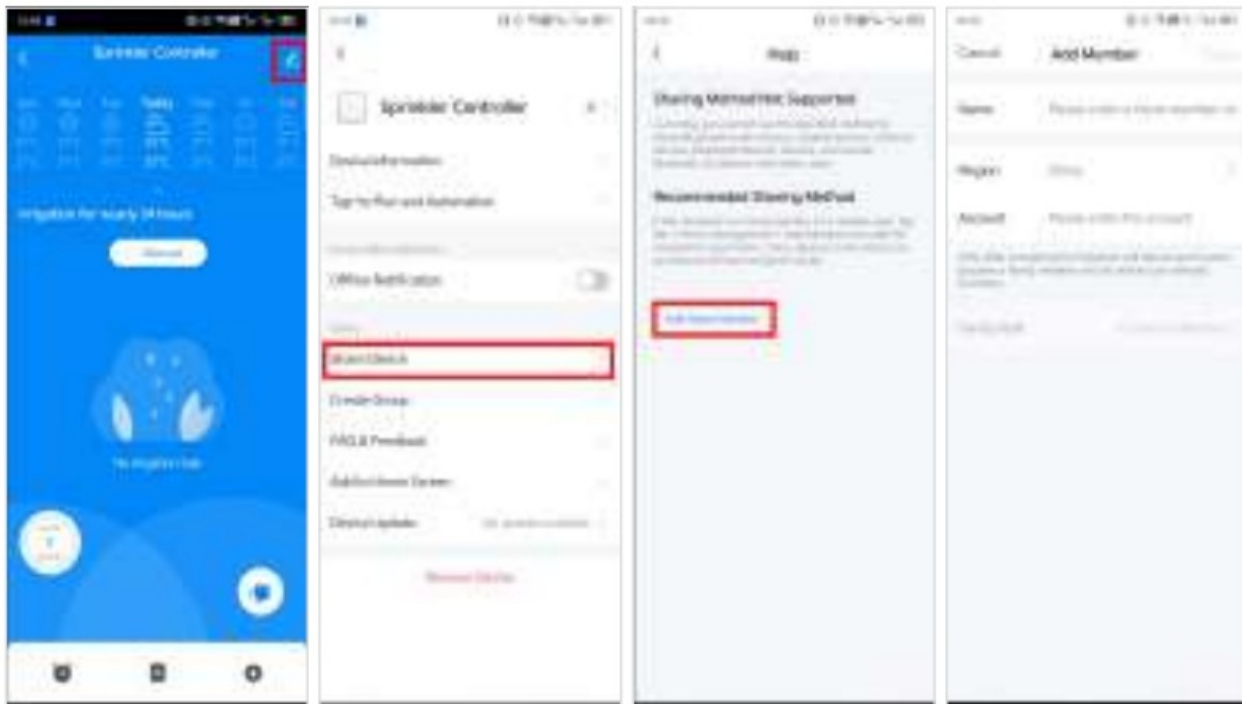

Clear record

By deleting devices through the app and adding them again, you can clear device records and restore default settings

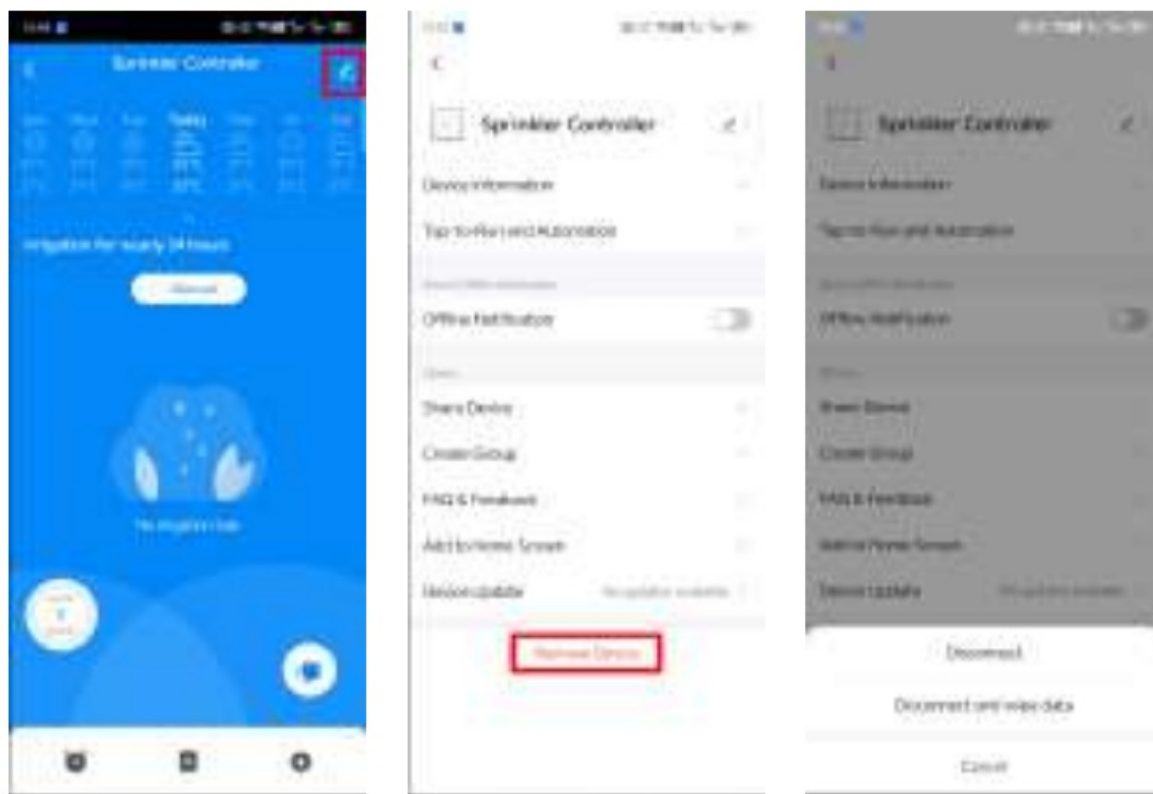

Due to the app update, the above interface is for reference only



Documents / Resources



[tuya ZIGBEE Smart Sprinkler Timer](#) [pdf] User Guide

NAS-WV03B2, V3.0, ZIGBEE Smart Sprinkler Timer, ZIGBEE, Smart Sprinkler Timer, Sprinkler Timer, Timer

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.