

# TYGER TG-LX3F82418 LanderX Running Board Installation Guide

Home » TYGER » TYGER TG-LX3F82418 LanderX Running Board Installation Guide 🖔



#### **Contents**

- 1 BEFORE INSTALLATION
- 2 Documents / Resources
  - 2.1 References

## **BEFORE INSTALLATION**

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THEO CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT:

## WWW.TYGERAUTO.COM/CONTACT


# **TORQUE VALUES**

Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7 15-16	6-7
8mm		22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

#### **Parts List**


- x1 Driver/Left TYGER LanderX
- x1 Passenger/Right TYGER LanderX
- x1 Driver/Left Front Mounting Bracket A
- x1 Driver/Left Center Mounting Bracket B
- x1 Driver/ Left Rear Mounting Bracket C
- x1 Passenger/Right Front Mounting Bracket D
- x1 Passenger/Right Center Mounting Bracket E
- x1 Passenger/Right Rear Mounting Bracket F
- x12 8mm x 25mm Combo Bolts
- x12 10-1.5mm x 30mm Hex Bolts
- x12 10mm Lock Washers
- x12 10mm x 27mm OD x 3mm Flat Washers

Reference the letters printed on the brackets to determine mounting locations

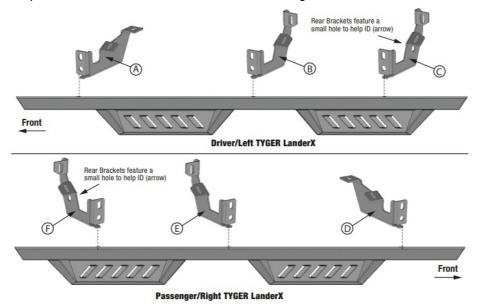

#### **Bottom View**

**ATTENTION:** Refer to the D or P labelling on the tubes to determine the Driver or Passenger side steps.

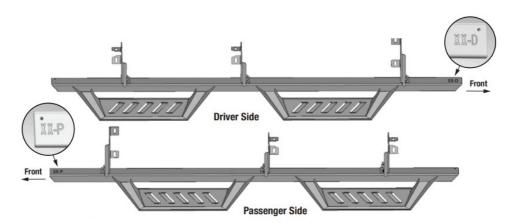


#### **PROCEDURE:**

REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.


### STEP 1


panel. Locate the threaded mounting holes in the rocker panel toward the front wheel opening (Fig 1). Remove the plastic plugs covering the mounting holes.

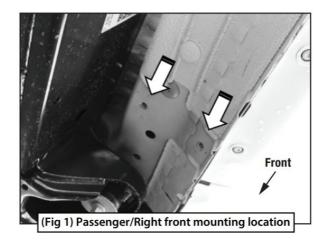

#### STEP 2


Select the Passenger/Right Front Mounting Bracket D (Fig 2). Attach Bracket to passenger/right front location with (2) 10mm x 30mm Hex Bolts, (2) 10mm Lock Washers and (2) 10mm Flat Washers (Figs 2 & 3). DO NOT fully tighten hardware.

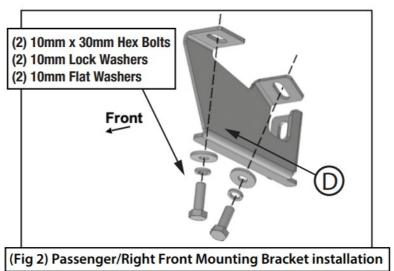


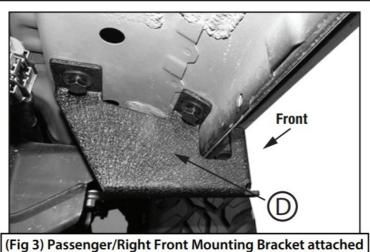


## STEP 3

Move to the center of the vehicle and locate the threaded mounting holes (Fig 4). Select the Passenger/Right Center Mounting Bracket E (Fig 5). Attach the Bracket to the threaded holes with the included (2) 10mm x 30mm Hex Bolts, (2) 10mm Lock Washers and (2) 10mm Flat Washers (Fig 6). DO NOT fully tighten hardware.

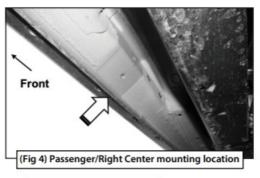

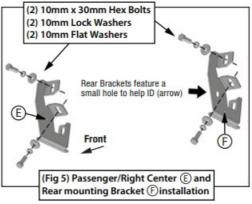


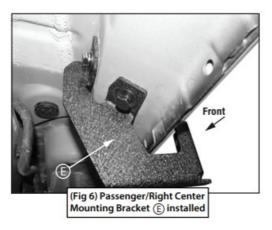


# STEP 4


Move to the last threaded holes closest to the rear wheel opening. Select the Passenger/Right Rear Mounting Bracket (Fig 5). Repeat STEP 3 to attach the Rear Mounting Bracket (Fig 7).


**IMPORTANT:** Rear Mounting Brackets feature a small hole for identification purposes.

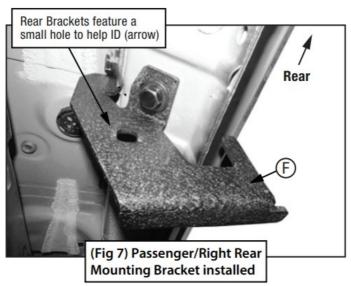

Carefully unwrap the TYGER LanderX. Select the Passenger/Right TYGER LanderX. Line up the TYGER LanderX with the (3) Mounting Brackets. Attach the TYGER LanderX to the Brackets with the included (6) 8mm x 25mm Combo Hex Bolts (Figs 8-12).

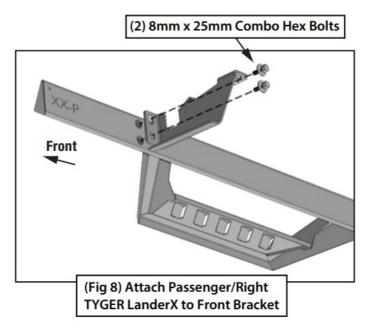

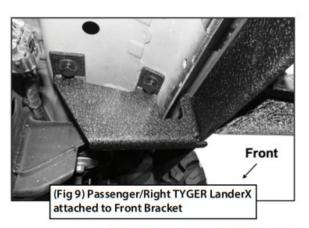

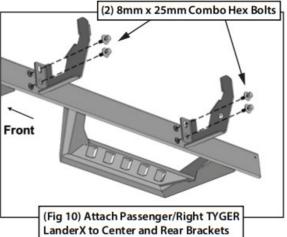





# STEP 6

Level and adjust the TYGER LanderX and tighten all hardware.

#### STEP 7

Repeat STEPS 1-6 for driver/left side TYGER LanderX installation.

## STEP 8

Do periodic inspections to the installation to make sure that all hardware is secure and tight.



# **Documents / Resources**



TYGER TG-LX3F82418 LanderX Running Board [pdf] Installation Guide TG-LX3F82418 LanderX Running Board, TG-LX3F82418, LanderX Running Board, Running Board, Board

## References

• User Manual

#### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.