





U LINE UHNP315-IS01A Nugget Ice Machine User Guide

Home » U-Line » U LINE UHNP315-IS01A Nugget Ice Machine User Guide Ta

Contents

- 1 U LINE UHNP315-IS01A Nugget Ice
- Machine
- 2 Specifications
- **3 Product Usage Instructions**
- **4 Product Installation**
- 5 FAQ
- **6 PRODUCT INFORMATION**
- **7 Integrated Panel Dimensions**
- **8 EXTENDED INTEGRATED PANEL**
- 9 Integrated Panel
- 10 Grille Installation
- 11 CONTACT
- 12 Documents / Resources
 - 12.1 References



U LINE UHNP315-IS01A Nugget Ice Machine



Specifications

Model: UHNP315-IS01AManufacturer: U-Line

Weight Limit for Door Panel: 20 lbs (10 kg)
 Manufactured in: Milwaukee, Wisconsin, USA

Product Usage Instructions

- U-Line offers exceptional functionality, style, and innovative designs.
- Headquartered in Milwaukee, Wisconsin, U-Line has a strong reputation for quality and product selection.
- Before connecting the Nugget Ice Machine, carefully follow all manufacturer recommendations in the guide regarding water quality.
- Refer to the WATER HOOKUP section for detailed information.

Product Installation

The integrated panel must align seamlessly with the surrounding cabinetry for a finished look.

- 1. Cut the panels to the dimensions specified in the diagram.
- 2. Optional: Stain or finish the panel as desired.
- 3. Optional: Install handles and hardware.

Note: Ensure both sides of the panel are finished to prevent warping and potential visibility through the glass when the door is open.

Follow manufacturer instructions for installing the grille to ensure proper ventilation and performance of the unit.

FAQ

- Q: What should I do if the integrated panel does not align perfectly with the door?
- A: Due to differences in surrounding cabinetry, slight misalignment may occur. Follow the panel preparation steps provided to achieve a finished integrated look.
- Q: Can I exceed the weight limit for the door panel?
- A: No, ensure that the door panel does not weigh more than 20 lbs (10 kg) to prevent damage to the unit.

WELCOME TO U-LINE

Congratulations on your U-Line purchase. Your product comes from a company with over five decades of premium modular ice-making, refrigeration, and wine preservation experience. U-Line continues to be the American leader, delivering versatility and flexibility for multiple applications including residential, light commercial, outdoor and marine use. U-Line's complete product collection includes Wine Captain® Models, Beverage Centers, Clear Ice Machines, Nugget Ice Machines, Crescent Ice Makers, Glass & Solid Door Refrigerators, Drawer Models, Freezers, Combo® Models, and more.

U-Line has captivated those with an appreciation for the finer things with exceptional functionality, style, inspired innovations, and attention to even the smallest details. We are known and respected for our unwavering dedication to product design, quality, and selection. U-Line is headquartered in Milwaukee, Wisconsin, and has shipped products to five continents for over two decades and is proud to have the opportunity to ship to you.

U-LINE — RIGHT PRODUCT, RIGHT PLACE, RIGHT TEMPERATURE®

PRODUCT INFORMATION

IMPORTANT – Before connecting your new Nugget Ice Machine, be sure to carefully follow all manufacturer recommendations throughout this guide regarding water quality. Please see the WATER HOOKUP section for more information.

Looking for additional information on your product? User Guides, Spec Sheets, CAD Drawings, Compliance Documentation, and Product Warranty information are all available for reference and download at <u>u-line.com</u>.

PROPERTY DAMAGE / INJURY CONCERNS

In the unlikely event property damage or personal injury is suspected related to a U-Line product, please take the following steps:

- 1. U-Line Customer Care must be contacted immediately at +1.414.354.0300.
- 2. Service or repairs performed on the unit without prior written approval from U-Line is not permitted. If the unit has been altered or repaired in the field without prior written approval from U-Line, claims will not be eligible.

Integrated Panel Dimensions

Metric measurements are rounded and optimized.

INTEGRATED PANEL NOTICE

- Due to differences in surrounding cabinetry, the panel may not perfectly align with a door.
- The procedure below is designed to provide a finished integrated panel that seamlessly integrates with surrounding cabinetry.

Panel Preparation

• A full integrated door panel completely covers the door frame and provides a built-in appearance.

NOTICE

The door panel must not weigh more than 20 lbs (10 kg).

It is important to ensure that all drilled holes are drilled to the correct depth to avoid splits in the wood when the hardware is installed.

- 1. Cut the panels to the dimensions listed in the diagram below.
- 2. Optional: Stain or finish panel to desired stain or color.


Be sure to closely follow the instructions provided by the manufacturer.

3. Optional: Install handles and hardware.

NOTICE

When applying an integrated panel to a unit, ensure that both sides are finished to prevent warping. In some panel installations, the panel may be visible through the glass while the door is open.

Integrated Panel Dimensions

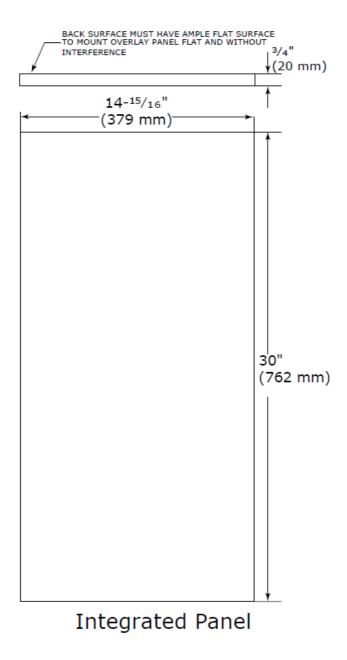

HANDLELESS INTEGRATED DOOR PANEL

- The following procedure is designed to provide a finished, handleless solid panel for a 15" (381 mm) door that seamlessly integrates with its surrounding cabinetry.
- NOTE: Many cabinet manufacturers provide a ready solution for a handleless, integrated design that can be
 easily applied to your model. Consult your cabinet manufacturer for applicable design and installation details.
- The cabinet manufacturer's solution to this design and integration detail will often result in an integrated panel solution wherein the size of the panel may result in a height dimension taller than what we specify. This can be achieved provided the additional height is positioned above the appliance door.

NOTICE

The integrated panel aligns with the surrounding cabinetry and, due to differences in cabinetry, may not align perfectly with the door.

The appliance will need up to 34-1/2" (876 mm) to the underside of the counter to leave room for leveling adjustments.


A single prepared panel with an insert must not weigh more than 20 lbs (10 kg). Integrated Panel Preparation

1. Cut the main panel to the dimensions below. For details, see the drawings on the next page.

Main panel width	Main panel height
14-15/16" (379 mm)	28-13/16" (732 mm)

- 2. Create the top design for the handleless feature and the 1/8" (3 mm) notch for the insert(s) indicated on the Top Detail drawing, on the next page.
- 3. Prepare the insert(s) that will back up the handleless design. Wooden Insert Cut 1/8" (3 mm) thick wooden insert(s) to the dimensions below.

Wooden insert width	Wooden insert height
14-15/16" (379 mm	3-1/2" (89 mm)

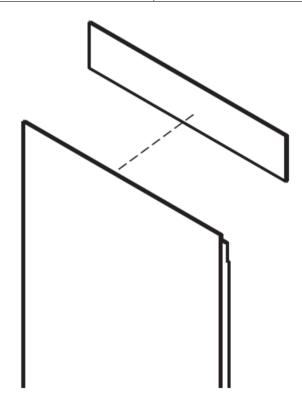


4. Optional: Stain or finish panel and wooden insert to desired stain or color. Be sure to closely follow the instructions provided by the manufacturer.

NOTICE


If the finishing panel or wooden insert, all sides must be finished to prevent warping.

5. Attach the insert to the panel. Wood glue or equivalent adhesive should be used to attach insert to the panel.



Attach Wooden Insert

Handleless Integrated Panel Dimensions

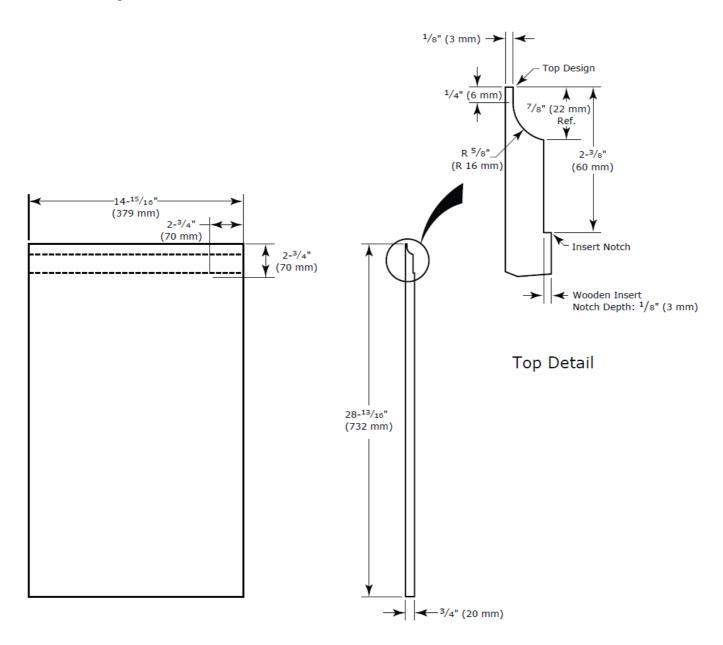

Wooden Insert Dimensions



EXTENDED INTEGRATED PANEL

NOTICE

- Due to differences in surrounding cabinetry, the panel may not perfectly align with the door.
- The procedure below is designed to provide a finished panel that seamlessly integrates with surrounding cabinetry.


Panel Preparation

An extended integrated panel can be used to maintain alignment with an adjacent extended cabinet height or a reduced toe-kick/grille application.

- 1. Cut the panels to the dimensions listed in the appropriate diagram on the next page.
- Optional: Stain or finish panel to desired stain or color.Be sure to closely follow the instructions provided by the manufacturer.
- 3. Optional: Install handles and hardware


NOTICE

- The door panel must not weigh more than 20 lbs (10 kg).
- It is important to ensure that all drilled holes are drilled to the correct depth to avoid splits in the wood when the hardware is installed.
- The appliance will need up to 34-1/2" (876 mm) to the underside of the counter to leave room for leveling adjustments.
- When applying an integrated panel to a unit, ensure that both sides are finished in order to prevent warping. In some installations, the panel may be visible through the glass while the door is open.

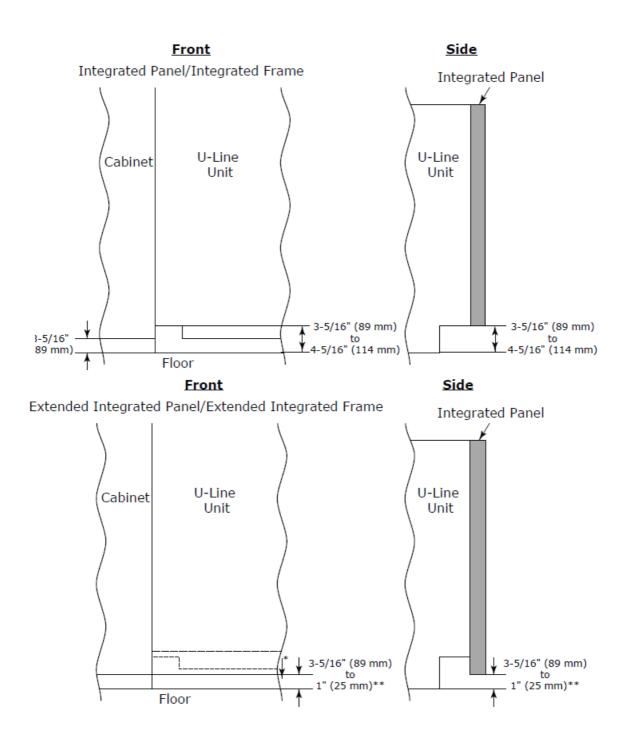

- The panel can extend beyond the door frame.
- A minimum of 1" (25 mm) from the floor is required for proper ventilation.

Extended Integrated Panel Dimensions

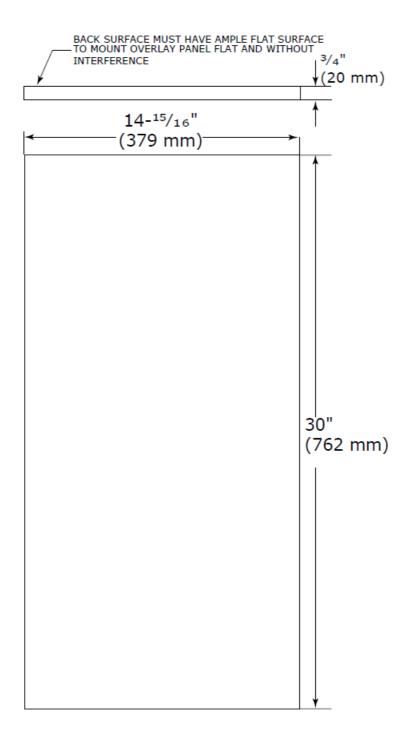


Integrated Panel

• A minimum of 1" (25 mm) from the floor to the bottom of the extended integrated panel/frame for proper ventilation.

Integrated Panel Installation

1. Fully open door.




- 2. Starting at a corner, pull the gasket away from the door.
- 3. Continue to pull gasket free from the gasket channel.
- 4. Upon removal, lay the gasket down on a flat surface.
- 5. Align top of the panel with the top edge of the door. The center panel on the door.

NOTICE

Due to differences in floor construction or surrounding cabinetry, the panel may not sit flush with the top of the door.

6. Secure integrated panel to door using clamps. A robust tape may also be used. U-Line recommends the use of bar clamps to secure the panel to the door. If using tape, be certain the tape will not damage the panel finish upon removal.

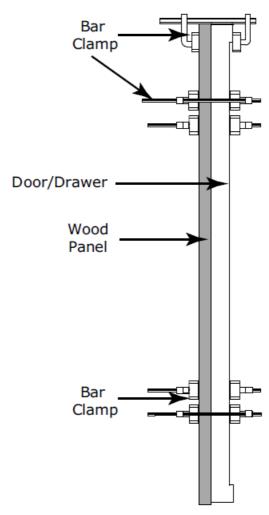


7. Using a 7/64" (3 mm) drill bit, drill 6 pilot holes into the wood panel 1/2" (12 mm) deep using the holes in the door frame as a guide.

NOTICE

It is important to ensure that all drilled holes are drilled to the correct depth to avoid splits in the wood when hardwood is installed.

- 8. Locate 6 of the #6x 1-1/2" (38 mm) screws provided with your unit.
- 9. Using a Phillips screwdriver, place one screw into each of the 6 pilot holes and screw down. Do not overtighten screws.
- 10. Ensure the screws sit flush against the bottom of the channel.

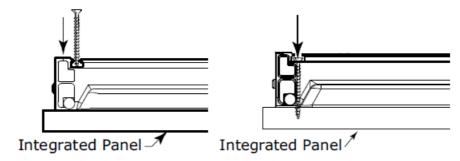

11. Remove clamps from the door.

NOTICE

If the panel requires additional adjustment after removing the clamps, slightly loosen each screw and adjust the panel as necessary. Tighten screws upon completion.

12. Starting at the corners, re-install the gasket into the gasket channel in the frame. Make sure the gasket is fully seated.

Grille Installation

• REMOVING AND INSTALLING GRILLE

WARNING

- Disconnect electric power to the unit before removing the grille.
- When using the unit, the grille must be installed.

WARNING


DO NOT touch the condenser fins. The condenser fins are SHARP and can be easily damaged.

Removing the grille

- 1. Disconnect power to the unit.
- 2. Loosen the two screws (1).
- 3. Remove grille (2) from unit.

Installing the grille

- 1. Align cabinet and grille holes and secure, but do not over-tighten grille screws (1).
- 2. Reconnect power to the unit.

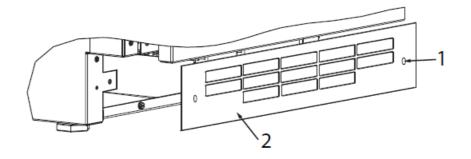

CONTACT

- U-Line Corporation
- 8900 N. 55th Street
- Milwaukee, Wisconsin 53223 USA
- Monday Friday 8:00 am to 4:30 pm CST
- T: +1.414.354.0300
- Email: sales@u-line.com
- u-line.com

SERVICE & PARTS ASSISTANCE

- Monday Friday 8:00 am to 4:30 pm CST
- T: +1.414.354.0300
- Service Email: onlineservice@u-line.com
- Parts Email: onlineparts@u-line.com

CONNECT WITH US













Designed, engineered and assembled in WI, USA

Documents / Resources



U LINE UHNP315-IS01A Nugget Ice Machine [pdf] User Guide UHNP315-IS01A, UHNP315-IS01A Nugget Ice Machine, UHNP315-IS01A, Nugget Ice Machine, Ice Machine, Machine

References

- BestShop | Best Price, Smart Shopping
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.