



U-PROX G1 Wireless Touch Mini Keypad User Manual


[Home](#) » [U-PROX](#) » U-PROX G1 Wireless Touch Mini Keypad User Manual 

Contents

- [1 U-PROX G1 Wireless Touch Mini Keypad](#)
- [2 Functional parts of the device](#)
- [3 TECHNICAL SPECIFICATIONS](#)
- [4 WARRANTY](#)
- [5 REGISTRATION](#)
- [6 RANGE TEST FOR OPTIMAL INSTALLATION LOCATION](#)
- [7 INSTALLATION](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

U-PROX


U-PROX G1 Wireless Touch Mini Keypad

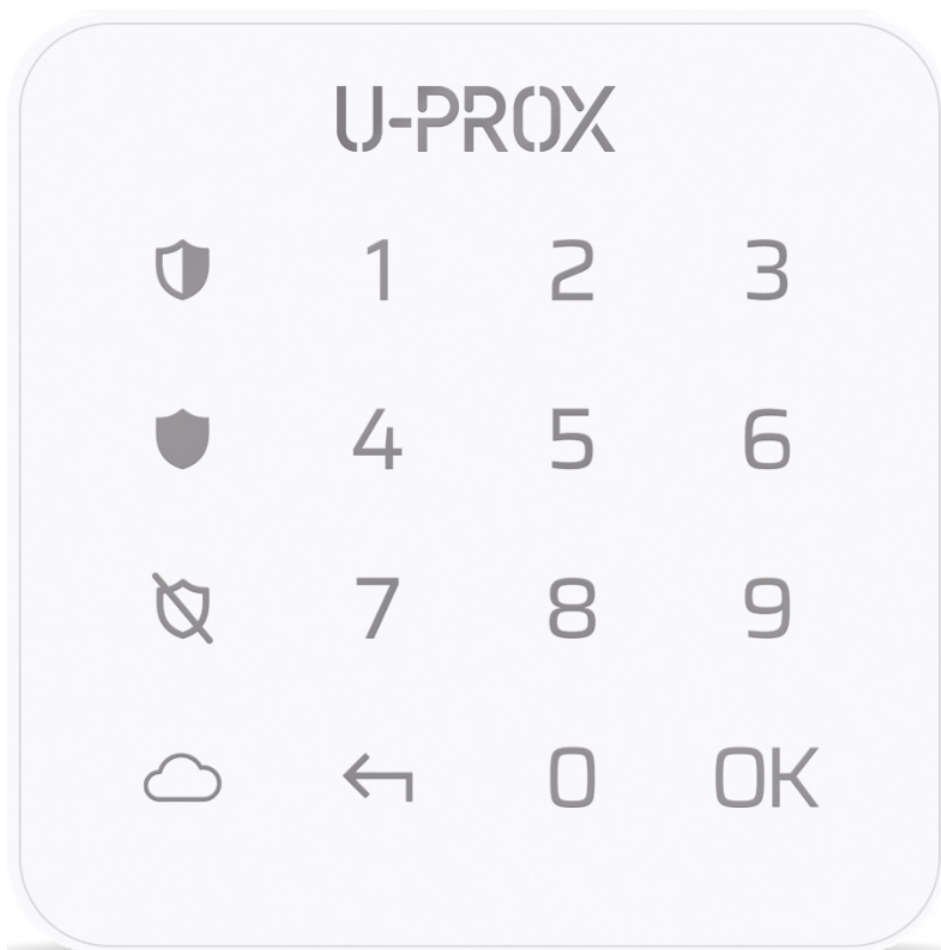

U-Prox Keypad G1 – is a wireless keypad designed for arming and EN disarming, displaying alarms and device status, as well as interaction with the user of the alarm system.

The device is connected to the control panel and is configured with the U-Prox Installer mobile application.

Functional parts of the device

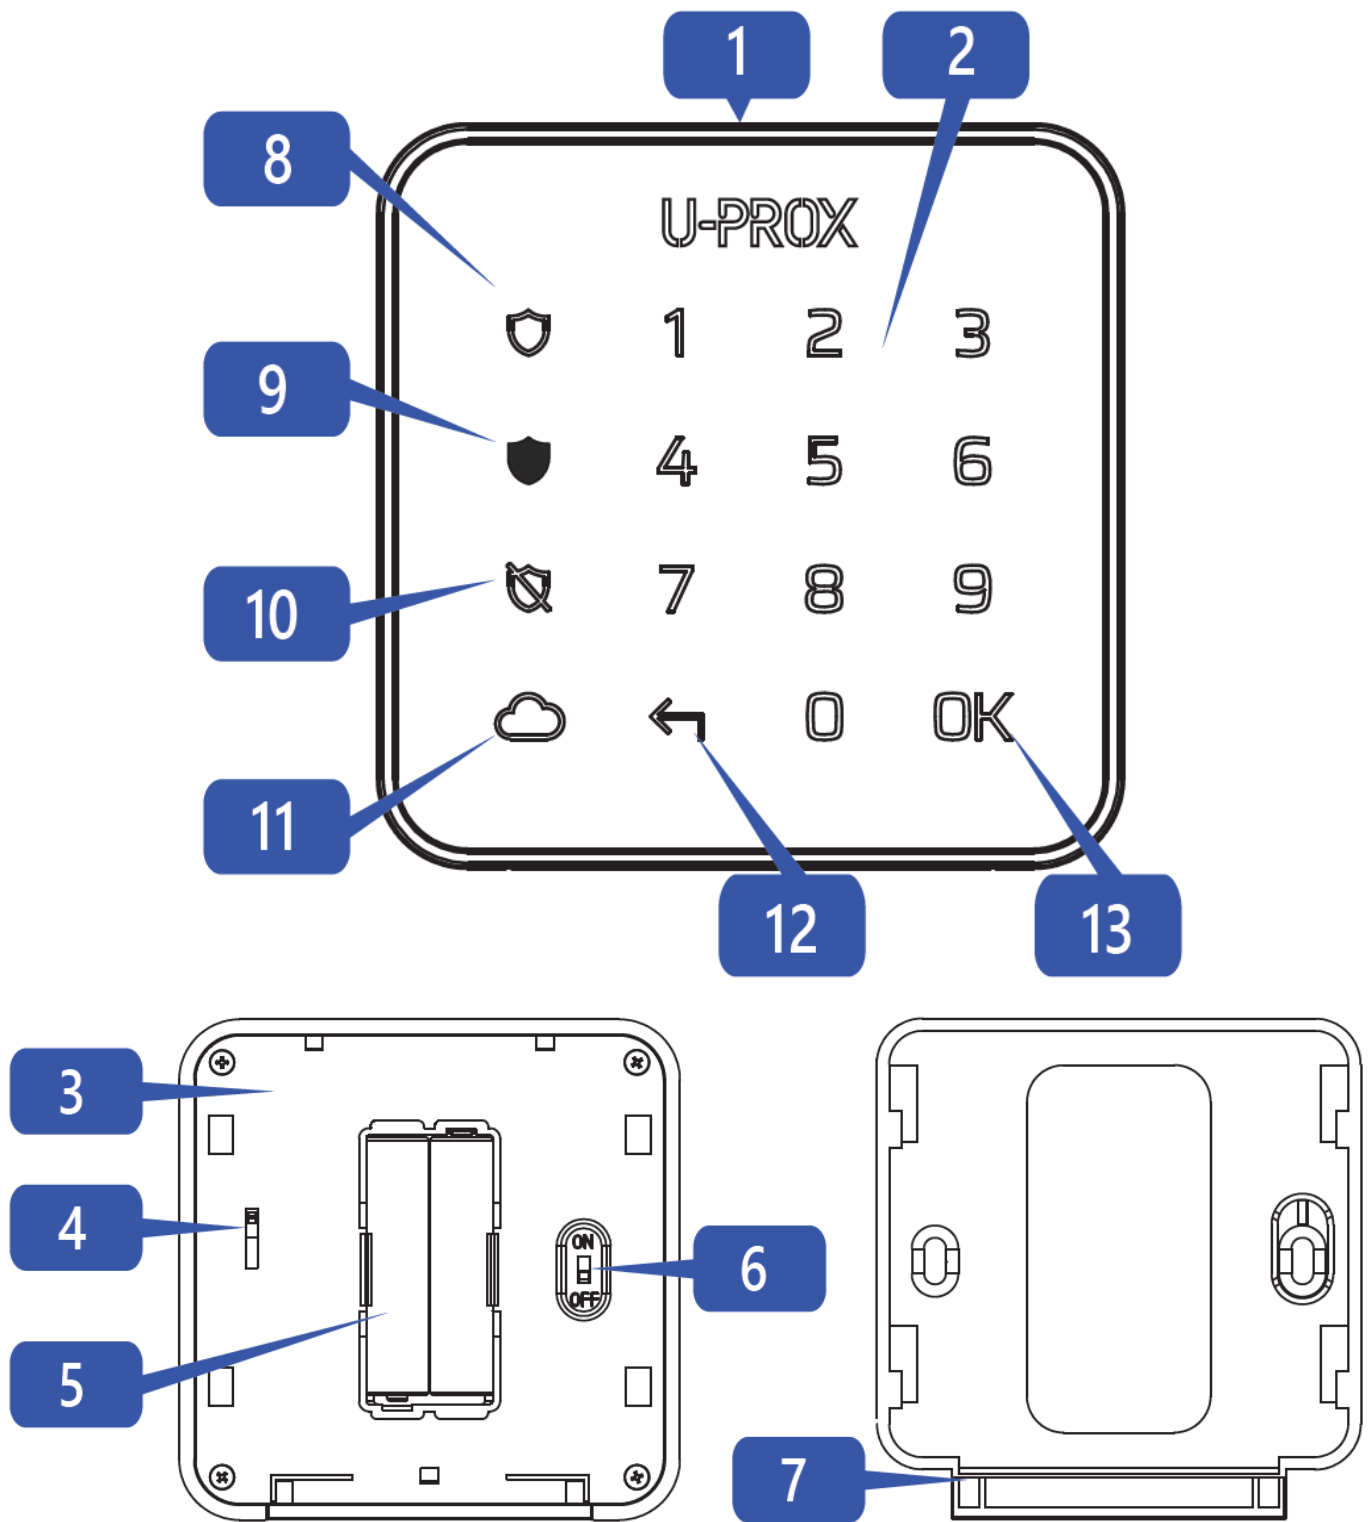

1. Keypad case
2. Numeric keypad
3. Keypad case, rear view
4. Tamper switch
5. Batteries
6. On/Off switch
7. Keypad plate
8. "Partial Arming" button ("Stay" or "Night Mode") and indicator
9. "Arming" button and indicator
10. "Disarming" button and indicator
11. "Info" button and indicator with reprogramming capability

12. "Cancel" button
13. "OK" button – additional actions

TECHNICAL SPECIFICATIONS

Code length	6
Partitions	1
Power	3V, two AAA alkaline batteries included
Service life of battery	up to 2 years
Radio frequency	ISM-band wireless interface with several channels ITU region 1 (EU, UA): 868.0 to 868.6 MHz, bandwidth 100kHz, 20 mW max., up to 4800m (in line of sight) ITU region 3 (AU): 916.5 to 917 MHz, bandwidth 100kHz, 20 mW max., up to 4800m (in line of sight).
Communication	Secure two way communication, sabotage detection, key - 256 bits
Operating temperature range	-10°C to +55°C
Dimensions & weight	84.5 x 84.5 x 14.6 mm & 75 grams
Case colour	white, black

COMPLETE SET

1. U-Prox Keypad G1;
2. Two AAA LR03 alkaline batteries (pre-installed);
3. Quick start guide

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE USED BATTERIES ACCORDING TO THE NATIONAL REGULATIONS


- Do not use salt batteries (R03)! FR03 lithium batteries or alkaline batteries (LR03) are highly recommended. Usage of alkaline batteries (LR03) allowed only at temperatures above +5°C.




WARRANTY

Warranty for U-Prox devices (except batteries) is valid for two years after the purchase date. If the device operates incorrectly, please contact support@u-prox.systems at first, maybe it can be solved remotely.


REGISTRATION

Use a plastic card to open the device

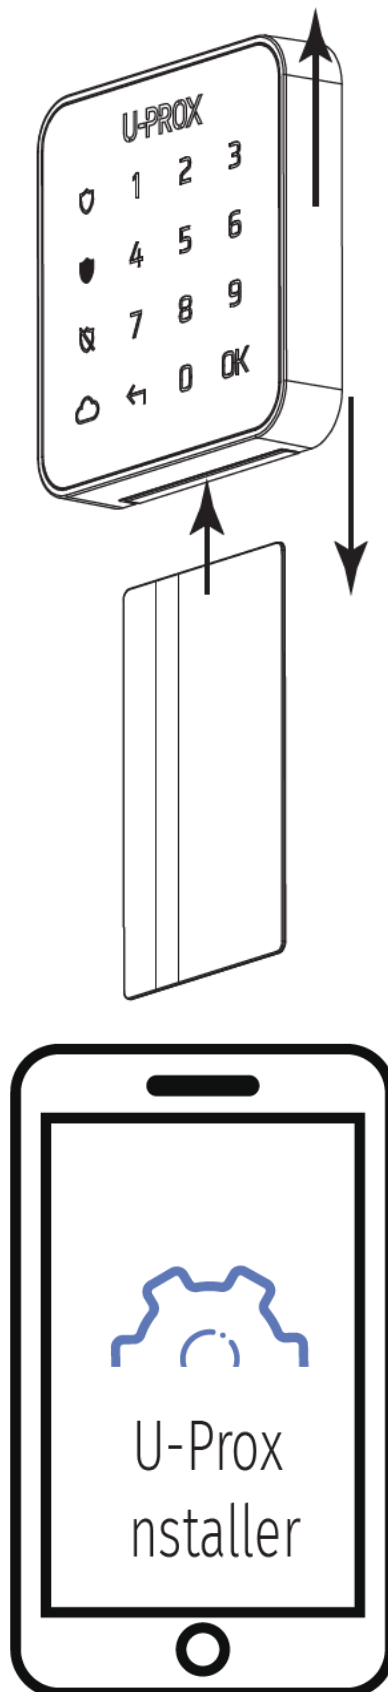

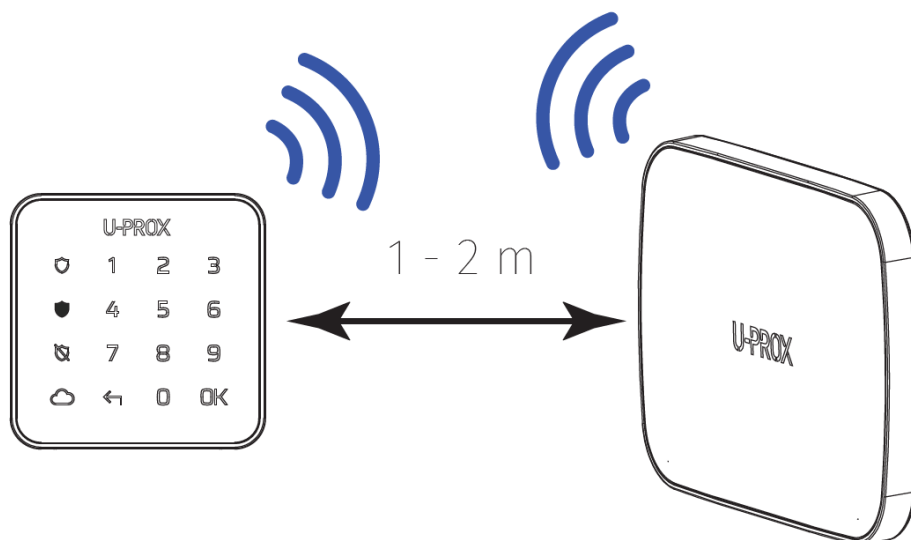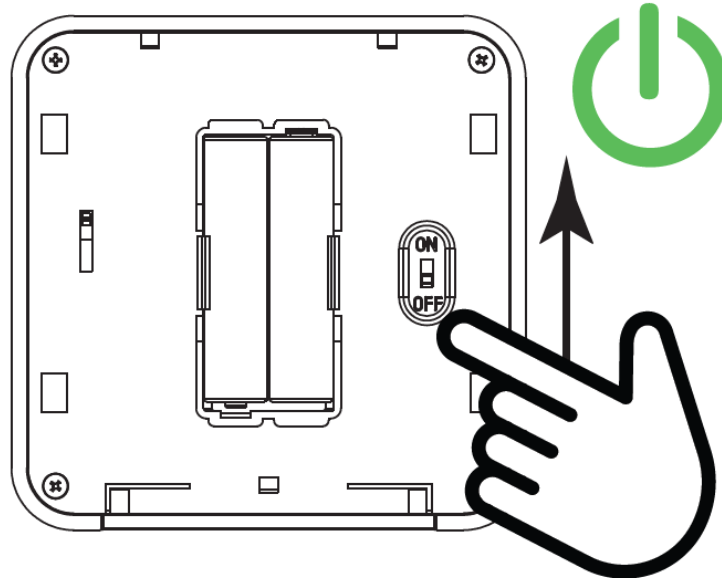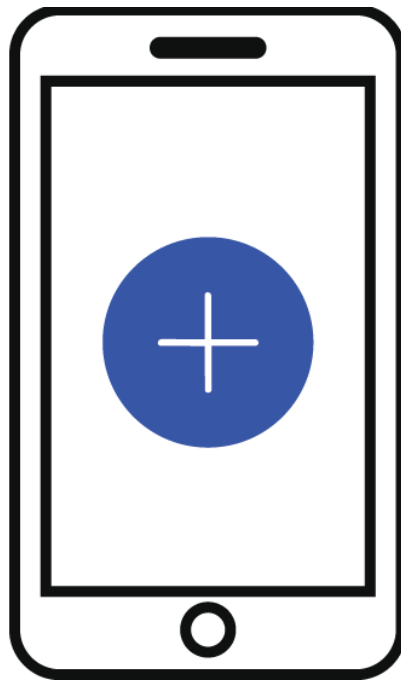

10-15 s


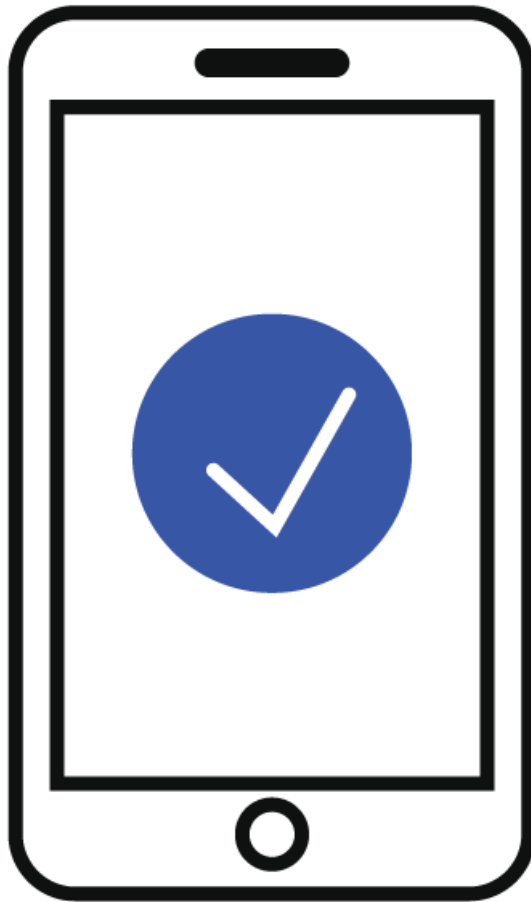



RANGE TEST FOR OPTIMAL INSTALLATION LOCATION







Due to Grade 2 requirement RF link works with reduction of power in 8 dB

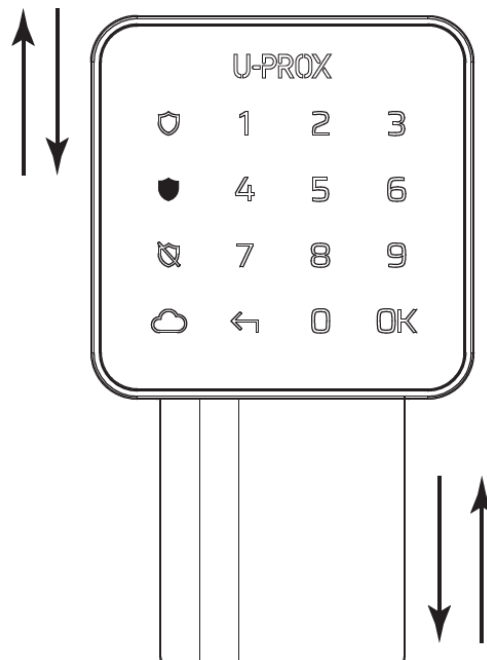
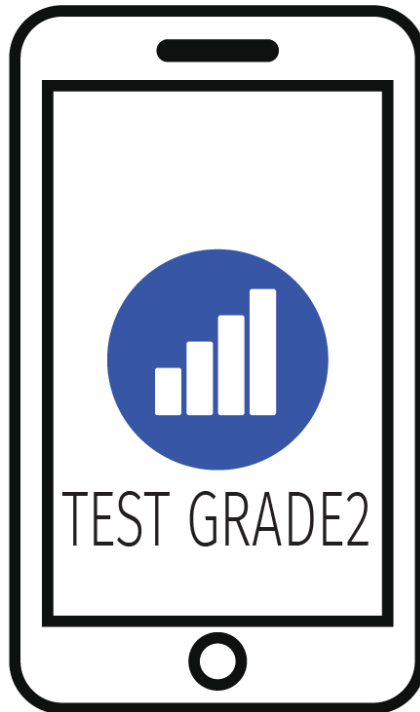


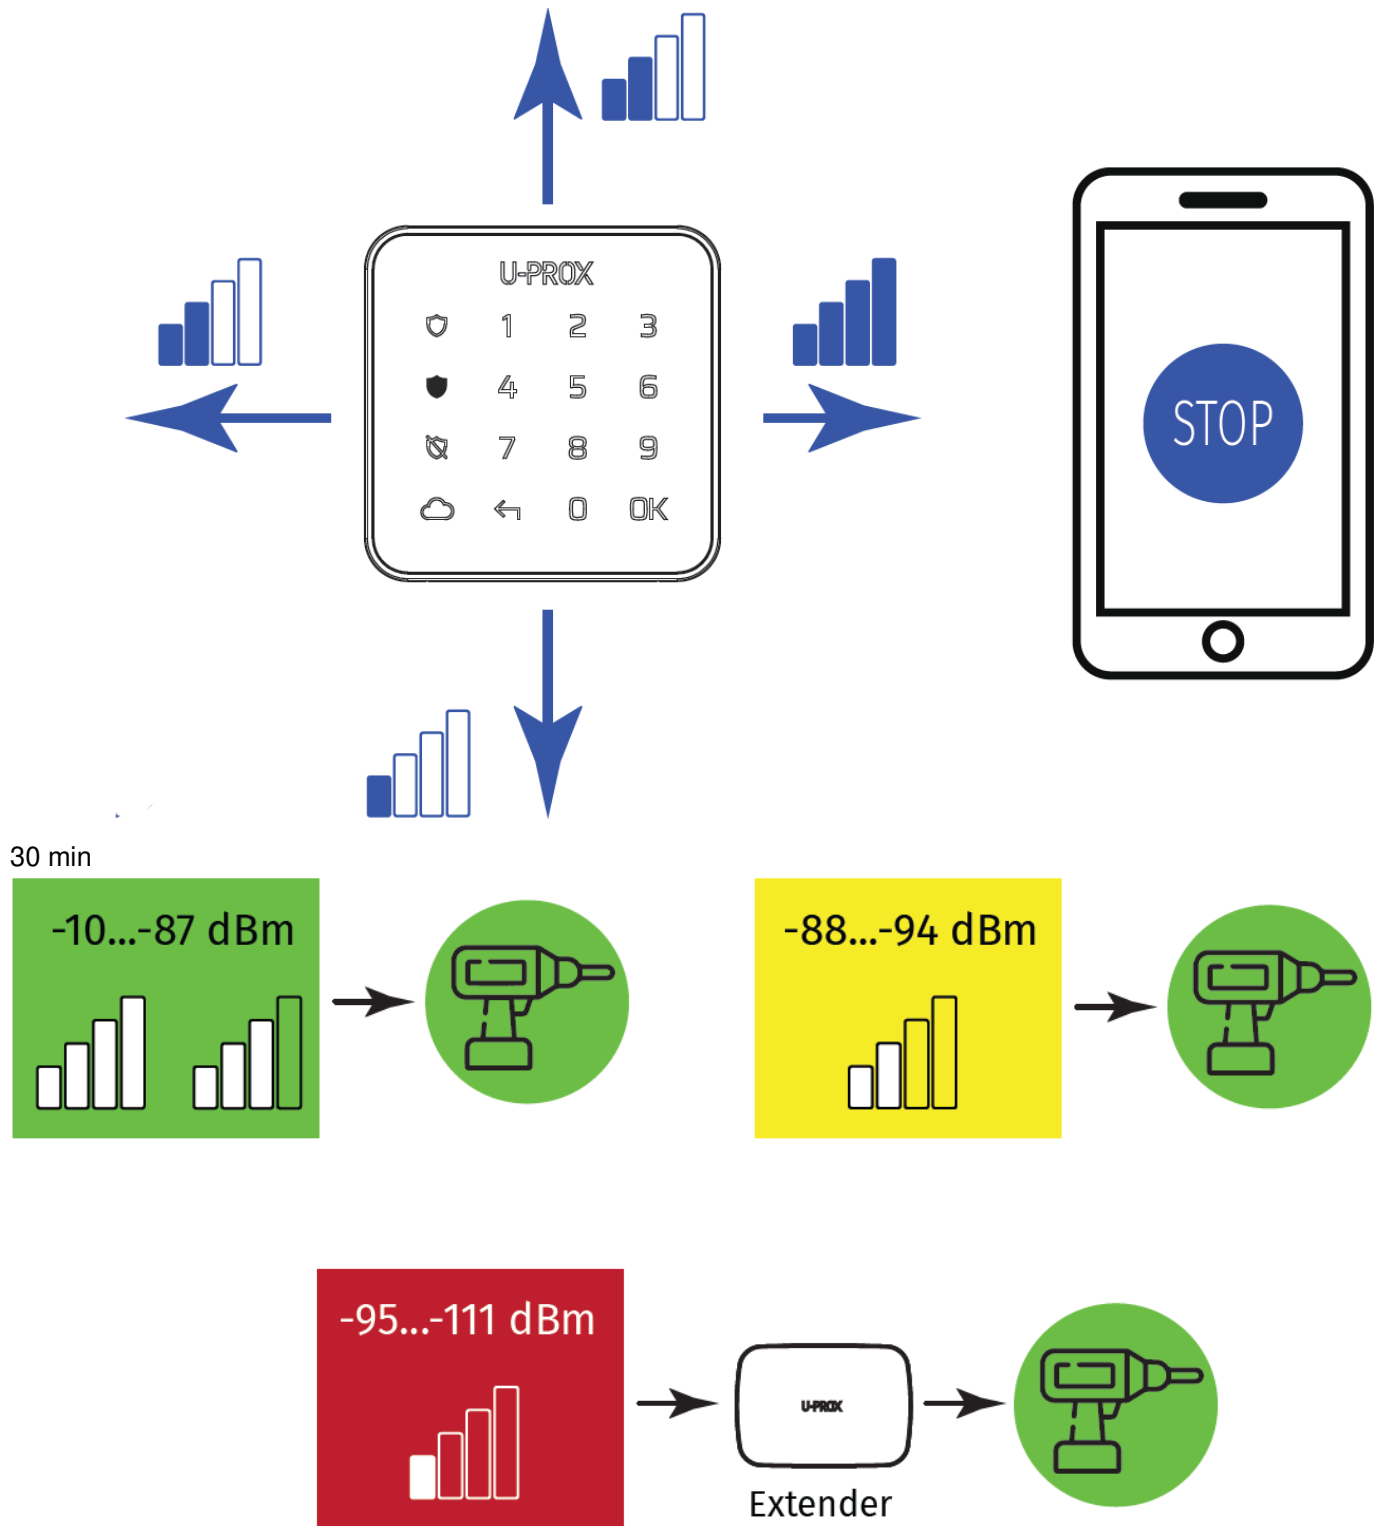


INSTALLATION

Use a plastic card to open the device

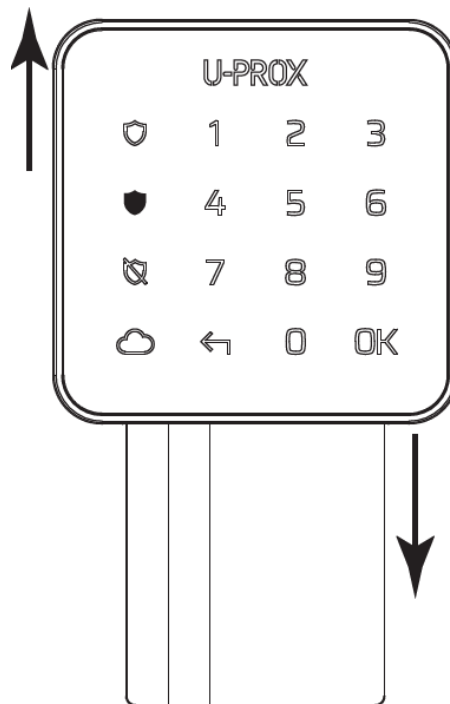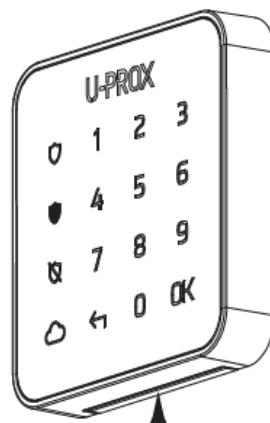


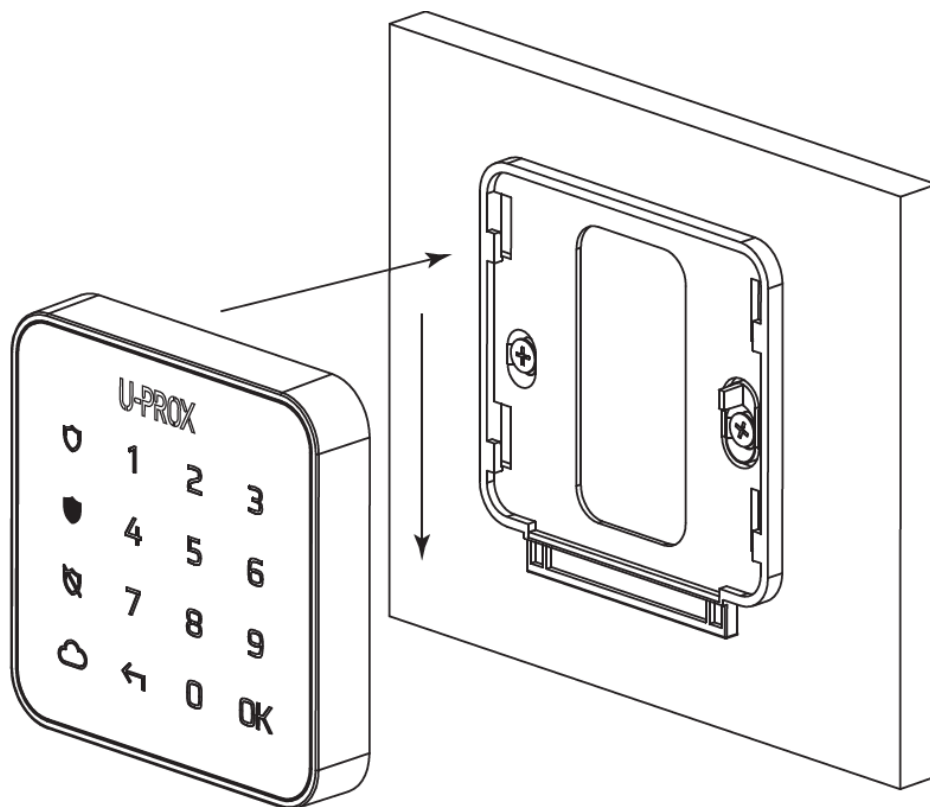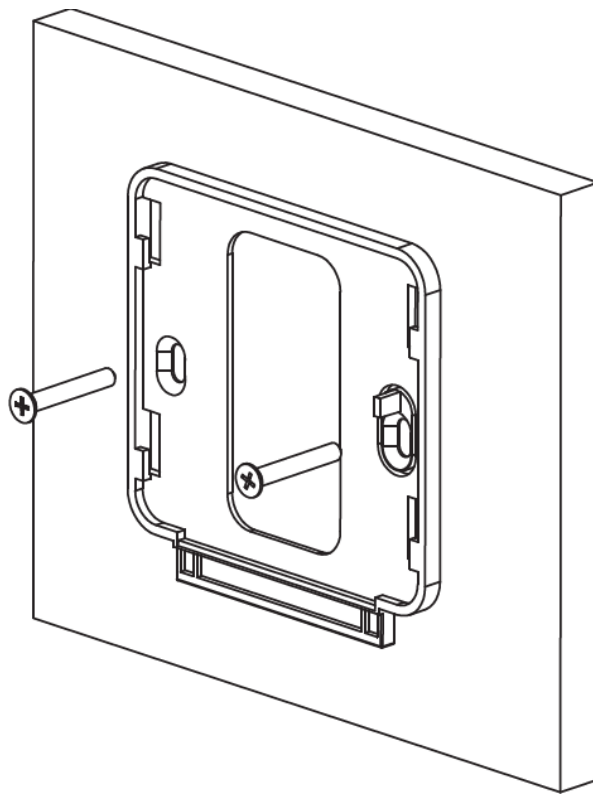

INDICATION

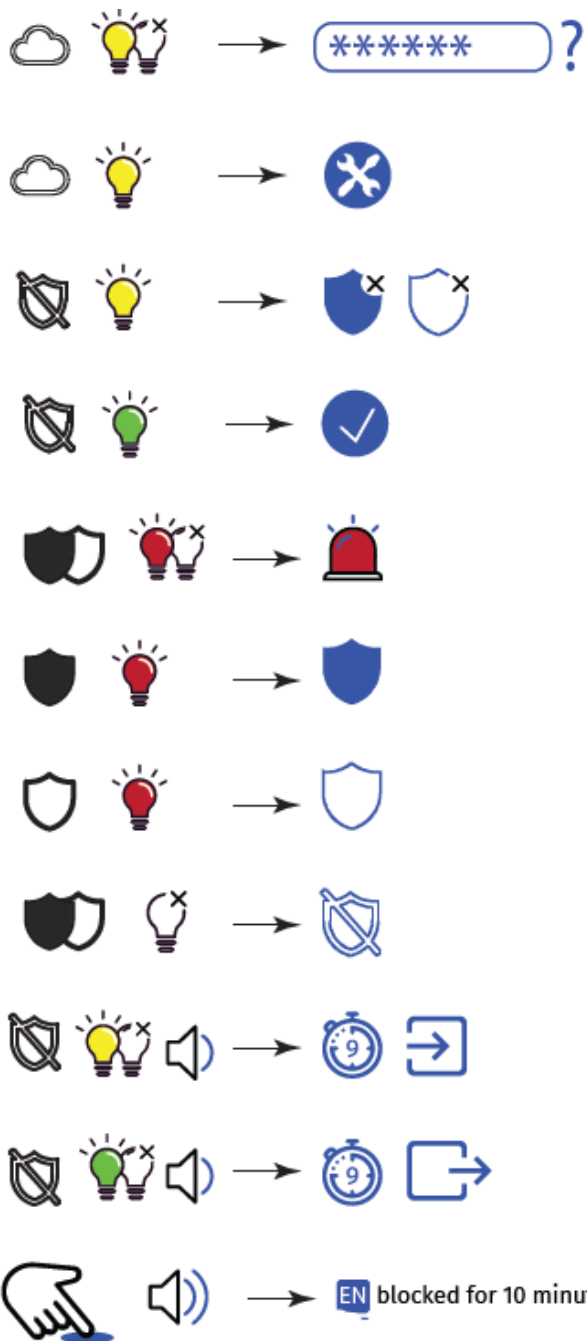


ARM

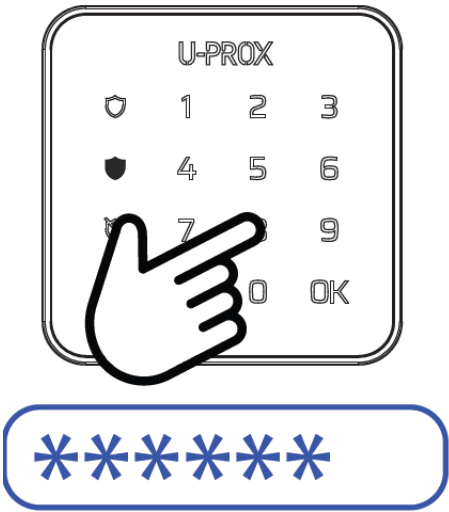









DISARM

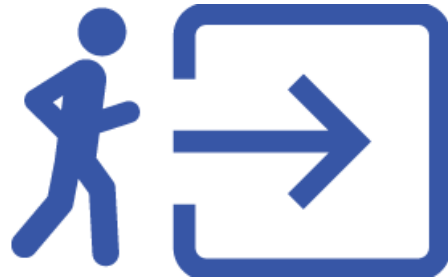


U-PROX			
	1	2	3
	4	5	6
	7	8	9
		0	OK

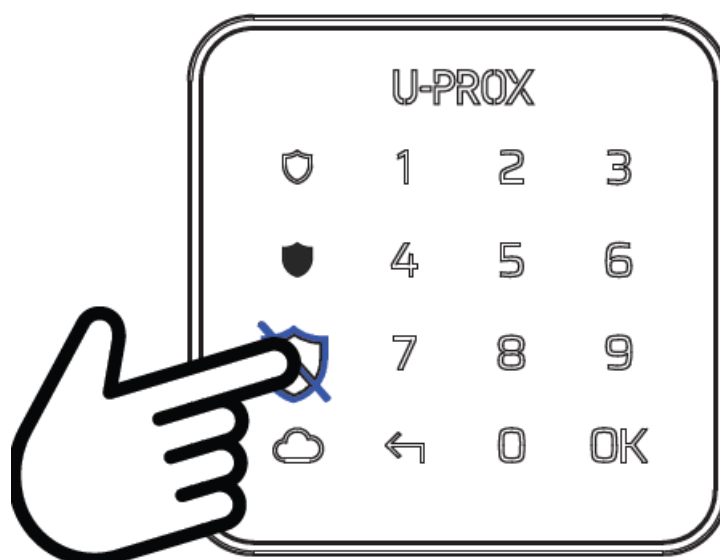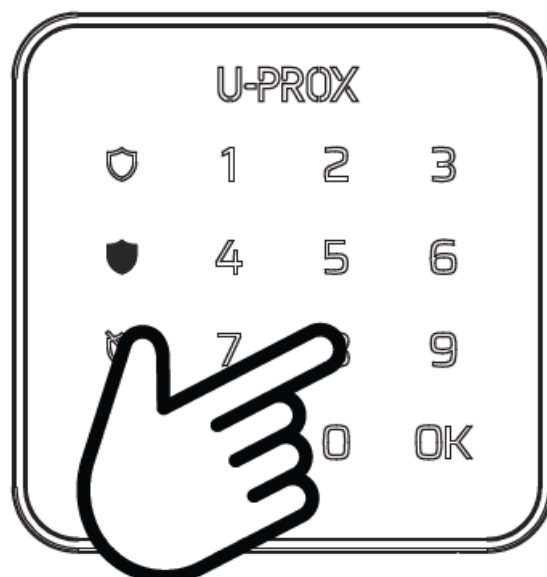


CANCELLING ALARM

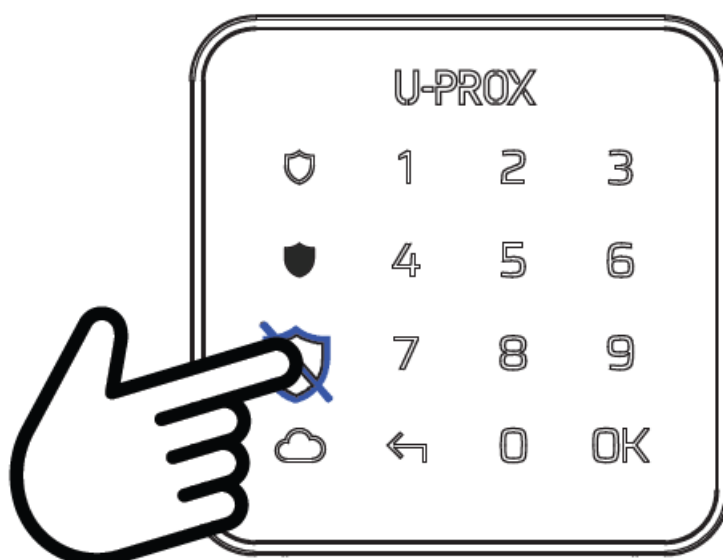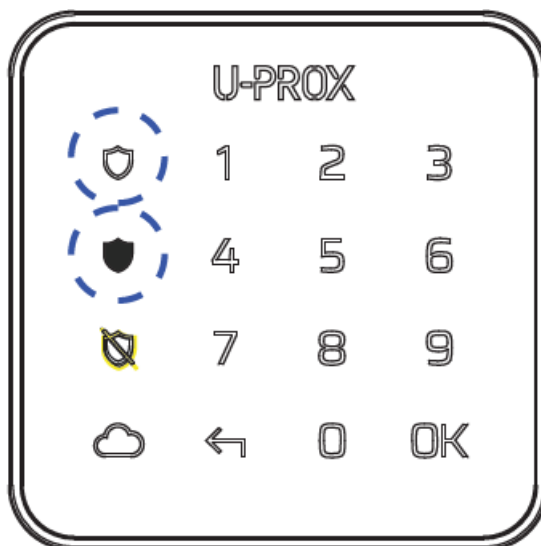

STAY ARM / NIGHT MODE

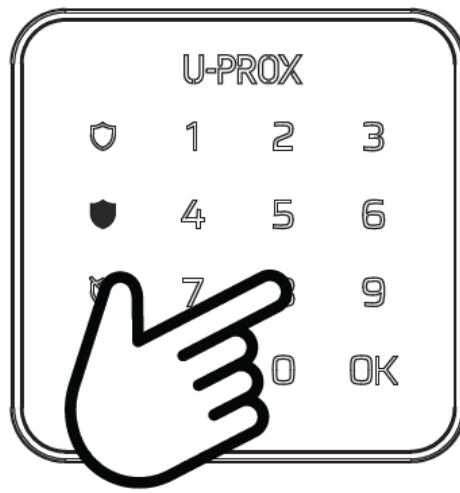


1

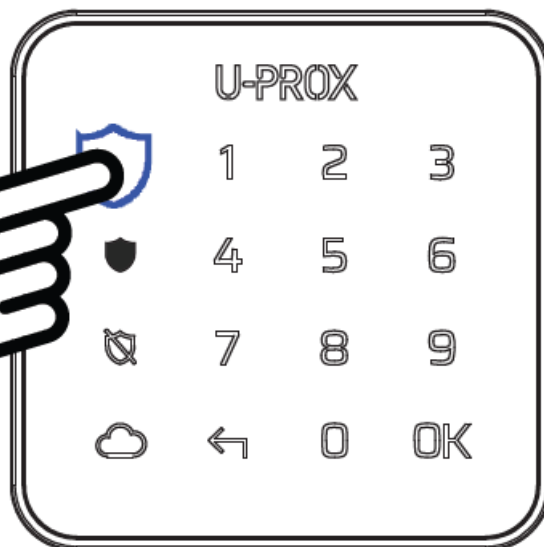




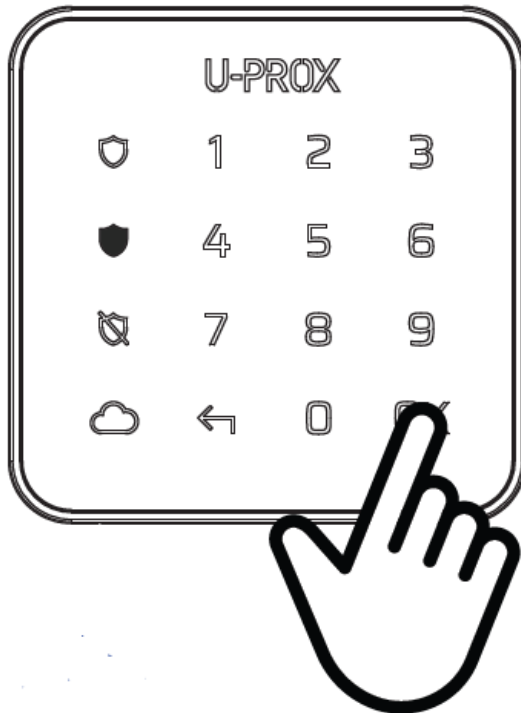


CHANGE CODE



- old
- 4-5 s
- Press 4
- new

DURESS CODE



258238	→		258239
182479	→		182470
241890	→		241891

Documents / Resources



[U-PROX G1 Wireless Touch Mini Keypad](#) [pdf] User Manual

G1 Wireless Touch Mini Keypad, G1, Wireless Touch Mini Keypad, Touch Mini Keypad, Mini Keypad, Keypad