



Ultralux LNL37 LED Dimmable Table Lamp User Guide

[Home](#) » [ULTRALUX](#) » Ultralux LNL37 LED Dimmable Table Lamp User Guide 

Contents


- [1 Ultralux LNL37 LED Dimmable Table Lamp](#)
- [2 LED DESK LAMP](#)
- [3 TECHNICAL INFORMATION](#)
- [4 TAKING CARE OF THE NATURAL ENVIRONMENT
CLEANLINESS](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Ultralux


Ultralux LNL37 LED Dimmable Table Lamp




This product contains a light source of energy efficiency class G.

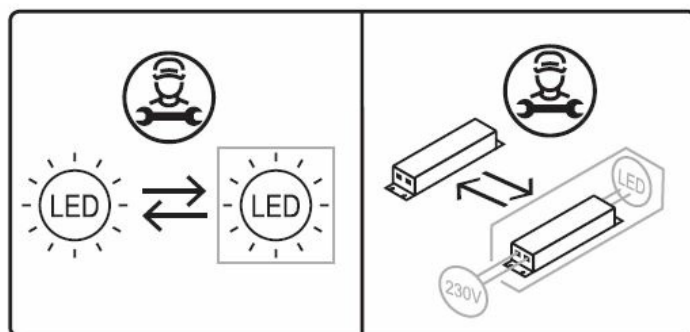


LED DESK LAMP

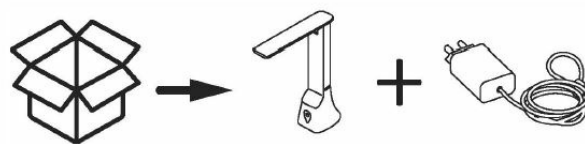


1. Open the package and take out all components.

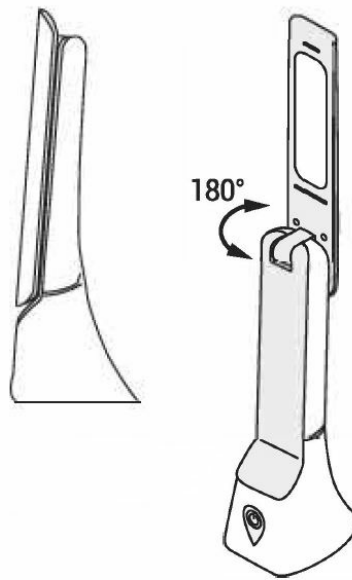

2. Carefully open the lamp arm. The maximum angle is 180°.
3. Connect the micro USB cable to the power adapter and to the lamp.

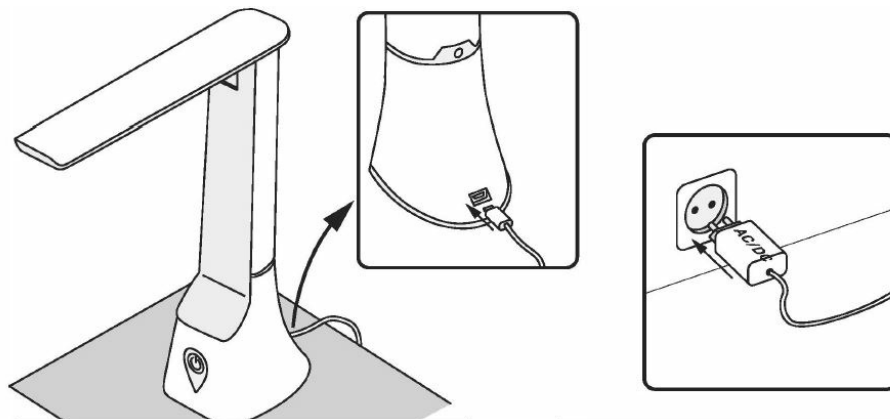

4. Connect the power adapter to the mains.
5. With a quick touch of the on/off button select the desired color temperature. By holding the on/off button adjust the brightness level of the light.

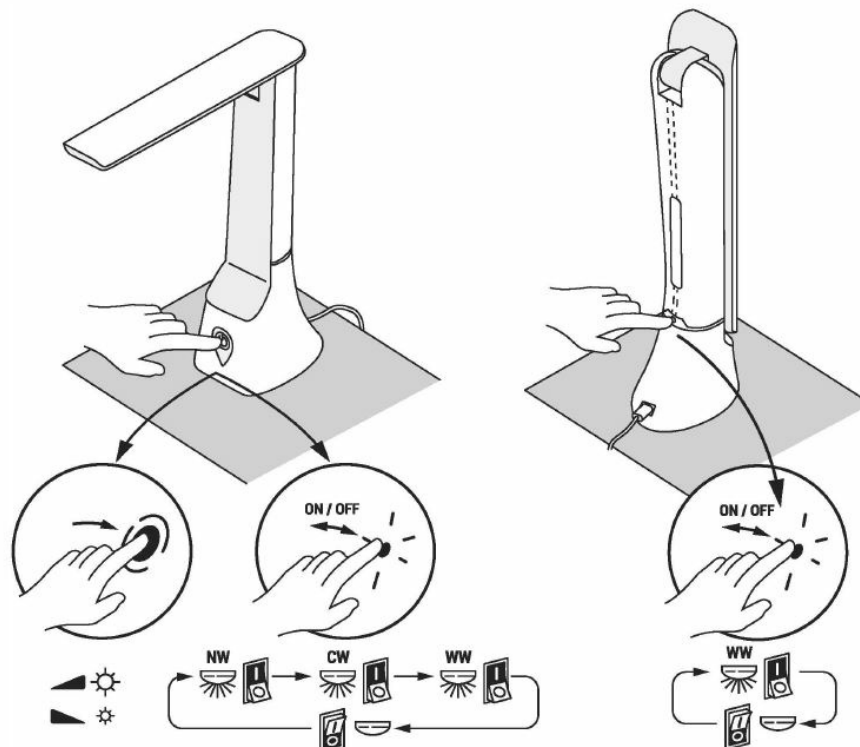

6. With a quick touch of a button on the back, turn on the ambient light.


TECHNICAL INFORMATION

- Supply voltage: 220-240V AC/ 50-60 Hz
- USB power adapter and micro USB cable included
- Length of USB cable: 2 m
- Rated power: 7W
- 6.5W main light
- 0.5 W ambient light
- Max. luminous flux: 300 lm
- Color temperature:
 - 3000/4200/6000K main light
 - 3000K ambient light
- Color rendering index: Ra>80
- Beam angle: 120°
- Working temperature: 0°C +40°C
- Dimming range: 10%-100%
 - Built-in dimmable driver
- Dimensions: 295/245/77 mm
- Warranty: 2 years

TAKING CARE OF THE NATURAL ENVIRONMENT CLEANLINESS

- The product and its components are not harmful to the environment.
- Please dispose of the package elements separately in containers for the corresponding material.
- Please dispose of the broken product separately in containers for out-of-usage electrical equipment.

Documents / Resources

	<p>Ultralux LNL37 LED Dimmable Table Lamp [pdf] User Guide LNL37 LED Dimmable Table Lamp, LNL37, LED Dimmable Table Lamp, Dimmable Table Lamp , Table Lamp</p>
---	--