



Univex 6612M Value Slicer Instructions

[Home](#) » [univex](#) » Univex 6612M Value Slicer Instructions 



WE RAISE THE BAR. WE SET THE STANDARD.

6612M

Value Series Slicer

Model:  6612M: 1/2hp Manual Slicer



Project _____
Item Number _____
Quantity _____

Contents

- [1 6612M Value Slicer](#)
- [2 Features:](#)
- [3 Optional Accessories:](#)
- [4 Warranty:](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

6612M Value Slicer

*NEW Low Friction Blade comes standard with slicer!

CERTIFIED BY NSF INTERNATIONAL TO MEET AND EXCEED THE NSF/ANSI 2012 STANDARDS

12" Precision slicing German hollow ground blade Unique smooth curve transitions to redirect

Features:


- Light to medium duty, intermediate volume slicer
- Maximum duty 4 hours a day
- Capable of slicing limited amounts of cheese
- Unique drip tray fence redirects liquids away from controls and operator towards distinctive concave base casting for easy cleaning
- Ergonomic comfort design operation
- Powerful 1/2 hp motor standard
- Adjustable slice thickness from 0 to 1/2"
- Easily removable sharpener for cleaning
- Quick and simple disassembly of carriage and feed grip for easy and thorough cleaning
- Sanitary polished and anodized aluminum construction
- Permanently mounted protective edge guard for operator safety
- Heavy duty 3-1/2 lb gravity fed grip

Optional Accessories:

- Heavy duty clear plastic cover
- Stainless steel vegetable chute
- Sturdy stainless steel stand

Warranty:

- One year, on-site parts and labor

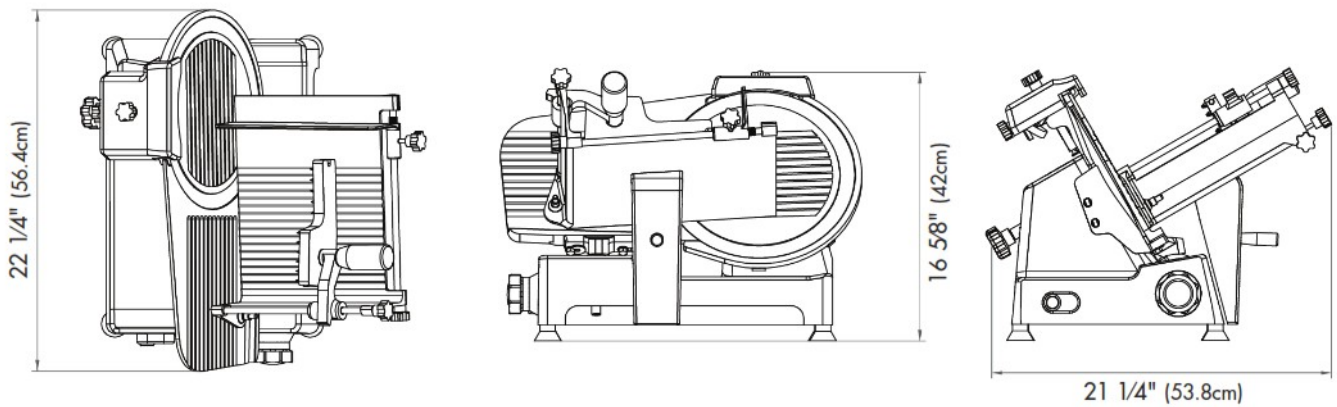

Controls: Manual slice thickness knob, push button on/off, attached blade sharpener

Drive Assembly: Belt driven

Blade diameter: 12" (38.48cm) razor sharp blade

Blade RPM: 345 RPM

Maximum slice thickness: .5" (1.27cm)

Maximum product size:

Rectangular: 9.25" x 7.5" (24.5cm x 19cm)

Square: 7.5" x 7.5" (19cm x 19cm)

Round: 8" (20.3cm)

Construction: Anodized, cast aluminum body for durability and stunning looks

Nema #: 5-15-P

Electrical Information (60Hz)					
	Voltage	Phase	Amps	RPM	hp(kW)
Standard Voltage	115	1	4.0	1680	1/2 (.37)
Optional Voltage	208-240	1	3.	1680	1/2 (.37)

Carriage Stroke
11" (27.94cm)

Shipping Information		
Net Weight	Shipping Weight	Overall Shipping Dimensions
67.9lbs. (30.8Kg)	861bs. (39Kg)	21" (53.3cm) H x 27" (68.6cm) W x 23" (58.4cm) D



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America

TEL: (800)258-6358
INTL TEL: (603)893-6191
FAX: (800)356-5614
INTL FAX: (603)893-1249

Printed in U.S.A.
REV 1 01/2017
LH-560

Documents / Resources



[Univex 6612M Value Slicer](#) [pdf] Instructions
6612M Value Slicer, 6612M, Value Slicer, Slicer

References

- [Univex Corporation - Manufacturer of commercial quality mixers, slicers, dough processors and prep equipment](#)

Manuals+