

USI WM-CW-26 WiFi Module Instructions



[Home](#) » [USI](#) » USI WM-CW-26 WiFi Module Instructions 



Contents

- [1 USI WM-CW-26 WiFi Module Instructions](#)
- [2 WIFI](#)
- [3 Remote Control](#)
- [4 Suggestion of module placement on the host PCB](#)
- [5 Antenna Information](#)
- [6 Regulatory Notices](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

USI WM-CW-26 WiFi Module Instructions





WM-CW-26 Setup Environment

#	Items	quantity
1	Power supply with 3.6v	1
2	USB to SDIO adapter	1
3	USB dongle with Ubuntu live CD to boot up (Set this USB the 1 st boot device in laptop's BIOS), all commands are executed by Terminal application window.	1
4	Micro USB cable for SDIO - WIFI	1
5	Mini USB cable for UART - BT	1

Note: WIFI & BT can work at the same time.

WIFI

1. Power supply with 3.6V

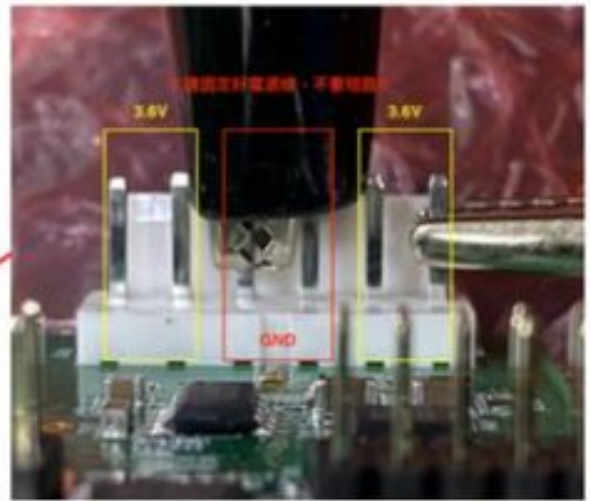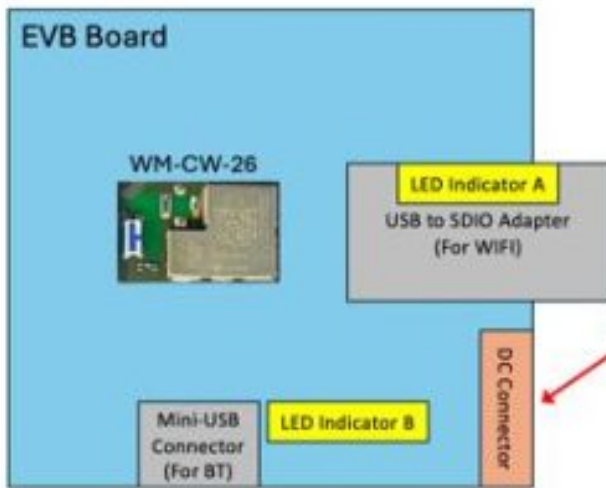

P.S. Both LEDs in yellow block should turn on if not please refer to section8 for troubleshooting.

2. insert micro-USB cable for “USB to SDIO adapter” to PC check SDIO card detected!
Use command: ‘dmesg | grep mmc’, check mmc slot number. (Password = usi)

```
root@cyw26-PC: /home/cyw26
cyw26@cyw26-PC:~$ sudo su
[sudo] password for cyw26:
root@cyw26-PC: /home/cyw26# dmesg
```

```
885.929981] mmc1: new high speed SDIO card at address 0001
926.238439] Loading modules backported from Linux version v5.15.58-2023.0901-
```

3. mmc1 → SDIO card in slot #1

execute the script with the #1 to bring up WIFI function.

WiFi user mode for iperf (v2.0.5)

```
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26
cyw26@cyw26-PC:~$ sudo su
[sudo] password for cyw26:
root@cyw26-PC: /home/cyw26# cd WM-BN-CYW-26/
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ./up_wifi_user.sh 1
```

WiFi mfg mode for RF test

```
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26
cyw26@cyw26-PC:~$ sudo su
[sudo] password for cyw26:
root@cyw26-PC: /home/cyw26# cd WM-BN-CYW-26/
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ./up_wifi_mfg.sh 1
```

4. If the firmware version shows up, the WIFI module brings up successfully.

User mode firmware version

```
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26
[sudo] password for cyw26:
root@cyw26-PC: /home/cyw26# ls
123.pdf  Documents  examples.desktop  Pictures  Templates  WM-BN-CYW-26
Desktop Downloads  Music           Public    Videos    WM-BN-CYW-26 EMC_user
_guide.odt
root@cyw26-PC: /home/cyw26# cd WM-BN-CYW-26
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# vim down_wifi.sh
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ./up_wifi_user.sh 1
rmmod: ERROR: Module compat is not currently loaded
18.15 RC1.49
wl0: Aug 31 2023 01:16:08 version 7.95.64.1 (64b6b2d CY) FWID 01-b73af1f1
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26#
```

mfg mode firmware version

```
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26#
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26#
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ./up_wifi_mfg.sh 2
rmmod: ERROR: Module iwldvm is not currently loaded
rmmod: ERROR: Module iwlwifi is not currently loaded
rmmod: ERROR: Module mac80211 is not currently loaded
18.15 RC1.49
wl0: Jul 27 2022 20:54:42 version 7.95.55 (68e5ffa CY WLTEST) FWID 01-37276975
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26#
```

5. User mode: Throughput by iperf (v2.0.5)

(a) connect to SSID “Y21” which must be OPEN AP (AP’s DHCP must Enable) and get DHCP IP.

Detail command:

wl join <AP’s SSID>

wl status # check WIFI connection if AP and EUT are connected.
 rfkill unblock wifi # unblock all locks.
 ifconfig wlan0 up # Enable wlan0 interface.
 dhclient wlan0 # Get IP from AP.
 (optional)ifconfig wlan0 192.168.x.x # Manual set IP but still need to stay in the AP's IP range.
 ifconfig wlan0 # Check EUT if get IP or not.
 ping <AP's IP>

```

cyw26-PC: /home/cyw26/WM-BN-CYW-26
18.15 RC1.49
wlan0: Aug 31 2023 01:16:08 version 7.95.64.1 (64b6b2d CY) FwID 01-b73af1f1
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# wl join Y21
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# wl status
SSID: "Y21"
Mode: Managed  RSSI: -19 dBm  SNR: 0 dB  noise: -91 dBm  Flags: RSSI on-channel  Channel: 11
BSSID: 36:08:12:E3:F7:72  Capability: ESS ShortSlot
Supported Rates: [ 1(b) 2(b) 5.5(b) 9 11(b) 12 18 24 36 48 54 ]
Extended Capabilities: BSS_Transition
HT Capable:
  Chanspec: 2.4GHz channel 11 20MHz (0x100b)
  Primary channel: 11
  HT Capabilities: SGI20
  Supported HT MCS : 0-7
VS_IE:dd180050f202010180ff03a4000027a4000042435e0062322f00
VS_IE:dd07000ce700000000

root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# dhclient wlan0
/etc/resolvconf/update.d/libc: Warning: /etc/resolv.conf is not a symbolic link to /run/resolvconf/resolv.conf
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ifconfig
eth0      Link encap:Ethernet  HWaddr 3c:97:8e:44:d7:cc
          UP BROADCAST MULTICAST  MTU:1500  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)
          Interrupt:20 Memory:f2500000-f2520000

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:65536  Metric:1
          RX packets:4 errors:0 dropped:0 overruns:0 frame:0
          TX packets:4 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:240 (240.0 B)  TX bytes:240 (240.0 B)

wlan0     Link encap:Ethernet  HWaddr 08:00:4c:3e:10:01
          inet addr:192.168.140.27  Bcast:192.168.140.255  Mask:255.255.255.0
          inet6 addr: fe80::290:4cff:fe2e:1001/64 Scope:link
          inet6 addr: 2001:b400:e4aa:f6a7:290:4cff:fe2e:1001/64 Scope:Global
          inet6 addr: 2001:b400:e4aa:f6a7:d1:a524:fe94:73c3/64 Scope:Global
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
  
```

(b) Run iperf

6. mfg mode

(a) TX: run script "test_tx.sh", choose what RF setting do you want to verify


```

root@cyw26-PC: /home/cyw26/WM-BN-CYW-26
rmmod: ERROR: Module iwlwifi is not currently loaded
rmmod: ERROR: Module mac80211 is not currently loaded
rmmod: ERROR: Module compat is not currently loaded
18.15 RC1.49
wl0: Jul 27 2022 20:54:42 version 7.95.55 (68e5ffa CY WLTEST) FWID 01-37276975
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# ./test_tx.sh
band(5g=a, 2.4g=b)?[b]
RF band b
band(b, g, n)?[n]
RF mode n
channel(1-14)?[1]
RF channel 1
Bandwidth(20, 40u, 40l)?[20]
RF BW 20
rate(MCS 0-7(SISO))?[7]
RF rate 7
power(dBm)?[15]
RF power 15
packet gap(>20 us)?[100]
RF gap 100
./wl band b
Chanspec set to 0x1001
wl chanspec 1/20
wl 2g_rate -h 7 -b 20
wl txpwr1 -o -d 15
wl pkteng_start 00:11:22:33:44:55 tx 100 1024 0
TX mode now is ready....
Press any key to stop TX

```

(b) RX: run script “test_rx.sh”, choose what RF setting do you want to verify

```

root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# wl ver
18.15 RC1.49
wl0: Jul 27 2022 20:54:42 version 7.95.55 (68e5ffa CY WLTEST) FWID 01-37276975
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# ./test_rx.sh
band(5g=a, 2.4g=b)?[b]
RF band b
band(b, g, n)?[n]
RF mode n
channel(1-14)?[1]
RF channel 1
Bandwidth(20, 40u, 40l)?[20]
RF BW 20
./wl band b
Chanspec set to 0x1001
wl chanspec 1/20
wl pkteng_start 00:90:4c:2e:10:01 rx
RX mode now is ready....
Send waveform from VSG and then press any key when all waveform packet be sent

counters_version 10
datalen 1060
reinit 0 reinitreason_counts: 0(0) 1(0) 2(0) 3(0) 4(0) 5(0) 6(0) 7(0)
reset 0 pciereset 0 cfgrestore 0 dma_hang 0
txframe 0 txbyte 0 txretrans 0 txfail 0 txchanrej 0


```

7. Remove WIFI driver when change another EVB: run the script “./down_wifi.sh”

```
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# ./down_wifi.sh  
rmmod: ERROR: Module mac80211 is not currently loaded  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# ^C  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# wl ver  
wl: wl driver adapter not found  
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#
```



8. Troubleshooting:

1. Can't detect the SDIO card
 - a. Please make sure the USB to SDIO adapter board LED A is lighting.
 - b. re-power cycle for CYW-26 EVB
 - c. Press the button (Red block) to reset the USB to SDIO adapter board.

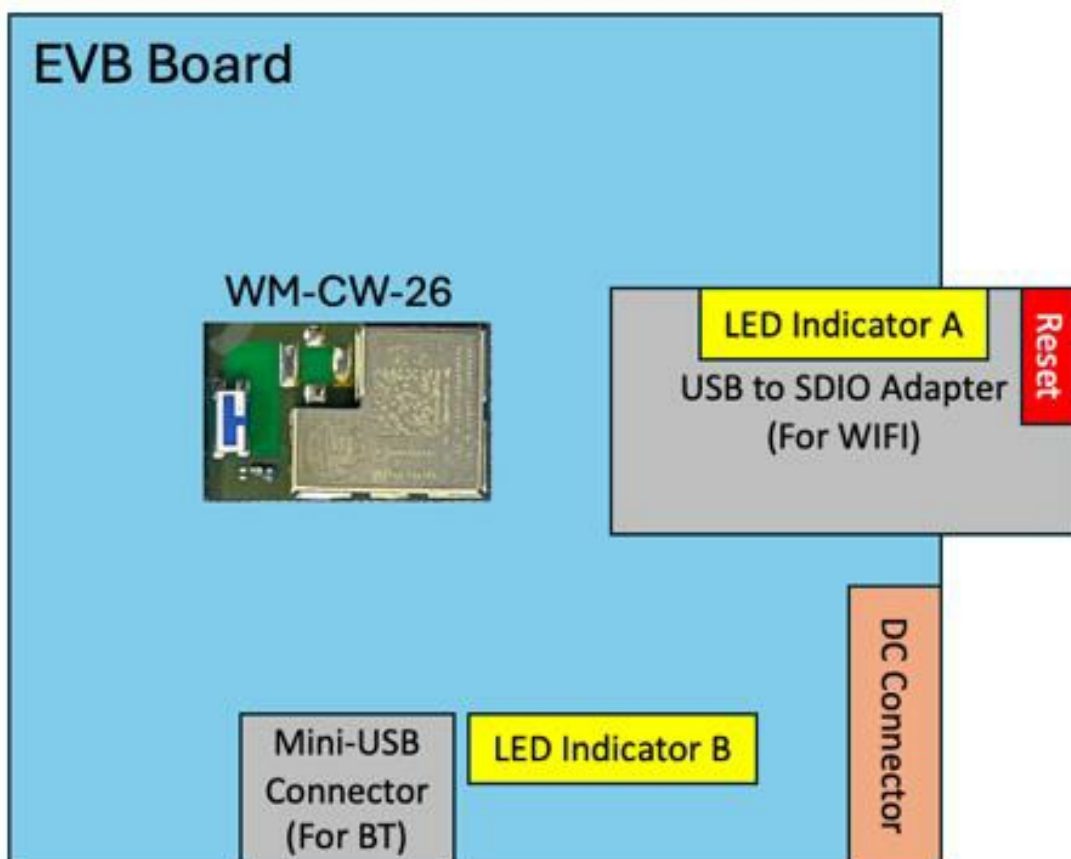

BT

1. Power supply with 3.6V and insert the Mini USB cable.

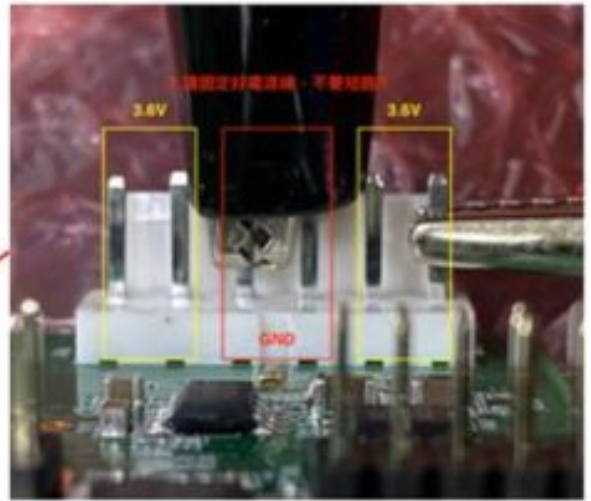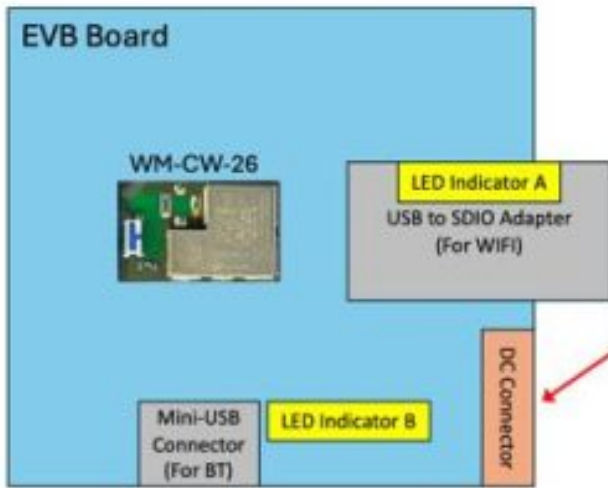

P.S. LED B (yellow block) will turn off is normal when mini-USB cable is plugged.

2. Check UART to USB slot number,

use command: `ls /dev/ttyUSB*`

`/dev/ttyUSB0` → here is #0

```

root@cyw26-PC: /home/cyw26/WM-BN-CYW-26
test_rx.sh
test_tx.sh
up.sh
up_wlfl_mfg.sh
up_wlfl_user.sh
up_wlfl_user.sh~
wlfmac18.15.1.49_x64
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# chmod 777 mybluetool_1.8.2_20240227_x86
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# vim BT_mfg.sh
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ls /dev/
Display all 232 possibilities? (y or n)
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ls /dev/tty
tty      tty21    tty35    tty49    tty62    ttyS17    ttyS30
tty0     tty22    tty36    tty5      tty63    ttyS18    ttyS31
tty10    tty23    tty37    tty50    tty7      ttyS19    ttyS4
tty11    tty24    tty38    tty51    tty8      ttyS2     ttyS5
tty12    tty25    tty39    tty52    tty9      ttyS20    ttyS6
tty13    tty26    tty4     tty53    ttyprintk ttyS21    ttyS7
tty14    tty27    tty40    tty54    ttyS0     ttyS22    ttyS8
tty15    tty28    tty41    tty55    ttyS1     ttyS23    ttyS9
tty16    tty29    tty42    tty56    ttyS10    ttyS24    ttyUSB0
tty17    tty3     tty43    tty57    ttyS11    ttyS25
tty18    tty30    tty44    tty58    ttyS12    ttyS26
tty19    tty31    tty45    tty59    ttyS13    ttyS27
tty2     tty32    tty46    tty6     ttyS14    ttyS28
tty20    tty33    tty47    tty60    ttyS15    ttyS29
tty20    tty34    tty48    tty61    ttyS16    ttyS3
root@cyw26-PC: /home/cyw26/WM-BN-CYW-26# ls /dev/ttyUSB0
/dev/ttyUSB0

```

3. execute the script with the #0 to bring up BT function

(A) BT user mode for A2DP

a. Don't close this terminal.


```

root@cyw26-PC:/home/cyw26/WM-BN-CYW-26#
root@cyw26-PC:/home/cyw26/WM-BN-CYW-26# ./BT_mlsson.sh 0
option ro2bytes
option tosleep with arg 5600
option patchram with arg CYW4343A2_001.003.016.0031.0000_Generic_UART_37_4MHz_wlbgc_BU_dl_signed.hcd
option enable_hci
Open Serial Port: '/dev/ttyUSB0'
Uart Control Signals (ON): RTS DTR
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer: ret=0
Unknow chipid=147
Download hcd file start, size=4857
Sleep 5600 us
(100.00 %) [ 4857/ 4857]
Download hcd file finished
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer: ret=0
Done setting line discipline

```

b. Open another terminal and run cmd “**hciconfig -a**” to make sure only one BT device with UART interface (Cypress Semiconductor Corp.) is active on your system.

!!!! If there is another BT device on your system, here is hci1 with USB interface.

Please make sure to run cmd “**sudo hciconfig hci1 down**” to disable it. !!!!

(Password: usi)

```

Manufacturer: Cypress Semiconductor Corporation (305)


root@cyw26-PC:/home/cyw26# hciconfig -a
hci1:   Type: BR/EDR  Bus: USB
BD Address: 08:3E:8E:E5:FF:45  ACL MTU: 1021:8  SCO MTU: 64:1
DOWN
RX bytes:882 acl:0 sco:0 events:36 errors:0
TX bytes:386 acl:0 sco:0 commands:36 errors:0
Features: 0xbf 0xfe 0xcf 0xfe 0xdb 0xff 0x7b 0x87
Packet type: DM1 DM3 DM5 DH1 DH3 DH5 HV1 HV2 HV3
Link policy: RSWITCH SNIFF
Link mode: SLAVE ACCEPT

hci0:   Type: BR/EDR  Bus: UART
BD Address: 43:43:0A:2A:1F:AC  ACL MTU: 1021:8  SCO MTU: 64:10
UP RUNNING
RX bytes:1964 acl:0 sco:0 events:82 errors:0
TX bytes:1193 acl:0 sco:0 commands:82 errors:0
Features: 0xbf 0xfe 0xcf 0xfe 0xdb 0xff 0x7b 0x87
Packet type: DM1 DM3 DM5 DH1 DH3 DH5 HV1 HV2 HV3
Link policy: RSWITCH SNIFF
Link mode: SLAVE ACCEPT
Name: 'cyw26-PC'
Class: 0x0c010c
Service Classes: Rendering, Capturing
Device Class: Computer, Laptop
HCI Version: (0xb) Revision: 0x0
LMP Version: (0xb) Subversion: 0x2310
Manufacturer: Cypress Semiconductor Corporation (305)


root@cyw26-PC:/home/cyw26#

```

c. Use BT setting UI to pair a BT headset.

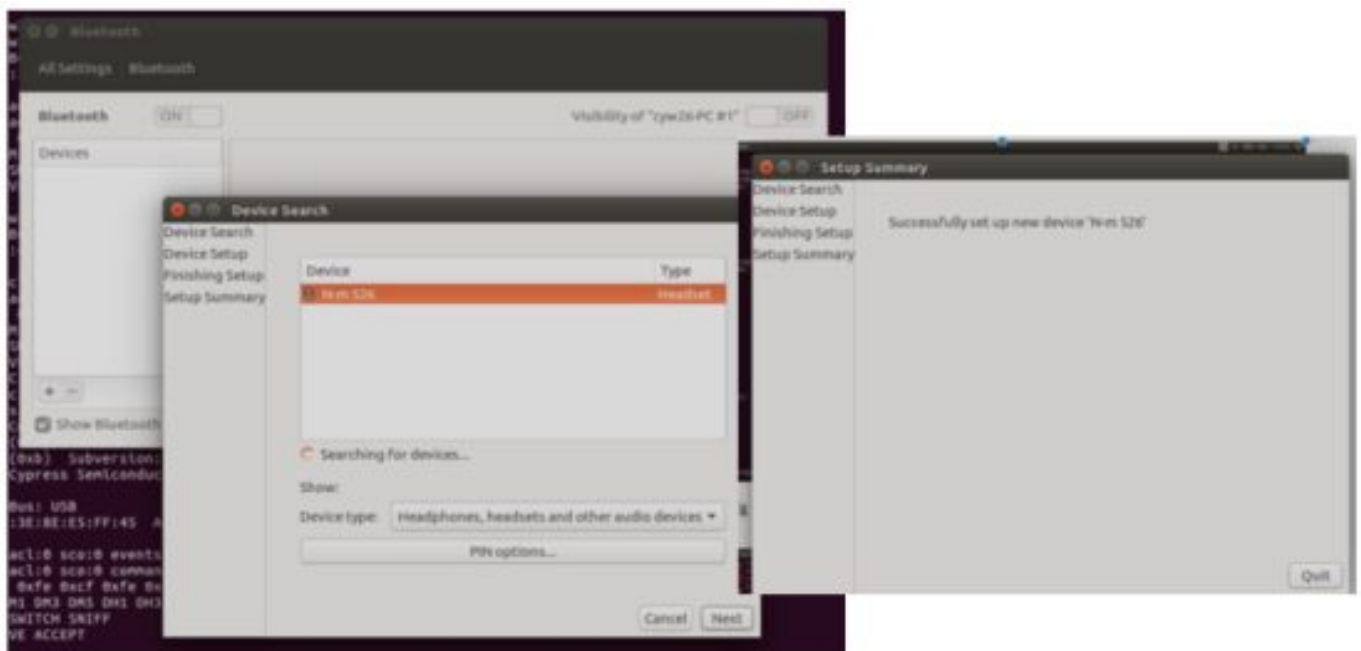

d. Play music “m_set_106.wav”, and make sure the Sound setting to BT A2DP

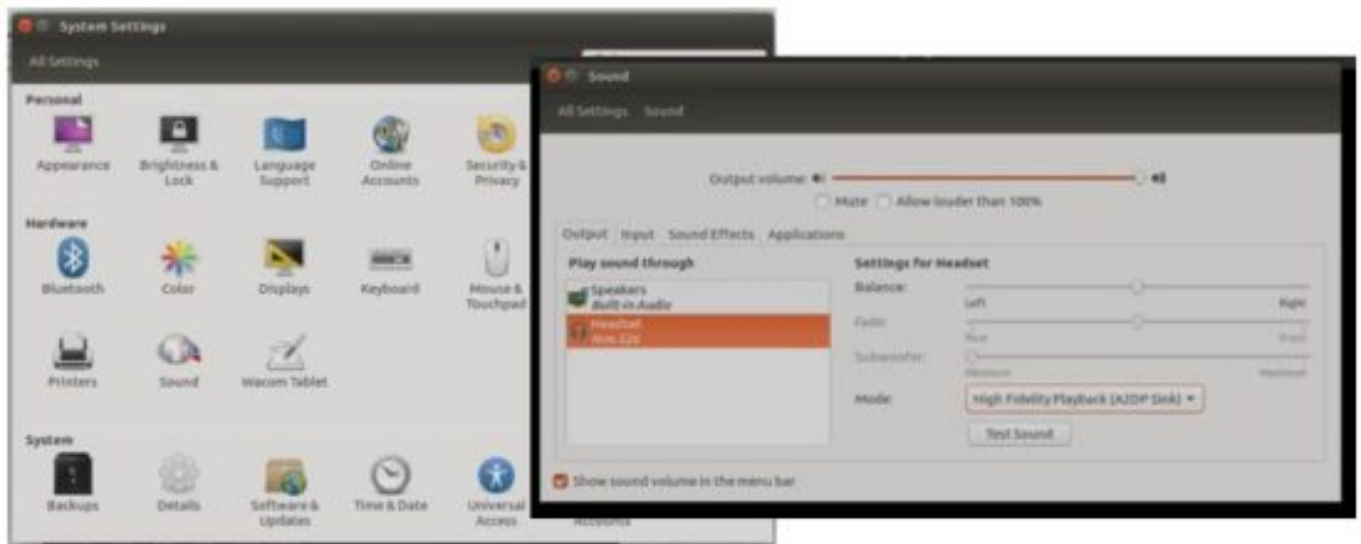

(B) BT mfg mode for RF test

```

root@cyw26-PC:/home/cyw26/MM-BN-CYW-26# ls /dev/ttyUSB0
/dev/ttyUSB0
root@cyw26-PC:/home/cyw26/MM-BN-CYW-26# ./BT_mfg.sh 0
option no2bytes
option tosleep with arg 5000
option patchram with arg CYW4343A2_001.003.016.0031.0000_Generic_UART_37_4MHz_wlbgc_BU_dl_signed.hcd
Open Serial Port: '/dev/ttyUSB0'
Uart Control Signals (0M): RTS CTS DTR
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer; ret=0
Unknown chipid=147
Download hcd file start, size=4857
Sleep 5000 us
(100.00 %) [ 4857/ 4857]
Download hcd file finished
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer; ret=0

#### USI MyBlueTool v 1.8.2 #####
# D) Enable Device Under Test Mode #
# C) Set TX Carrier Frequency ARM #
# T) TX Test #
# R) RX Test #
# P) [LE] TX Test #
# Q) [LE] RX Test #
# O) [LE PHY/2M] TX Test #
# W) [LE PHY/2M] RX Test #
# H) [LE coded PHY] TX Test #
# I) [LE coded PHY] RX Test #
# M) Set Tx Power Control Mode #
# E) Exit MyBlueTool API. #
#####

Type 'd', 'c', 't', 'r', 'p', 'q', 'o', 'w', 'm' or 'e' and <enter> :t
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer; ret=0

```

```

cyw26-PC: /home/cyw26/WM-BN-CYW-26
# D) Enable Device Under Test Mode #
# C) Set TX Carrier Frequency ARM #
# T) TX Test #
# R) RX Test #
# P) [LE] TX Test #
# Q) [LE] RX Test #
# O) [LE PHY/2M] TX Test #
# W) [LE PHY/2M] RX Test #
# H) [LE coded PHY] TX Test #
# I) [LE coded PHY] RX Test #
# M) Set Tx Power Control Mode #
# E) Exit MyBlueTool API. #
#####

Type 'd', 'c', 't', 'r', 'p', 'q', 'o', 'w', 'h' or 'e' and <enter> :t
> Send reset command
< Receive reset event
flush UART Tx/Rx buffer: ret=0
TX Test
Please type Target MAC address: 001122334455

Please type hopping mode(0=79 channel, 1=single frequency, 2=fixed pattern):1

Please type channel(0-78):0

Please type modulation type(1=0x00, 2=0xFF, 3=0xAA, 9=0xF0, 4=PRBS9 Pattern):4

Please type logical channel(0=ACL EDR, 1=ACL Basic, 2=eSCO EDR, 3=eSCO Basic, 4=SCO Basic):1

Please type packet type(4=DH1/2-DH1, 8=3-DH1, 11=DH3/3-DH3, 10=2-DH3, 15=DH5/3-DH5, 14=2-DH5):15

Please type packet length(0-65535):65535

Please type power by Power Table Index 0-7 (0=Max. power):0

TX Test Parameter List:
  BT Address: 00:11:22:33:44:55
  Hopping Mode:(1) Single frequency
  Frequency: (0) 2402 MHz
  Modulation Type: (4) PRBS9 Pattern
  Logical Channel: (1) ACL Basic
  Packet Type: (15) DH5/3DH5
  Packet Length: 65535 Bytes


```

Choose what RF setting do you want to verify. For example, “t” for TX test here.
P.S. BT support BR/EDR/BLE 1M, not support BLE coded (125K, 500K).
P.S. BT is class2 (short range, output power less than 10dBm).

Remote Control

Use Putty to remote control EUT when doing radiated test.

1. Setup EUT control PC's RJ45 LAN to 192.168.100.101 (OS: Ubuntu)
2. Setup remote control PC's (outside chamber) RJ45 LAN to 192.168.100.100
3. Putty setup as below,

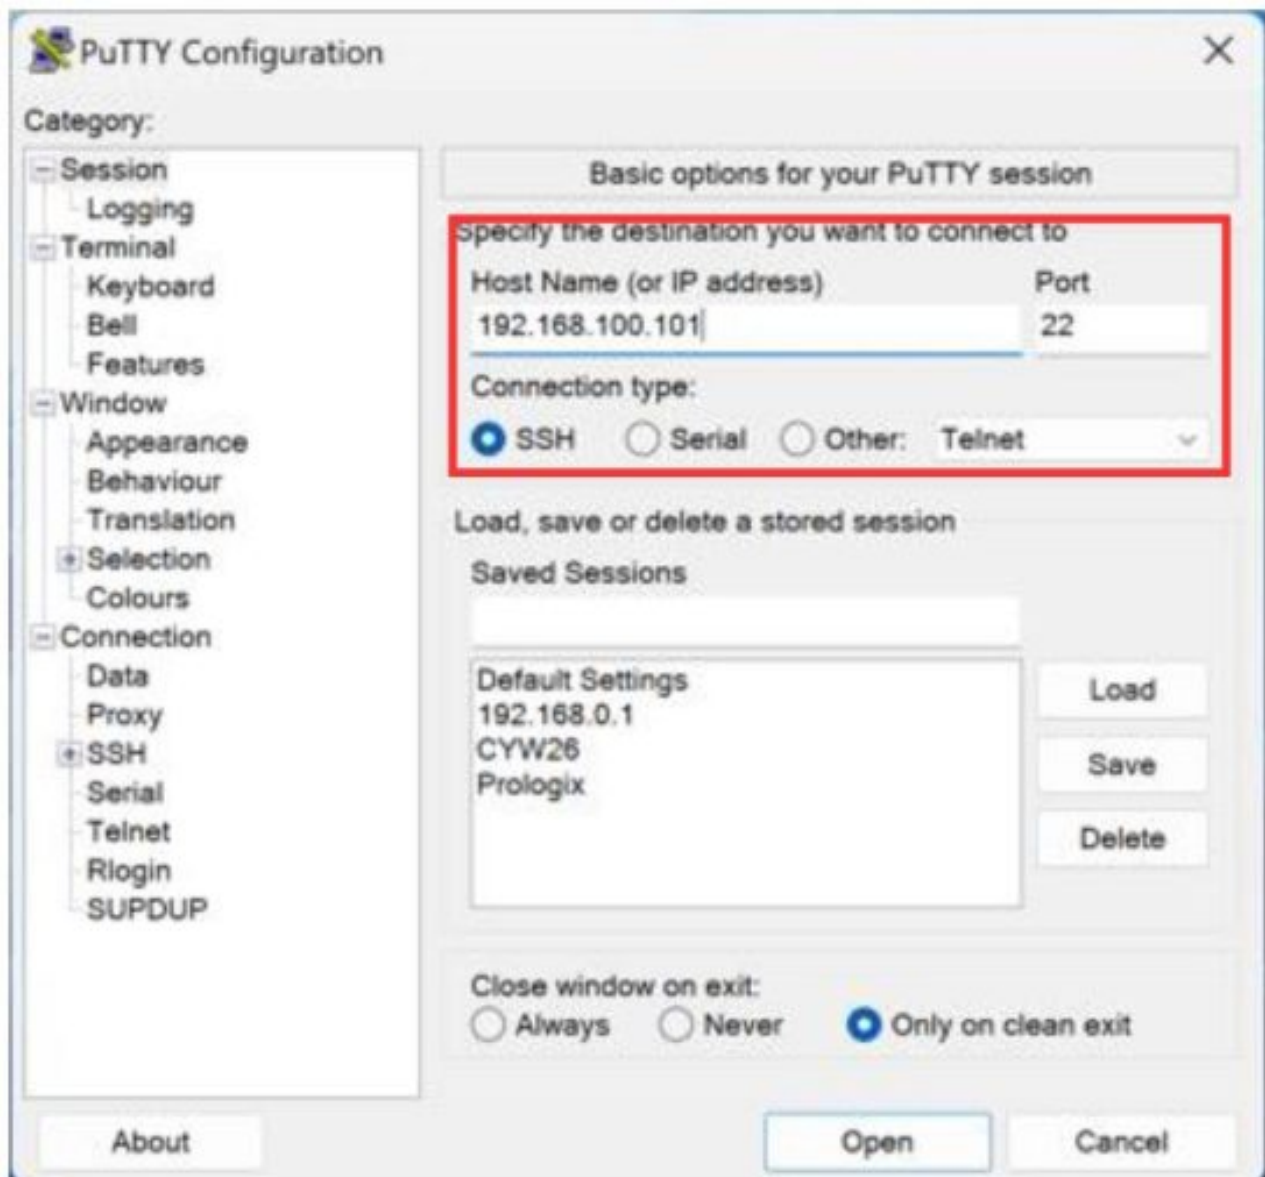

4. User login: cyw26
Password: usi


```
cyw26@cyw26-PC: ~  
login as: cyw26  
cyw26@192.168.100.101's password:  
Welcome to Ubuntu 16.04.7 LTS (GNU/Linux 4.12.0 x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:       https://ubuntu.com/pro  
  
32 packages can be updated.  
17 updates are security updates.  
  
Last login: Thu Dec  4 06:17:00 1980 from 192.168.100.78  
cyw26@cyw26-PC:~$
```

Suggestion of module placement on the host PCB

* This PIFA chip antenna performance will be impacted grounding length strongly.
USI suggest customer place this WiFi module in middle of the main PCB and
keep 20 mm grounding length for getting a good performance.

** If WiFi module is placed at the corner of the main PCB, grounding length have to keep
10 mm.


Grounding length : $L \geq 20 \text{ mm}$

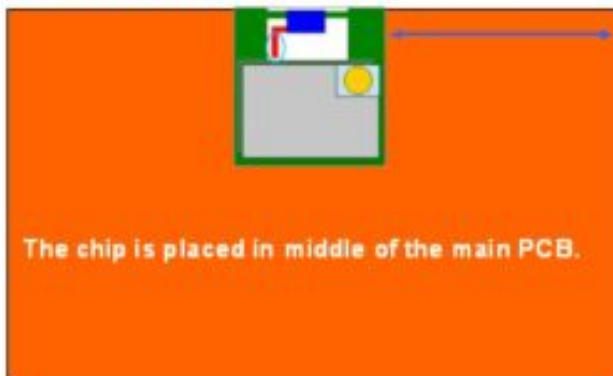

Grounding length : $L = 10 \text{ mm}$



* WiFi module placement suggestion.

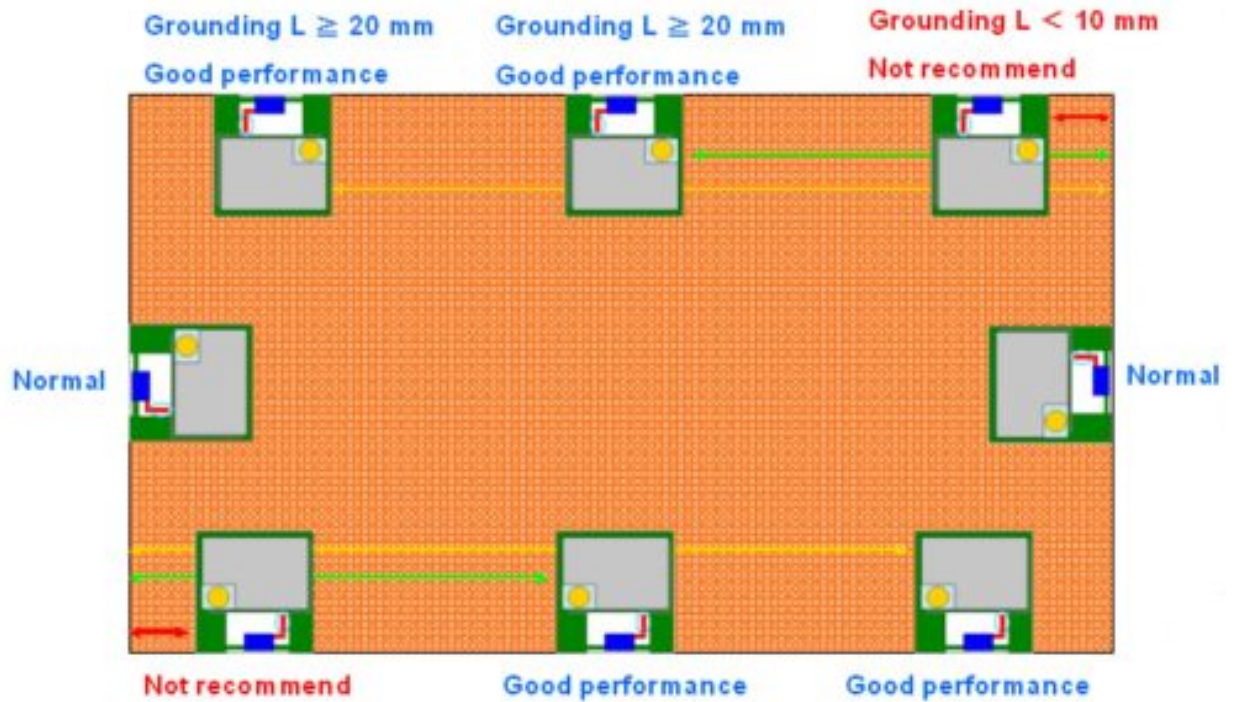

Antenna Information

DESCRIPTION	VALUE
Centre Frequency	2.45 GHz
Bandwidth	230 MHz (Typ.)
Return Loss	6.5 dB Min
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Peak Gain	3.68 dBi (Typ.)
Impedance	50 Ω
Operating Temperature	- 40 °C ~ 105 °C
Maximum Power	1 W
Termination	Ag (Environmentally-Friendly Leadless)
Resistance to Soldering Heats	260°C , 10sec.

NOTE



1. The specification is defined on Yageo evaluation board

DIMENSIONS

Table 2 Machinical Dimension

	DIMENSION
L (mm)	3.2 ± 0.10
W (mm)	1.6 ± 0.10
T (mm)	1.2 ± 0.10

OUTLINES

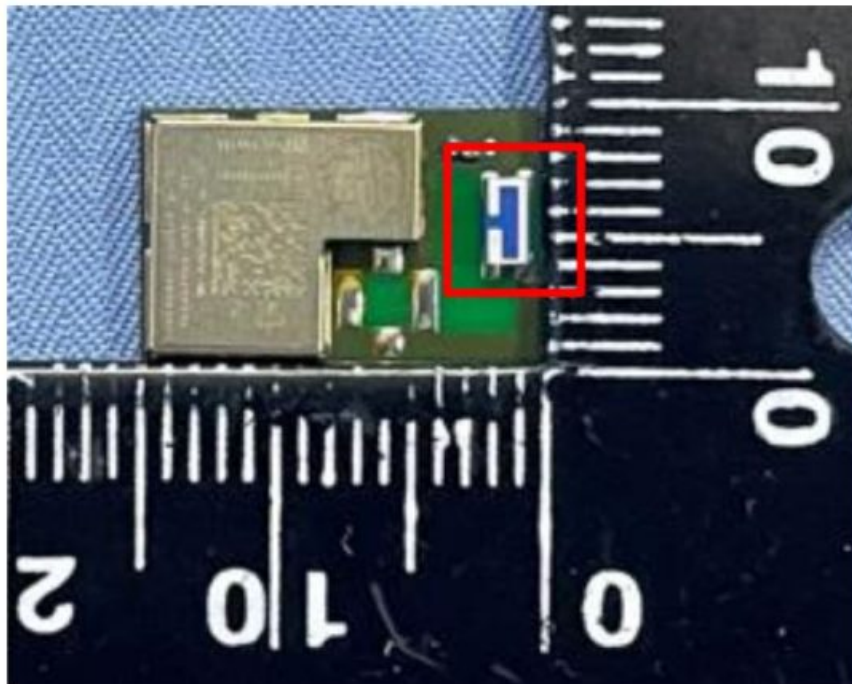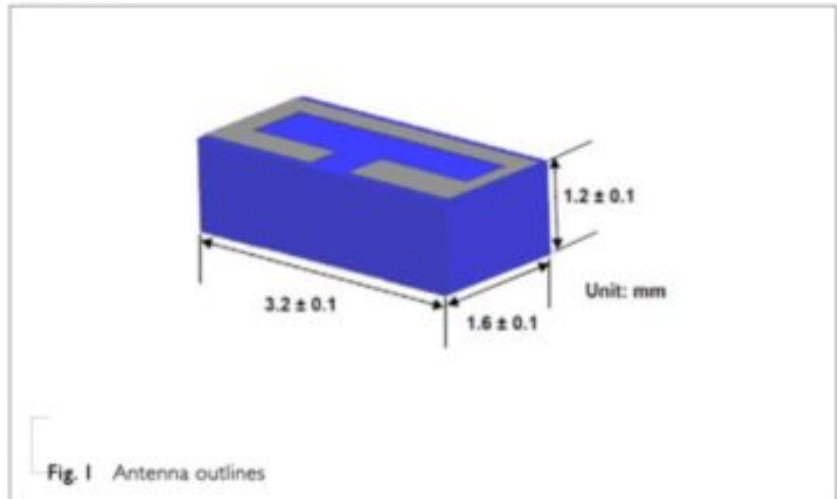

Regulatory Notices

Federal Communication Commission (FCC) – USA



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses

and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that
- to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. The final end product must be labeled in a visible area with the following: "Contains FCC ID: COF-WMCW26". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

This transmitter module is tested as a subsystem and its certification does not cover the FCC Part 15 Subpart B (unintentional radiator) rule requirement applicable to the final host. The final host will still need to be reassessed for compliance to this portion of rule requirements if applicable.

As long as all conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE: If these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid, and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Based on KDB 996369 D03 OEM Manual v01r01

§2.2 List of applicable FCC rules:

The module, WM-CW-26, complies with the following, FCC CFR47 Part 15 Subpart C regulations:

§15.203 Antenna Requirement

§15.204 External radio frequency power amplifiers and antenna modifications.

§15.212 Modular Transmitters §15.207 Conducted Limits

§15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz (digitally modulated)

FCC CFR47 Part 15 Subpart A—General

§15.19 Labeling requirements

§15.21 Information to user

§2.3 Operational Use Conditions:

The module, WM-CW-26, has been approved for use in the US, Canada and Japan.

Changes or modifications to the module could void the user's authority to operate the module.

The host product operating conditions must be such that there is a minimum separation distance of 20 cm between the antenna and nearby persons.

§2.4 Limited Module procedures:

The module, WM-CW-26, has full modular approval.

§2.5 Trace antenna designs:

The module, WM-CW-26, does not require Micro-Strip antennas or traces on the host device. All traces and antennas are contained on the module.

§2.6 RF exposure considerations:

The host product operating conditions must be such that there is a minimum separation distance of 20 cm between the antenna radiating structures and nearby persons. The host manufacturer is obligated to confirm the use conditions of the host product to ensure that the distance specified in the instructions is met.

The following statement must be included as a CAUTION statement in manuals and OEM products to alert end users of FCC RF Exposure compliance:

“To satisfy FCC RF Exposure requirements for mobile and base station transmission devices, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during operation. To ensure compliance, operation at closer than this distance is not recommended. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.”

§2.7 Antennas:

The module, WM-CW-26, uses a non-detachable ceramic chip antenna on the module, thus no antenna other than that furnished by the responsible party shall be used with the device.

§2.8 Label and compliance information:

Host product manufacturer must provide a physical label stating, “Contains FCC ID: COF-WMCW26” and “IC: 10293A-WMCW26” in a visible location on the finished product.

The module host shall bear the following statement in a conspicuous location on the host and in the manual: “This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada’s licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

§2.9 Information on test modes and additional testing requirements:

Host manufacturer should confirm proper operation using a known good module to link to the installed module. Test procedure for the host will require a particular setting to address the good module and proper operational response will be checked.

§2.10 Additional testing, Part 15 Subpart B disclaimer:

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules, i.e., §15.207, §15.247) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification, such as Part 15 Subpart B, Unintentional Radiators. Compliance should be checked with all transmitters operating.

§2.11 Note EMI Considerations

Host manufacture is recommended to use D04 Module Integration Guide recommending as “best practice” RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties For standalone mode, reference the guidance in D04 Module Integration Guide and for simultaneous mode7; see D02 Module Q&A Question 12, which permits the host manufacturer to confirm compliance.

§2.12 How to make changes

Only Grantees are permitted to make permissive changes, need any support please use below information: <https://www.usiglobal.com/en/enquiry-form>

This device complies with ISED's license-exempt RSSs. Operation is subject to the following two conditions: this device may not cause interference, and this device must accept any interference, including interference that may cause undesired operation of the device.

CAN ICES-3(B)/ NMB-3(B)

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter, except tested built-in radios. Cet appareil et son antenne ne doivent pas être situés ou fonctionner en conjonction avec une autre antenne ou un autre émetteur, exception faites des radios intégrées qui ont été testées.

The County Code Selection feature is disabled for products marketed in the US/ Canada. La fonction de sélection de l'indicatif du pays est désactivée pour les produits commercialisés aux États- Unis et au Canada.

This radio transmitter (IC: 10293A-WMCW26 / Model: WM-CW-26) has been approved by ISED to operate with the antenna type listed below with maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. Déclaration d'exposition aux radiations: Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

This device is intended only for OEM integrators under the following conditions: (For module device use) 1) The antenna must be installed such that 20cm is maintained between the antenna and users, and 2) The transmitter module may not be co-located with any other transmitter or antenna. As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.


IMPORTANT NOTE: If these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid, and the IC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re- evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

Label and compliance information The final product must be labeled in a visible area with the following: "Contains IC: 10293A-WMCW26".

The grantee's IC ID can be used only when all IC compliance requirements are met.


Read More About This Manual & Download PDF:

Documents / Resources

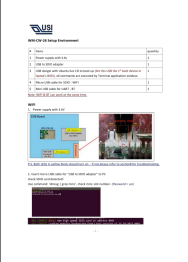

[USI WM-CW-26 WiFi Module \[pdf\] Instructions](#)
WM-CW-26, WM-CW-26 WiFi Module, WiFi Module, Module

References

-  [USI | Enquiry Form](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.