



# Valcom V-1222 One Way Amplified Dual Input Wall Speaker User Manual

[Home](#) » [Valcom](#) » Valcom V-1222 One Way Amplified Dual Input Wall Speaker User Manual 

## Contents

- [1 Valcom V-1222 One Way Amplified Dual Input Wall Speaker](#)
- [2 SPECIFICATIONS](#)
- [3 FREQUENTLY ASKED QUESTIONS](#)



## Valcom V-1222 One Way Amplified Dual Input Wall Speaker



## **INTRODUCTION**

The V-1220 and V-1222 are dual Input One-Way Amplified Speaker assemblies for use with any one-way or handsfree page control unit. These speakers are for interior use only. These instructions contain the specifications and information necessary to install, operate and maintain the Dual Input One-Way Amplified Interior Speakers.

## **SPECIFICATIONS**

### **Applications**

- One or Two-Way Page Controls
- Electronic Key System Page Ports (interface adapter may be required)
- PABX Page Ports (interface adapter may be required)
- Stand Alone Systems
- Existing 70V Paging Systems
- Background music systems

### **Features**

- Self-contained dual input amplifier and volume controls
- 8 inch cone type speaker
- Operates on -24VDC
- All speakers wired with 3 pair station cable
- Screw terminals for all connections

### **Dimensions/Weight**

- V-1220 – Ceiling Speaker 13.0" Dia. X 3.0" D (33cm Dia. X 7.6cm D) 3.8 lbs. (1.73 kg)
- V-1222 – Wall Speaker 10.6"H x 9.7"W x 5.2"D (26.92cm H x 24.63cm W x 13.20cm D) 4.4 lbs. (2.0 kg)

### **Nominal Specifications**

- Amplifier Input Impedance 1000 Ohms Nominal
- Amplifier Input Level -10dBm Nominal
- Amplifier Output 1 Watt into 45 Ohm speaker load

### **Power Requirements**

- Voltage -24VDC
- Current 50mA

### **Environment**

- Temperature 0 to 50 Degrees C
- Humidity 0 – 85% non-precipitating


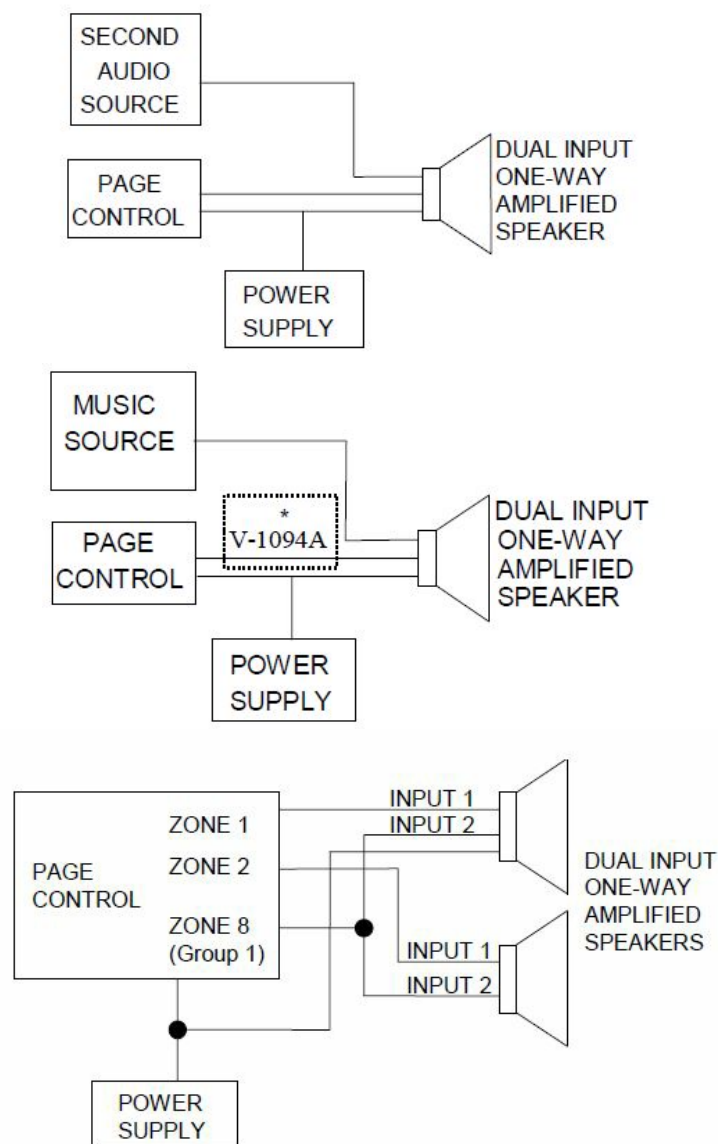


FIGURE 3 - GROUP CALL BLOCK DIAGRAM

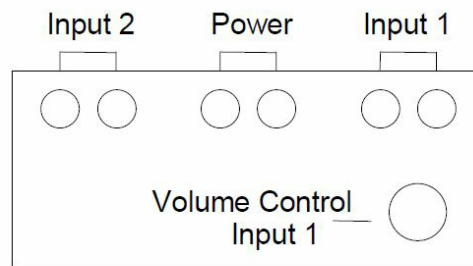

Screw Connection Location and Designations - Figure 4

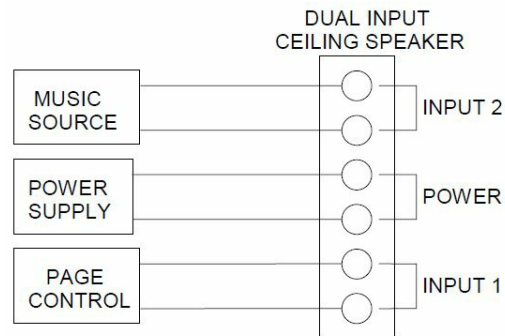


FIGURE 5

## FREQUENTLY ASKED QUESTIONS

Download the PDF Link: [Valcom V-1222 One Way Amplified Dual Input Wall Speaker User Manual](#)