

valotehdas SILEÄ12 BC/Q9 Subtle Cornice with Glow of Light Instruction Manual


[Home](#) » [valotehdas](#) » valotehdas SILEÄ12 BC/Q9 Subtle Cornice with Glow of Light Instruction Manual 

Contents

- [1 valotehdas SILEÄ12 BC/Q9 Subtle Cornice with Glow of Light](#)
- [2 SIMILAR IN THE OFFER](#)
- [3 ACCESSORIES](#)
- [4 ENDINGS](#)
- [5 CONECTORS](#)
- [6 ACCESSORIES](#)
- [7 Dimension](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

valotehdas


valotehdas SILEÄ12 BC/Q9 Subtle Cornice with Glow of Light

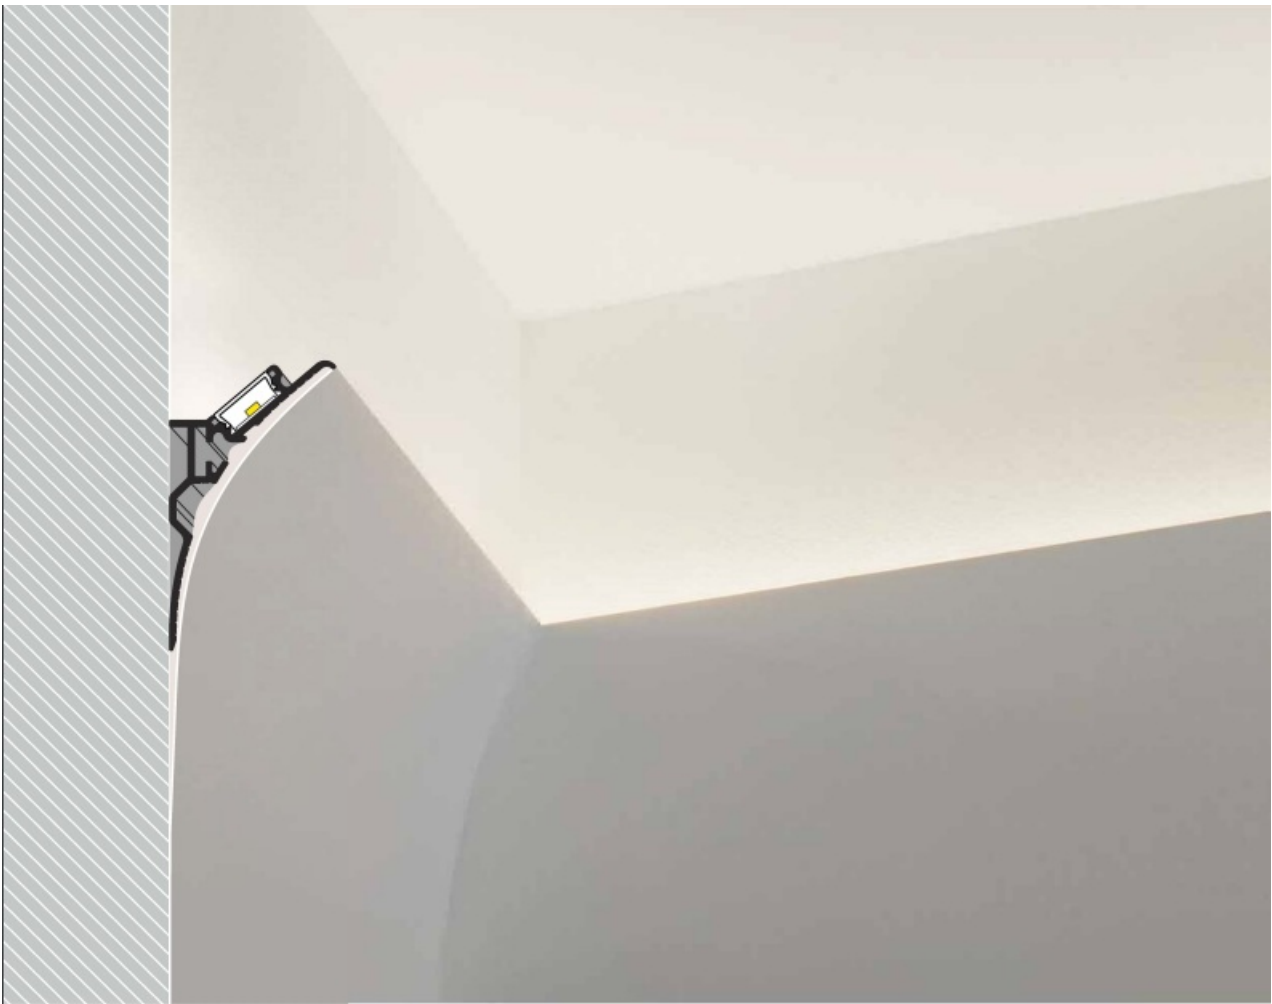

SUBTLE CORNICE WITH A GLOW OF LIGHT

- installation to the wall without a drywall system
- invisible profile, atmospheric light
- accentuating of the room outline
- maximum LED strip width: 12 mm

SIMILAR IN THE OFFER

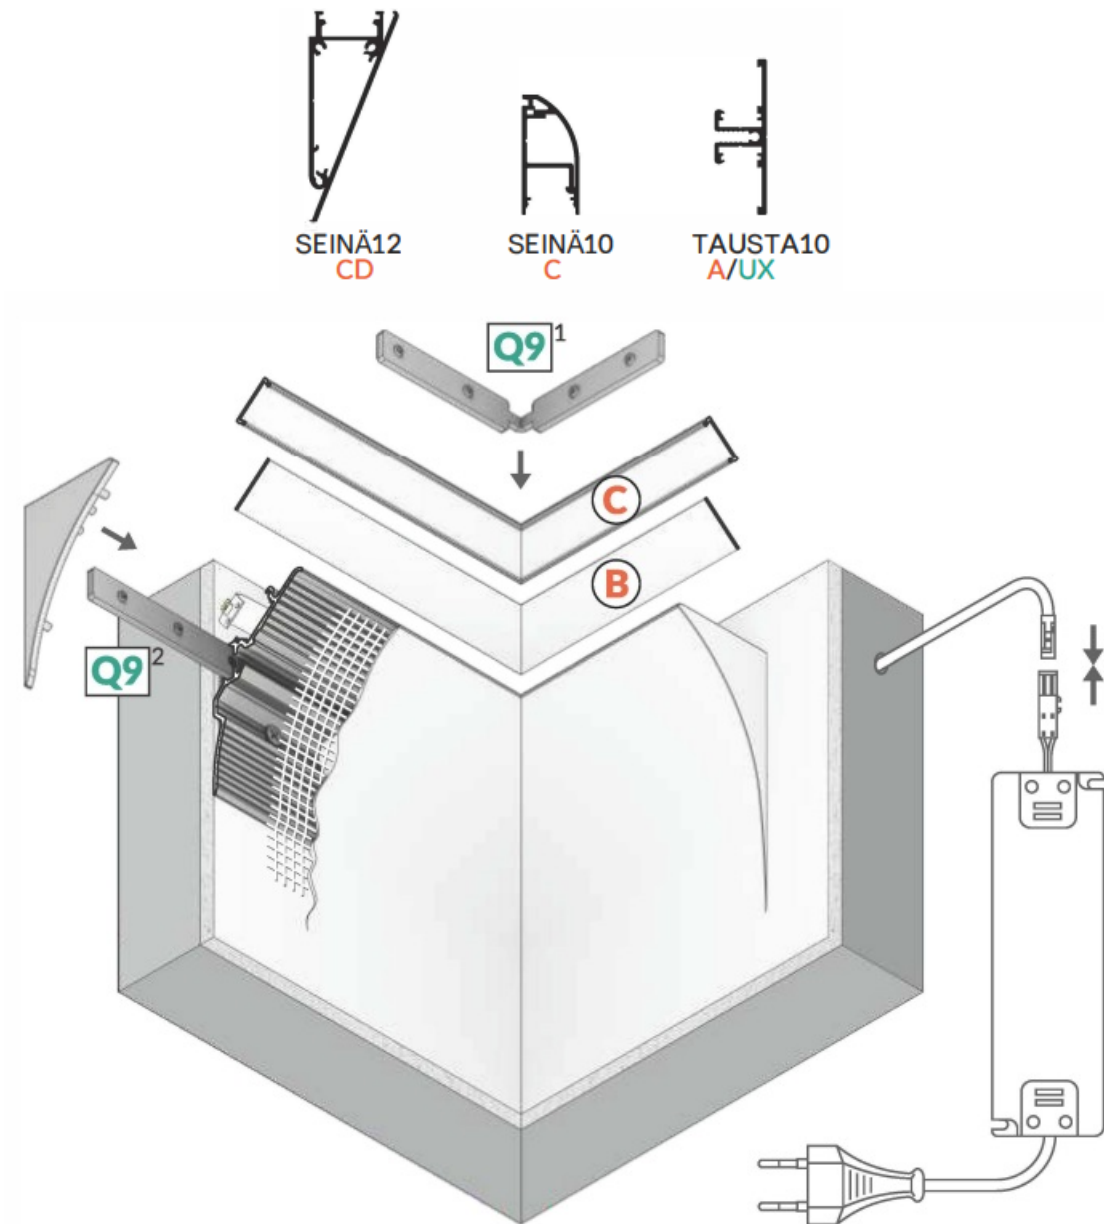

B slide cover

C click cover



Q91 Q9-90 deg bent connector Q9-90

Q92 Q9-180 deg connector t<1cznik

other angles of Q9 connectors:

deg

45, 60, 90, 120, 135

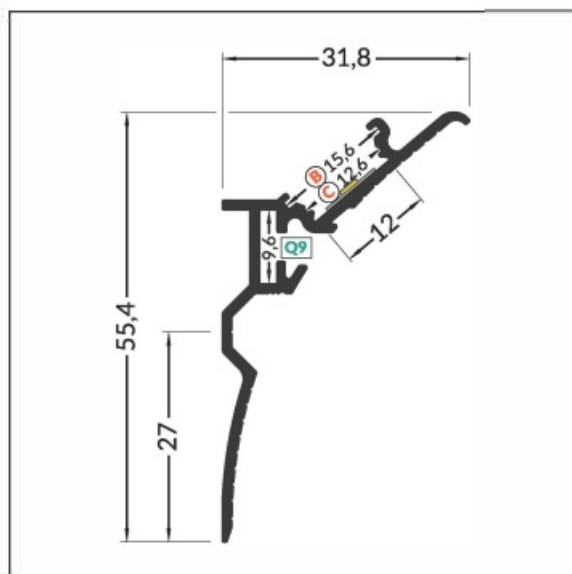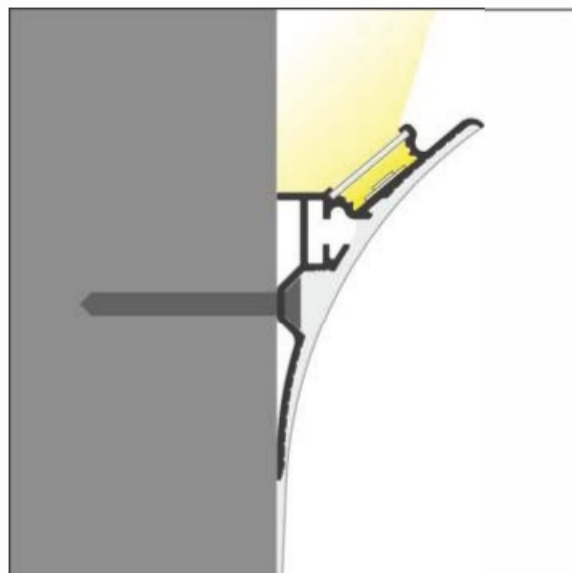

max12mm
ssppeecjiaalln ayp plication



INDEX= 1 pc, length 2000 mm
package > check the pricelist


raw aluminium
H9000200

Available lengths: 1000 mm, 2000 mm, 3000 mm, 4000 mm.
The standard profile length tolerance is +20 mm.
More details » 1.08.


ACCESSORIES

COVERS

Note! Dimensions of the space to install LED source

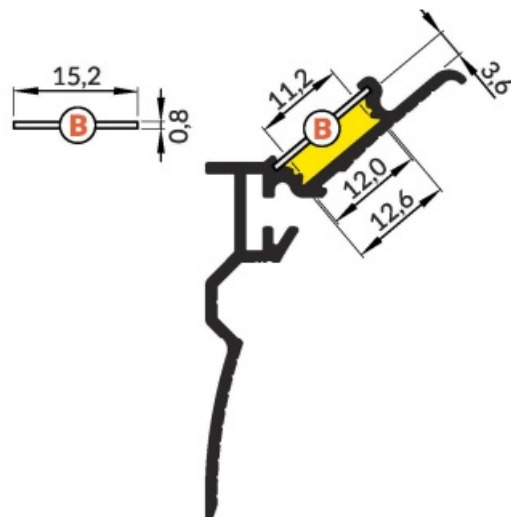


B slide cover colours: transparent, frosted, opal material!: PC, PP, PP

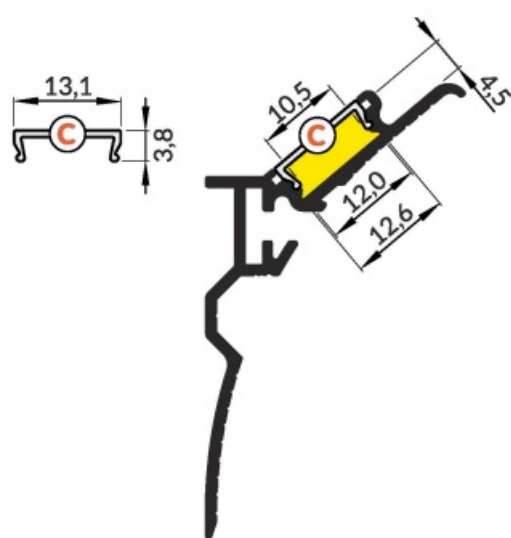

C click cover
colours: transparent, opal material!: PMMA

length 2000 mm
package > check the pricelist



B transparent / B transparently index = 10 pcs / indeks = 10 szt. 76250016

B frosted / B szron index = 10 pcs / indeks = 10 szt. 76250039

B opal / B mleczny index = 10 pcs / indeks = 10 szt. 76250038

C transparent / C transparently index = 1 pc / indeks = 1 szt. 76330000

C opal / C mleczn index = 1 pc / indeks = 1 szt. 76330038

reel, length 20 m package > check the pricelist

C opal / C mleczny index = 1 pc / indeks = 1 szt. 763600385

The standard cover length tolerance is +20 mm.

More details » 1.08


ENDINGS

SILEÄ12 ending

colour: grey

material: ABS

Ending with marked space to bore the holes.

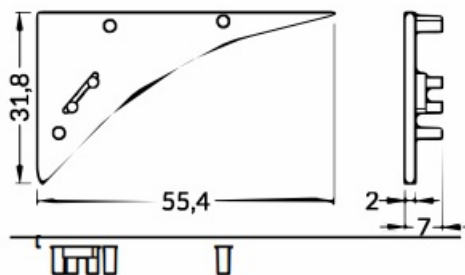

INDEX= 10 sets = 20 pcs

package > check the pricelist


grey / szary

H9999922

CONECTORS

Q9-90 deg bent connector

material: zink coated steel

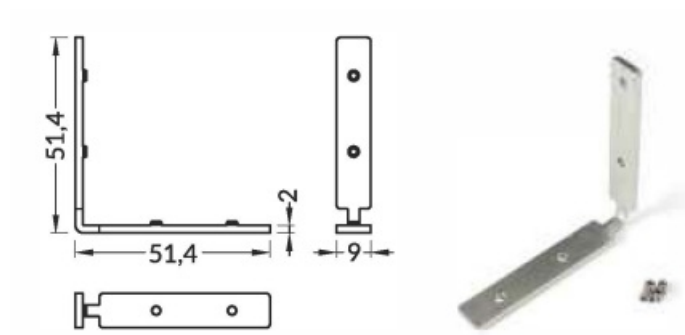

INDEX= 1 set


package > check the pricelist

90 deg bent / 90 st gity

V59995195

Q9-45 deg / -60 deg / -90 deg / -120 deg / -135 deg / -180 deg connector


material!: zink coated steel

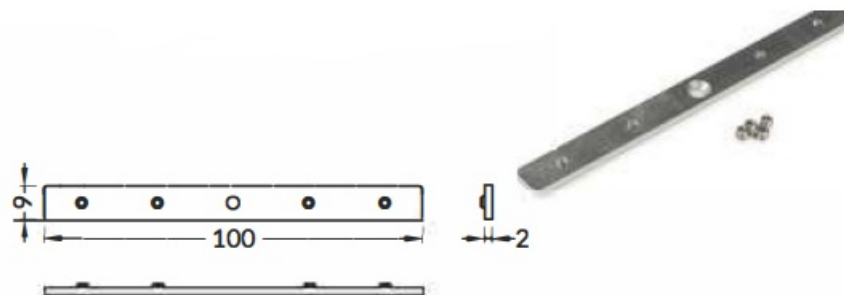

180 deg / st

V59998195

ACCESSORIES

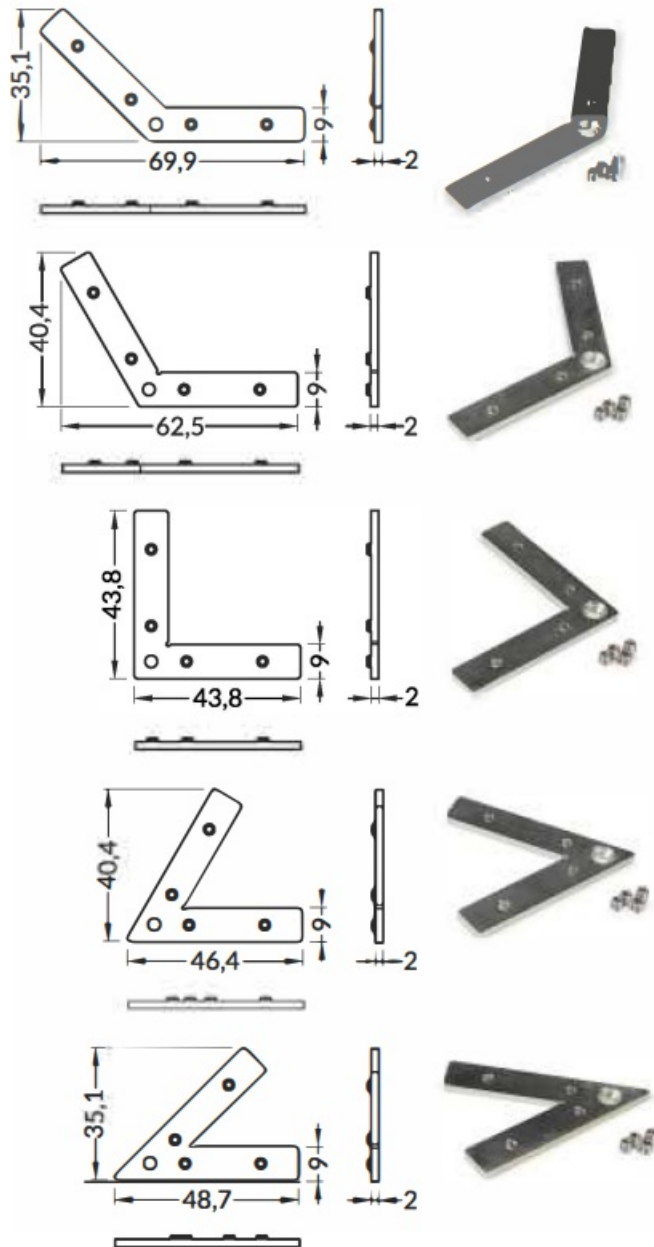

135 deg / st **V59997195**

120 deg / st **V59996195**


90 deg / st **V59994195**

60 deg / st **V59993195**

45 deg / st **V59992195**

SPECIAL PROFILE


max 12 mm

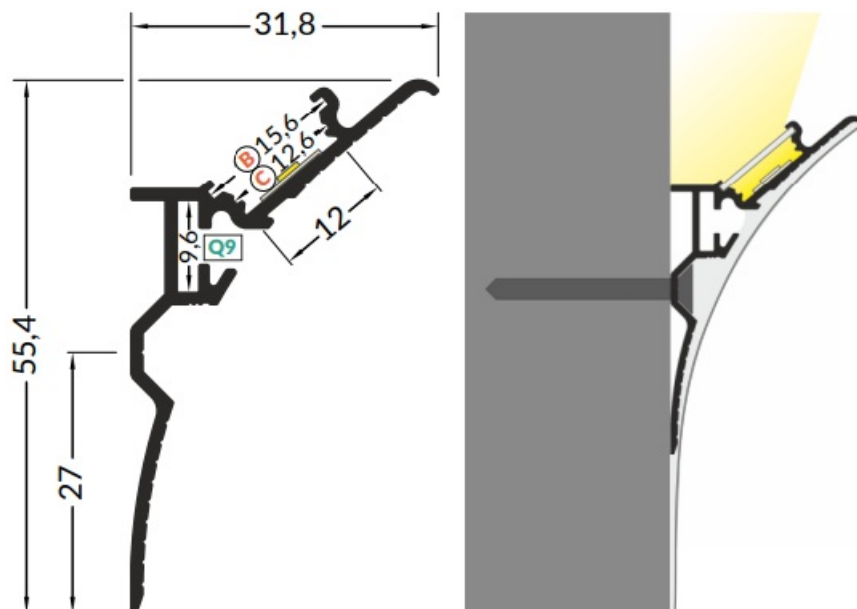

- B** slide cover
- C** click cover
- Q9**¹ Q9-90 deg bent connector
- Q9**² Q9-180 deg connector

Other angles of Q9 connectors:
45, 60, 90, 120, 135 deg

- 1** SMOOTH12 ending
- 2** power supply cable
- 3** LED power supply

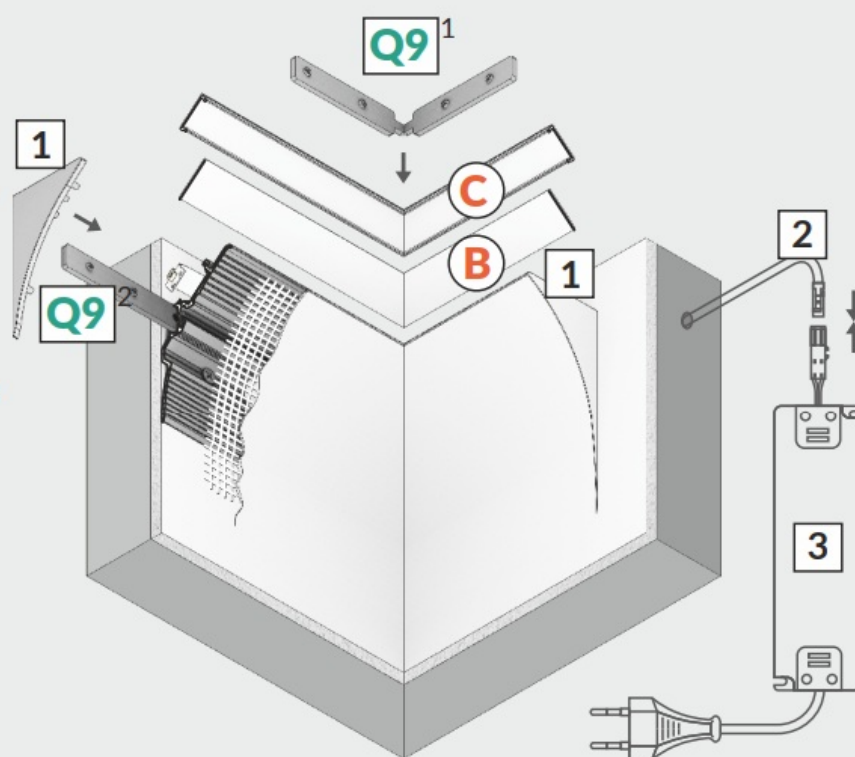

scissors



hacksaw



pliers



solder



soldering iron



screwdriver







drill











spatula


Dimension

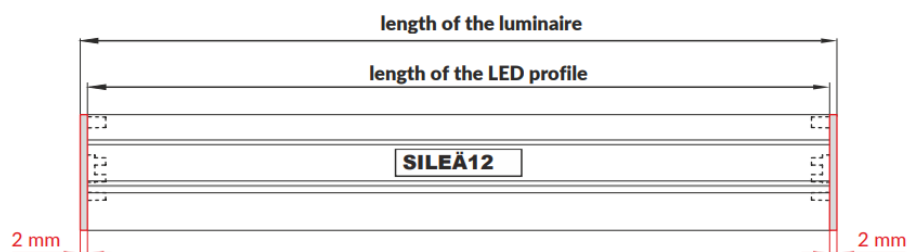

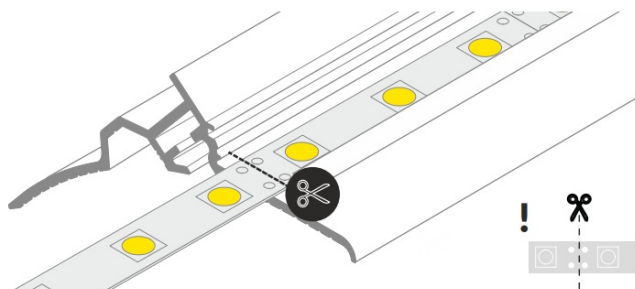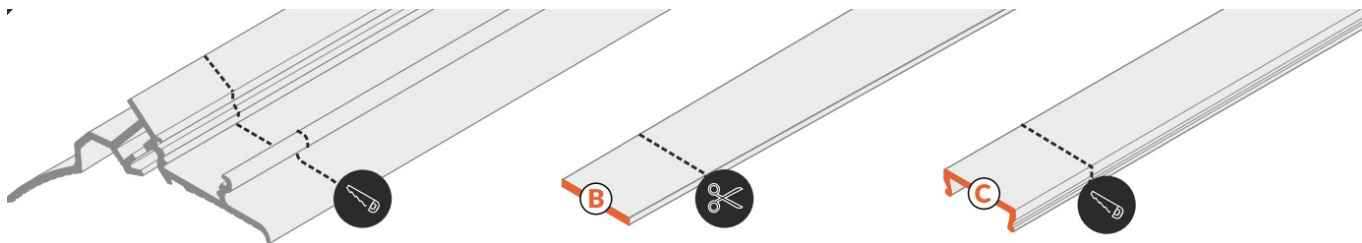


Dimensions of the space
to install LED source

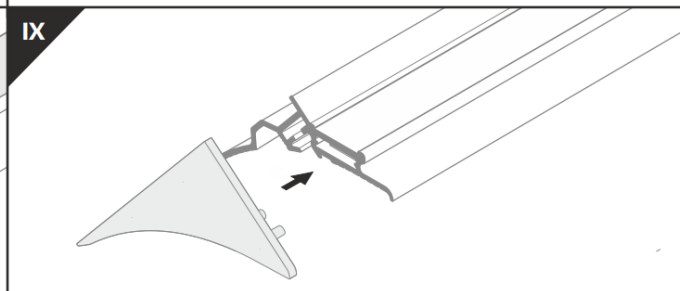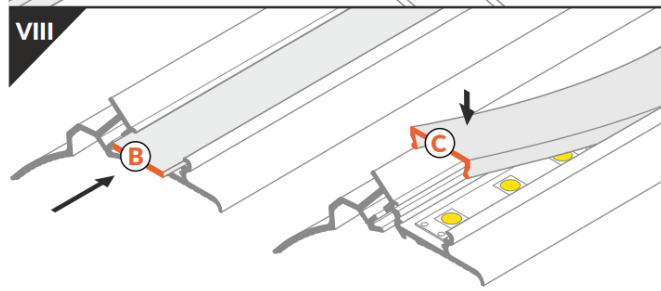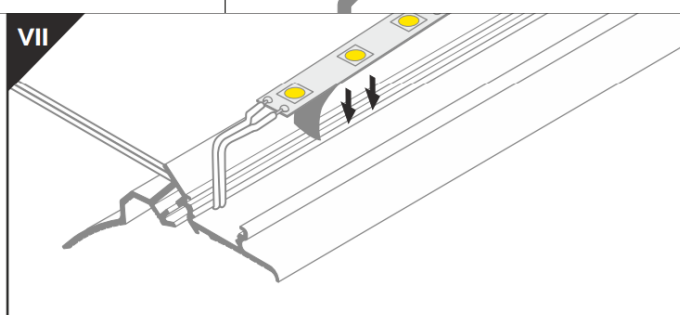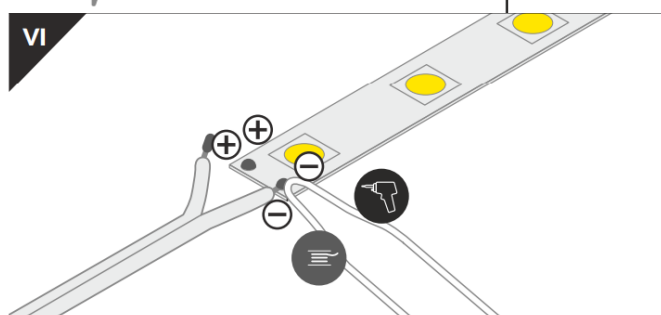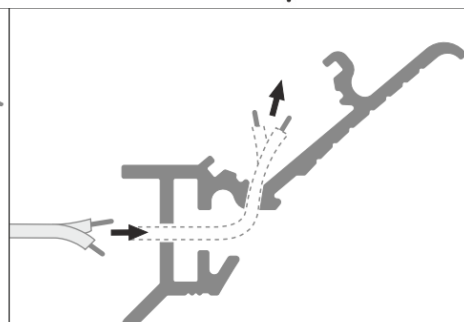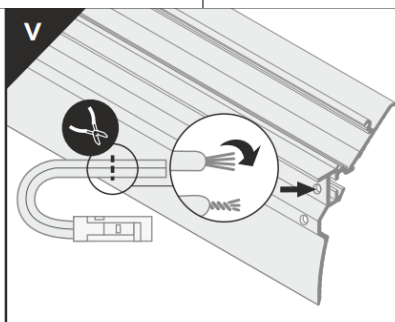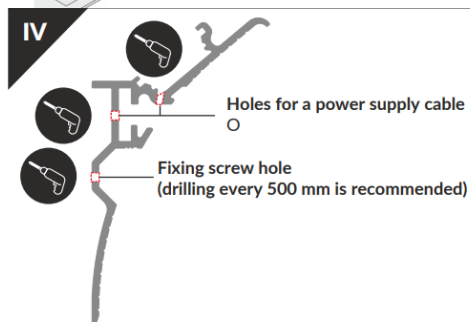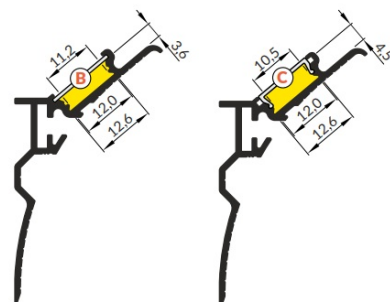

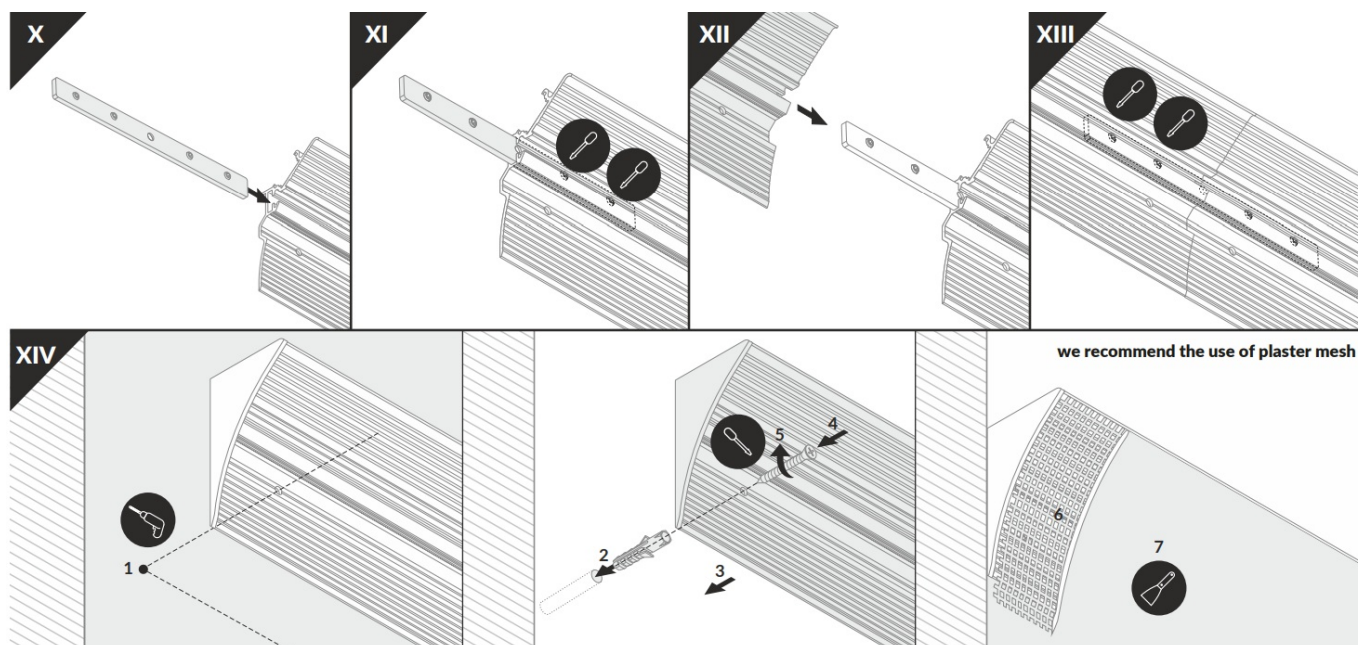

POWER SUPPLY

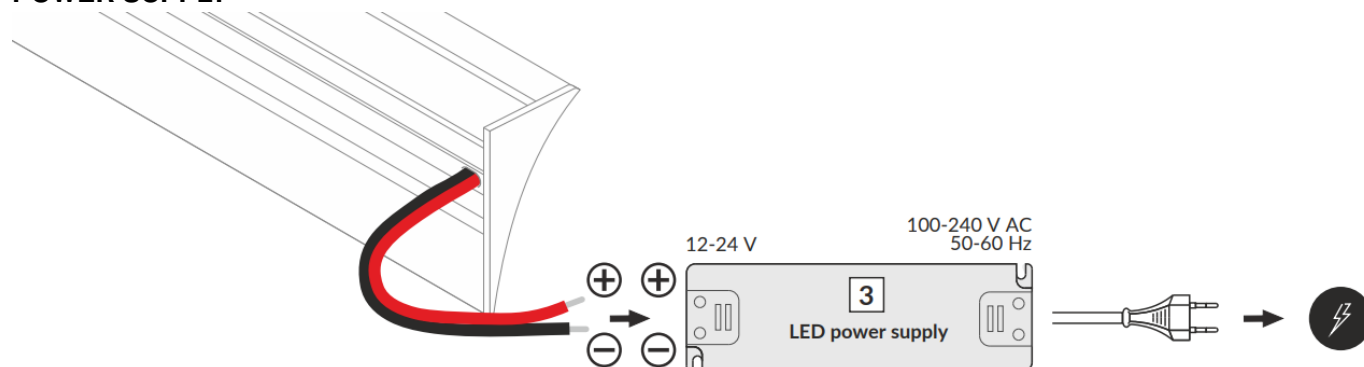

ACCESSORIES

- power switches
- controller + remote
- movement sensors

Documents / Resources

	valotehdas SILEÄ12 BC/Q9 Subtle Cornice with Glow of Light [pdf] Instruction Manual SILE 12 BC Q9 Subtle Cornice with Glow of Light, SILE 12 BC Q9, Subtle Cornice with Glow of Light, Cornice with Glow of Light
--	--