




VANKYO Native Projector Performance User Manual

[Home](#) » [VANKYO](#) » VANKYO Native Projector Performance User Manual


Contents [[hide](#)]

- 1 VANKYO Native Projector Performance User Manual
- 2 PACKING LIST
- 3 NOTICE
- 4 FUNCTION OVERVIEW
- 5 QUICK START
- 6 INPUT SOURCE
- 7 B.USB Connection
- 8 C.H D Connection
- 9 PROJECTOR CONNECTION
- 10 PROJECTION DISTANCE&SIZE
- 11 SPECIFICATION
- 12 TROUBLESHOOTING GUIDE
- 13 CAUTION
- 14 RECYCLING
- 15 VANKYO SUPPORT
- 16 Read More About This Manual & Download PDF:
- 17 Documents / Resources
- 18 Related Posts

VANKYO Native Projector Performance User Manual

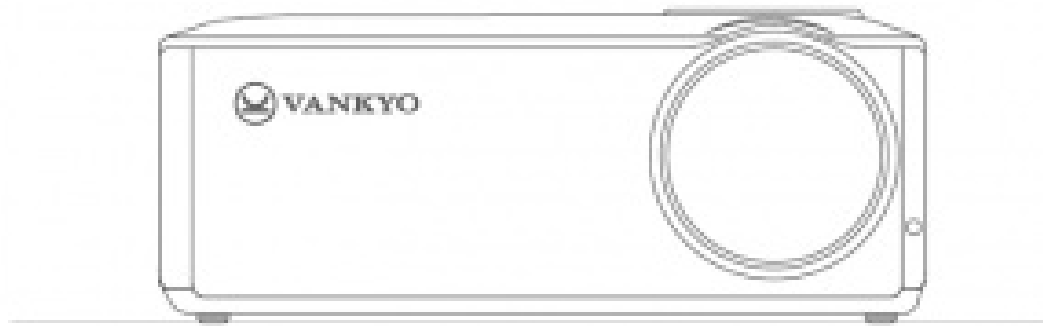

PACKING LIST



PERFORMANCE V830



Remote
(Batteries Not Included)



Carrying Bag



User Manual



AV Cable




HDMI Cable




Power Cable

NOTICE



Recommended




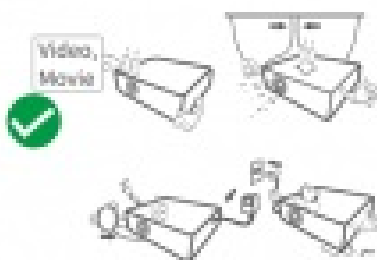


NOT Recommended

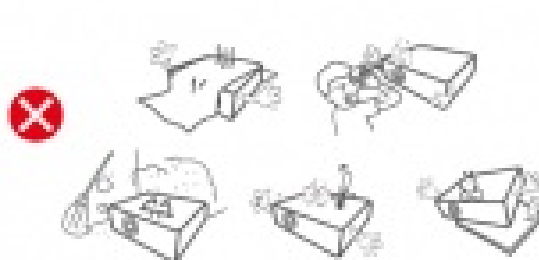


FUNCTION OVERVIEW

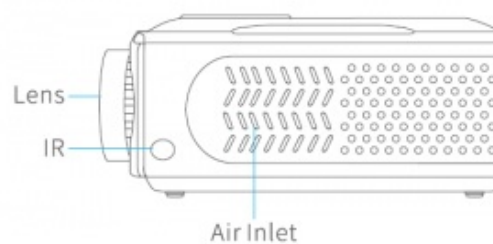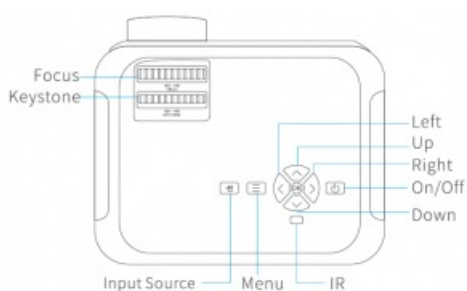

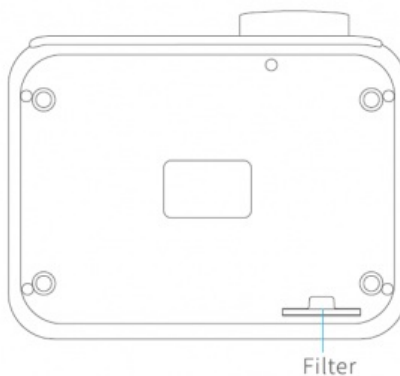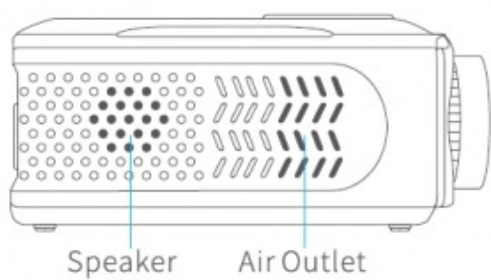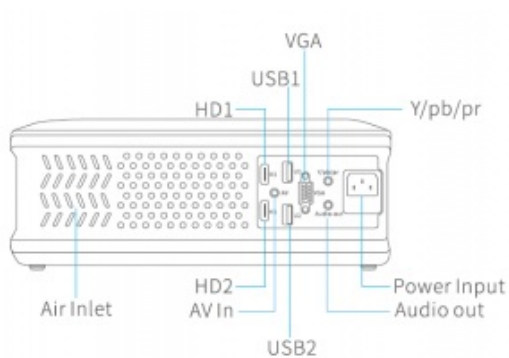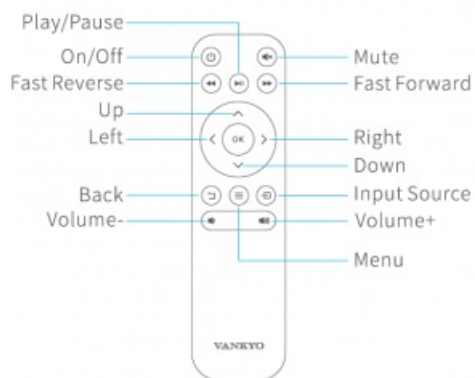


QUICK START


1. Plug the power cord into n outlet.

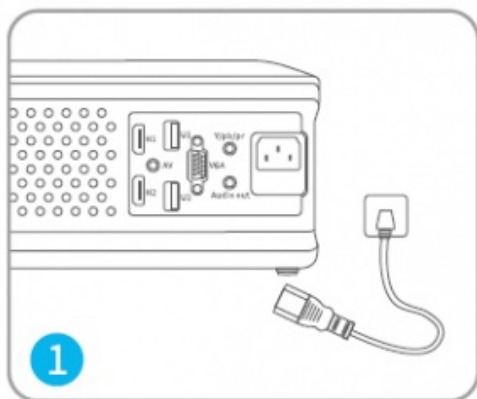

2. Take off the lens cover.

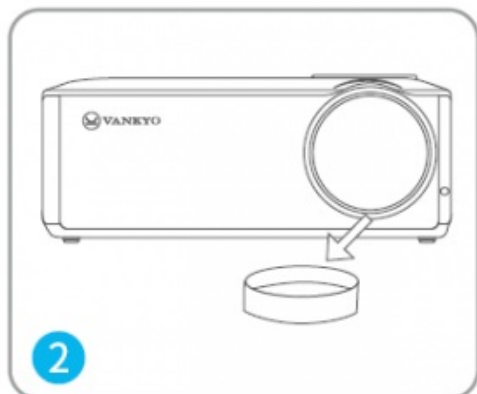


3. Connect your device to the projector correctly

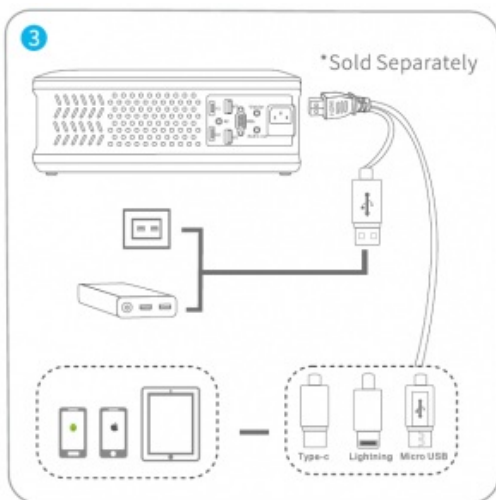


4. Press the power button to turn on the projector




5. Select the correct input source to project your device.

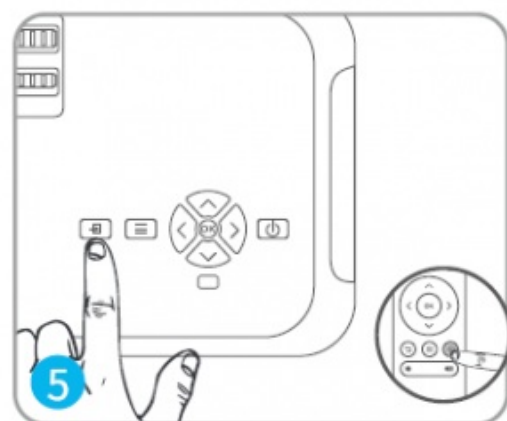


6. Adjust the kickstand accordingly.

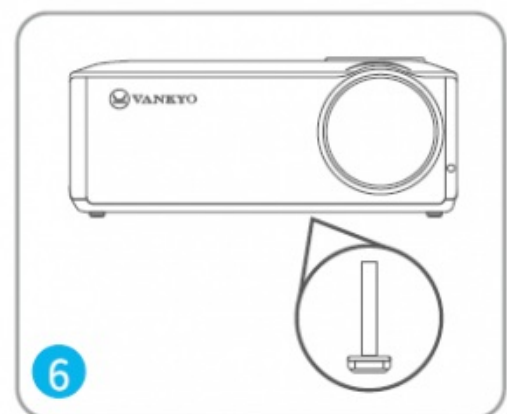

7. Adjust the keystone and focus ring to get the best image performance

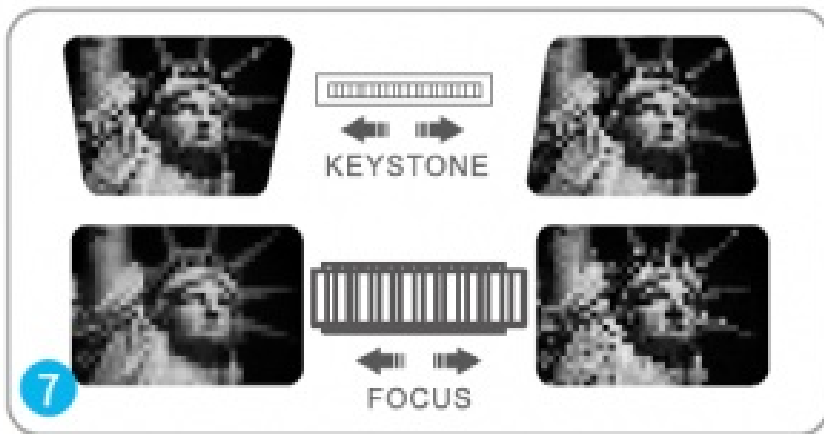

8. Press the power button twice to turn off the projector.

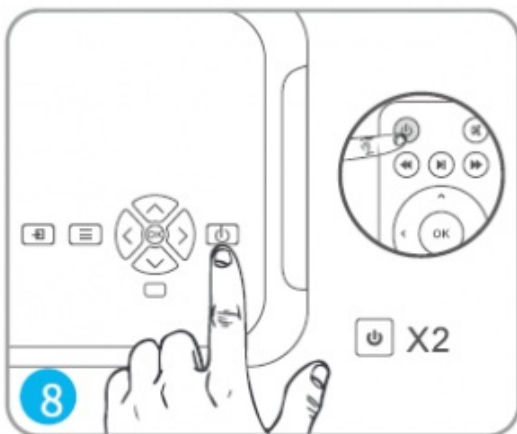


INPUT SOURCE

Press ~ button on the projector or remote to enter the interface of Input Source.


A.VGA Connection




B.USB Connection

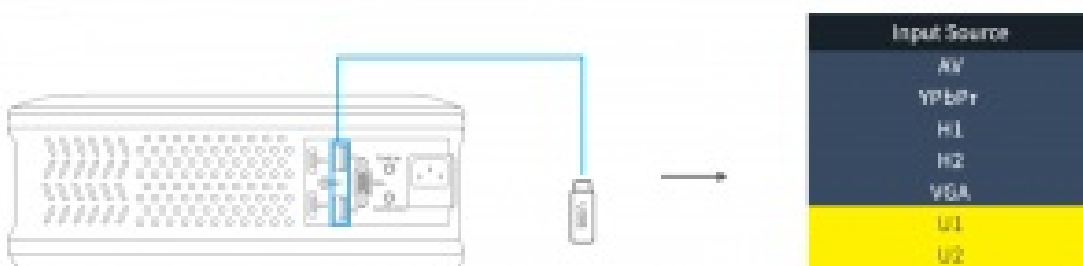


C.H D Connection

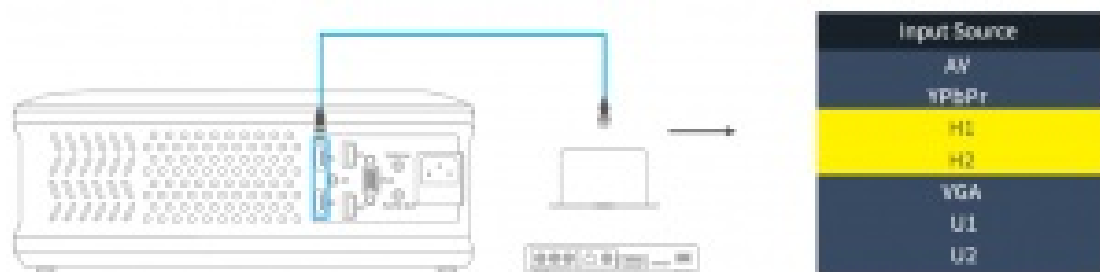

PROJECTOR CONNECTION

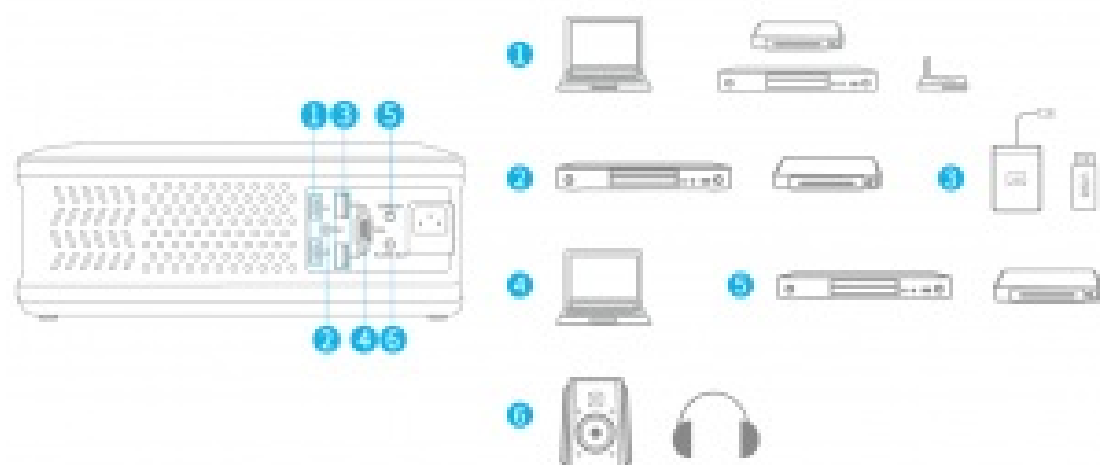

PROJECTION DISTANCE&SIZE

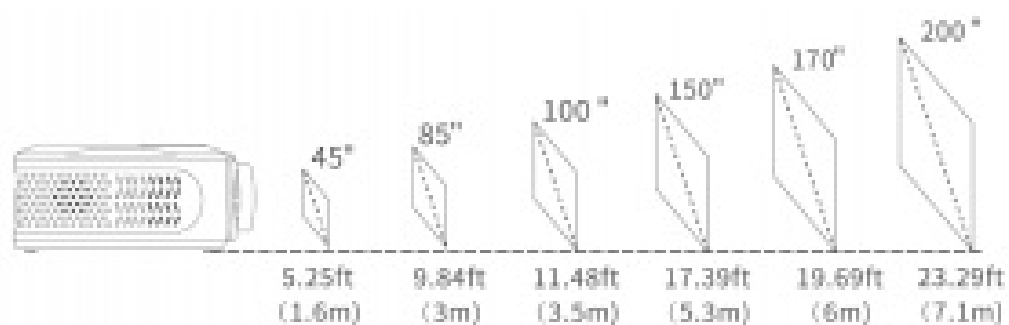

The recommended projection screen is around 85 inches with a projection distance of around 9.84ft. Ambient darkness will improve the clarity of the projected images

SPECIFICATION

Display Technology	LCD	Light Source	LED
Resolution	Native 1920 x 1080	Input Signal	5 7 6 i / 72 0 P / 10 80 i / 1080 P
Installation Type	Front/Rea r/Cei li ng	Aspect Ratio	4:3/16:9/Auto
Focus	Manual	Keystone	±15'
Speaker	3W/4ohm	Power Supply	AC 100-240V, 50/60Hz
Unit Dimension	320 x 260 x 120mm (12.6 X 10.2 X 4.7in)	Unit Net Weight	2.56kg(5.6lb)
Photo Format Supported	BMP/J PG/J PEG/PNG/T I F/G IF	Audio Format Supported	MP3/WMA/M4A/MC/WA V
Video Format Supported	AVI/M P4/DIV/MOV/M K V/ WS F/ ASF/FLV /WMV / A SM/ 3GP/3G2/WMV/H264	Ports	YPbPr x l/U2.0 Portx 2/V GA Port x 1/ AV In x 1/Audio outx 1/HD In x2
Mounting Screws	M4 Metric	Number of Screws	

TROUBLESHOOTING GUIDE

1. Blurry Image

- Adjust focus ring/keystone.
- Projector and screen/wall must be in effective distance.

2. Remote Unresponsive

- Make sure remote points at IR receiver directly.
- * Do not cover IR receiver.
- Try a new pair of AAA batteries.

3. Mobile Connection

iOS: Genuine lightning to HDMI cable.

Android: Micro USB to HDMI adapter/Type C to HDMI cable.

4. Upside Down Images

Go to Menu> PICTURE> Projection Mode to flip the projection image.

CAUTION



The symbol indicates AC voltage



RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

VANKYO SUPPORT



www.ivankyo.com



@VankyoOfficial



VANKYO

North America support@ivankyo.com


United Kingdom support.uk@ivankyo.com

Deutsch land

France

Espana

Italia

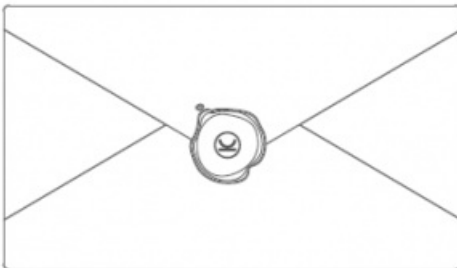

support.de@ivankyo.com

support.fr@ivankyo.com


support.es@ivankyo.com

support.it@ivankyo.com

support.jp@ivankyo.com

Read More About This Manual & Download PDF:

Documents / Resources

	VANKYO Native Projector Performance [pdf] User Manual Native Projector Performance, V620
---	---