



Veise G2 Smart Lock WiFi Gateway User Manual

[Home](#) » [Veise](#) » Veise G2 Smart Lock WiFi Gateway User Manual 

Contents

- [1 Veise G2 Smart Lock WiFi Gateway](#)
- [2 Product Usage Instructions](#)
- [3 SMART LOCK GATEWAY G2](#)
- [4 Light Status](#)
- [5 Pair with App](#)
- [6 FCC Warning](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



Veise G2 Smart Lock WiFi Gateway



Smart Lock Gateway Specifications

- **Model:** G2
- **Dimensions:** 70mm x 70mm x 26mm
- **Network:** WiFi 2.4G 802.11 b/g/n
- **Power interface:** Type-C USB
- **Power input:** 5V/500mA

Product Usage Instructions

Pairing with App

1. Open the App on your device.
2. Tap on the icon located on the upper left corner of the screen.
3. Select [Gateway].

Adding the Gateway

4. Select [G2] from the available options.
5. Plug in the Gateway and power it on.
6. While the light on the Gateway is flashing in Red and Blue alternately, tap on "Add Gateway".

Connecting to Wi-Fi

7. Select the network you want to connect to and enter your Wi-Fi password.
8. Tap on "Next".

Note: If the above process times out, please power off the Gateway and try again.

Frequently Asked Questions (FAQ)

1. Q: What do the different light statuses indicate?

A: When the Gateway is powered on:

- **Flashing Red/Blue lights:** Stand-by mode – Ready to Pair
- **Blue light:** Normal mode
- **Red light:** Network failure

2. Q: Can I change the Gateway's name?

A: Yes, during the pairing process, you will have the option to enter a name for your Gateway.

3. Q: Can I connect the Gateway to a 5GHz Wi-Fi network?

A: No, the Gateway only supports 2.4GHz Wi-Fi networks.

4. Q: Is there a warranty for the product?

A: Please refer to the warranty information provided with your purchase for details on warranty coverage.

User Manual

- Thank you for purchasing our products. Please review this manual thoroughly before operating your device.
- All pictures in this manual are for illustration purpose only. Actual product may vary due to product upgrade

SMART LOCK GATEWAY G2

- **Model:**
 - G2
- **Dimensions :**
 - 70mm x 70mm x 26mm
- **Network :**
 - WiFi 2.4G
- **JEEE standard:**
 - 802.11 b/g/n
- **Power interface :**
 - Type-C USB
- **Power input :**
 - 5V/500mA

Light Status






When the Gateway is powered on:




- **Flashing Red/Blue lights:** Stand-by mode - Ready to Pair
- **Blue light:** Normal mode
- **Red light:** Network failure

Pair with App


1. Open the App
2. Tap on “☰” on the upper left corner of the screen
3. Select [Gateway]

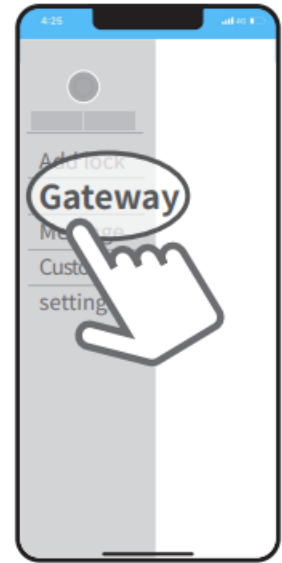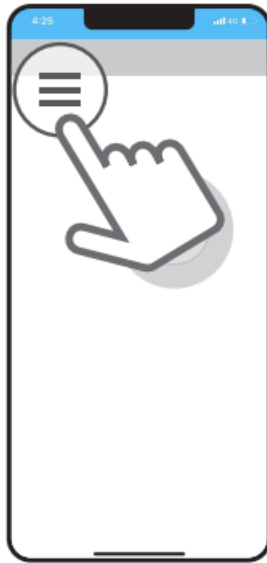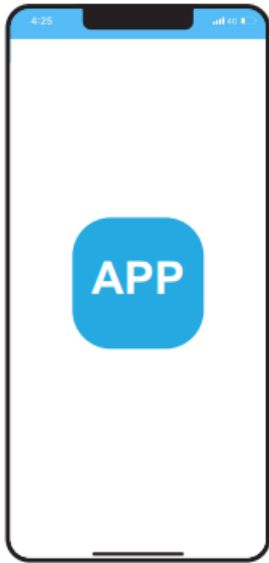

4. Select [G2]
5. Plug in the Gateway and power it on
6. While the light is flashing in Red and Blue alternately, tap on “+ ”

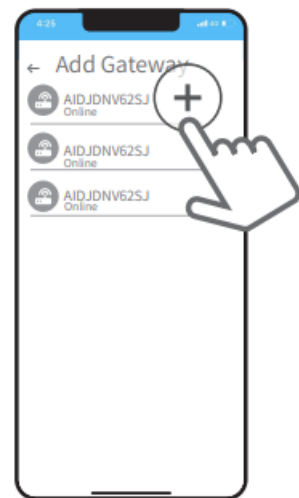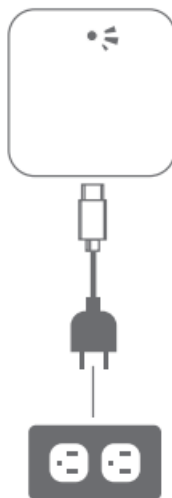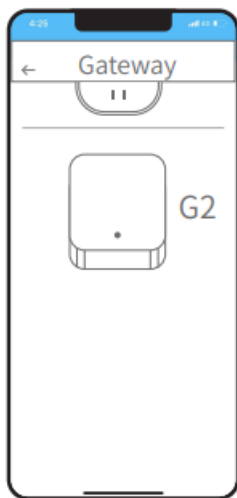

7. Add Gateway
8. Select the network and enter your Wi-Fi password

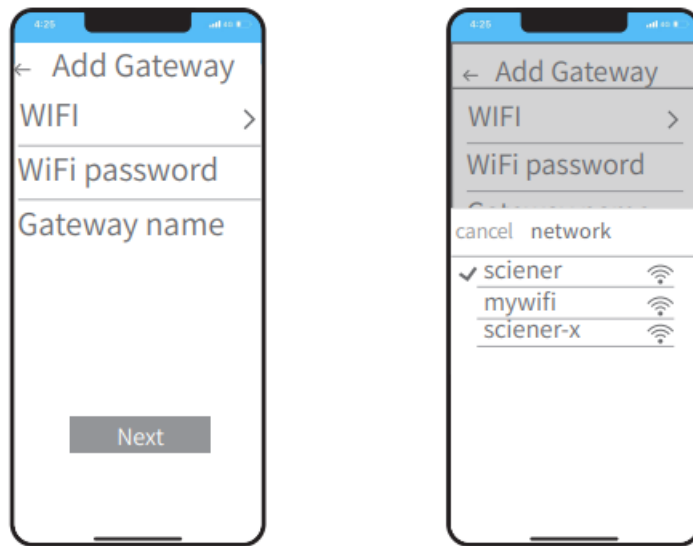

Notice

If the above process times out, please power off and try again.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.


- If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna

Disclaimer

- We continuously optimize products as new technologies and features are developed. For this reason,
- we reserve the right to make alterations to the products without prior notice.

Documents / Resources

	<p>Veise G2 Smart Lock WiFi Gateway [pdf] User Manual</p> <p>G2 Smart Lock WiFi Gateway, G2, Smart Lock WiFi Gateway, Lock WiFi Gateway, WiFi Gateway, Gateway</p>
---	--

References

- [User Manual](#)