



VEVOR JS-75-GD-01 Button Maker Machine Instruction Manual

[Home](#) » [VEVOR](#) » VEVOR JS-75-GD-01 Button Maker Machine Instruction Manual 

VEVOR JS-75-GD-01 Button Maker Machine Instruction Manual



Contents

- [1 SAFETY REMINDER](#)
- [2 COMPONENTS](#)
- [3 MANUFACTURE PROCESS](#)
- [4 FAILURE AND TROUBLESHOOTING](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

SAFETY REMINDER

1. This badge machine is only applied for the intended purpose. Don't apply in other applications which exceed safety considerations.
2. Children cannot operate this product unless accompanied by an adult.
3. Pay attention to safety during operation, and avoid crushing fingers.

COMPONENTS



1. Tin Up Cover
2. Plastic Back Plate



3. White Paper (The paper thickness needs to be in the range of 127g-159g, and the paper diameter should be the same as the transparent film diameter)
4. Transparent Film
5. Metal Back Plate



6. Plastic (Only back Washer required when using metal back plate.)



MANUFACTURE PROCESS

1. Revolve and twist handle in.



2. Put "Tin up cover"–"Paper" (pattern levelly placed)– "Transparent plastic film" into the right mold in sequence, then anticlockwise revolve the down mold to bottom till the up and down mold aligned.




3. Use one hand to hold the machine body first then stable the machine body by the handle another hand press the machine handle till down press to be bottom. (Special attention: this time down pressed up mold hinge is in a separate state.)



4. Put the plastic back plate into the left mold (Attention: The pin should be level without protruding. The upside words upward placed according to the mold side triangle indication mark), rotate the down mold clockwise to the bottom until the up and down mold aligned.



5. Hand holds the machine body, right hand down press the handle until up and down mold merged to bottom, now the upper mold hinge is in merged state, and the pin passes through the hole.

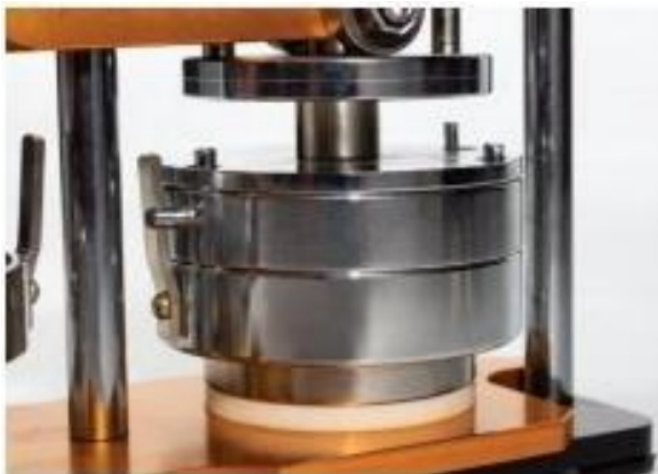

6. Manufacture finished



Special Attention: If use the metal back plate, the left mold groove needs to place the plastic washer



FAILURE AND TROUBLESHOOTING

Failure Appearance	Possible Reasons	Troubleshooting
<p>First time downward press iron cover and not absorbed to up mold</p>	<p>1. Unsuitable operating method 2. Too much lubricating oil in the up mold</p>	<ol style="list-style-type: none"> 1. First time downward press up mold hinge is in a separate state 2. Use clean cloth or tissue completely wipe it if found too much lubricating oil on the up mold 3. The up and down mold must be on the same vertical line when closing

Second downward press part not wrapped in	<ol style="list-style-type: none"> 1. Unsuitable operating method 2. High mold friction force 3. Unsuitable paper thickness 4. Up mold screws loosen 	<ol style="list-style-type: none"> 1. The up and down mold must be on the same vertical line when closing 2. Evenly coat lubricating oil in the up and down mold internal holes 3. Use the stipulated thickness paper 4. Place the up mold on the machine body, use the complimentary Allen key to fix the screws in the up mold internal hole center.
Not tightly press the badge, pressed in but not firm	<ol style="list-style-type: none"> 1. The downward press is not in place, not press to the bottom 2. Paper is thinner 3. (75mm) Configured metal back consumables must place the washer 	<ol style="list-style-type: none"> 1. Need press to the bottom when downward pressing 2. Change to use a slightly thicker paper 3. Right side mold place 2mm thickness washer when using the metal back consumables
Noise during pressing manufacture	High friction force between molds	Evenly coat lubricating oil in the up and down mold internal holes
Up mold unable to lift up after pressing manufacture, blocked	<ol style="list-style-type: none"> 1. Up and down mold position deviated 2. The paper is incorrectly cut round or blocked by a foreign object. 	Use a sharp tool (such as a straight screw driver) to align to middle merge position clearance which is between up and down mold, and pry open with the object like a hammer (Attention: Just tap it, generally, it will not be too tightened)

Product Mode	S-75-GD-01
Manufactured Badge Specification	φ75
Machine Body Color	Gold
Paper Requirements	127-157g Copper Plate Paper
Accessories With Machine	<ol style="list-style-type: none"> 1. φ75 Iron Bottom Back Plate *50 Pieces 2. φ75 Plastic Bottom Back Plate* 50 Pieces 3. φ75 Tin Up Cover *100 Pieces 4. φ75 Blank Round Paper* 50 Pieces 5. φ75 Transparent Film*100 Pieces 6. φ75 Round Cutter*1 Piece 7. Allen Key* 2 Pieces 8. Magic Book *1 Set 9. Washer * 2 Pieces 10. Instruction *1 Set

Manufacture: Taizhou Huangyan Junmao Machinery Technology Co, Ltd. Address: No.91, Shiyuan Road, Nancheng Street, Huangyan District, Taizhou, Zhejiang Province.

Importer: WAITCHX

Address: 250 bis boulevard Saint-Germain 75007 Paris

Importer: FREE MOOD LTD

Address: 2 Holywell Lane, London, England, EC2A 3ET

EC REP

EUREP GmbH

Unterlettenweg 1a,85051 Ingolstadt, Germany

UK REP


EUREP UK LTD

UNIT 2264,100 OCK STREET,ABINGDON

OXFORDSHIRE ENGLAND OX145DH

Made in China

Documents / Resources

	<p>VEVOR JS-75-GD-01 Button Maker Machine [pdf] Instruction Manual JS-75-GD-01, JS-75-GD-01 Button Maker Machine, JS-75-GD-01 Maker Machine, Button Maker Machine, Maker Machine, Button Machine</p>
--	--

[Manuals+](#)