

ViewSonic LDP216-121 4K UHD All-in-One Direct View LED **Display User Guide**

Home » Viewsonic » ViewSonic LDP216-121 4K UHD All-in-One Direct View LED Display User Guide 🖺

Contents


- 1 ViewSonic LDP216-121 4K UHD All-in-One Direct View LED **Display**
- 2 Instructions
- 3 Package Contents
- **4 Product Overview**
- **5 Introduction**
- **6 Installing the Cabinets**
- 7 Connecting the System Control Box
- 8 Installing the LED Modules
- 9 Documents / Resources
- **10 Related Posts**

ViewSonic[®]

ViewSonic LDP216-121 4K UHD All-in-One Direct View LED Display



Instructions

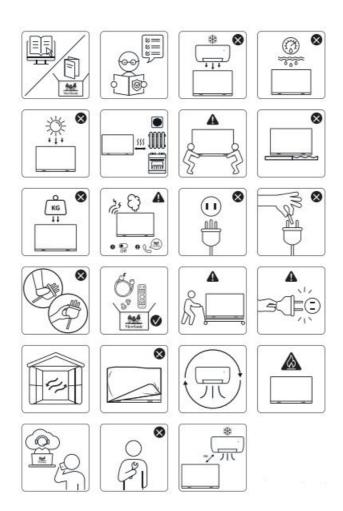

Package Contents

Item		Quantity	Note
Cabinet Sections	(C)(C) (C)(C)(C) (C)(C) (C)(C)(C) (C)(C) (C)(C)(C) (C)(C) (C)(C)(C) (C)(C) (C)(C)(C) (C)(C) (C)(C)(C) (C)(C)(C)(C)(C)(C) (C)(C)(C)(C)(C)(C)(C)(C)(C)(C)(C)(C)(C)(8 sections tota	
System Control Bo x (Left and Right si des)		2 sides	
Quick Start Guide	ViewSonic And LDP210-121 4K UMD All-to-One Direct View LED Display One of the Line One of the Line One of the Line One of the Line And the contempor profile Schedinstrate/bung One of the Line And the Line	1	
COB LED Modules Frame		128 frames	There are 6 pieces of COB LED modules in a Frame. The quantity of spare LED modules will var y by country.
Remote Control	W M M M M M M M M M M M M M M M M M M M	1	
Screws	1	48 x M6x50mm Expansion (1) 48 x TA6x30mm (2) 32 x M6x10mm (3) 18 x KM3x6mm (4)	

Item		Quantity	Note
Hex Tool (Allen wre nch)	/	2	1 x 5 mm 1 x 8 mm
System Control Bo x Covers (Left, Middle, and Right sides)		3	
Wall Mounting Brac kets		4	
Vacuum Suction To ol		1	
Anti-Static Gloves	EEN	2 pairs	
LAN Cable (5m)		1	
IR Extender (3m)		1	
Power Cord		2	Power consumption i s large, so two power cords and two dedicat ed power outlets are r equired.


Item	Quantity	Note
Bag with LEDs	1 bag (1,000 p ieces)	Replacement LED be ads specific to modul e batch number. Cannot be used on different LED module batch(es).

NOTE:


- This product is packed in an air transport box.
- Due to the size and weight, it is recommended that two or more people handle it.

Product Overview

Front Panel

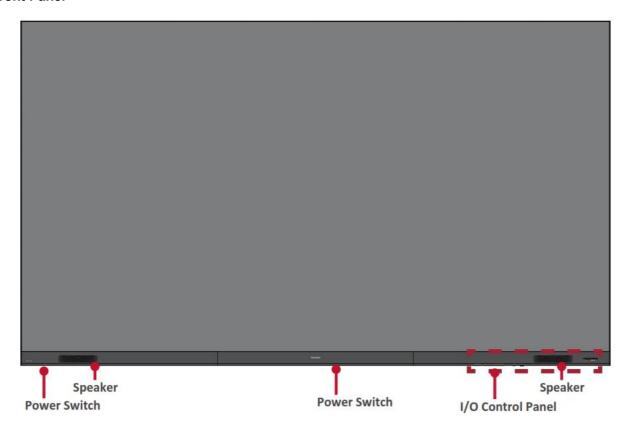

Rear Panel

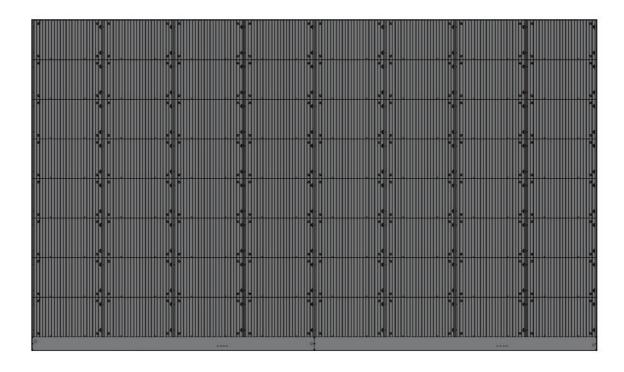


Introduction

Before Installing


- Maintain an adequate air gap between the back of the display and any wall for proper ventilation.
- Ensure there is no direct airflow from air conditioning or heating vents blowing on the display.
- · Avoid installing the display in places with high humidity.
- Due to high power usage, always use power cords specifically designed for this product.

Wall Mounting


Installing the Upper and Lower Wall Mount Brackets

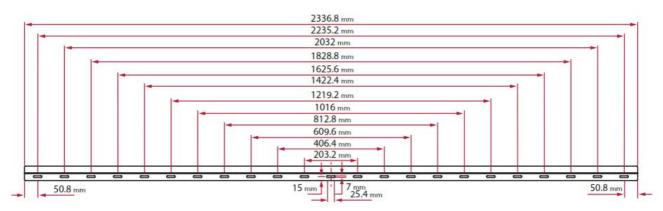

- 1. Ensure the wall area and size is an appropriate installation site.
 - **NOTE:** The height of the Upper Wall Mount Brackets must not be less than 129.92" (3.3 meters) from the ground.
- 2. Using the Wall Mount Bracket (pictured above) as a guide, mark at least twelve (12) holes and pre-drill them.
- 3. Install the first Upper Wall Mount Bracket with the provided screws (M6x50mm Expansion for masonry; TA6x30mm for load bearing wood).
- 4. Repeat Step 2, ensuring the second Upper Wall Mount Bracket is level with the first upper bracket.

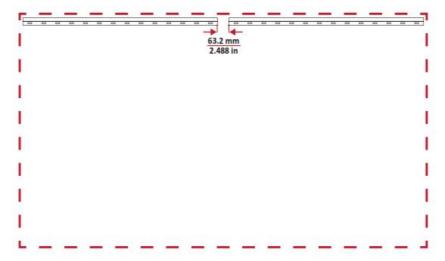

5. Install the Lower Wall Mount Brackets in the same manner as the Upper Wall Mount Brackets. The distance between the Upper and Lower Wall Mount Brackets is 93.01" (2362.5 mm).




Note:You can also install the Upper Wall Mount Brackets, hang the screen, and then install the Lower Wall Mount Brackets for a more precise fit.

Ensure the wall can safely support 749.57 lbs. (340 kg).


Ensure the deviation of wall surface must be <5mm (0.197 inches).

6. After installing both Upper and Lower Wall Mount Brackets, the installation wall should look like:

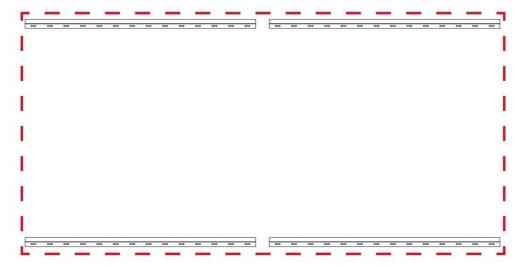


Installing the Cabinets


1. Ensure the Mounting Brackets on the rear of the eight (8) Cabinets are positioned at the top and bottom mounting positions as shown below:

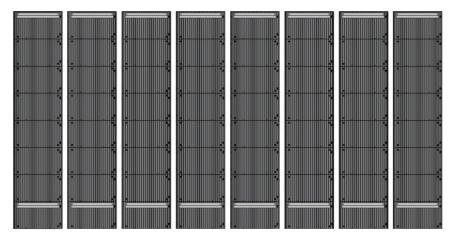


2. Carefully lift each cabinet up onto the Upper Wall Mount Brackets, starting from the left.

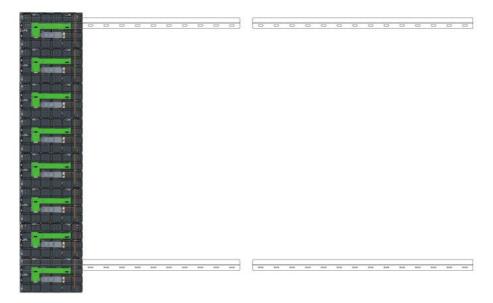

3. Ensure the Mounting Brackets sit securely on the Wall Mount Brackets as shown below.

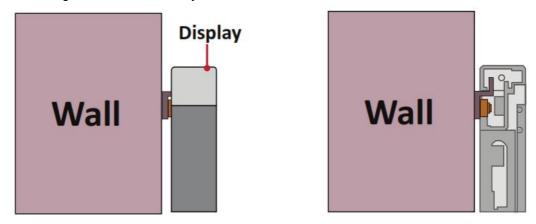


4. Push each Locking Bolt and lock each Hook with the hex tool to securely connect each cabinet together. It may be necessary to align the hole with an Allen wrench in order to engage the Locking Bolt.

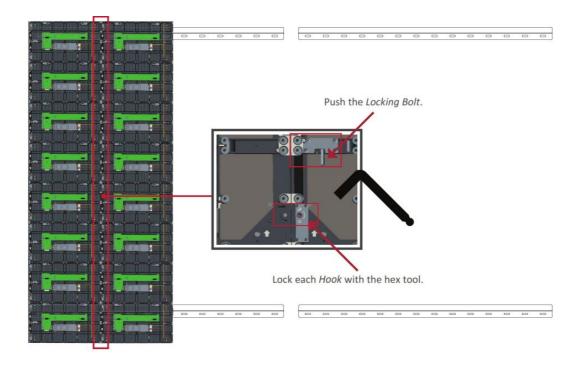

Note: There are eight (8) Locking Bolts and 16 Hooks between each cabinet.

- 5. Place the remaining Cabinets up onto the Upper Wall Mount Brackets. Install from left to right, ensuring the Mounting Brackets sit securely on the Wall Mount Brackets.
- 6. Repeat Step 4, securing the cabinets together with each Locking Bolt and Hook.

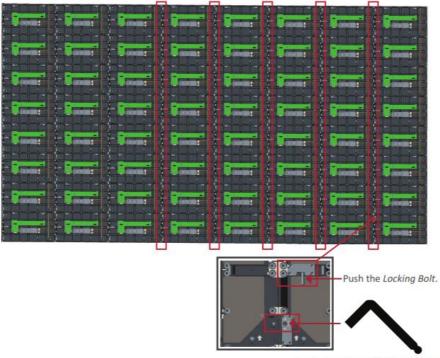


Lock each Hook with the hex tool.


NOTE: There are eight (8) Locking Bolts and 16 Hooks between each cabinet.

Connecting the System Control Box

- Carefully unfold the System Control Box panel. Ensure the main system control board is on the right.
 NOTE: Use caution as the System Control Box panel is separated into two pieces with wires attached.
- 2. Align the holes of the Cabinet with the System Control Box to attach.

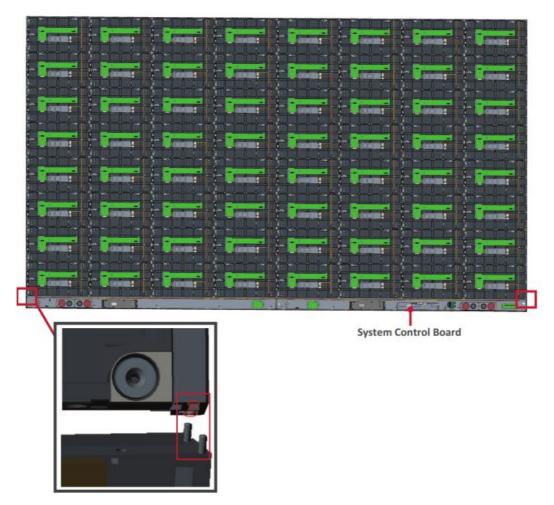

3. You can also reroute the power cable at two positions for cable management. Loosen the two (2) PWM 4x6mm screws, pull the power cable out, thread the power cable through the hole and then fasten the screws tightly.

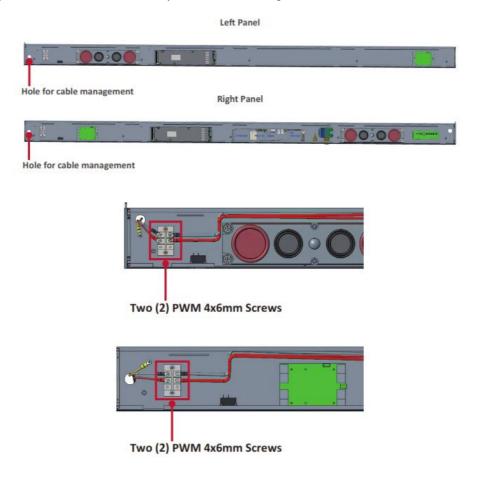


Note: Professional installation only.

4. Further secure the System Control Box to the Cabinets with the 32 provided M6x10mm screws.



5. Connect the Network and Power cables of the Cabinets to the System Control Box.


NOTE: There are four (4) Network and eight (8) Power cables to connect.

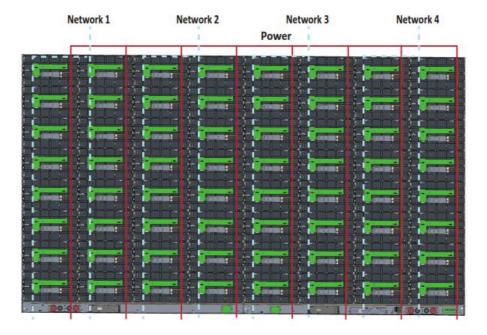

Installing the LED Modules

Install each LED Module onto the Cabinets, being sure to match the corresponding numbers on the Module to the Cabinet.

Note: Please wear Anti-Static Gloves before handling the LED modules.

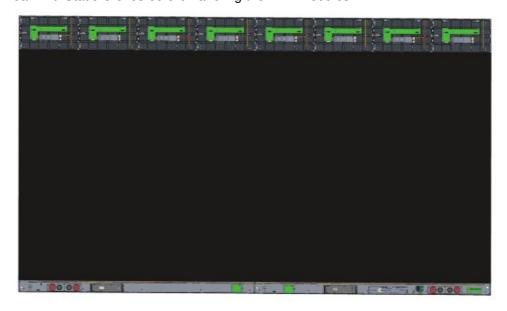

Ensure each Module is flush and that there is little to no gap between each. It may be necessary to gently tap the module to make it flush.



Installing System Control Box Covers

There are three (3) System Control Box Covers: Left, Middle, and Right.




1. Begin by installing the Right Cover onto the System Control Box.

NOTE: Ensure the Power Button cable is connected to the System Control Box Power cable before securing the Cover.

2. After connecting the Power Button cable, ensure the Right Cover is properly aligned with the System Control Box; then secure it with the 18 provided KM3x6mm screws.



3. Repeat the above steps for the Middle and Left Cover.

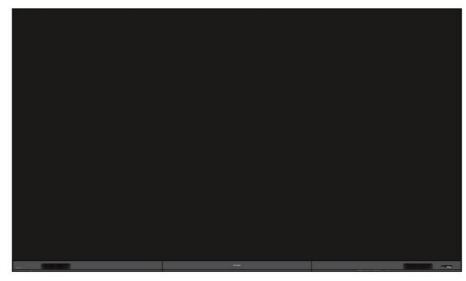

4. Your display is now ready to power on.



Documents / Resources



<u>ViewSonic LDP216-121 4K UHD All-in-One Direct View LED Display</u> [pdf] User Guide LDP216-121, 4K UHD All-in-One Direct View LED Display, LDP216-121 4K UHD All-in-One Direct View LED Display, UHD All-in-One Direct View LED Display, Direct View LED Display, View LED Display, LED Display

Manuals+,