



## VigilLink VLKV-H20P2D 2 Port Dual Monitor 4K60 HDMI DP KVM Switcher User Manual

[Home](#) » [VigilLink](#) » VigilLink VLKV-H20P2D 2 Port Dual Monitor 4K60 HDMI DP KVM Switcher User Manual 

### VigilLink VLKV-H20P2D 2 Port Dual Monitor 4K60 HDMI DP KVM Switcher



## Contents

- 1 Thank you
- 2 Introduction
- 3 Features
- 4 Package Contents
- 5 Specifications
- 6 Operation Controls and Functions
- 7 IR Remote
- 8 Dual-mode Function
- 9 Hotkey Switch Function
- 10 Keyboard & Mouse Hotkey Function
- 11 ASCII Commands
- 12 Application Example
- 13 Documents / Resources
  - 13.1 References
- 14 Related Posts

## Thank you

### Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating, or adjusting this product. Please keep this manual for future reference.

### Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Introduction

This is a 2×1 HDMI/DP KVM Switcher with dual-channel switching and hotkey switching. It supports resolutions up to 4K@60Hz 4:4:4 8bit and can also transmit USB 3.0 signal up to 5Gbps for KVM function. It can share two monitors and USB devices between two PCs and supports two modes to operate.

The switcher features virtual interaction function, so that it can automatically wake up the connected PC that is in standby mode, which can reduce the switching time. It also supports direct switching through buttons on the front panel, IR remote, and hotkeys through keyboard/mouse connected to the special USB port. It provides a wide compatibility choice for different operating systems, such as Windows, Mac OS and Linux, no driver required and simple plug and play.

## Features

- HDCP 2.3 and DP1.2a compliant
- Support Ultra-wide Screen, resolution up to 4K@60Hz, 2K@60Hz/144Hz as specified in HDMI 2.0
- HDR, HDR10, HDR10+, Dolby Vision, HLG pass-through
- Using only 1 set of keyboard, mouse and monitor to control 2 computers
- Support video fast switching, and keyboard/mouse seamless switching
- Each input port has an EDID emulator to provide the correct information for the PC

- Support hot plug, disconnect or connect devices to the KVM at any time
- Switching via front panel buttons, keyboard/mouse hotkeys, IR remote control, and RS-232 commands
- Support auto switching
- Input supports 2x DP ports and 2x HDMI ports
- Advanced hardware/software design and production ensure zero latency
- The integrated USB 3.0 ports allow you to share USB peripherals like printer, scanner, webcam and hard disk between computers with data transfer rate up to 5Gbp/s
- Compact design for easy and flexible installation

## Package Contents

1. 1 x 4K60 2x1 HDMI/DP Dual Monitor KVM Switcher
2. 1 x IR Remote
3. 1 x 3pin-3.81mm Phoenix Connector (male)
4. 1 x Fixed Frequency 38KHz IR Receiver Cable (1.5 meters)
5. 2 x USB Cable (USB 3.0, Type A to Type B, 1.8 meters)
6. 2 x HDMI Cable (male to male, 1.5 meters)
7. 2 x DP Cable (male to male, 1.5 meters)
8. 2 x Mounting Ears
9. 4 x Machine Screws (KM3\*4)
10. 1 x 12V/1A Multinational Locking Power Supply
11. 1 x User Manual

## Specifications


Technical	
HDMI Compliance	HDMI 2.0
HDCP Compliance	HDCP 2.3
DP Compliance	DP1.2a
Video Bandwidth	18Gbps
Audio Latency	No Latency
Video Latency	No Latency
Video Resolution	Up to 4K@60Hz, 2K@60Hz/144Hz
IR Level	5Vp-p
IR Frequency	Fixed frequency 38KHz
Color Space	RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0

Color Depth	8/10/12bit	
HDR	HDR, HDR10, HDR10+, Dolby Vision, HLG	
Audio Formats	HDMI IN/OUT: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X, DSD L/R OUT: PCM 2.0CH	
ESD Protection	IEC 61000-4-2: ±8kV (Air-gap discharge) & ±4kV (Contact discharge)	
<b>Connection</b>		
Input ports	2 x HDMI input [Type A, 19-pin female] 2 x DP input [20-pin female]	
Output ports	2 x HDMI output [Type A, 19-pin female] 1 x L/R audio output [3.5mm Stereo Mini-jack]	
Control ports	1 x RS-232 [3pin-3.81mm phoenix connector] 1 x IR EXT [3.5mm Stereo Mini-jack] 2 x USB HOST [USB Type B] 4 x USB DEVICES [USB Type A]	
<b>Mechanical</b>		
Housing	Metal Enclosure	
Color	Black	
Dimensions	220mm [W] x 100mm [D] x 30mm [H]	
Weight	626g	
Power Supply	Input: AC 100 – 240V 50/60Hz Output: DC 12V/1A (US/EU standard, CE/FCC/UL certified)	
Power Consumption	Typical value: 8.4W Standby mode: 0.6W	
Operating Temperature	32 – 104°F / 0 – 40°C	
Storage Temperature	-4 – 140°F / -20 – 60°C	
<b>Recommended HDMI Cable</b>		
Video Resolution	4K60 4:4:4	1080P 4:4:4
HDMI Cable Type	HDMI cable	HDMI cable
HDMI Cable Length (HDMI IN / OUT)	5m/16ft	10m/33ft
The use of “Premium High-Speed HDMI” cable is highly recommended.		

## Operation Controls and Functions


### Front Panel

No.	Name	Function Description
1	USB 3.0 ports	USB 3.2 Gen 1 device ports, connected to USB 3.0 flash disk, camera, printer etc .
2	USB 3.0 ports (with hotkey mode)	<ul style="list-style-type: none"> <li>When Hotkey switch to OFF mode, these two ports support USB 3.2 Gen 1 device.</li> <li>When Hotkey switch to ON mode, these two ports support USB 1.1 mouse and keyboard only.</li> </ul>
3	Power LED	The Power LED will light in green when the product is working, and red when the product is on standby.
4	Input channel LED 1/2	When the HDMI input port 1/2 is selected as the signal input channel, the corresponding LED 1/2 will light in green.
5	MODE 1/2 LED	When MODE 1/2 is selected by pressing the MODE button on the front panel or the M1/2 button on the IR Remote, the corresponding MODE 1/2 LED will light on. For the details of MODE 1/2, please refer to “7. Dual-mode Function Description”.
6	AUTO LED	When the auto switching function is enabled, the AUTO LED will light in green. The input channel will be automatically switched when plugging or unplugging the input source.
7	IR Window	IR signal receiving window.
8	HOTKEY switch	<p>Use the switch to enable/disable the hotkey switching mode.</p> <ul style="list-style-type: none"> <li>Switch to “ON”: The connected keyboard and mouse support hotkey switching mode.</li> <li>Switch to “OFF”: The connected keyboard and mouse don’t support hotkey switching mode.</li> </ul>
9	MODE button	Press the MODE button to switch between MODE 1/2.
10	SELECT button	Press the button to switch the input channel.

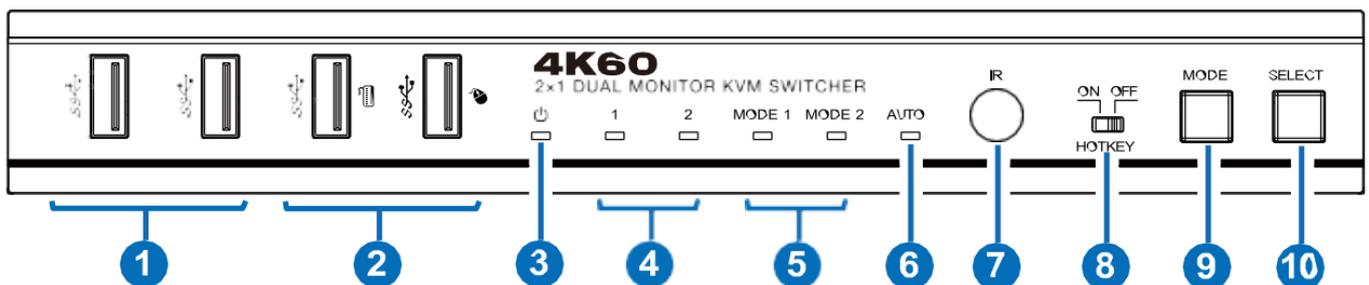

### Rear Panel

No.	Name	Function Description
1	PC 1 ports	<b>HDMI:</b> HDMI signal input port, connected to HDMI source device such as PC with HDMI cable. <b>DP:</b> DP signal input port, connected to DP source device such as PC with DP cable. <b>USB HOST:</b> USB Host port, connected to PC 1. It can be used for MCU software upgrade.
2	PC 2 ports	<b>HDMI:</b> HDMI signal input port, connected to HDMI source device such as PC with HDMI cable. <b>DP:</b> DP signal input port, connected to DP source device such as PC with DP cable. <b>USB HOST:</b> USB Host port, connected to PC 2.
3	DISPLAY HDMI A/B ports	HDMI signal output ports, connected to HDMI display device such as TV or Monitor with HDMI cable.
4	L/R audio port	3.5mm analog audio output port.
5	RS-232 port	3-pin phoenix connector, connected to a PC or control system for serial port upgrade.
6	IR EXT port	IR signal receiving port, connected with 38KHz IR Receiver cable. If the IR signal receiving window of the unit is blocked or the unit is installed in a closed area out of infrared line of sight, the IR receiver cable can be inserted to the "IR EXT" port to receive the IR remote signal.
7	DC 12V	DC 12V/1A power input port.

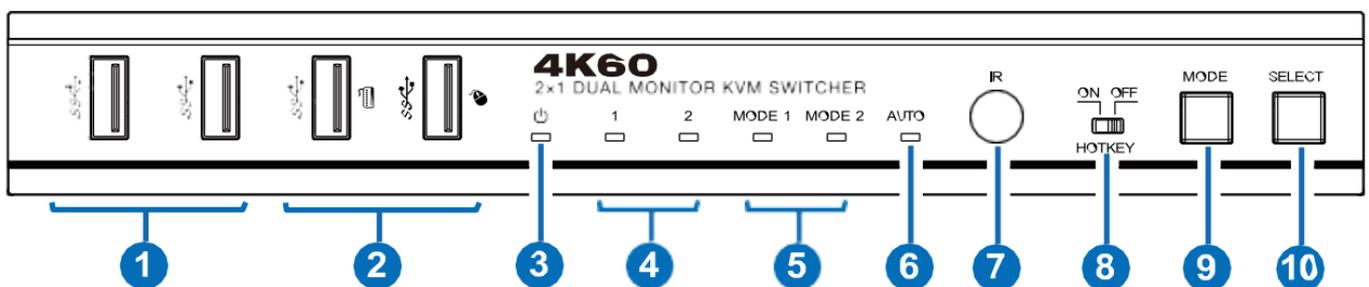


### IR Pin Definition

IR Receiver pin's definition is as below:



IR RECEIVER

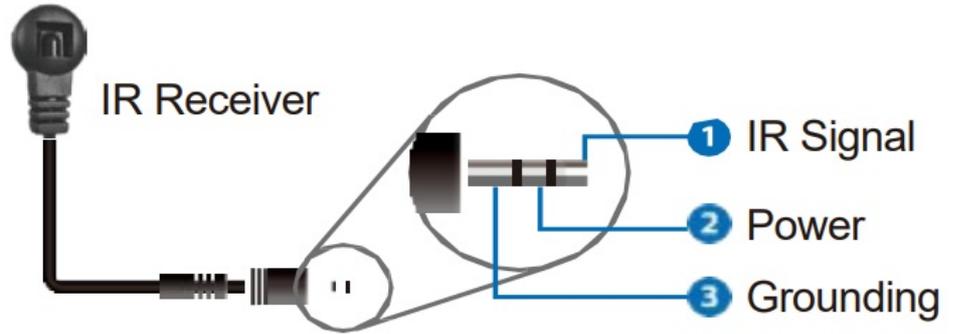


### IR Remote

1. Power on or Standby: Press this button to power on the switcher or set it to standby mode.
2. Auto: Press this button to enable/disable the auto switching function.
3. 1/2: Press 1/2 button to select the HDMI input port 1/2 as the input channel, and the corresponding channel LED on the front panel will light in green.



: Press this button to cyclically switch the input channel.


4. M1/2: Press M1/2 button to select MODE 1/2.

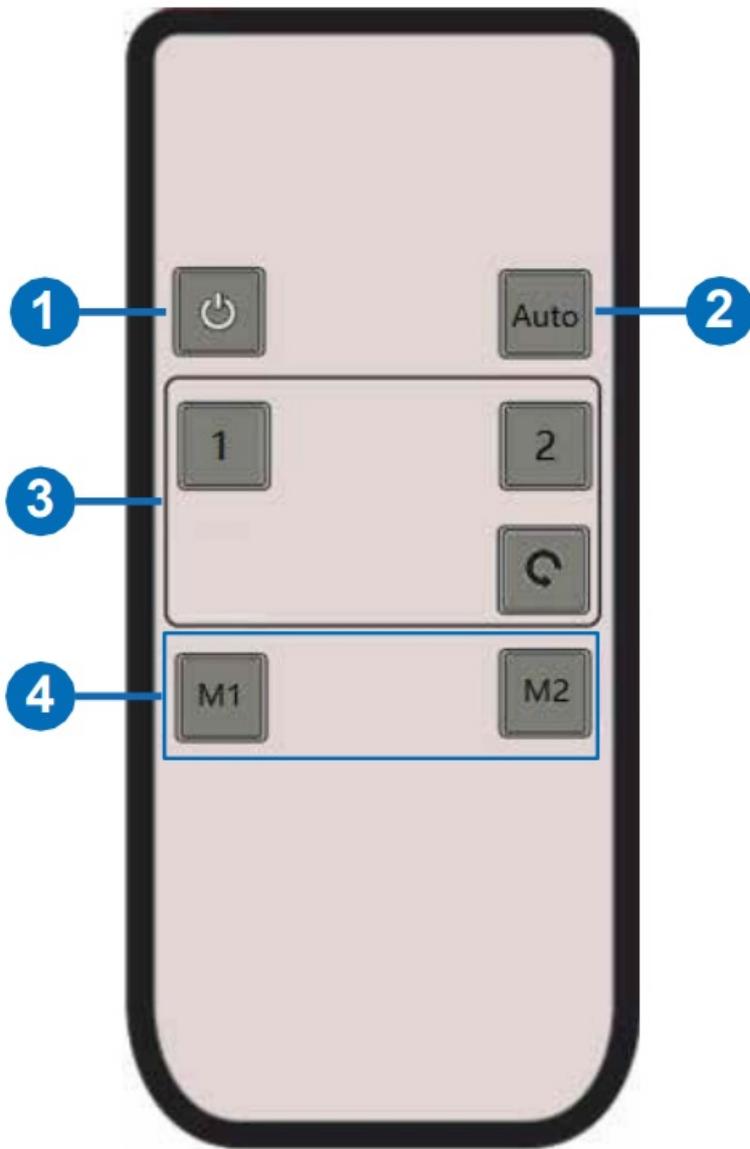

## Dual-mode Function

### MODE 1: Single PC mode


In this mode, output A, B select the PC 1 A, B input or the PC 2 A, B input correspondingly, and the USB DEVICE ports follow the corresponding PC 1 HOST or PC 2 HOST. You can press the SELECT button on the front panel or the 1/2 button on the IR Remote, or use keyboard/mouse hotkeys to switch the input source. The EDID of the Monitor connected to output A will be copied to input 1A/2A accordingly; The EDID of the Monitor connected to output B will be copied to input 1B/2B accordingly.

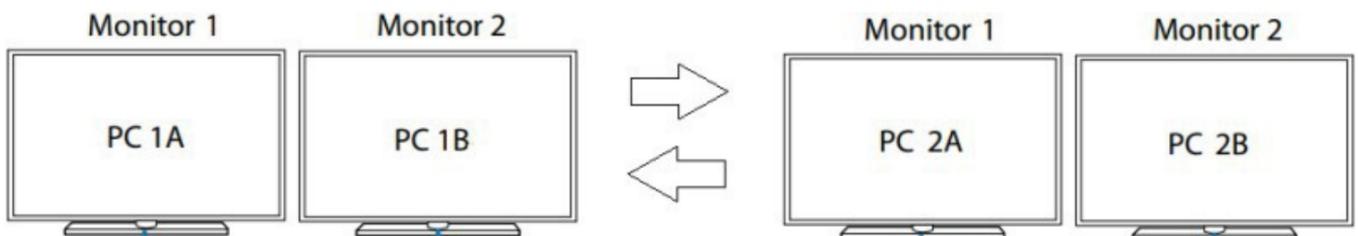

### MODE 2: Dual PC mode

In this mode, output A is fixed to select PC 1 A input, and output B is fixed to select PC 2 A input. You can press the SELECT button on the front panel or the 1/2 button on the IR Remote, or use keyboard/mouse hotkeys to switch USB DEVICE to follow the corresponding PC 1 HOST or PC 2 HOST.

The EDID of the Monitor connected to output A will be copied to input 1A accordingly; The EDID of the Monitor connected to output B will be copied to input 2A accordingly.

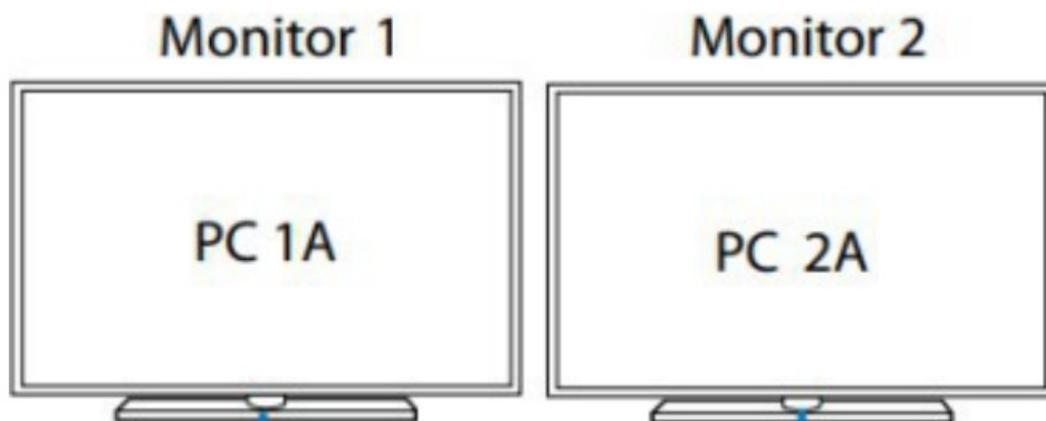

## Hotkey Switch Function

The Hotkey switch on the front panel allows you to enable/disable the hotkey switch function.

(1) When Hotkey switch to OFF mode, the hotkey switch function is disabled, and two USB 3.0 ports (with hotkey mode) support USB 3.2 Gen 1 device.

(2) When Hotkey switch to ON mode, the hotkey switch function is enabled, and two USB 3.0 ports (with hotkey mode) only support USB 1.1 mouse and keyboard, which can be used for hotkey switching.

## Keyboard & Mouse Hotkey Function

When the hotkey mode is enabled, you can use keyboard and mouse hot keys to operate and control the product.

(1) Keyboard hotkeys are as following:

	+		+		OR		+		+		Switch to input 1
	+		+		OR		+		+		Switch to input 2
	+		+		OR		+		+		Switch to next input
	+		+		OR		+		+		Switch to previous input
	+		+		OR		+		+		Enable/Disable buzzer


Mouse hotkeys are as following:

Double-Click Middle-Right (Double-click the mouse scroll wheel, and then click the right button): Switch to next input

Double-Click Middle-Left (Double-click the mouse scroll wheel, and then click the left button): Switch to previous input

## ASCII Commands

The product also supports ASCII commands control. Connect the RS-232 port of the product to a PC with a 3-pin phoenix connector cable and an RS-232 to USB cable. The connection method is as follows.

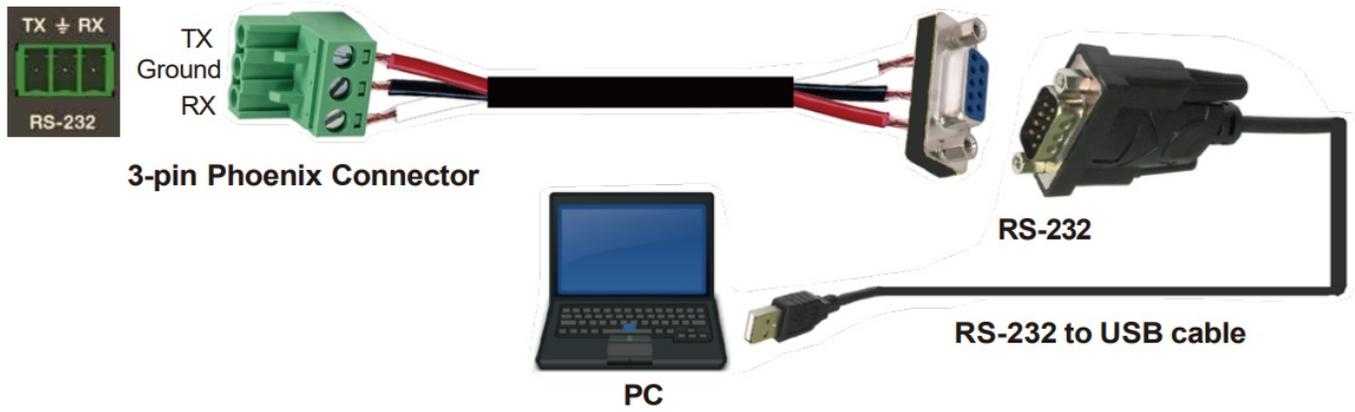

Then, open a Serial Command tool on PC to send ASCII commands to control the product. The ASCII commands list about the product is shown as below


## ASCII Commands

Serial port protocol. Baud rate: 115200 (default), Data bits: 8, Stop bits:1, Check bit: 0

x – Parameter 1	z – Parameter 2	! – Delimiter			
<b>Command Code</b>	<b>Function Description</b>		<b>Example</b>	<b>Feedback</b>	<b>Default Setting</b>
help!	List all commands		help!		
status!	Get device current status		status!		
r type!	Get device model		r type!	2x1 dual monitor kvm hdmi2.0 switcher	
rfwversion!	Get firmware version		rfw version!	mcufw version: vx.xx.xx kvmfw version: vx.xx.xx	
power z!	Power on/off the device (z=0~1) 0. power off 1. power on		power 1!	power on	
r power!	Get current power state		r power!	power on	
reboot!	Reboot the device		reboot!	reboot ...	
reset!	Reset to factory defaults		reset!	reset to factory defaults	

Command Code	Function Description	Example	Feedback	Default Setting
s auto switch x!	Enable/disable auto switch feature (x=0~1) 0. disable auto switch 1. enable auto switch	s auto switch 1!	auto switch: enable	auto switch: enable
r auto switch!	Get auto switch feature	r auto switch!	auto switch: enable	
s beep z!	Enable/disable buzzer function (z=0~1) 0. beep off 1. beep on	s beep 1!	beep on	beep off
r beep!	Get buzzer state	r beep!	beep on	
s output mode z!	Set output mode (z=1~2) 1. output mode1 2. output mode2	s output mode 1!	output mode: 1	output mode: 1
r output mode!	Get output mode	r output mode!	output mode: 1	
s input/usb z!	Set input port or usb host port (z=1~2) 1. input1 2. input2	input/usb 1!	input/usb: 1	input/usb: 1
r input/usb!	Get input port or usb host port	rinput/usb!	input/usb: 1	
output x stream z!	Set output (x=0~2) stream on/off (z=0~1) x:0. all output x:1. output 1 x:2. output 2 z:0. disable output stream z:1. enable output stream	soutput 1 stream 1!	output 1 stream: enable	output 1 stream : enable output 2 stream: enable
rou tput x stream !	Get output stream status	r output x stream !	output 1 stream: enable	

## Application Example

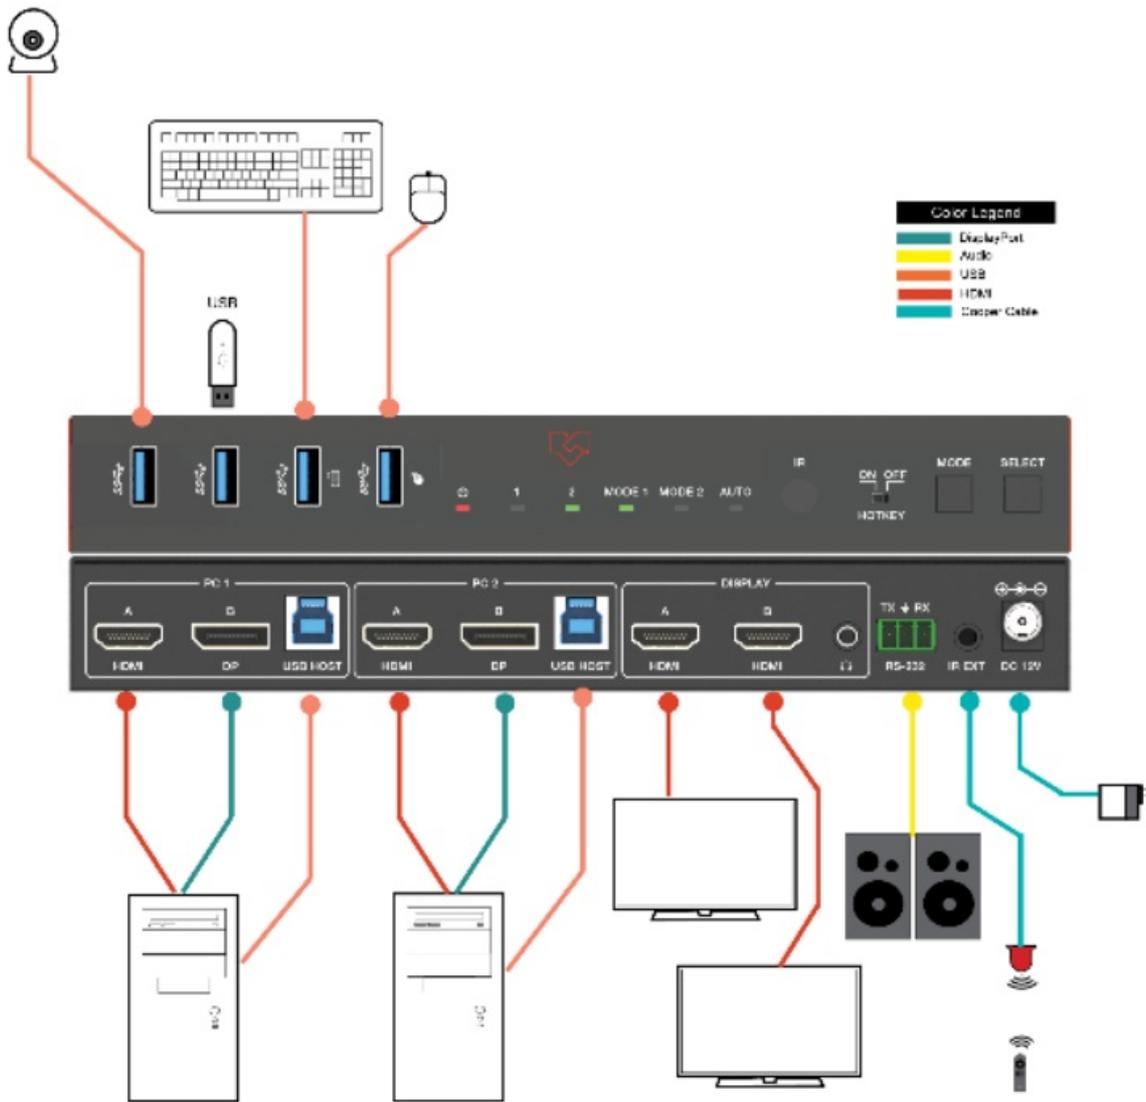

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



## Documents / Resources

 <p>VigilLink 2 Port Dual Monitor 4K60 HDMI/DP KVM Switcher VLKV-H20P2D</p>	<p><a href="#">VigilLink VLKV-H20P2D 2 Port Dual Monitor 4K60 HDMI DP KVM Switcher</a> [pdf] User Manual</p> <p>VLKV-H20P2D, VLKV-H20P2D 2 Port Dual Monitor 4K60 HDMI DP KVM, Switcher, 2 Port Dual Monitor 4K60 HDMI DP KVM Switcher, Dual Monitor 4K60 HDMI DP KVM Switcher, 4K60 HDMI DP KVM Switcher, HDMI DP KVM Switcher, KVM Switcher, Switcher</p>
--	---

## References

- [User Manual](#)

**Manuals+, Privacy Policy**

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.