



PLANA: Connected NFC/RFID switch white
14467

[Wiring devices](#) / [View Wireless wiring devices](#) / [PLANA](#) / [Devices](#)

Contents [[hide](#)]

- [1 Connected NFC/RFID switch white](#)
- [2 Product Status](#)
- [3 Minimum order quantity](#)
- [4 Drawings](#)
- [5 Technical data](#)
- [6 Certifications](#)
- [7 Packaging](#)
- [8 Legal](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

Connected NFC/RFID switch white

NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, white – 2 modules.



Product Status

3 – Active

Minimum order quantity

1 NR

You may also be interested in




[14462 – Connected RFID outer switch white](#)

Sheets, Manuals, Documentation

- [Full Multilanguage instructions sheet \(1862 kb\)](#)
- [Light multilanguage instructions sheet \(1802 kb\)](#)

- [Manuel appli View Wireless \(40963 kb\)](#)
- [Εγχειρίδιο τεχνικού εγκατάστασης \(41171 kb\)](#)
- [Manuale app View Wireless \(20845 kb\)](#)
- [Manual app View Wireless \(45032 kb\)](#)
- [Manual View Wireless app \(45072 kb\)](#)
- [Installationsanleitung View Wireless \(44942 kb\)](#)

Drawings

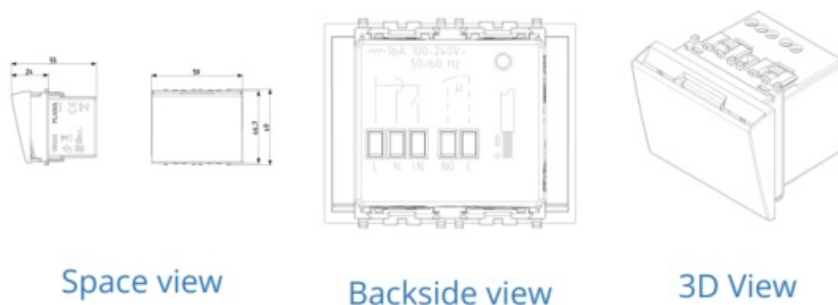

Technical data

- Class group: Alarm installations, emergency call and signalling
- Class: Access control system
- Standalone: Yes
- Networkable: No
- PC-binding: No
- Type of interface: Other
- Max. number of persons: 200
- Type of reading technique: Code
- Signalling: Light signal
- Mounting method: Flush-mounted
- Operating voltage AC 50 Hz: 120,00 – 230,00 V
- Operating voltage AC 60 Hz: 120,00 – 230,00 V
- Operating temperature: 0 – 40 °C
- Degree of protection (IP): IP20
- Colour: White
- Model: Reader
- Material: Plastic
- Power over Ethernet (PoE): Other

- Width: 67,30 mm
- Height: 49,00 mm
- Depth: 50,00 mm

Certifications

- 00. CE Marking – EU ([download](#))
- 37. Marking – Morocco
- 40. Bluetooth technology
- 46. UK PSTI compliance ([download](#))
- 99. WEEE Directive ([download](#))

Packaging



Code	8007352661509
Q.tà	1 NR
Dim.	5.7×5.3×7.7 [cm]
Weight	84.8 [g]



Code	8007352663633
------	---------------

Q.tà	5 NR
Dim.	21.4×11.6×6 [cm]
Weight	478.6 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see Conditions of Use.

Vimar SpA – Viale Vicenza, 14 – 36063 Marostica VI – Italy – www.vimar.com

24/07/2025



<https://www.vimar.com/en/int/catalog/product/index/code/14467>

Documents / Resources

	VIMAR 14467 Connected NFC-RFID Switch [pdf] Owner's Manual 14467, 14462, 14467 Connected NFC-RFID Switch, Connected NFC-RFI D Switch, NFC-RFID Switch, Switch
---	---

References

- [User Manual](#)

■ VIMAR

🔍 14462, 14467, 14467 Connected NFC-RFID Switch, Connected NFC-RFID Switch, NFC-RFID Switch, switch,
VIMAR

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.