



VIMAR 30810.x-02973 Smart Home View Wireless Connected Dial Thermostat Instruction Manual

[Home](#) » [VIMAR](#) » VIMAR 30810.x-02973 Smart Home View Wireless Connected Dial Thermostat Instruction Manual 

VIMAR 30810.x-02973 Smart Home View Wireless Connected Dial Thermostat




Contents

1 THREE OPERATING MODES (ALTERNATIVE)
2 STAND ALONE CONFIGURATION
3 CONFIGURATION IN
4 CONFIGURATION IN
5 CONFIGURATION IN
6 OVERVIEW
7 Ring signalling
8 RESETTING THE THERMOSTAT
9 THERMOSTAT DATE/TIME SETTING
10 INSTALLATION RULES
11 CHARACTERISTICS
12 OPERATION IN Bluetooth technology
MODE
13 OPERATION IN Zigbee technology MODE
14 USE
15 REGULATORY COMPLIANCE
16 CONNECTIONS
17 CUSTOMER SUPPORT
18 Documents / Resources
18.1 References




THREE OPERATING MODES (ALTERNATIVE)

Stand alone •  **Bluetooth®**  **zigbee**

Download the View Wireless  App from the stores onto the tablet/smartphone you will be using for configuration.

When the device is powered for the first configuration, we recommend you search for any new firmware and perform the update.

Depending on the mode you select, you will need:




Stand alone	 Bluetooth®	 zigbee
Nothing else	Gateway art. 30807.x-20597-19597-16497-14597	Smart Home Hub
Nothing else	 View App for management via smartphone/tablet	Samsung SmartThings Hub
	Amazon Alexa, Google Assistant, Siri (Homekit) voice assistants for possible voice operation	

Create your Installer account on MyVimar (on-line).

STAND ALONE CONFIGURATION

1. Wire all the thermostats.
2. Start the View Wireless App and log in with the credentials you just created.
3. Create the system and the environments.
4. Associate all the thermostats with the environments.

To associate the thermostat:




- Select “Add” (), choose the environment to place it and give it a name
 - Select  ; activate the Bluetooth connection on your tablet/smartphone and approach the thermostat
 - Press  for 5 s; the ring flashes blue and association is complete.
5. For each thermostat, set the functions and parameters.
 6. Go to the “Temperature control” menu and for each thermostat set the time schedules, the setpoints for the operating modes and the current time.

CONFIGURATION IN



1. Wire all the devices in the system (2-way switches, relays, thermostats, gateway, etc.).
2. Start the View Wireless App and log in with the credentials you just created.
3. Create the system and the environments.
4. Associate all the devices with the environments, except for the gateway (which should be associated last).

To associate the thermostat:

- Select “Add” (), choose the environment to place it and give it a name
 - Select  ; activate the Bluetooth connection on your tablet/smartphone and approach the thermostat
 - Press  for 5s; the ring flashes blue and association is complete.
5. For every device, set the function, the parameters and any accessory devices (wired or radio control and related function).
 6. Transfer the configuration of the devices to the gateway and connect it to the Wi-Fi network.
 7. Transfer the system to the Administrator user (who must have created his/her profile on MyVimar).

For full details, see the View Wireless App manual that can be downloaded from the www.vimar.com website.




CONFIGURATION IN



1. Wire all the devices in the system (2-way switches, relays, thermostats, gateway, etc.).
2. Start the View Wireless App and log in with the credentials you just created.
3. Create the system and the environments.

4. Associate all the devices with the environments, except for the gateway (which should be associated last).

To associate the thermostat:

- Select “Add” (), choose the environment to place it and give it a name
- Select  ; activate the Bluetooth connection on your tablet/smartphone and approach the thermostat
- Press  for 5 s; the ring flashes blue and association is complete.

5. For every device, set the function, the parameters and any accessory devices (wired or radio control and related function).
6. Transfer the configuration of the devices to the gateway and connect it to the Wi-Fi network.
7. Transfer the system to the Administrator user (who must have created his/her profile on MyVimar).


For full details, see the View Wireless App manual that can be downloaded from the www.vimar.com website.

CONFIGURATION IN



Follow the procedure above from points 1 to 2.



Associate the device directly to a ZigBee Hub (e.g. Amazon Echo Plus, SmartThings Hub)


1. Download the Zigbee software using the View Wireless App (see the View Wireless App manual). Press the  key on the device until the display shows “bt” and the ring blinks in blue. To update the software on the device, the procedure is the same.
2. After conversion to Zigbee technology (or the software update), the device automatically goes into pairing mode for 5 minutes, during this period the Lightable ring blinks white. If the device is not in pairing mode, cut off the power supply and restore it after a few seconds.
3. Associate the device according to the procedure envisaged by the ZigBee Hub.
4. Associate the module according to the procedure envisaged by the ZigBee Hub (see the Hub’s manufacturer documentation).


Set the thermostat parameters.

Within the first 10 minutes after the device has been powered (already associated with ZigBee Hub) or after restart at the conclusion of Zigbee association, press the key related to the parameter to be changed as stated below.

1. Set the winter/summer calibration


- Press  key for 5 s this starts the configuration for choosing the “heating offset temperature” within 2 minutes timeout. The Lightable ring will flash amber and “H” appears on the display to indicate the “heating offset temperature” adjustment; by turning the Dial it is possible to set a temperature offset. The Lightable ring flashes amber and the offset appears on the display.
- Press  key for 5 s to confirm the “heating offset temperature”. The “C” now appears on the display and the crown flashes cyan at maximum brightness and 2 minutes timer starts for setting


the “Press”  key for 5 s to confirm the “cooling offset temperature”; by turning the dial it is possible to set a temperature offset. The Lightable ring flashes cyan and the offset appears on the display.

- Press  key for 5 s to confirm the “cooling offset temperature”, saving is confirmed by three cyan flashes on the Lightable ring.

Note: if you don’t want to save the chosen values, let the 2 min timeout expire.


2. Set the ring color.





- Press  key for 5 s this starts the configuration for choosing the lightable ring color within 2 minutes timeout. The “LeD” apperas on the display to indicate the “Ring color” choice; every press to the “Display Brightness” button changes the selected ring color.

Press  key for 5 s to confirm the “Ring Color”, saving is confirmed by three flashes on the Lightable ring.

Note: if you don’t want to save the chosen color, let the 2 min timeout expire.

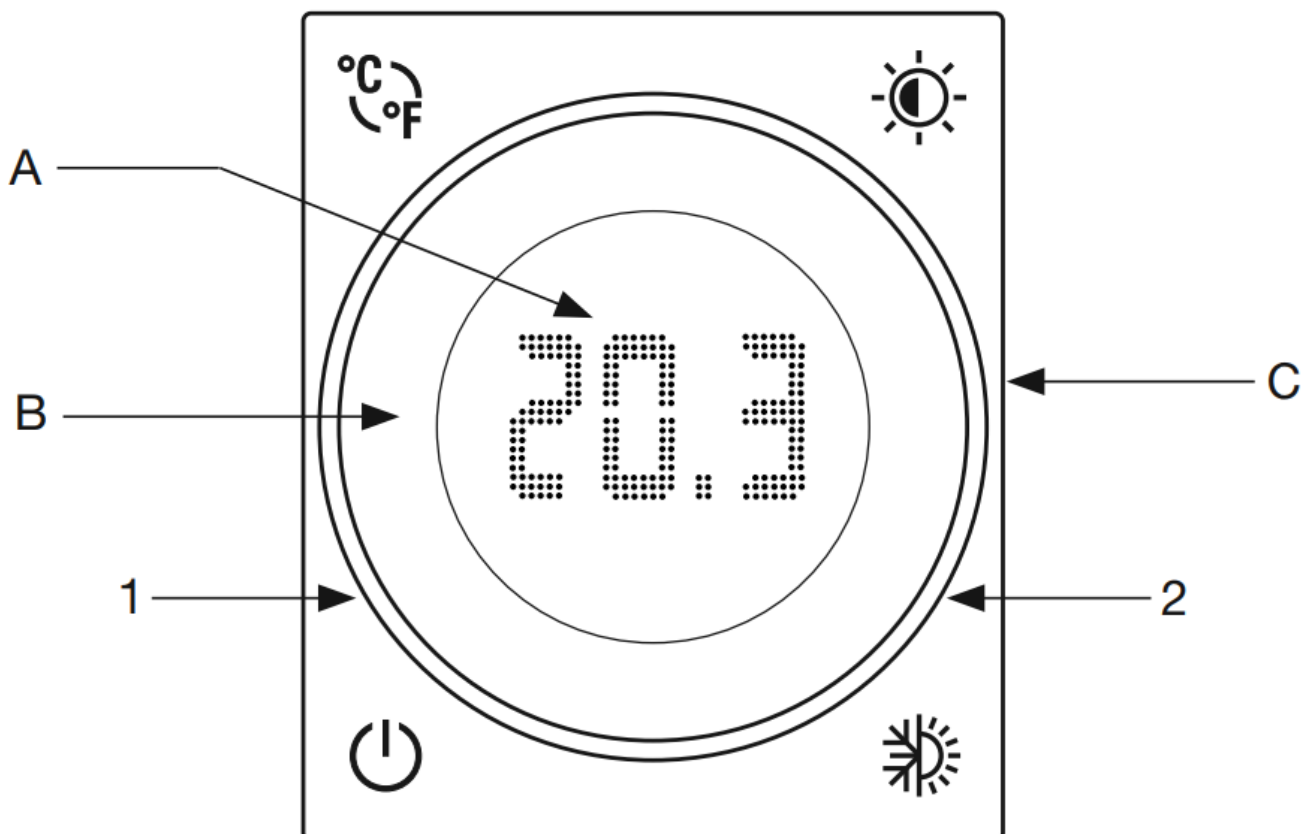OVERVIEW



	<ul style="list-style-type: none"> • Short press = degrees Celsius/Fahrenheit selection • Long press (5 s) = the thermostat enters the configuration phase (bt) • Prolonged press (30 s) within the first 5 min of powering = device reset (rst)
	<p><i>Display brightness and RGB LED in standby setting</i></p> <ul style="list-style-type: none"> • 1st press = current brightness display • Subsequent presses = cyclic display of available brightness values L-3 (high), L-2 (medium), L-1 (low) and L-0 (off).
<p>A</p>	<p><i>Display</i></p> <ul style="list-style-type: none"> • bt = devices in Bluetooth configuration • off = thermostat off; on = thermostat on • °C = degrees Celsius; °F = degrees Fahrenheit • L-0, L-1, L-2, L-3 = brightness in standby (from the lowest to the highest) • H = heating; C = air conditioning • opn = open window (associated with the thermostat via magnetic contact art. 03980)
<p>B</p>	<p>Dial</p>
<p>C</p>	<p>Light able ring</p>
	<ul style="list-style-type: none"> • Power on and off. <p>Upon power on or off, the thermostat starts in the last operating mode associated with it set via the View* App or View Wireless* App.</p>
	<ul style="list-style-type: none"> • Heating or air conditioning mode selection.

* Only for Bluetooth technology

Ring signalling

All flashing blue = thermostat in configuration mode	
All lit amber* = thermostat in heating mode and relay active	
All lit blue** = thermostat in air conditioning mode and relay active	
1	<ul style="list-style-type: none"> Lit amber * = thermostat in heating mode and relay not active Lit blue ** = thermostat air conditioning mode and relay not active In standby, the brightness is set during configuration; otherwise, the value is the maximum one.
2	<ul style="list-style-type: none"> Flashing red = the thermostat, in automatic mode, has lost the hourly value and has therefore switched to manual mode. When it receives the hourly value from the gateway again, the thermostat returns to automatic mode and the flashing ends.


* Amber with automatic colour or of the selected colour.

** Blue with automatic colour or of the selected colour.

Summary of Zigbee technology mode signalling.








Colour of the ring	Display	Meaning
Flashing white (for max 5 min.)	Measured Temperature	Active pending Hub association
Flashing blue (for max 2 min.)	bt	Pending receipt of a fw update
Blue permanent	bt	Device associated via Bluetooth with the smartphone
Flashing amber (for max 2 min.)	H	Heating temperature calibration
Flashing cyan (for max 2min.)	C	Cooling temperature calibration
Flashing cyan for three times		Save Calibration
Fixed current color (for max 2 min.)	Le3	Ring color setting
Flashing for three times		Save ring color
Flashing green quickly 3 times		Device correctly associated with the Smart Hub


RESETTING THE THERMOSTAT


The reset restores the factory settings. Within the first 5 minutes of powering, press  for 30 s; during these 30 s the ring flashes blue and then emits 2 white flashes to confirm the operation.

THERMOSTAT DATE/TIME SETTING

In the event of a mains voltage outage, if the thermostat is configured in Stand alone and the “ON Mode”-“Automatic” is set, the date and time can be inserted directly on the device without using the App.

1. Press  ; you have entered the "Time entry" phase; during this phase, keys   , and  are not operational.
2. Turn the ring and display the number representing the desired day of the week (1=Monday, 2=Tuesday, 3=Wednesday and so on).
3. Confirm by pressing  ; now proceed and set the time.
4. Turn the ring and display the number representing the hours (00, 01, 02 and so on all the way to 23).
5. Confirm by pressing  ; now proceed and set the minutes.
6. Turn the ring and display the number representing the minutes (00, 01, 02 and so on all the way to 59).
7. Confirm by pressing  ; the thermostat returns to the state it was in before the blackout and the display and part 2 of the ring stop flashing.

N.B. During the selection phases, the display and part 2 of the ring flash and key  flashes red. If no selection is made within 2 minutes, the thermostat quits the procedure.

To change the time without a blackout press  for 5 s and perform the procedure from point 1 to 7 above.

INSTALLATION RULES



- Installation and configuration must be carried out by qualified persons in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.
- The C-NO contact of the relay must be protected against overloads by installing a device, fuse or automatic 1-way switch, with a rated current not exceeding 10 A.
- Do not connect a SELV circuit to the C-NO terminals as there is no double insulation on the L-N terminals
- The device must be installed in a flush mounting box or surface mounting box with the related mounting frames and cover plates, at a height of 1.5 m above floor level, in a suitable position for the correct detection of the room temperature, avoiding installation in recesses, behind doors and curtains, areas affected by heat sources or subject to the flow of forced heating/ cooling ventilation sources or affected by atmospheric factors. Avoid in particular installation on perimeter walls or in association with devices which generate heat (e.g. dimmers or lamps).

CHARACTERISTICS

- **Rated supply voltage:** 100-240 V~, 50/60 Hz.
- **Dissipated power:** 0.55 W.
- **RF transmission power:** < 100mW (20dBm).
- **Frequency range:** 2400-2483.5 MHz.
- **Terminals:**
 - 2 terminals (L and N) for line and neutral

- 2 terminals for external temperature probe (art. 02965.1 and 20432-19432-14432) Maximum length of the external sensor connection cable: 10 m. Use a twisted cable with a minimum cross-section of 0.5 mm² (art. 01840).
- 2 C-NO relay terminals.
- **Relay output with voltage-free contact:** 5(2) A 240 V~
- **Input for external sensor (art. 02965.1-20432-19432-14432) with the following functions:** XX
 - replacement of the internal sensor
 - average with the internal one
 - screed temperature limitation
- Current settable setpoint: 4°C – 40°C.
- **Temp. measurement precision (integrated probe):** 0.5°C between +15°C and 30°C, 0.8°C at the extremes
- For use for Heating/Air Conditioning (winter/summer).
- **Operating modes:** Automatic, Manual, Reduction, Absence, Protection, Off, Timed Manual
- **Temperature control algorithms:** ON/OFF or configurable PID
- 4 front buttons for control and configuration/reset
- RGB LED for configuration status (flashing blue) and output status (configurable colour) signalling
- Operating temperature: T40 (0 °C +40 °C) (indoor use)
- Protection degree: IP30
- **ErP classification (EU Reg. 811/2013):** – ON/OFF: class I, contribution 1%. – PID: class IV, contribution 2%.
- Device in class II
- **Number of manual cycles:** 3,000
- **Number of automatic cycles:** 100,000
- **Type of contact opening:** micro-disconnection
- **Type of action:** 1BU
- **Tracking index:** PTI175
- **State of pollution:** 2
- **Rated pulse voltage:** 4000 V
- **Software class:** A
- **Reading resolution:** 0.1 °C
- **Settings resolution:** 0.1 °C
- **Update of temperature displayed:** every 10 s
- **Room temperature display:** 0 °C +40 °C
- **Hysteresis adjustable via App:** from 0.1 °C to 1 °C
- Hourly temperature setting (via App)
- **Room temperature during transportation:** -25 °C +60 °
- **Clock error:** ≤ 1 s per day
- With the View Wireless App, the Installer configures the thermostat and creates climate control programmes.
- With the View Wireless App and the View App, the Administrator creates or modifies climate control programmes.
- Controllable via View App, Alexa, Google, Siri and Homekit voice assistant for.

OPERATION IN Bluetooth technology MODE

In Bluetooth technology mode, the device should be configured using the View Wireless App.

The App can be used to set the following parameters:

- **Lighting in standby:** high, medium, low, off; default = medium
 - **Circular ring indication selection:** automatic or monochrome; default = automatic
 - **RGB colour selection:** in the event of monochrome, possibility of setting the colour
 - **Temperature calibration for heating:** between -5°C and +5°C with default = 0°C
 - **Temperature calibration for air conditioning:** between -5°C and +5°C with default = 0°C
 - **External probe use:** deactivated, average with the internal one, replacing the internal one; default = deactivated
 - **Relay output status:** normally open, normally closed; default = normally open
 - **Control type:** On/Off, PID; default = On/Off
 - **Hysteresis for On/Off control:** between 0.1°C and 1°C; default = 0.2°C
 - **Proportional band for PID control:** between 0.5°C and 5°C; default = 3°C
 - **Integrative time for PID control:** between 5 min and 120 min; default = 20 min
 - **Derivative time for PID control:** between 0 and 255 s, disabled; default = 0
 - **Cycle time for PID control:** between 10 min and 30 min; default = 10 min
- The View Wireless App can also be used to associate a magnetic or wired contact of art.

03980 to turn off the temperature control system in the event of an open window; in this case, the time for reaction and reactivation of contact opening and closing can be set:

- **Reaction time:** between 0 minutes (instantaneous) and 30 minutes; default = 0 minutes
- **Reactivation time (time after which the thermostat is reactivated even without closing the window):** between 0 (disabled) and 12 hours; default = 1 hour.

The View App can be used to set:

- Time schedules (times and temperature levels T1, T2 and T3)
- Setpoint for all operating modes (Manual, Reduction, Absence, Protection)
- **Manual operation time:** between 1 min and 23 hours (with 1-min steps); default = 60 min
- Screenshot, exclusive Temp. ext, average functions.

OPERATION IN Zigbee technology MODE

In zigbee technology, associate the device directly to a ZigBee Gateway (e.g. Amazon Echo Plus, SmartThings Hub). The following parameters could be set:

- **Standby lighting:** high, medium, low, off; default = medium
- **Ring indication selection:** automatic or monochrome; default = automatic
- **RGB colour selection:** in the monochromatic case, the color can be set
- **Temperature calibration for heating:** from -5°C to +5°C; default = 0°C
- **Temperature calibration for cooling:** from -5°C to +5°C; default = 0°C

USE

The front buttons, the display, the dial and the lighting of the circular ring around the display can be used to set and display all the operating modes of the thermostat.

Use the dial to set a new setpoint. In particular, for operation in Bluetooth technology:

- in automatic operating mode, turn the dial for the thermostat to switch to manual operation for a period of time which can be set on the View App;
- in manual operation or reduction mode, the thermostat remains in this mode and the setpoint is that set on the dial.

REGULATORY COMPLIANCE

RED Directive. RoHS directive. ErP directive.

EN 60730-2-7, EN 60730-2-9, EN 301 489-17, EN 300 328, EN 62479, EN 63000 standards.


Vimar SpA declares that the radio equipment complies with Directive 2014/53/EU. The full text of the EU declaration of conformity is on the product sheet available on the following website:

www.vimar.com Temperature control device regulation (EU) no. 811/2013.

REACH (EU) Regulation no. 1907/2006 – Art.33. The product may contain traces of lead.

CONNECTIONS

Circulation pumps, burners, solenoid valves and temperature probe

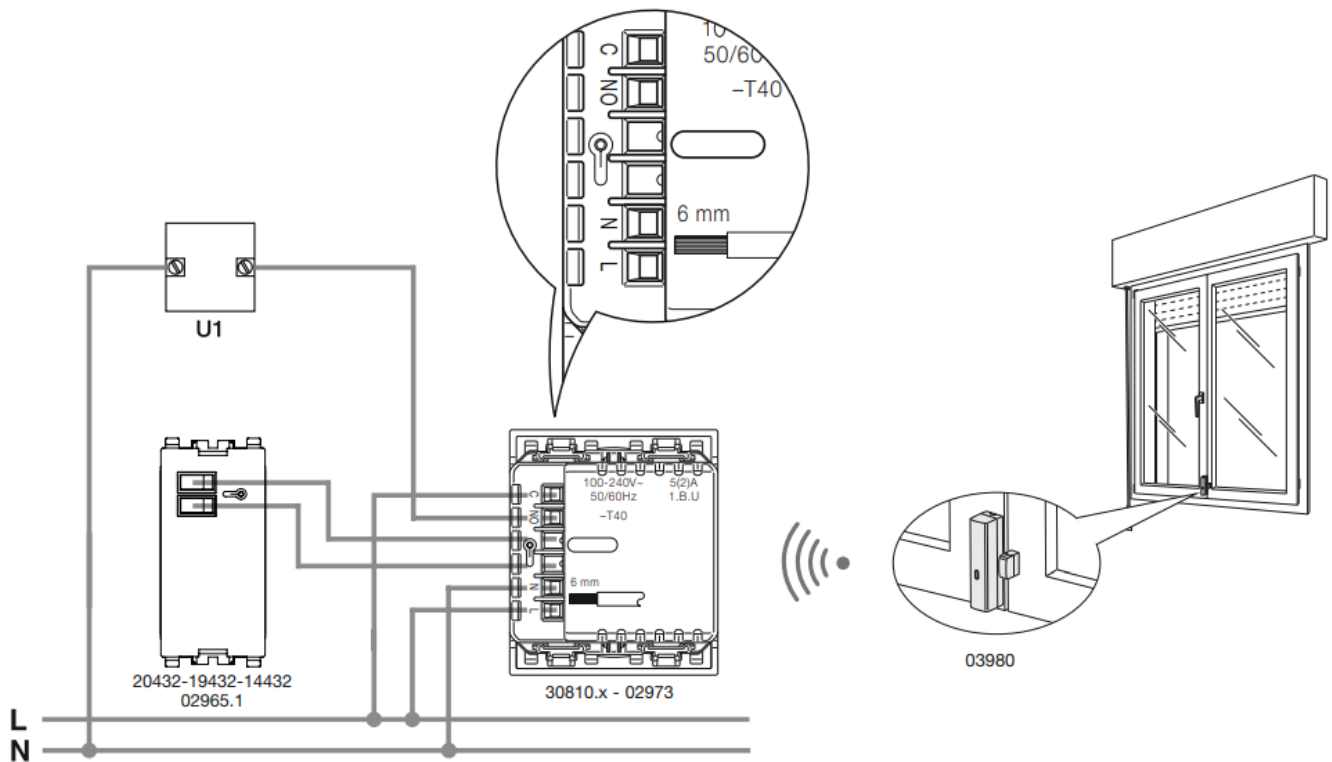

CUSTOMER SUPPORT

Viale Vicenza 14
36063 Marostica VI – Italy
30810.x-02973 04 2311

www.vimar.com



VIMAR

Documents / Resources



[VIMAR 30810.x-02973 Smart Home View Wireless Connected Dial Thermostat](#) [pdf] Instruction Manual

30810.x-02973, 30810.x-02973 Smart Home View Wireless Connected Dial Thermostat, Smart Home View Wireless Connected Dial Thermostat, View Wireless Connected Dial Thermostat, Wireless Connected Dial Thermostat, Dial Thermostat, Thermostat

References

- [Amazon.com](#)
- [Home automation, electrical equipment, smart home - Vimar energia positiva](#)
- [Home automation, electrical equipment, smart home - Vimar energia positiva](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.