



VITEC 6899171328085 MGW Nano Encoder Owner's Manual

[Home](#) » [VITEC](#) » VITEC 6899171328085 MGW Nano Encoder Owner's Manual 



6899171328085 MGW Nano Encoder
Owner's Manual



Portable MPEG-4 H.264 encoding and streaming appliance featuring Full HD processing, HD/SD-SDI and HDMI inputs, KLV/STA NAG metadata support and Error-free content delivery using Zixi™ technology and ProMPEG FEC.

Contents

- [1 Technical Specifications – General](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)

Technical Specifications – General

Video Inputs

- 1 x HD-SDI/SD-SDI (SMPTE 259M-C, SMPTE 292M, SMPTE 274M, SMPTE 296M, SMPTE 424M, SMPTE 425M)
- 1 x HDMI (support for HDCP and non-HDCP protected sources)

Input Resolutions/frame rates:

1920x1080p @ 60, 59.94, 50, 30, 29.97, 25, 24 Hz
 1920x1080i @ 60, 59.94, 50 Hz
 1600x1200p @ 85, 60, 50 Hz
 1366x768p @ 60, 50 Hz
 1280x800p @ 60, 50 Hz
 1280x768p @ 60, 50 Hz
 1024x768p @ 60, 50 Hz
 1280x720p @ 60, 59.94, 50, 30, 29.97, 25 Hz
 720x480p @ 30, 29.97 Hz
 720x480i @ 59.94 Hz
 720x576p @ 25 Hz
 720x576i @ 50 Hz

Audio Inputs

- 1 x SDI Embedded audio (Stereo and Mono)
- 1 x HDMI Embedded audio (Stereo and Mono)

Video Output

- H.264 (ISO/IEC 14496-10 AVC MPEG-4 part 10). Modes:
 - o Baseline Profile L3
 - o Main Profile L3 and L4
 - o High Profile L4 and L4.1
- Bit Rate: 100 Kbps – 14 Mbps
- Frame Rate: 5-60 fps. Down sampling modes: third, half, three quarters
- Bit Rate Regulation Modes: Constant (CBR), Variable (VBR)
- Output Resolutions: Configurable from QCIF up to 1920 x 1080 p 30/1280 x 720 p 60
- Encoding Latency: 65 milliseconds (Turbo Video™ mode)

Audio Output

- MPEG-4 AAC-LC (ISO/IEC 14496-3), MPEG-1 L2
- Stereo and mono modes
- Bit Rate: 32Kbps – 256Kbps in Stereo, 16Kbps – 128Kbps in Mono
- Sampling Rate: 16 kHz – 48 kHz

Network Protocols

- Streaming:
 - o UDP, RTP, RTSP, SAP, MPEG-2 Transport encapsulation, unicast and multicast modes
- Error Correction:

- o Zixi™ technology for up to 30% packet loss recovery
- o SMPTE-2022 ProMPEG Forward-Error-Correction (FEC)
- Peripheral:
 - o HTTPS, DHCP, NTP, SSH, SAP

Management

- Secure Web based remote management interface (HTTPS)
- Dashboard with dynamically updating I/O signal detection and streaming stats
- SSH interface with “get/set” or XML API for integration with 3rd party control software
- Autostart mode recovers saved configuration after power cycle
- Remote firmware and software upgrade capability via command line
- System and channel event logging

Security

- Real-time AES encryption for video, audio and metadata. Interoperability with EZ TV and FITIS systems.
- Password protected HTTP and CLI control interfaces

Metadata

- CoT over serial RS-232, KLV over IP, KLV over SDI (VANC per SMPTE 336M)
- UAS Datalink Local Metadata Set (MISB STD 0601.5, STD 0902)
- Time Stamping and Transport of Compressed Motion Imagery and Metadata (MISB STD 0604.2)
- Cursor on Target (CoT) Conversions to Key- Length-Value (KLV) Metadata (MISB EG 0805)
- Security Metadata Universal and Local Sets for Digital Motion Imagery (MISB STD 0102.8)
- STANAG 4609 output stream over UDP/IP

Environmental/Regulation

- Operating Temperatures: -20° C to +50° C (-4° F to +122° F)
- Relative Humidity: 5% to 95% (non-condensing)
- MTBF: Ground – 9.00 years. Airborne – 12.70 years (As per MIL-HDBK-217F)
- EMC Standards: FCC part 15 class A and CE
- Power: 12VDC, 10W
- Not controlled under ITAR
- TAA Compliant

Physical

- 1.34” H x 5.51” W x 4.65” D (34.00 mm H x 140.00 mm W x 118.00 mm D)
- Weight: 0.948 lb (0.430 kg)
- Enclosure: Industrial-grade aluminum case, rack-mount kit available as add-on
- Status LED's for power, network activity, streaming and video source indications

- Fan-less, no moving parts design, 100% silent operation
- Mounting holes for seamless installation in vehicles/flat surface


Advanced Features

- Low latency HD streaming from SDI or HDMI sources with metadata
- Hardware based resolution and frame rate scaling
- Real-time image stabilization and image cropping (Area of Interest isolation)
- Motion-adaptive adjustment of bit-rate utilization in static scenes
- Built-in Zixi and PromPEG FEC Error correction technologies

Ordering Information

18478 → MGW Nano HD
18479 → MGW Nano HD TS (UDP TS only)

Rear Panel Interfaces

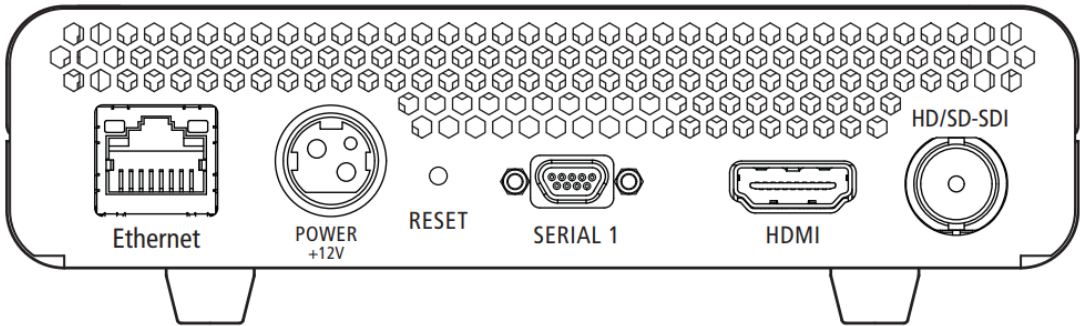

USA, East Coast 3174 Marjan Drive ATLANTA, GA 30340 USA T: +1-(404)-320-0110 E: atlanta@vitec.com	USA, West Coast 931 Benecia Avenue SUNNYVALE, CA 9 USA T: +1-(800)-451-5100 E: sunnyvale@vitec.com
GERMANY Lise-Meitner-Str.15 24223 SCHWENTINENTAL Germany T: +49-(0)4307-8358-0 E: germany@vitec.com	UNITED KINGDOM LONDON, UK T: +44-79-71-54-25 E: uk@vitec.com

©VITEC. All rights reserved. VITEC, the VITEC Logo, MGW Pico, MGW Pico TOUGH, MGW Nano, MGW Nano Tough, MGW Sprint, MGW Premium, MGW Ace, MGW D265, MGW Diamond-Hx OG, Turbo Video are either trademarks or registered trademarks of VITEC. All other trademarks are property of their respective owners. The information herein is accurate at the timing of printing and subject to change without notice. Rev W Q12022

Documents / Resources

 The image shows a small, dark-colored electronic device, the MGW Nano Encoder, with a blue and white graphic above it. Below the device are several small circular icons and the VITEC logo at the bottom right.	VITEC 6899171328085 MGW Nano Encoder [pdf] Owner's Manual 6899171328085 MGW Nano Encoder, 6899171328085, MGW Nano Encoder, Nano Encoder, Encoder
--	--

References

- [VITEC - IPTV, Video Streaming & Digital Signage Solutions](#)

Manuals+.