


VTOMAN
JS-211
Jump
Starter



VTOMAN JS-211 Jump Starter User Manual

[Home](#) » [VTOMAN](#) » VTOMAN JS-211 Jump Starter User Manual 

Contents

- 1 VTOMAN JS-211 Jump Starter
- 2 PRODUCT OVERVIEW
- 3 PACKAGE CONTENT
- 4 INSTALLATION
- 5 Steps to Use the Air Inflator
- 6 Technical Specification
- 7 FAQ
- 8 Your Warranty Includes
- 9 Documents / Resources
 - 9.1 References


VTOMAN

VTOMAN JS-211 Jump Starter






Product: X1
Model: JS-211

PRODUCT OVERVIEW

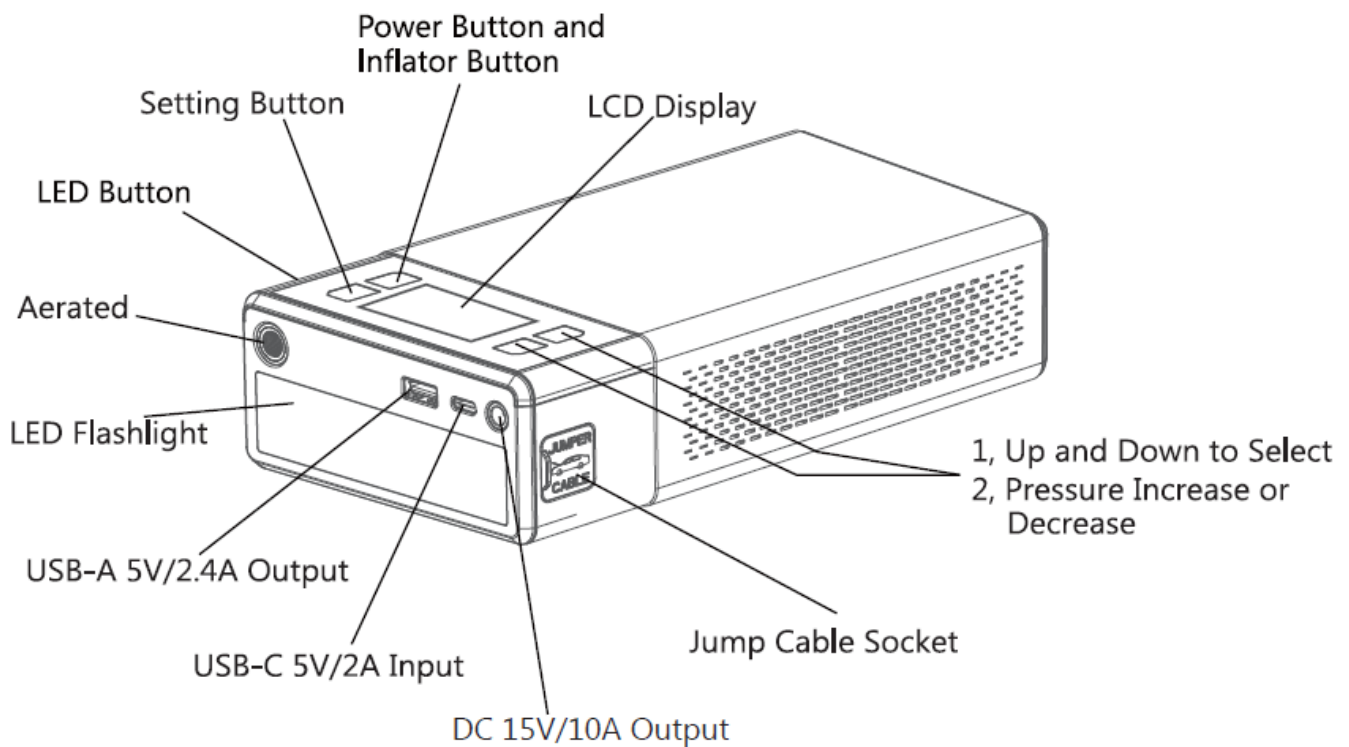

PACKAGE CONTENT

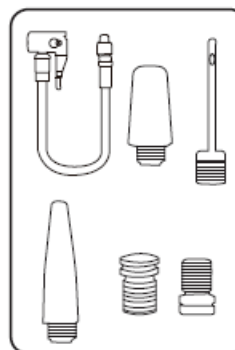
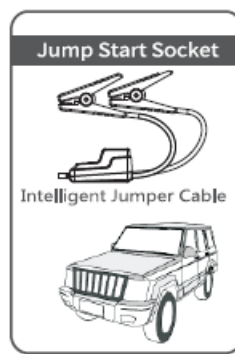


INSTALLATION

How to Start a 12V Vehicle (Make sure the battery power>2 bars)

Note: Do not press the “BOOST” button on the jumper cable before connecting the vehicle battery correctly.



1. Insert the blue end of the battery clip into the hose machine while making sure that the indicator on the clip is off.
2. Connect the clip correctly respectively to the positive and negative ends of the car battery, where the red clip connects to the positive pole of the battery (+) and the black one connects to the negative pole (-).
3. Then operate following the instructions below in accordance with the state of the indicator

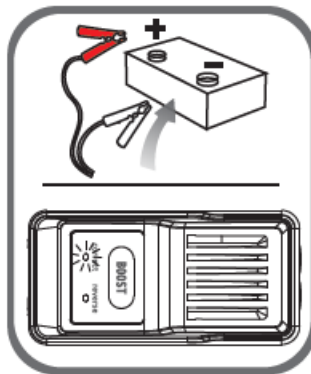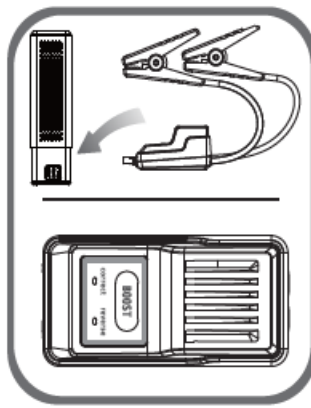

Solid red light: This indicates that the positive and negative terminals are incorrectly connected. Please reconnect them correctly, and once the green light turns solid, proceed with the emergency jump-start.


Flashing green light: This indicates that the battery voltage is too low. Press the BOOST button, and once the green light turns solid, complete the jump-start within 30 seconds.

No red or green light: This may indicate that the battery is completely damaged. Ensure the positive and negative terminals are correctly connected, then press the BOOST button. Once the green light turns solid, complete the jump-start within 30 seconds.



4. Rotate the car's starting switch to the position of START.
5. Remove the battery clips after the car is started.

Steps to Use the Air Inflator

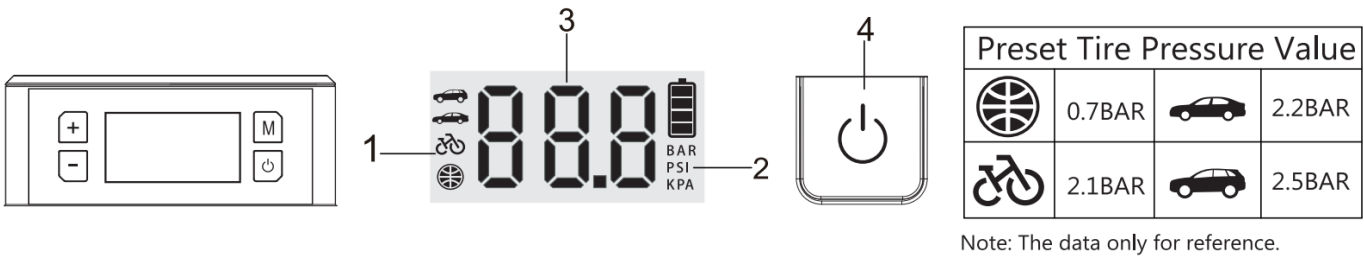

Power on, short press the “M” key to start to set the air inflator.

1. Press the “M” key once, the icon on the far left flashes, and then press the “+” or “-” keys to switch between “basketball”, “bicycle”, “car” and “SUV” icon.
2. Press the “M” key twice, the pressure unit icon flashes, and then press the “+” or “-” keys to switch between “BAR”, “PSI”, and “KPA”.
3. Press the “M” key again, the current target pressure value flashes, and then press the “+” or “-” keys to adjust the target pressure value.
4. After selecting the inflating mode, the inflation function can be turned on by short pressing the power switch key once.

How to Turn On/Off the LED Flashlight

Simply press the button once to turn on the LED light function, each time you press the button to switch the light mode, there are three light modes for you to choose. (Normal, Strobe, SOS)

How to Turn this unit on and off

Press and hold the power button for two seconds to turn on the device, and press and hold the power button again for two seconds to turn off the device. Also, when the device is not in use, it will automatically shut down in 30 seconds.

Toxic and Harmful Substances

Composition and amount of toxic or harmful substance in this product

Pb	Hg	Cd	Cr(Vi)	PBB	PBDE
0	0	0	0	0	0

0: Indicate that the content of harmful substances in all homogeneous materials is all lower than the prescribed limit of MCV (the standard 2002/95/EC/RoHs)

Package Content

#	Part Name	Quantity
1	Host	1
2	Smart Jumper Cable	1
3	USB-A to USB-C Cable	1
4	Carrying Bag	1
5	Pump Tube	1
6	Air Nozzle	5
7	User Manual	1

Technical Specification

Capacity	44.4Wh
Starting Current	400A (3s)
Peak Current	2500A
USB-C In	5V/2A
USB-A Out	5V/2.4A
DC Out	15V/10A
Operating Temp	-20°C ~ 60°C /-4°F ~140°F
Life time	> 1000 Cycles
Full Charge Time	6-8 hours (5V/2A Charger)

FAQ

What is the operating temperature of this unit and how to store it?

This unit is lithium polymer battery, operating temp is -20-60 °C -4-140°F. If the ambient temperature is higher than 60°C 140°F, the internal construction of the battery cells may be damaged, it may swell and become unsafe. So don't store the device in vehicle which parked in hot weather for long periods of time.

How to start a vehicle with this unit?

Please refer to the instructions about How to Start a 12V Vehicle

How do you know if this unit is connected to the vehicle correctly?

With the battery clamps connected to the vehicle battery, when the LED indicator on the jumper cable shines a steady green light, it means it's connected correctly. If red light illuminates solid with beeping, it means it's reverse connection.

Can this unit charge other devices while it is being charged?

Yes.

Can this product charge other devices while starting a vehicle?

No.

How often does this unit need to be recharged?

It would be best to recharge it every 3 months.

Why it shuts off in 30s when charging other devices?

This unit may shut off automatically when charging for the devices that need light charging current, such as headphone, smart watch, etc since there is minimum load current limitation 200mA on this unit, it will be automatically off after 30s if the load current is less than 200mA.

Q: What should I do if this unit can't start a vehicle?

A: Recharge this unit fully, and try to press the "BOOST" button on the jumper cable after connecting the vehicle battery correctly, the LED indicator illuminates steady green light, then start the vehicle within 30s. If it still does not work, contact us at: support@toman.com (Attach your order ID).

Q: What should I do if this unit can't charge up?

A: Charge it with a usb-c cable and wall charger for a full overnight period. If it still does not work, contact us at: support@vtoman.com (Attach your order ID).

Q: What should I do if this unit can't charge other devices?

A: Try to charge the device with another charging cable, If it works, which means the charging cable we provided is defective, we will provide you a new one; If it still does not work, please email us at: support@vtoman.com (Attach your order ID).

Warning

1. Please read this user manual carefully before using this machine.
2. Please be careful when using this machine. If you do not follow the instructions, you may injure yourself or damage the equipment or vehicle battery.
3. Do Not allow people who do not have proper knowledge or ability to operate the device without supervision.
4. Do Not use this unit as a toy. Keep it away from children to avoid accident.
5. This unit work for vehicles (equipment) with 12V battery, doesn't for vehicles with non-12V battery. It is forbidden to be used in other machines, such as airplanes and ships.
6. Do Not use this unit when any cable, clamp, or cord was damaged or when this unit was overheated, swelled or leaking fluid.
7. Do Not use it as a vehicle battery or a battery charger.
8. Do not use the unit to start a vehicle while charging the internal battery.
9. Only use the battery clamps provided to start vehicle and the qualified charger to charge this unit.
10. Don't over-discharge the unit (don't let the battery run out), charge it regularly, it would be best to recharge it every 3 months.
11. Make sure the blue plug of the jumper cable is plugged fully into the battery clamps output port, otherwise, the blue plug could be melt.
12. Make sure the battery terminals are clean before starting up, and make sure the battery clamps are well connected. If the battery terminals on the vehicle are dirty or corroded, the output power of the unit will decrease.
13. Do not start the product for more than three consecutive times, as this may cause it to overheat and damage the product. If you need to start the product multiple times, please make sure to wait for two minutes between each start-up.
14. Do Not connect the jump starter's clamps to the battery reversely after pressing the "BOOST" button to avoid accident.
15. Use this unit to start the vehicle when the battery power is more than 2 bars.
16. Do Not recharge this product immediately after starting the vehicle, please let it cool for 30 minutes before recharging it.
17. Do Not let the product be immersed in water
18. Do not operate this product in an explosive environment, such as a place where flammable liquid, gas or dust exists.
19. Do not modify or disassemble this machine. Only service technicians can repair this equipment.
20. Do not expose the product to extreme heat or fire.
21. Do not drop or squeeze the device. If the device is hit hard or damaged in any other way, it should be inspected by a qualified battery technician.
22. Do not store in places where the temperature may exceed 60°C/140°F.
23. Only charge at ambient temperature of -10~45°C/14~113°F.
24. Under extreme conditions, the battery may leak. If there is a liquid leak from the device, do not handle it with bare hands. If there is skin contact, wash immediately with soap and water. If the liquid accidentally touches the

eyes, immediately rinse the eyes with water for at least 10 minutes and seek medical help.

25. The device contains a lithium battery. At the end of the product's service life, or if the device leaks liquid, dispose of the device according to local regulations.

Your Warranty Includes

- 18 Months Online After-sales service

Within 18 months, we will provide timely and effective online after-sales service after your purchase.

- 30 Days Money Back Guarantee

Within the first 30 days after your purchase, you can apply return for it when you have any product issue.

- 30 Days to 18 Months

We will replace the defective unit due to manufacturing issues with a new one within 18 months.

Disclaimer

- When the product needs to be repaired or replaced, the original purchaser should show the original receipt (order ID), and the warranty will take effect.
- The warranty does not cover damage or product failures caused by normal wear and tear, physical abuse, improper installation, misuse, modification, or unauthorized third-party repairs.
- We are not responsible for any accidental or indirect damage caused by incorrect use or misuse of this product.
- All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of vtoman.

ATTENTION



Do Not Submerge In Water



Do Not Disassemble



Do Not Drop



Avoid Extreme Temperatures



Do Not Place Near or Into Fire



Overcharge/discharge
Protection



Fuse Protection



Against-reverse
Plug

Customer Service

18 Months Limited Warranty Service
Lifetime Technical Service

Feel Free to Contact Us
Support@vtoman.com


For FAQ and More Information
Support@vtoman.com

Thank You for Choosing Us



Made in China

Documents / Resources



[VTOMAN JS-211 Jump Starter](#) [pdf] User Manual
JS-211 Jump Starter, JS-211, Jump Starter, Starter

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.