



# Waterdrop WD-G2CF Pre Sediment and Carbon Block Filter Instruction Manual

[Home](#) » [Waterdrop](#) » Waterdrop WD-G2CF Pre Sediment and Carbon Block Filter Instruction Manual 


## Waterdrop WD-G2CF Pre Sediment and Carbon Block Filter



## Contents

- [1 Pre-sediment and Carbon Block Filter \(CF\)](#)
- [2 Getting Started](#)
- [3 Storage and Maintenance](#)
- [4 Frequently Asked Questions:](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## Pre-sediment and Carbon Block Filter (CF)

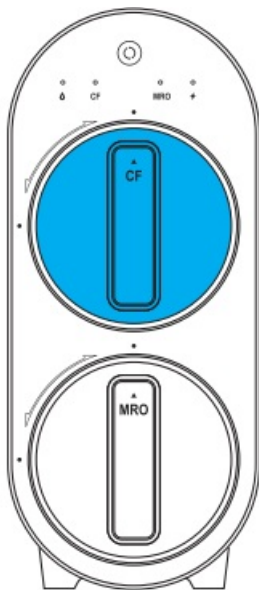

### Model: WD-G2CF

Replacement for the following water filtration system:  
Waterdrop G2 Reverse Osmosis Water Filtration System


**Filter Use:** Up to 12 months or 1,100 gallons, whichever comes first. This may vary depending on filtered water consumption.

**Note:** This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

## Getting Started


With the leak-free design, filters could be replaced directly without cutting off power and water. No tool is required.

1. Before removing the filter, please turn off the faucet first and wait for 30s to fully release the internal pressure of the RO machine, which makes the filter easier to remove and install.
2. Twist off the filter counterclockwise (Figure 1);

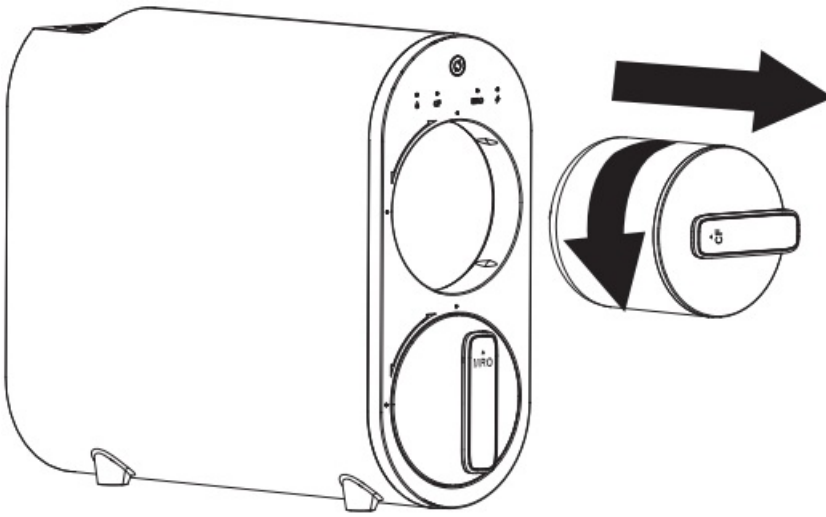


**NOTE:** The CF filter is relatively short. When removing the filter, it is recommended to hold the filter with one hand, while rotating and removing the filter with the other hand, in order to prevent the filter from falling out of the system.


3. Remove the shrink wrap and protective cap from the new filter;
4. Insert the filter into the top hole, aligning the arrow with the empty circle on the housing (Figure 2);

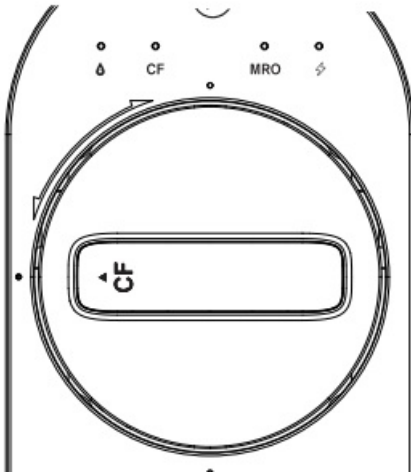

5. Apply slight forward pressure to the filter and rotate it a 1/4 turn clockwise, until the arrow is aligned with the solid circle on the housing. You may hear a click when the filter is fitted properly (Figure 3);

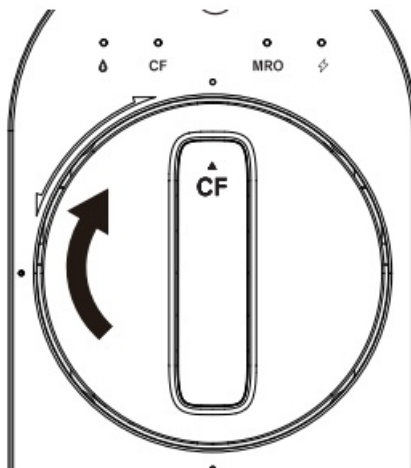

6. Reset the CF filter with reference to the following steps.
  1. Press the filter life reset indicator for 5 seconds (Figure 4). ( Release the indicator when you hear a beep. Now filters are ready to be reset;

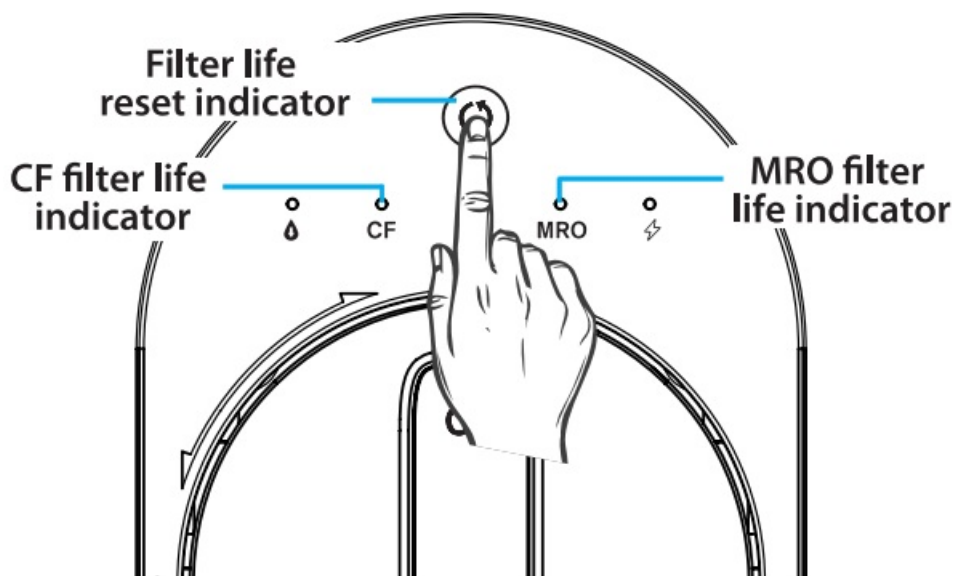

2. Press the reset indicator and choose the CF filter (there is no need to choose if only one filter expired). The CF filter life indicator will flash when it is selected;
3. Press the reset indicator for 5 seconds again. The reset is completed when you hear a beep. The CF filter life indicator will be permanent blue.

**NOTE:** Please do NOT wait longer than 3 seconds between each steps, otherwise the unit may exit the reset mode before it's complete.

7. Turn on the RO faucet to flush for 5 minutes, until the filtering indicator is permanent blue.

## Storage and Maintenance

- Please replace the filter regularly according to the filter life indicator reminder. Stored filters do not expire. Keep your unused filters in a cool, dark, and dry place. The water source should meet the requirements of municipal tap water.
- It is recommended not to expose the unit to direct sunlight.



### Warning:

- To reduce the risk of property damage due to water leakage, this filter **MUST** be installed in accordance with the manufacturer's specifications and instructions.
- Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product.

## Frequently Asked Questions:

### Q: Does the filter have to be replaced every 12 months?

**A:** Yes. The filter must be replaced regularly. Otherwise, the water flow rate and water quality may be negatively affected. In addition, the life of the filter depends on both the filtration capacity and usage time. As long as one of the factors reaches the limit, the indicator will notify you to replace the filter. If you consume a large amount of water daily, you may need to replace the filter within 12 months.

### Q: What will happen if I do not change my filter when the filter life indicator light turns red?

**A:** Excessive use of the filter will reduce the filtration performance, causing contaminants to leak back into the water, which will affect your health. If the filter life indicator flashes or the faucet indicator turns red, it is recommended that you replace the filter immediately.

**Q: Why is the filter life indicator still red after the filter has been changed?**

**A:** You may have forgotten to reset the filter life indicator. Please reset it again: Press and hold the filter life indicator for 5 seconds until the system beeps and the blue light stays on.

### Manufacturer Technical Support

Tel: 1-888-352-3558 (U.S.)

E-mail: [service@waterdropfilter.com](mailto:service@waterdropfilter.com)




Made in China V040

Qingdao Ecopure Filter Co., Ltd

---

## Documents / Resources

|  |   |
|--|---|
|  | <p><a href="#">Waterdrop WD-G2CF Pre Sediment and Carbon Block Filter</a> [pdf] Instruction Manual<br/>WD-G2CF Pre Sediment and Carbon Block Filter, WD-G2CF, Pre Sediment and Carbon Block Filter, Sediment and Carbon Block Filter, Carbon Block Filter, Block Filter, Filter</p> |
|--|---|

## References

- [User Manual](#)