



Waterdrop WD-PF-01A Plus Pitcher and Dispenser Replacement Filter Instruction Manual

[Home](#) » [Waterdrop](#) » Waterdrop WD-PF-01A Plus Pitcher and Dispenser Replacement Filter Instruction Manual



Waterdrop WD-PF-01A Plus Pitcher and Dispenser Replacement Filter Instruction Manual



Filter life: Up to 200-gallon capacity. The actual result may vary according to the local water quality.



REPLACEMENT ELEMENT

Tested and Certified by NSF International against NSF/ANSI Standard 42 in Model WD-PF-01A-S for the reduction of the claims specified on the Performance Data Sheet, and to NSF/ANSI 372 ($\leq 0.25\%$ lead),


Contents

- 1 Installation instructions
- 2 Frequently asked questions
- 3 Q: Why does the water flow get slow?
- 4 Q: Why does the water taste bad?
- 5 Q: Why are there fine particles on the surface of the filter?
- 5.1 Performance data sheet
- 5.2 Substance reduction:
- 5.3 Manufacturer Technical Support
- 5.4 Documents / Resources
 - 5.4.1 References
- 5.5 Related Posts

Installation instructions


Step 1 Remove the old filter.

Step 2 Take out the new filter from the package. Soak the filter in cold water for 10 minutes. **[figure 1]**

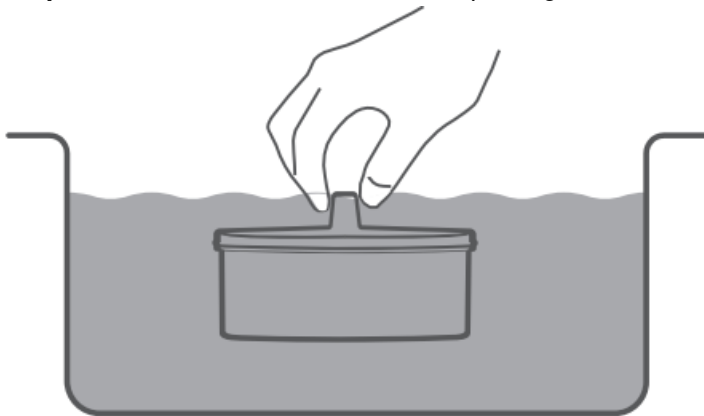

[figure 1]

Step 3 Install the new filter into the reservoir to ensure a tight seal. **[figure 2]**

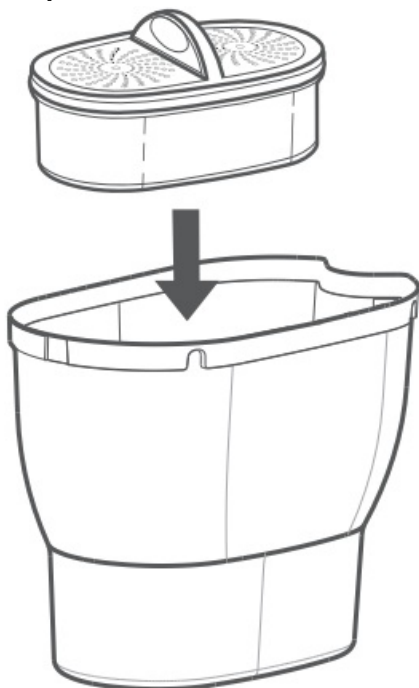

[figure 2]

Step 4 Fill the reservoir with cold tap water. Discard the first two pitchers of filtered water.

Step 5 Hold the button for 5 seconds until the blue light flashes to activate the filter life indicator. **[figure 3]**



[figure 3]

NOTE: Repeat this step after each new filter replacement.



Warning

1. To reduce the risk of property damage due to water leakage, this filter **MUST** be installed in accordance with the manufacturer's specifications and instructions.
2. The operating temperature of this pitcher filtration system is 5-38°C/41-100°F.
3. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product.

Frequently asked questions

—

Q: Why does the water flow get slow?

A: Please check the indicator to see if it's time to change the filter. If yes, please replace the filter immediately. If not, please try the following steps to solve the problem

—

Option 1: Remove the filter and shake it horizontally in order to shift the granules inside.



Option 2: Remove the filter. Flush under flowing water for about 30 seconds to eliminate blockage of water outlets

of the filter.

Stop flushing and shake the filter horizontally. Then put the filter back in the pitcher.



—

Q: Why does the water taste bad?

A: The product is unclean, or the filter is not installed properly. It could also be time to change the filter. Please clean the pitcher and install the cartridge correctly or replace the filter.

—

Q: Why are there fine particles on the surface of the filter?

A: Fine particles are part of the filter material, which may leak out during long distance transportation due to shaking and other reasons. These particles will not have a negative impact on health. In order to remove these fine particles, please follow the using steps of our products, Soak the filter in cold water for 10 minutes. Flush the filter twice. After flushing the filter, the pitcher can be used normally.

Performance data sheet

System Model No.: WD-PF-01A-S

Substance reduction:

The system has been tested and certified by the NSF International according to NSF/ANSI Standards 42, and 372. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for the water leaving the system, as specified by NSF/ANSI Standards 42. While testing was performed under standard laboratory conditions, actual performance may vary.

Substance	Inf. Average	NSF Specified Challenge Concentration	Ave. % Reduction(%)	Average Product Water Concentration	Max Permissible Product Water Concentration	NSF Reduction Requirements	NSF Test Report
Chlorine Taste and Odor	2.0 mg/L	2.0mg/L±10%	96.7%	0.05mg	N/A	≥50 %	400355920



Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.



Made in China V051
Qingdao Eco pure Filter Co., Ltd

Manufacturer Technical Support

Tel: +1-[888-352-3558](tel:888-352-3558) (U.S.)
E-mail: CT@waterdropfilter.com

Waterdrop

Documents / Resources

	<p>Waterdrop WD-PF-01A Plus Pitcher and Dispenser Replacement Filter [pdf] Instruction Manual</p> <p>WD-PF-01A Plus, WD-PF-01A Plus Pitcher and Dispenser Replacement Filter, Pitcher and Dispenser Replacement Filter, Dispenser Replacement Filter, Replacement Filter</p>
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.