



1.9inch Segment e-Paper V1.1

User Manual

Contents [[hide](#)]

- 1 B0BD4DR37Y 1.9 Inch Segment E Paper V1.1 Raw Display
- 2 OVERVIEW
- 3 FEATURES
- 4 MECHANICAL SPECIFICATIONS
- 5 PIN ASSIGNMENT
- 6 ELECTRICAL CHARACTERISTICS
- 7 OPTICAL CHARACTERISTICS
- 8 HANDLING, SAFETY, AND ENVIRONMENT REQUIREMENTS
- 9 RELIABILITY TEST
- 10 BLOCK DIAGRAM
- 11 Documents / Resources
 - 11.1 References

B0BD4DR37Y 1.9 Inch Segment E Paper V1.1 Raw Display

Revision History

| Version | Content | Date | Page |
|---------|--------------|------------|------|
| 1 | New creation | 2024/12/27 | All |

| | | | |
|--|--|--|--|
| | | | |
| | | | |

OVERVIEW

1.9inch Segment e-Paper V1.1 is a Segment Electrophoretic Display Module which can be used in thermometer. The module is integrated circuits including Segment drivers.

FEATURES

| | |
|---|---|
| <ul style="list-style-type: none"> ✧ White reflectance above 35% (0 minute) ✧ Contrast ratio above 9:1 (0 minute) ✧ Wide viewing angle ✧ Ultra low power consumption | <ul style="list-style-type: none"> ✧ Reflective mode ✧ Bi-stable display ✧ Commercial temperature range ✧ I2C interface |
|---|---|

MECHANICAL SPECIFICATIONS

3.1 DIMENTIONS


| Parameter | Value | Unit |
|---|----------------------|---------|
| Display Resolution | 91segment+1Vcom+1BG | segment |
| Active Area Dimensions Diameter | 28.11*41.35 | mm |
| Overall Dimensions Width Height Thickness | 32.11*49.35*0.87±0.1 | mm |

3.2 ELECTRICAL CONNECTOR

| Service | Connector | Number of pins |
|-----------|-----------------|----------------|
| Interface | FPC pitch=0.5mm | 8 |

The position of the interface width FPC = (8+1) *0.5=4.5 mm


3.3 MECHANICAL DRAWING OF EPD MODULE

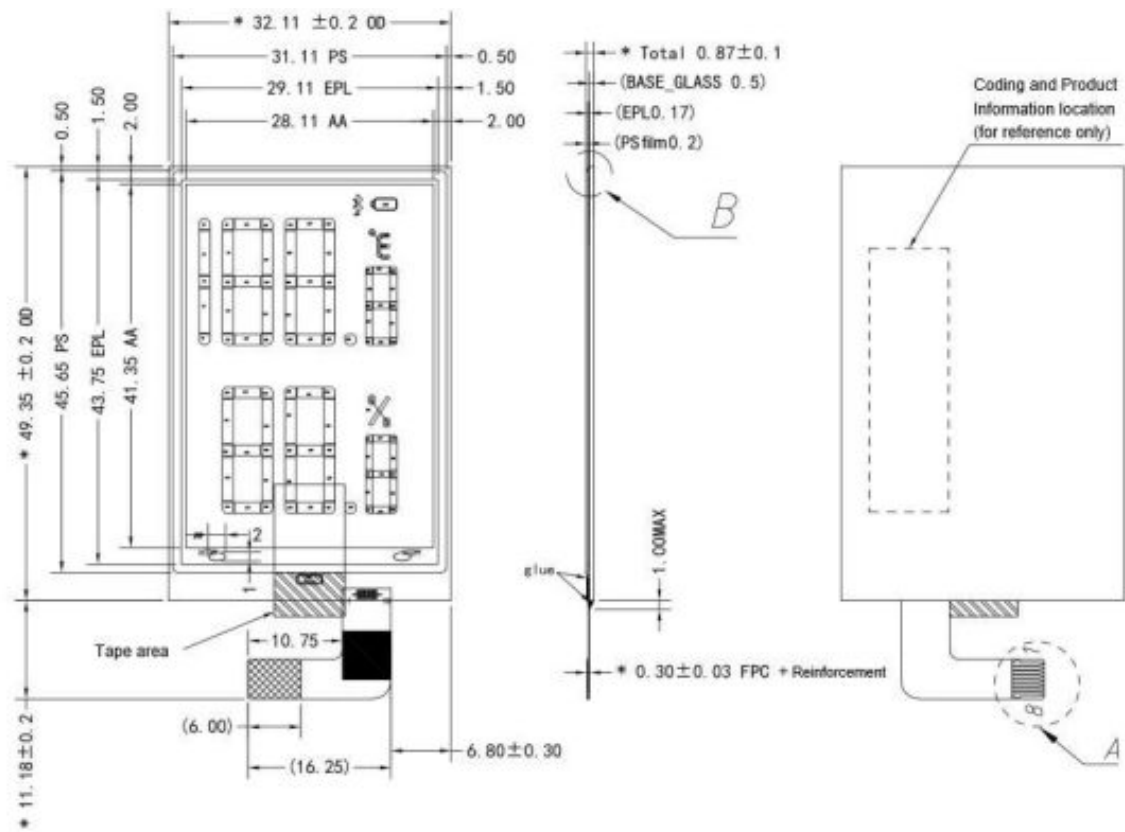

Front


Side

Back

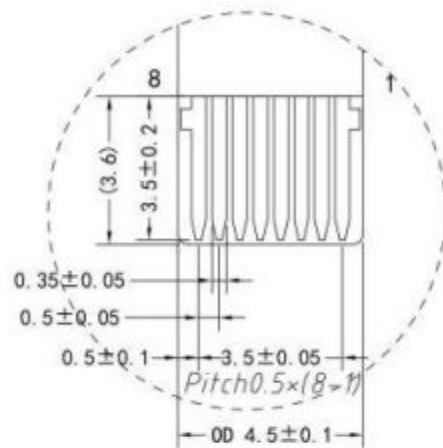

DETAIL A

SCALE:4:1



DETAIL B
SCALE:4:1

| | |
|-----|--------|
| 8 | HV |
| 7 | NC |
| 6 | VSS |
| 5 | VDD |
| 4 | RESB |
| 3 | SDA |
| 2 | SCL |
| 1 | BUSY_N |
| PIN | PIN |

Note:

1. Display module 1.9" array for EPD;
2. Unspecified tolerance is ± 0.20 ;
3. Materials confirm to RoHS standards;
4. The mark * for control dimensions, () for reference dimensions;
5. Product thickness(THK) includes: Top glass + EPL + PS film.

PIN ASSIGNMENT

| N O . | Name | I/O | Description |
|-------------|------------|-----|---|
| 1 | BUSY _N | O | L: interface is BUSY and not ready for write command and data H: interface is ready for write command and data |
| 2 | SCL | I | Serial clock for IIC interface |
| 3 | SDA | I/O | Serial data for I IC interface |
| 4 | RESB | I | Hardware Reset input pin. When RESB is "L", initialization is executed |
| 5 | VDD | P | Core logic power pin |
| 6 | VSS | P | Ground |
| 7 | NC | / | Do not connect |
| 8 | HV | C | HV, connect the capacitance 1 UF/25V |

I = Input Pin, O =Output Pin, I/O = Bi-directional Pin (Input/Output), P = Power Pin, C = Capacitor Pin

ELECTRICAL CHARACTERISTICS**Module DC Characteristics**

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit | Note |
|----------------------|--------|-------------------|------|------|------|------|-------|
| Signal ground | VSS | | – | 0 | – | V | |
| Logic Voltage supply | VDD | | 1.9 | 3.0 | 3.6 | V | |
| | IVDD | Update | – | 1 | 1.2 | mA | |
| | Istop | Stop mode | – | 1 | – | uA | |
| Gate Positive supply | VPP | | 1.4 | 15 | 30 | V | |
| | IVPP | Update | – | 30 | – | uA | |
| Storage | Tst | Temperature | 0 | – | 50 | °C | 2.3 |
| | RHst | Relative humidity | – | – | 70% | | 2.3 |
| Operating | Tst | Temperature | 0 | – | 50 | °C | 1.2.3 |
| | RHst | Relative humidity | – | – | 70% | | 2.3 |

Note:

1. The temperature of panel display surface area should be 0°C Min and 50°C Max
2. No condensation and no frost
3. In order to keep good performance of EPD, please refer to precaution for storage condition

OPTICAL CHARACTERISTICS

| Parameter | Condition | Value | | | Unit | Note |
|-----------|-----------|-------|------|------|------|------|
| | | Min. | Typ. | Max. | | |
| | | | | | | |

| | | | | | | |
|-------------------------|----------|------|---|---|----|---|
| White Reflectivity | 0 minute | 35 | — | — | ok | |
| Contrast Ratio (CR) | 0 minute | 9:01 | — | — | | 1 |

(Tamb=25°C. Measurements are made with Eye-One Pro Spectrophotometer.)

Note:

1. CR=Surface Reflectance with all white pixels/Surface Reflectance with all black pixels

HANDLING, SAFETY, AND ENVIRONMENT REQUIREMENTS

1. The EPD Panel is manufactured from fragile materials such as glass and plastic, and may be broken or cracked if dropped. Please handle with care. Do not apply force such as bending or twisting to the EPD panel
2. The display module should not be exposed to harmful gases, such as acid and alkali gases, which corrode electronic components
3. Do not apply pressure to the EPD panel in order to prevent damaging it
4. Do not connect or disconnect the interface connector while the EPD panel is in operation
5. Do not stack the EPD panels / Modules
6. Keep the EPD Panel / Module in the specified environment and original packing boxes when storage in order to avoid scratching and keep original performance
7. Do not disassemble or reassemble the EPD panel
8. Use a soft dry cloth without chemicals for cleaning. Please don't press hard for cleaning because the surface of the protection sheet film is very soft and without hard coating. This behavior would make dent or scratch on protection sheet
9. Please be mindful of moisture to avoid its penetration into the EPD panel, which may cause damage during operation
10. It's low temperature operation product. Please be mindful the temperature different to make frost or dew on the surface of EPD panel. Moisture may penetrate into the EPD panel because of frost or dew on surface of EPD panel, and makes EPD panel damage.
11. High temperature, high humidity, sunlight or fluorescent light may degrade the EPD


panel's performance. Please do not expose the unprotected EPD panel to high temperature, high humidity, sunlight, or fluorescent for long periods of time. Please store the EPD panel in controllable environment of warehouse and original package. Without sunlight, without condensation a temperature range of 15°C to 35°C, and humidity from 30%RH to 60%RH

RELIABILITY TEST


| N o. | Test | Condition | Method | Remark |
|---------|--|---------------------------------|--------------------|---|
| 1 | High-Temperature Operation | T = +50°C, RH = 30% for 168 hrs | IEC 60 06 8-2-2Bp | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 2 | Low-Temperature Operation | T = 0°C for 168 hrs | IEC 60 06 8-2-2Ab | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 3 | High-Temperature Storage | T = +70°C, RH =23% for 168 hrs | IEC 60 06 8-2- 2Bp | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 4 | Low-Temperature Storage | T = -25°C for 168 hrs | IEC 60 06 8-2-1Ab | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 5 | High-Temperature High-Humidity Operation | T = +40°C, RH =70% for 168 hrs | IEC 60 06 8-2-3CA | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |

| | | | | |
|---|--|---|----------------------|---|
| 6 | High-Temperature High-Humidity Storage | T = +60°C, RH =80% for 168hrs | IEC 60 06 8-2-3CA | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 7 | Thermal Shock | 1 cycle: [-25°C 30min] → [+70 °C 30min] : 50 cycles | IEC 60 06 8-2-14 | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |
| 8 | Electrostatic Effect (non-operating) | Machine model +/- 250V, 00, 200pF | IEC 62179, IEC 62180 | At the end of the test, electrical, mechanical, and optical specifications shall be satisfied |

BLOCK DIAGRAM

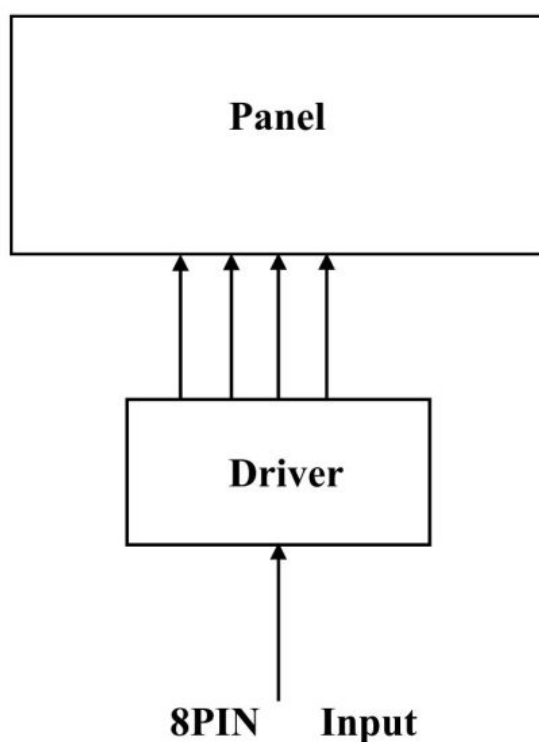

Documents / Resources

| | |
|--|---|
|  | <p>WAVESHARE B0BD4DR37Y 1.9 Inch Segment E Paper V1.1 Raw Display [pdf] User Manual</p> <p>B0BD4DR37Y 1.9 Inch Segment E Paper V1.1 Raw Display, B0BD4DR37Y, 1.9 Inch Segment E Paper V1.1 Raw Display, Segment E Paper V1.1 Raw Display, Paper V1.1 Raw Display, Raw Display</p> |
|--|---|

References

- [User Manual](#)

WAVESHARE

1.9 Inch Segment E Paper V1.1 Raw Display, B0BD4DR37Y, B0BD4DR37Y 1.9 Inch Segment E Paper V1.1 Raw Display, Paper V1.1 Raw Display, Raw Display, Segment E Paper V1.1 Raw Display, WAVESHARE

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.