



**IRAD2 IRAD Plus  
IGN-REM Generator  
Plus Delay**



# Wavtech IRAD2 IRAD Plus IGN-REM Generator Plus Delay Owner's Manual


[Home](#) » [wavtech](#) » Wavtech IRAD2 IRAD Plus IGN-REM Generator Plus Delay Owner's Manual 

## Contents

- [1 Wavtech IRAD2 IRAD Plus IGN-REM Generator Plus Delay](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Package Contents](#)
- [5 Warranty & Service Care](#)
- [6 Specifications](#)
- [7 Introduction](#)
- [8 Features](#)
- [9 Wiring Connections](#)
- [10 Operation Modes, Settings & Functions](#)
- [11 CONTACT](#)
- [12 FAQ](#)
- [13 Documents / Resources](#)
  - [13.1 References](#)



**Wavtech IRAD2 IRAD Plus IGN-REM Generator Plus Delay**

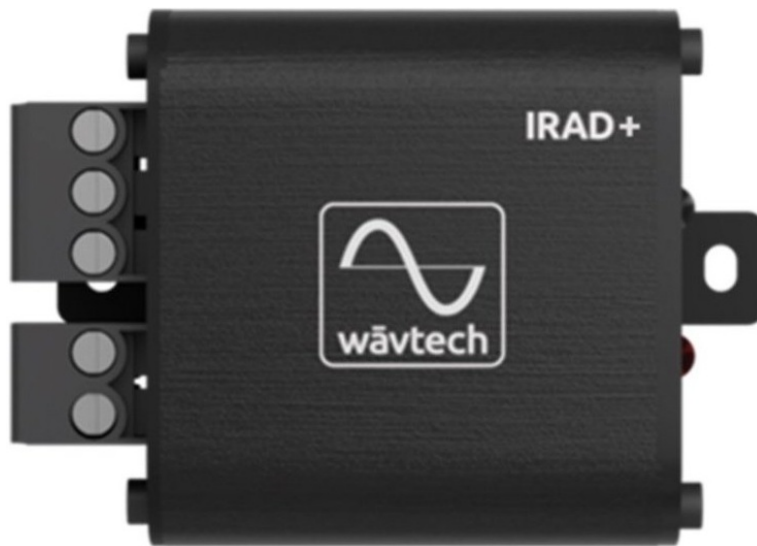

## Product Information

- The HQHUDWRU'HOD is a versatile product designed to meet various needs.
- It features advanced technology and durable construction, making it suitable for both personal and professional use.

## Product Usage Instructions

- Carefully unpack the product and ensure all components are included as per the user manual.
- Follow the setup instructions provided in the manual to assemble the product correctly.
- Connect the product to a power source and turn it on using the designated power button.
- Refer to the user manual for specific instructions on how to use the product for different functions.

## WARNING



- This symbol means important instructions.
- Failure to heed them can result in serious injury or death.

## CAUTION



- This symbol means important instructions.
- Failure to heed them can result in injury or property damage.

## WARNING

- FOR USE WITH 12V NEGATIVE GROUND VEHICLE APPLICATIONS ONLY. Using this product other than in its designed application may result in fire, injury or product damage.
- MAKE THE CORRECT WIRING CONNECTIONS AND USE PROPER FUSE PROTECTION. Failure to connect wiring correctly or use appropriate Fuse protection may result in fire, injury or product damage. Ensure proper

fusing of all system power wiring and install a 6-ampere inline fuse (not included) with the + 12V lead to the unit's power supply connector.


- **DISCONNECT THE NEGATIVE BATTERY TERMINAL BEFORE INSTALLATION.** Failure to do so may result in fire, injury, or damage to the unit.
- **DO NOT ALLOW CABLES TO BECOME ENTANGLED IN SURROUNDING OBJECTS.** Arrange wiring and cables to prevent obstructions when driving. Cables or wiring that obstruct or hang up on places such as the steering wheel, brake pedals, etc., can be extremely hazardous.
- **DO NOT DAMAGE VEHICLE SYSTEMS OR WIRING WHEN DRILLING HOLES.** When drilling holes in the chassis for installation, take precautions so as not to contact, puncture or obstruct brake lines, fuel lines, fuel tanks, electrical wiring, etc. Failure to take such precautions may result in fire or an accident.
- **DO NOT UTILIZE OR CONNECT TO ANY PART OF VEHICLE SAFETY SYSTEMS.** Bolts, nuts, or wires used in the brake, airbag, steering, gear or any other safety-related systems or fuel tanks should NEVER be used for mounting, power, or ground connections. Using such parts may disable control of the vehicle or result in fire.

## **CAUTION**


- **STOP USE IMMEDIATELY IF A PROBLEM OCCURS.** Failure to do so may result in personal injury or damage to the product. Return it to your authorized Wävtech dealer.
- **HAVE AN EXPERT DO THE WIRING AND INSTALLATION.** This unit requires special technical skill and experience for wiring and installation. To ensure safety and proper function, always contact the authorized dealer where you purchased the product to have it done professionally.
- **INSTALL THE UNIT SECURELY WITH THE SPECIFIED PARTS.** Be sure to use only the included parts and specified installation accessories (not included). Use of parts other than the designated parts may damage this unit. Install the unit securely so that it will not come loose during a collision or sudden jolt.
- **ROUTE WIRING AWAY FROM SHARP EDGES AND MOVING PARTS.** Arrange cables and wiring away from sharp or pointed edges, and avoid moving parts such as seat hinges or rails to prevent pinching or wear. Use loom protection where appropriate and always use a grommet for any wiring routed through metal.
- **NEVER RUN SYSTEM WIRING OUTSIDE OR UNDERNEATH THE VEHICLE.** All wiring must be routed, secured, and protected inside the vehicle. Failure to do so may result in fire, injury or property damage.
- **INSTALL THE UNIT IN A DRY AND VENTILATED LOCATION.** Avoid mounting locations where the unit will likely be exposed to high moisture or heat without adequate ventilation. Moisture penetration or heat buildup may result in product failure.

## **Package Contents**

## Main Unit

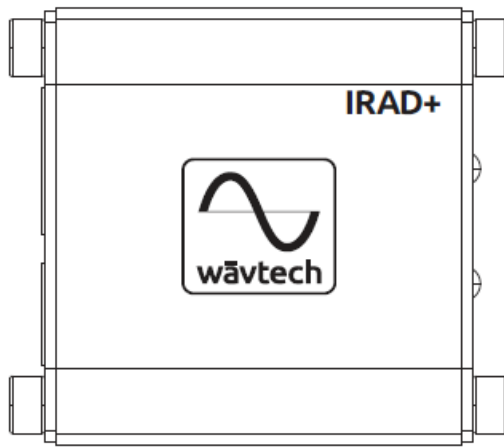


## Terminals



Power/Output

## Mounting Tabs (detachable)



Accessories Required for Installation (not included):

- 18AWG Wire
- In-line Fuse Holder w/6A fuse
- Battery Ring Terminal
- Ground Terminal
- Wire Crimp Connectors
- Grommets and Loom
- Cable Ties
- Mounting Screws

## Warranty & Service Care

- Wāvtech warrants this product to be free from defects in material and workmanship for one (1) year when purchased from an authorized Wāvtech retailer within the United States.
- This warranty will be extended to a period of two (2) years when the installation is performed by an authorized Wāvtech retailer. A valid sales receipt is required to verify the eligibility of the purchase and installation.
- This warranty is valid only to the original purchaser and is not transferable to subsequent parties.
- This warranty is void if the product serial number has been altered or removed.
- Any applicable implied warranties are limited in duration to a period of express warranty as provided herein, beginning with the date of the original purchase at retail, and no warranties, whether expressed or implied, shall apply to this product thereafter. Some states do not allow limitations on implied warranties, therefore, these exclusions may not apply to you.
- This warranty gives you specific legal rights. You may also have other rights that vary from state to state.
- If your product needs service, you should contact Wavtech Customer Service to receive a Return Authorization RA Number.
- Any product received without an RA number will be returned to the sender.
- Once your product is received and inspected by customer service, Wāvtech at its sole discretion, will be repair or replace it with a new or remanufactured product at no charge.
- Damage caused by the following is not covered under warranty: accident, abuse, failure to follow instructions, misuse, modification, neglect, unauthorized repair, or water damage.
- This warranty does not cover incidental or consequential damages. This warranty does not cover the cost of

removing or reinstalling the product.

- Cosmetic damage and normal wear are not covered under warranty.

#### For Service within the United States:

Wavtech Customer Service: [480-454-7017](tel:480-454-7017) Monday-Friday, 8:00 am to 4:00 pm MST

#### Important Notice for International Customers:

For products purchased outside the United States of America or its Territories, please contact your local distributor concerning specific procedures for your country's warranty policy. International purchases are not covered by Wavtech, LLC.

## Specifications

<b>Operating Voltage (B+)</b>			3V-18V
<b>Ignition Detect Threshold (B+)</b>			$V_{HIGH}-V_{LOW} \geq 0.5V$
<b>Trigger Threshold (REM IN)</b>	DC		$\geq 5V$
	Square		$\geq 5Vp < 3.6kHz$
	Sine		$\geq 5Vp (< 400Hz)$
<b>Output Voltage at max load</b>			<3% from B+
<b>Current Capacity</b>	Single Output		3A
	Dual Outputs		3A each
	Parallel Output		6A
<b>Ignition Detect Mode (IDM)</b>	IGN OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=0s
	REM OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=0s
	Output Order	Turn-On	IGN-REM
		Turn-Off	IGN→REM normal) REM→IGN reverse)
<b>Switched Trigger Mode (STM)</b>	IGN OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=0s
	REM OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=0s
	Output Order	Turn-On	IGN-REM
		Turn-Off	IGN-REM normal) REM-IGN (reverse)
<b>Relay Control Mode (RCM)</b>	IGN OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=3m
	REM OUT Delay	Range	0-10 sec/min
		Defaults	On=0s, Off=0s
<b>Current Draw</b>	Max		6A
	Idle (no load)		<22mA
	Sleep		<2.7mA

<b>Current Draw</b>	Max	6A
	Idle (no load)	<22mA
	Sleep	<2.7mA
<b>External Fuse (not included)</b>		0.5A to 5A
<b>Minimum Wire Gauge</b>		18AWG
<b>Product Dimensions</b>	Chassis Only	0.79"x1.55"x1.46"
		20x38x37.2mm
	Incl. Tabs	0.87"x1.55"x2.4"
		22x38x61mm

#### Notes:

1. An external in-line fuse is required, but not included. Its rating should match the expected max total current draw, but must not exceed 6A.
2. Ignition detect thresholds may be set between any two voltages within 3-18V with a difference of at least 0.5V.
3. REM IN can accept pulsed voltages  $\geq 5V_p$  at  $<3.6kHz$  for a square wave or  $<400Hz$  for a sine wave when at least 1 sec of turn-off delay is applied to IGN OUT in normal order. or REM OUT (reverse order or when unlinked).
4. All specifications are subject to change without notice.

## Introduction

- Welcome to Wavtech, where expertise and innovation come together to create exceptional mobile audio performance and integration solutions.
- Built for the professional installer, our products are simply the best available for unlimited OEM and aftermarket upgrade possibilities.

## Features


- Automatic Ignition Generator with Dual Outputs
- Switched Trigger Isolator/Generator with Dual Outputs
- Stop-Start System Solution with Automatic Relay/Solenoid Control
- Independently Adjustable Turn-On/Off Delays, up to 10 sec or 10 min
- Reversible Turn-off Order for Ultimate Pop-Noise Mitigation
- Hold/Override over Ignition Detect for Continuous Operation
- Unlink Mode for Independent Remote and Ignition Outputs
- 3A Continuous Current per Output or 6A in Parallel to a Single Load

## Wiring Connections

A minimum of 18AWG wire is recommended for all IRAD wiring connections. Always protect the B+ wire with a 5-amp fuse (max).

1. Ground (GND): The GND terminal must be connected to a bare metal part of the same ground plane as the


vehicle battery chassis ground. This wire should be as short as possible and terminated with a ground-specific terminal, such as an EARL terminal, to prevent it from coming loose.

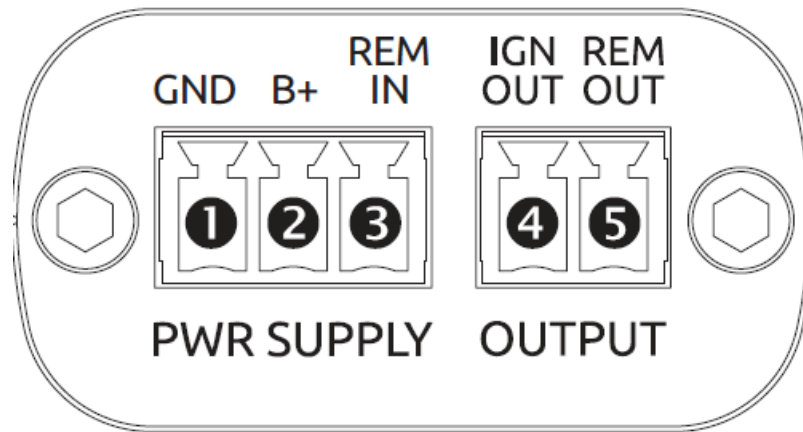

2. Battery (B+): The B+ terminal (a.k.a. +12V) must be connected the main starting battery or any power lead with constant battery voltage in order to monitor resting voltage (engine off) vs. charging voltage (engine running) and generate an ignition output based upon engine running status. In special installations where the RAD+ is not used for ignition detection, this lead may be connected to a switched power lead, but the ignition detection voltage threshold must be programmed accordingly to activate/deactivate IGN OUT.
3. Remote Input (REM IN): The REM IN terminal may be wired to any switched voltage source  $\geq 5V$  to trigger both outputs manually if automatic ignition detection is not programmed, or to override ignition detection activation/deactivation at any time.
4. Ignition Output (IGN OUT: This terminal provides a switched ignition output based upon engine running status (or any detected voltage change  $>0.5V$  at B+) if programmed.
5. Remote Output (REM OUT: This terminal provides an additional switched remote output linked to IGN OUT with its own delays and normal/reverse turn-off order. It can be activated via ignition detection and REM IN, or unlinked from IGN OUT as a separate output only activated by REM IN.

## Operation Modes, Settings & Functions

The IRAD+'s factory default mode is Switched Trigger Mode (STM), since ignition detect thresholds have not been programmed yet. All output delays are set to seconds with IGN OUT and REM OUT outputs linked in normal turn-off order. If using the IRAD+ only in STM, no programming is necessary, and the unit may simply be connected to power, ground, and a switched trigger lead with  $\geq 5V$  via REM IN to generate switched outputs from IGN OUT and REM OUT. If any delays, reverse turn-off order, etc, are needed, follow the procedure for each setting accordingly. If using the IRAD+ to generate an ignition output, follow the steps below to program the ignition detect thresholds to enable ignition Detect Mode (IDM).

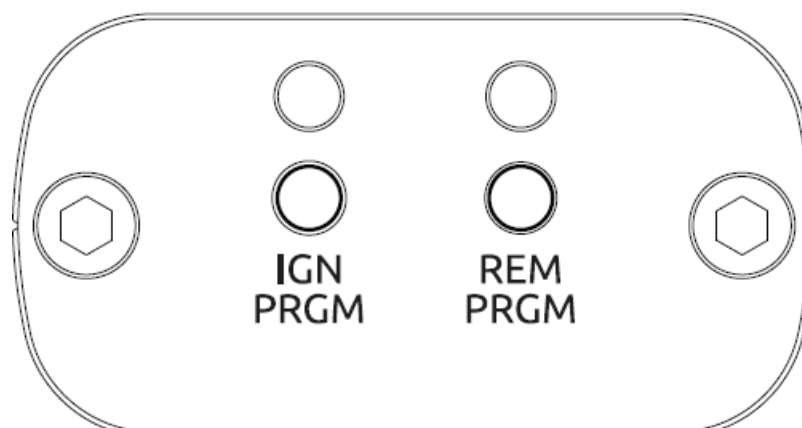

## Mode-1: Ignition Detect Mode (IDM)

- **Step 1:** Start the engine and let it idle until the alternator's charging voltage has mostly stabilized.
- **Step-2:** Long-press the IGN PRGM button for ~5sec until the red LED begins to flash. The IRAD+ is now learning the alternator's charging voltage and will turn solid red when finished (~30sec).
- **Step 3:** Shut off the engine and then short-press the IGN PRGM button once. The red LED will begin Flashing again to indicate the IRAD+ is now learning the battery's rest voltage and will turn off when finished (~30sec).

### Notes:

After finishing Step 3 above, confirm successful programming by starting the engine. The IRAD+'s outputs should turn on. If not, check that the two voltages are at least 0.5V apart while repeating the threshold programming process above. If the voltages are too close, it may require waiting longer or applying a load (e.g., turn on headlights) after Step 2 for the battery's rest voltage to settle more after charging. If the outputs shut off sometimes while the engine is still running, add some turn-off delay IGN OUT to prevent dropouts.

## Mode-2: Switched Trigger Mode (STM)

- The IRAD+ starts in STM by default and does not require any programming to be activated by REM IN.
- If ignition thresholds are programmed, REM IN may still be used to override ignition detect whenever  $\geq 5V$  is applied, either to activate manually or hold the outputs on. All IDM settings will apply, such as delay.

## Mode-3: Relay/Solenoid Control Mode (RCM)

- For stop-start enabled vehicles and other special applications, the IRAD+ has an alternative output operation mode for automatic battery isolation control (see Example 3). Ignition thresholds must be programmed first before the mode can be changed from IDM to RCM as follows:
- **Step-1:** Long-press the REM PRGM button for ~5sec and release. Both LEDs will alternate flashing blue-red to confirm RCM. Changing back to regular IDM is done the same way, where the blue LED will light solid briefly, indicating that REM OUT has returned to regular output function.

**Note:** When changed to RCM, all delays are set to 0sec except IGN OUT's turn-off delay is set to 3min. Any changes will be stored in RCM, and any previous changes made in IDM will be restored if the mode is changed back.

### Setting 1: Turn-On Delay

- **Step-1:** Short-press the chosen output's PRGM button once, and its LED will begin to flash slowly.
- **Step-2:** While flashing, short-press the same button once for each count of delay needed, up to 10x. The default delay increment is 1sec per count. If no press count is entered, it will be stored as zero.
- **Step-3:** After entering the desired amount of delay, the LED will time out after ~5sec, turn solid briefly, and then flash back the count of delay that was stored before turning off.

### Setting 2: Turn-Off Delay

- **Step-1:** Press the chosen output's PRGM button for ~2sec and release. Its LED will begin to flash fast.
- **Step-2:** While flashing, short-press the same button once for each count of delay needed, up to 10x.



- The default delay increment is 1sec per count (except in RCM where IGN OUT turn-off delay default is 3 min). If no press count is entered, it will be stored as zero.
- **Step-3:** After entering the amount of delay, the LED will time out after ~5sec, turn solid briefly, and then flash back the count of delay that was stored before turning off.

### **Setting-3: Seconds/Minutes**

- This setting allows either output's turn-on or turn-off delay increment to be toggled from seconds to minutes or minutes to seconds.
- **Step-1:** Follow the same procedure (Step-1 above) to enter either output's turn-on or turn-off

### **Function-1: Normal/Reverse Turn-Off Order (STM or IDM)**

- This function allows the turn-off order of the two outputs to be reversed. Normal order is the default, where IGN OUT turns off first, then REM OUT. Reverse order is REM OUT turns off first, then IGN OUT.
- **Step-1:** Press the REM PRGM button for ~2sec and release to enter its turn-off delay setting mode.
- **Step-2:** While the blue LED is flashing, press the REM PRGM button for ~10sec. When changed to reverse order. The blue LED will flash first, and the red LED last. When changed to normal order. the red LED will flash first, and the blue LED last.

### **Function-2: REM Unlink (IDM only)**

- This function allows REM OUT and its settings to be unlinked from IGN OUT for cases where both a generated ignition output and switched trigger output are needed separately from one IRAD+. When unlinked, REM OUT will only activate when  $\geq 5V$  is applied to REM IN while IGN OUT will only respond to ignition detection. Ignition thresholds must be programmed first to unlink REM OUT.
- **Step-1:** Long-press the REM PRGM button for ~10sec. The blue LED will flash to confirm REM OUT is unlinked and any previous turn-on/off delays are reset to 0sec default. Changing back to linked operation is done the same way, except the red LED will flash to indicate REM OUT is re-linked.

### **Function-3: Partial Delete or Factory Reset**

There are two options for partial deletion to help minimize re-programming, as well as a full factory reset:

1. Delete Thresholds: Long-press the IGN PRGM button for ~10 sec. The red LED will begin flashing slowly after 5sec, and after 10 seconds will flash fast to indicate the ignition detect thresholds have been deleted and the mode is returned to STM. All delays, sec/min changes, and turn-off orders are preserved.
2. Delete Delays: Long-press both the IGN PRGM and REM PRGM buttons at the same time for ~5sec, and release when both LEDs start flashing slowly. Only the delays are deleted while ignition detect thresholds, turn-off order, and current operating mode are preserved.
3. Factory Reset: Long-press both the IGN PRGM and REM PRGM buttons at the same time for ~10sec. Both LEDs will start flashing slowly at 5sec and after 10 seconds will flash fast to indicate the full reset is done.

### **PRGM Button Press Guide**

Button	1 <sup>st</sup> Press	2 <sup>nd</sup> Press	Result
<b>IGN PRGM</b>	Short	Short 0-10x	Turn-on Delay
		5sec	Seconds/Minutes
	2sec	Short 0-10x	Turn-Off Delay
		5sec	Seconds/Minutes
	5sec	wait ~30s	Learn B+ Von
		↳ short 1x	Learn B+ Voff
	10sec	-	Delete Thresholds
<b>REM PRGM</b>	Short	Short 0-10x	Turn-on Delay
		5sec	Seconds/Minutes
	2sec	Short 0-10x	Turn-Off Delay
		5sec	Seconds/Minutes
		10sec	Norm/Rev Order
	5sec	-	IDM/RCM
	10s	-	REM Link/Unlink
<b>IGN PRGM + REM PRGM</b>	5sec	-	Delete Delays
	10sec	-	Factory Reset


**Notes:**

- Short-press is a momentary press less than 1 second.
- 2sec press must be released in less than 5sec.
- 5sec press must be released in less than 10sec.
- 10sec press can be released after LED flashing/change.

**LED Programming Indications**

LED	Context		Flashing	Meaning
Red	Program Ignition		slow 30x (30s)	learning B+
			fast 15x	thresholds deleted
	Delay	On	slow (5s timeout)	ready for input
		Off	fast (5s timeout)	ready for input
	Delay Count		fast 3x each	count in sec
			1x each	count in min
	Sec/Min		fast 15x	changed to sec
			slow 3x	changed to min
Re-link		fast 10x	REM is re-linked	
Blue	Delay	On	slow (5s timeout)	ready for input
		Off	fast (5s timeout)	ready for input
	Delay Count		fast 3x each	count in sec
			1x each	count in min
	Sec/Min		fast 15x	changed to sec
			slow 3x	changed to min
	Unlink		fast 10x	REM is unlinked
IGN/RCM		3s solid	changed to IDM	
Red Blue	Turn-Off Order		fast Red→Blue	IGN OUT first
			fast Blue→Red	REM OUT first
	IGN/RCM		slow Red↔Blue 4x	changed to RCM
	Delete/Reset		5x both slow	delays deleted
			8x both fast	factory reset


**Example-1: Ignition Detect Mode w/Dual Outputs, Delays & Normal Turn-off Order**

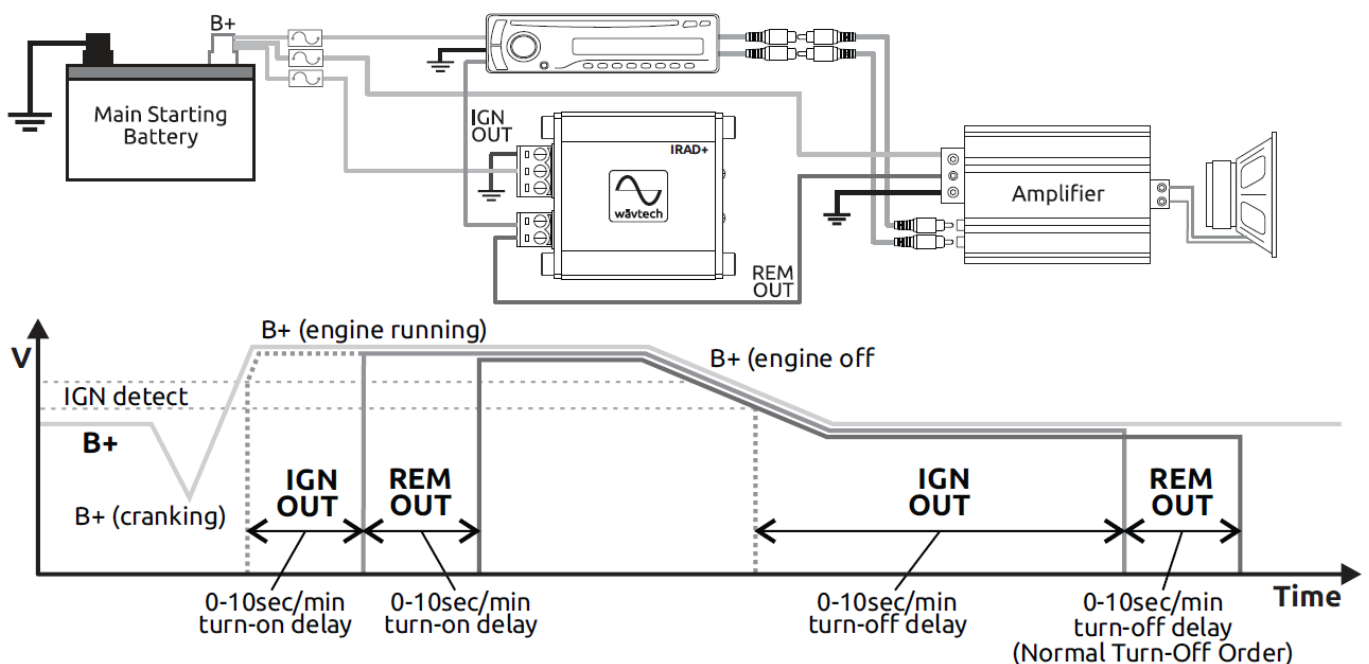

**Notes:** This is just one of many applications for generated outputs with linked delays, where in normal turn-off order, REM OUT follows IGN OUT delays based upon engine running status. The additional settings available are:


- The turn-off order may be reversed if required to eliminate turn-off pop so that REM OUT turns off first, followed by IGN OUT. See “Turn-Off Order” section for programming.
- Ignition Detection Mode (IDM) can be overridden as Switched Trigger Mode (STM) at any time by applying  $\geq 5V$  to EM IN, allowing the outputs to be activated manually or hold them on after the engine is shut off
- Only one ignition-generated output is required. REM OUT may be unlinked from IGN OUT and then manually activated independently by applying any switched trigger  $\geq 5V$  to REM IN. See “REM OUT Unlink” and Example-5

#### Example-2: Switched Trigger Mode w/Dual Outputs, Delays & Reverse Turn-off Order

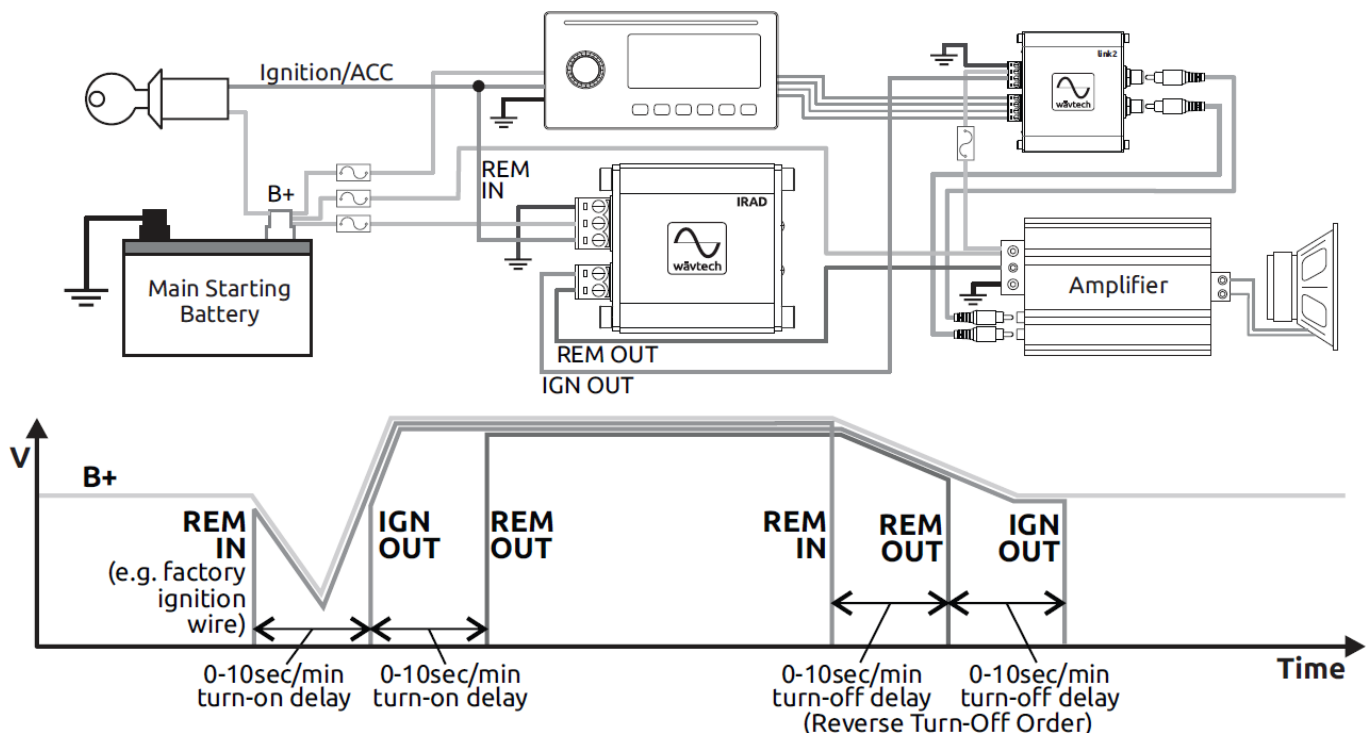

#### NOTES

- For cases where using an available switched +12V wire as a remote results in start-up timing conflicts between components, the IRAD+ may be used for its delays and reverse turn-off order capabilities to eliminate pop noise.
- For cases where an available trigger is at least 5V but intermittent, pulsed or sensitive to current draw, the IRAD+ isolates and generates a reliable switched trigger boosted to battery voltage (B+) by using its turn-off delay.

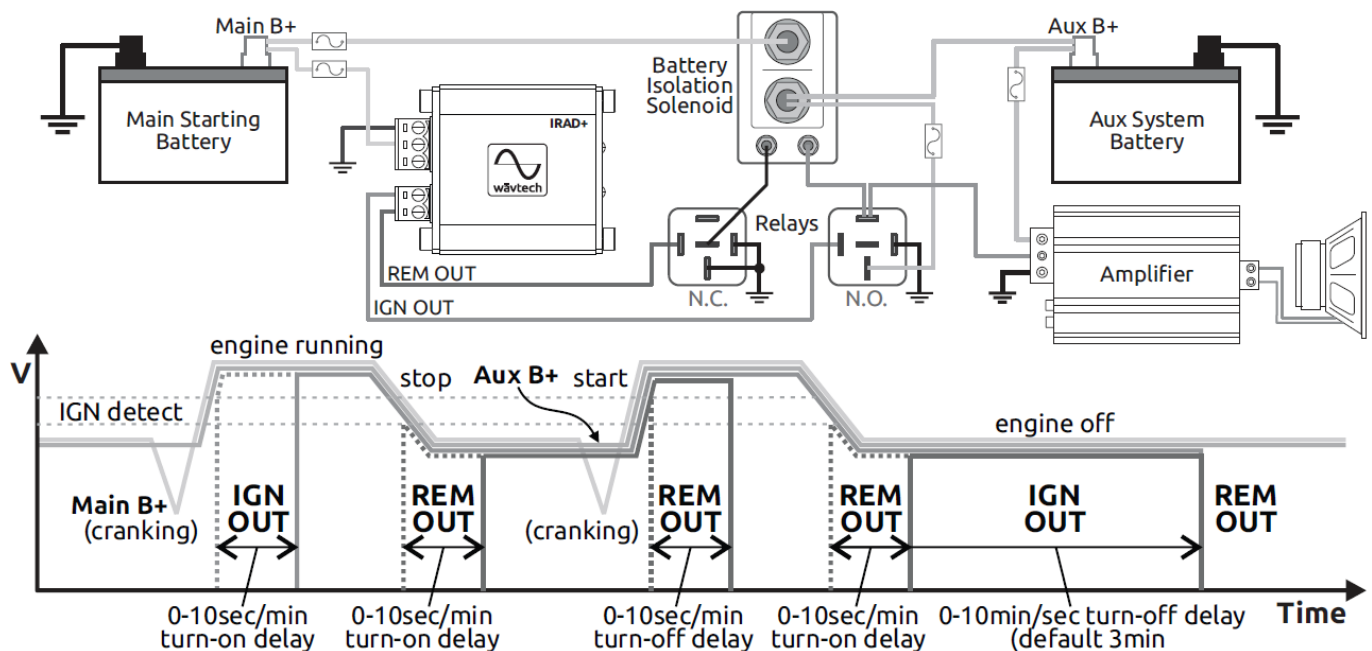


**Note:** When changed to Relay/Solenoid Control Mode (RCM), the default for IGN OUT turn-off delay is set to 3min.

This can be adjusted from 1-10 minutes or changed to seconds it needs. In this mode, REM OUT is dedicated to controlling when the relay/solenoid connects and disconnects the auxiliary battery. For vehicles with more sensitive thresholds, the REM OUT turn-on/off delays can also be adjusted to prevent triggering the solenoid too frequently, but after the IGN OUT's turn-off delay expires, it will automatically turn off REM OUT no matter its delay setting.


#### Example-4: Ignition Detect Mode & Switched Trigger Mode with Unlinked REM OUT

In some applications, it may be desirable to have two separately activated triggers, one from ignition and one from a switched, intermittent, or pulsed source. When REM OUT is unlinked, the IRAD+ can be used to simultaneously generate an ignition output via IGN OUT while also allowing a switched  $\geq 5V$  DC or pulsed voltage  $\geq 5V_p$  (see Specifications Note-3) applied to REM IN to activate REM OUT separately.

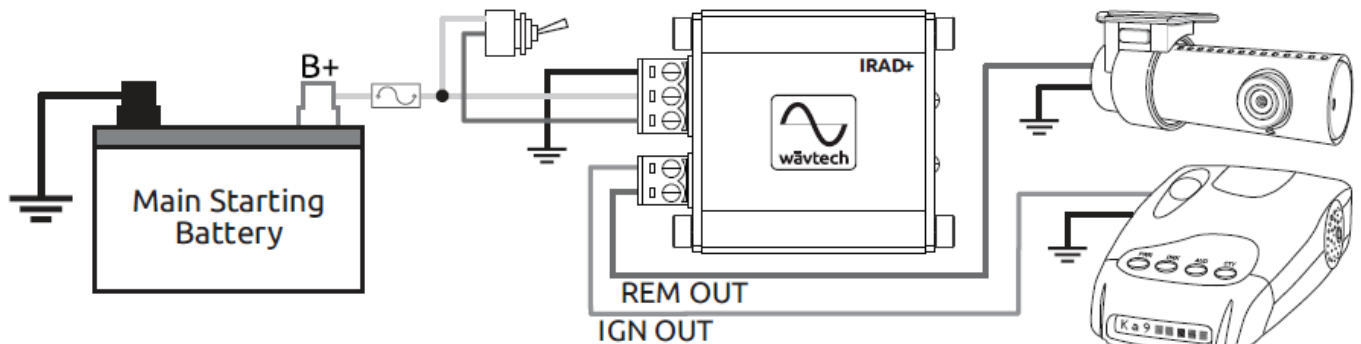

#### Example 5: Ignition Detect Mode with Paralleled Outputs

- The IRAD+'s outputs may be connected in parallel for a total continuous current of 6A max, allowing it to drive larger electronics directly, such as an RSE monitor or modular radar detector system.

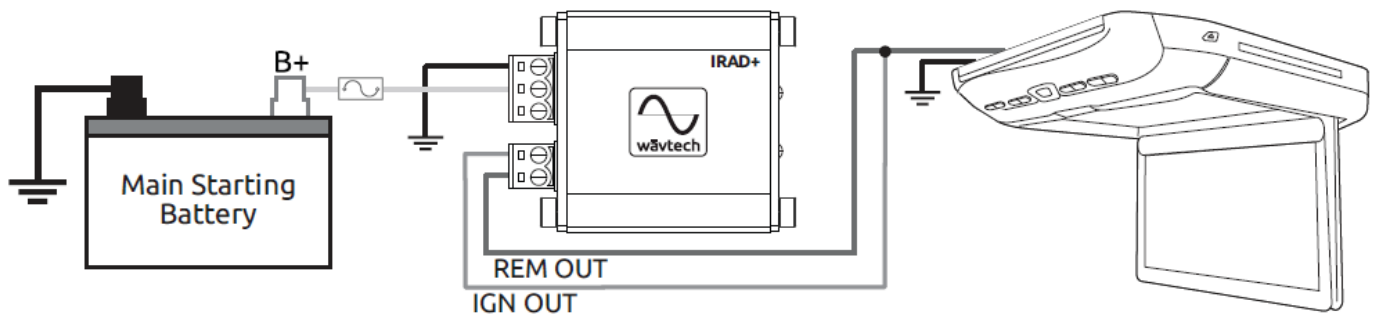

**Note:** If setting any turn-on or turn-off delays, make sure to apply the same delays to both IGN OUT and REM OUT.

## CONTACT

- Wavtech®
- 1050 N Fairway Drive Suite E-108
- Avondale, AZ 85323 [480-454-7017](tel:480-454-7017)
- ©Copyright 2024 Wävtech, LLC.
- All Rights Reserved.
- [www.wavtech-usa.com](http://www.wavtech-usa.com)



## FAQ

- **Q: Where can I find additional support for the product?**
  - **A:** For additional support, please visit our website or contact our customer service team.
- **Q: How do I clean the product?**
  - **A:** To clean the product, use a soft, damp cloth and avoid using harsh chemicals that may damage the surface.

## Documents / Resources

	<p><a href="#">Wavtech IRAD2 IRAD Plus IGN-REM Generator Plus Delay</a> [pdf] Owner's Manual  IRAD2, IRAD2, IRAD2 IRAD Plus IGN-REM Generator Plus Delay, IRAD2, IRAD Plus IGN-REM  Generator Plus Delay, IGN-REM Generator Plus Delay, Generator Plus Delay</p>
--	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.