

weboost Drive Reach RV Cell Signal Booster User Guide

[Home](#) » [Weboost](#) » weboost Drive Reach RV Cell Signal Booster User Guide

Contents [[hide](#)]

- 1 Drive Reach RV Cell Signal Booster
 - 1.1 Installation Overview
 - 1.2 Diagram
 - 1.3 Register your Signal Booster now!
 - 1.3.1 STEP 1: Mount Outside Antenna & Route Cable
 - 1.3.2 STEP 2: Connect Cable To Outside Antenna
 - 1.3.3 STEP 4: Booster Location & Connect Cables
 - 1.3.4 STEP 5: Connect Power Supply To Booster
- 2 Documents / Resources
 - 2.1 References
- 3 Related Posts

Drive Reach RV Cell Signal Booster

Installation Overview



Diagram



For product installation videos and more, visit: weboost.com/install

Register your Signal Booster now!

Complete the two easy steps to register your booster and receive premium customer service, special offers and more!

Step 1: Take a photo of your Photoregister Code including the points (●).



Step 2: Send it in.

Smartphone U.S. only Text photo to 71403

OR

Email U.S./CAN weboost@photoregister.com

OR Online register.weboost.com

Need help? Visit photoregister.com/help or text HELP to 71403.



GDE000228_Rev01_09.22.20 weboost.com

Installation Overview

Drive Reach RV Cell Signal Booster


STEP 1: Mount Outside Antenna & Route Cable

Determine where you want the Outside Antenna on your RV. Mount the Outside Antenna to a ladder or pole so that the entire Outside Antenna is above the roof line of the RV. Route 25' RG-6 cable from inside RV to Outside Antenna. NOTE: L-Bracket Pole Mount and hardware is provided. If installing with Spring, the Side Exit Adapter must be used.



L-Bracket Mount & hardware


STEP 2: Connect Cable To Outside Antenna



After routing the RG-6 Cable into the RV, connect the cable to the Outside Antenna.


STEP 3: Inside Antenna Location

Place Inside Antenna where stronger signal is desired in the RV.





STEP 4: Booster Location & Connect Cables

Find a location to place the Drive Reach Booster and secure it with provided bracket. Connect cable from Outside Antenna to labeled booster port and connect cable from Inside Antenna to labeled booster port.

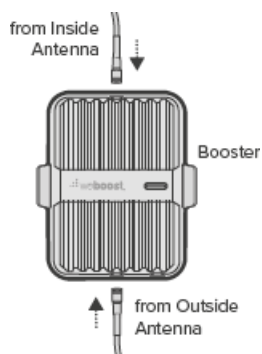


STEP 5: Connect Power Supply To Booster



Connect the power supply cord to the end of the booster, labeled “”, and connect into a 110V wall plug. Enjoy your boosted signal!

Refer to Installation Guide for Detailed Instructions.

Documents / Resources

	weboost Drive Reach RV Cell Signal Booster [pdf] User Guide Drive Reach RV Cell Signal Booster
---	---

References

- [Photoregister | Help](#)
- [Register Your weBoost Product | weBoost](#)
- [weBoost | Cell Phone Signal Boosters for Home, Cars, RVs & More](#)
- [How to Install a weBoost Cell Phone Signal Booster | weBoost](#)