



Weems Plath LX2-PT LX2 Collection Running LED Navigation Lights Owner's Manual

[Home](#) » [Weems Plath](#) » Weems Plath LX2-PT LX2 Collection Running LED Navigation Lights Owner's Manual 

Contents

- [1 Weems Plath LX2-PT LX2 CollectionRunning LED Navigation Lights](#)
- [2 Mounting](#)
 - [2.1 OWNER'S MANUAL](#)
 - [2.2 INTRODUCTION](#)
 - [2.3 INSTALLATION INSTRUCTIONS](#)
 - [2.4 SPECIFICATIONS](#)
 - [2.5 Warranty](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)



Weems Plath LX2-PT LX2 CollectionRunning LED Navigation Lights



Specifications

- **Visibility:** 2 nautical miles
- **Waterproof:** Yes, completely submersible
- **Power Consumption:** 2 Watts
- **Voltage Range:** 9V to 30V DC
- **Current Draw:** 0.17 Amps at 12V DC
- **Wiring:** 2-conductor 20 AWG UV jacketed 2.5-foot cable

Product Information

The LX2 Running LED Nav Lights come in three models: Port, Starboard, and Stern. The lens and LED bulb are clear, which can make identifying the particular light difficult from a casual glance. However, the part number is labeled on the back of each unit to help identify it. The type of light can also be determined by applying power to the light and observing the illuminated color.

Model #	Description	LED Color
LX2-PT	Port Running Light	Red
LX2-SB	Starboard Running Light	Cyan (Green)
LX2-ST	Stern Running Light	White

General

The LX2 lights are designed to meet the requirements of the Convention on the International Regulations for Preventing Collisions at Sea, 1972 (72 COLREGS). These regulations were developed and adopted by the International Maritime Organization (IMO). It is important to follow these instructions and the 72 COLREGS during installation to ensure compliance with the regulations.

Mounting

1. The Stern light must be mounted as nearly as is practical at the stern of the vessel, facing directly aft.
2. The 72 COLREGS documents the proper locations for navigation lights. Specific rules also apply for vessels over 65.5 feet (20 meters), including the use of screens. Please refer to those regulations when installing these lights.
3. The light is completely waterproof, so no extra precautions are necessary to protect the components within the light. The light is not designed to be opened; doing so will void the warranty.
4. The light is designed to be mounted using two 8-32 or similar-sized through bolts, preferably high-grade stainless steel, pan-head screws.
5. Avoid any undue tension, pulling, or bending of the wires behind the housing. Contact Weems & Plath directly if you have any questions.

Weems & Plath®

214 Eastern Avenue • Annapolis, MD 21403 p (410) 263-6700 • f (410) 268-8713 www.Weems-Plath.com/OGM

LX2 Running LED Nav Lights Models: LX2-PT, LX2-SB, LX2-ST

OWNER'S MANUAL

INTRODUCTION

Thank you for your purchase of Weems & Plath's OGM LX2 Running LED Navigation Lights. The rugged construction and long bulb life will provide years of trouble-free service for your marine application. This collection provides well over 2 nautical miles of visibility, suitable for both power and sailing vessels that are under 165-feet (50-meters). The lights are US Coast Guard certified, meet the COLREGS '72 and ABYC-16 standards. Additional certifications may be required for commercial applications. Check with your local regulations.

The LX2 Models

There are 3 LX2 models: Port, Starboard, and Stern. The lens and LED bulb are clear which can make identifying the particular light difficult from a casual glance but the part number is labeled on the back of each unit to help identify it. The type of light can also be determined by applying power to the light and observing the illuminated color. The table below outlines each part number:

Model #	Description	LED Color	Horiz. View Angle	Vert. View Angle
LX2-PT	Port Running Light	Red	112.5°	> 70°
LX2-SB	Starboard Running Light	Cyan (Green)	112.5°	> 70°
LX2-ST	Stern Running Light	White	135°	> 70°

INSTALLATION INSTRUCTIONS

General

The LX2 lights are designed to meet the requirements of the Convention on the International Regulations for Preventing Collisions at Sea, 1972, commonly called '72 COLREGS. These regulations were developed and adopted by the International Maritime Organization (IMO). These instructions and the '72 COLREGS should be followed during installation to ensure compliance with these regulations.

Mounting

1. **PORT & STARBOARD:** The Port and Starboard lights must be mounted at an angle of 33.75° from the centerline of the vessel. The lights come with a mounting bracket to facilitate mounting at the proper angle.
STERN: The Stern light must be mounted as nearly as is practical at the stern of the vessel, facing directly aft.
2. The '72 COLREGS documents the proper locations for navigation lights. Specific rules also apply for vessels over 65.5-feet (20-meters), including the use of screens. Please refer to those regulations when installing these lights.
3. The light is completely waterproof so no extra precautions are necessary to protect the components within the light. The light is not designed to be opened; doing so will void the warranty.
4. The light is designed to be mounted using two 8-32 or similar-sized through bolts, preferably high-grade stainless steel, pan-head screws.
5. Avoid any undue tension, pulling or bending of the wires behind the housing. Contact Weems & Plath directly if you have any questions.


Wiring

The LX2 lights come standard with 2.5-feet of marine-grade 2-conductor, 20-gauge wire. A waterproof splice should be made for extending the run of wire length. Wire of 20-gauge or larger is sufficient for the small current

draw (≤ 0.17 Amps) of these lights. The light must be protected with a 1 Amp circuit breaker or fuse. To install, connect the black wire to the boat's DC ground and the red wire to the boat's DC positive power source. Improper fuse protection may result in fire or other catastrophic damage in the case of a short or other failure.

SPECIFICATIONS


- **Visibility:** 2 nautical miles
- **Waterproof:** yes, completely submersible
- **Power Consumption:** 2 Watts
- **Voltage Range:** 9V to 30V DC
- **Current Draw:** ≤ 0.17 Amps at 12V DC
- **Wiring:** 2-conductor 20 AWG UV jacketed 2.5-foot cable

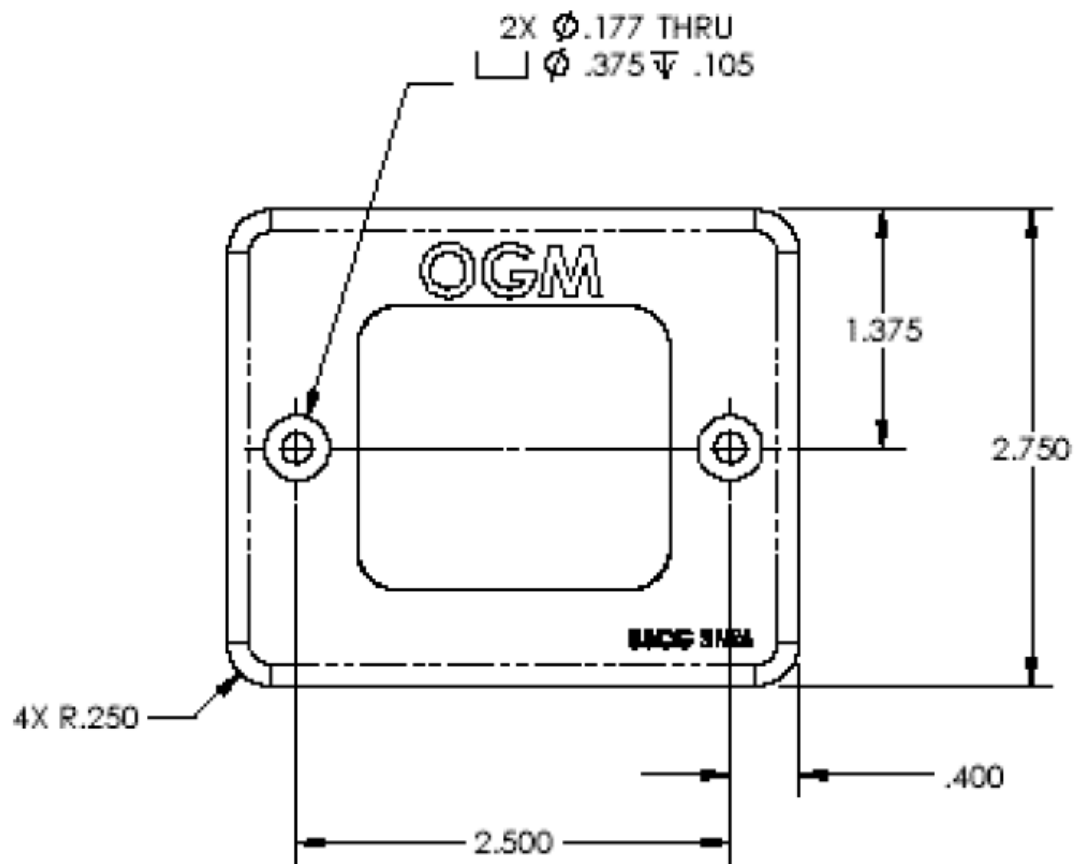

Warranty

This product is covered by a LIFETIME Warranty. For more details on the warranty, please visit: www.Weems-Plath.com/Support/Warranties

To register your product visit: www.Weems-Plath.com/Product-Registration

	Weems Plath LX2-PT LX2 Collection Running LED Navigation Lights [pdf] Owner's Manual LX2-PT LX2 Collection Running LED Navigation Lights, LX2-PT, LX2 Collection Running LED Navigation Lights, Running LED Navigation Lights, LED Navigation Lights, Navigation Lights, Lights
--	--

References

- [🌐 Product Registration](#)
- [🌐 Warranties](#)
- [📄 Manual-Hub.com - Free PDF manuals!](#)
- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.