



WIFI WCB735M Bluetooth Combo module compliant User Manual

[Home](#) » [WiFi](#) » WIFI WCB735M Bluetooth Combo module compliant User Manual 



Contents

1 WCB735M

- 1.1 1. Introduction
- 1.2 2. Hardware Architecture:
 - 1.2.1 2.1 Main Chipset Information
- 1.3 3. Operational Description
 - 1.3.1 – Features
 - 1.3.2 – Time base of the RF frequency
 - 1.3.3 – Synthesizer
 - 1.3.4 – Wi-Fi Transmission
 - 1.3.5 – Wi-Fi Receiver
 - 1.3.6 -Bluetooth Low Energy
 - 1.3.7 – Link Control Layer
 - 1.3.8 – Wideband speech
 - 1.3.9 – Adaptive Frequency Hopping
- 1.4 4. Product Details
 - 1.4.1 -Data Modulation
 - 1.4.2 -Frequency Range
 - 1.4.3 – IEEE 802.11n HT20
 - 1.4.4 – IEEE 802.11n HT40
 - 1.4.5 -IEEE 802.11ac
 - 1.4.6 -Output Power tolerance
 - 1.4.7 -Simultaneous transmission
 - 1.4.8 -Recommended Operating conditions
 - 1.4.9 -AS Information
 - 1.4.10 -Certification Information
 - 1.4.11 CE RF Radiation Exposure Statement:
- 1.5 FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual
 - 1.5.1 FCC Radiation Exposure Statement:
 - 1.5.2 OEM INTEGRATION INSTRUCTIONS:
 - 1.5.3 Validity of using the module certification:
 - 1.5.4 Upgrade Firmware:
 - 1.5.5 End product labeling:
 - 1.5.6 Information that must be placed in the end user manual:
 - 1.5.7 FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual
 - 1.5.8 IC Information
 - 1.5.9 Information for OEM Integrator
 - 1.5.10 Requirement per KDB996369 D03
 - 1.5.11 2.2 List of applicable FCC rules
 - 1.5.12 2.3 Summarize the specific operational use conditions
 - 1.5.13 2.4 Limited module procedures
 - 1.5.14 2.5 Trace antenna designs
 - 1.5.15 2.6 RF exposure considerations
 - 1.5.16 2.7 Antennas
 - 1.5.17 2.8 Label and compliance information
 - 1.5.18 2.9 Information on test modes and additional testing requirements⁵
 - 1.5.19 2.10 Additional testing, Part 15 Subpart B disclaimer

2 Documents / Resources

3 Related Posts

WCB735M

1. Introduction

WCB735M is a Wi-Fi / Bluetooth Combo module compliant with IEEE802.11 a.b.g.n.ac MAC/baseband/radio and

Bluetooth 5.0 optimized for low-power applications.
The core chipset is from MediaTek part number MT7668AUN.

2. Hardware Architecture:

2.1 Main Chipset Information

Item	Vendor	Part Number
IEEE802.11 a.b.g.n.ac mac/baseband/radio Bluetooth 5.0	MediaTek	MT7668AUN

3. Operational Description

WCB735M is the 802.11a/b/g/n /ac +Bluetooth 5.0 Combo Module that acts as a communication controller for users of a wireless device to connect to SMART TV

– Features

- >IEEE 802.11ac Draft compliant.
- >Dual-band 2.4GHz /5 GHz
- >Dual-stream spatial multiplexing up to 600Mbps data rate
- >Support 20, 40, 80MHz channel with optional SGI(256QAM modulation)
- >On-chip power amplifiers and low –noise amplifiers for both bands
- >Complies with Bluetooth Core Specification Version 5.0
- >Supports BT/Wi-Fi coexistence.
- >Adaptive frequency hopping (AFH) for reducing radio frequency interference

– Time base of the RF frequency

For IF and RF frequency, 40MHz crystal is a clock reference.

– Synthesizer

Synthesizer inside Transceiver. Internal voltage controlled oscillator (VCO) provides the desired LO signal base on the phase-locked loop (PLL) with a relatively wide tuning range for this application. Internal fractional nPLL allows support for a wide range of reference clock frequencies

– Wi-Fi Transmission

Baseband data is modulated and up converted to the 2.4GHz ISM and 5-GHz U-NII bands, respectively. Linear on chip power amplifier are included, which are capable of delivering high output powers while Meeting IEEE802.11ac and IEEE802.a/b/g/n specifications without the need for external PAs. When using the internal PAs, closed-loop output power control is completely integrated. Base-band Processing (BBP) IC has DSSS (BPSK/QPSK/CCK) and OFDM (BPSK/QPSK/16QAM/64QAM/25QAM) modulation function, it provides transmission data rate are 1, 2, 5.5, 11Mbps on DSSS and 6, 12, 18, 24, 36, 48, 54 Mbps on OFDM. Digital data signal will be converted to analog (TX IQ) signals through DAC in BBP IC, TX IQ pass through to low pass filter. TX I/Q signal use direct conversion (zero-IF) architecture converter to generate carrier frequency signal. Transceiver IC and internal PA magnify output power.

– Wi-Fi Receiver

The MT7668AUN has a wide dynamic range, direct conversion receiver that employs high-order on-chip channel filtering to ensure reliable operation in the noisy 2.4GHz ISM band or the entire 5GHz U-NII band. Control signals are available that can support the use of optional LNAs for each band, which can increase the receive sensitivity by several decibels. Reverse direction isolation of LNA inside Transceiver IC suppresses unwanted radiation. Then RF signal will be directly down to IF signal (RX IQ) and high frequency spurious emissions are suppressed by LPF. At last RX IQ signal will be demodulated digital data.

-Bluetooth Low Energy

The WCB735M support the Bluetooth 4.2 LE and 5.0 BLE 2Mbps

– Link Control Layer

The link control layer is part of the Bluetooth link control functions that are implemented in dedicated logic in the link control unit (LCU).

Each task performs a different state in the Bluetooth Link Controller.

– Wideband speech

The WCB735M provides supports for wideband speech (WBS) using on-chip SmartAudio technology.

The WCB735M can perform modified Sub Band Codec (mSBC) encoding and decoding of linear 16bitsat 16kHz(256kbps rate) transferred over USB interface.

– Adaptive Frequency Hopping

The WCB735M Mgathers link quality statistics on a channel by basis to facilitate channel assessment and Channel map selection. The link quality is determined using both RF and baseband signal processing to Provide a more accurate frequency-hop map.

4. Product Details

-Data Modulation

DSSS:CCK,BPSK,QPSK for 802.11b

OFDM:BPSK,QPSK,16QAM,64QAM,256QAM for 802.11a,g,n,ac

FHSS:GFSK,OQPSK, 8DPSK, $\pi/4$ DPSK for Bluetooth

-Frequency Range

2400-2497MHz

5150-5350MHz

5470-5725MHz

5725-5825MHz

– IEEE 802.11n HT20

MCS Index	Modulation	R	$N_{\text{BPSCS}}(i_s)$	N_{SD}	N_{SP}	$N_{\text{CBP}}s$	$N_{\text{DBP}}s$	Data rate (Mb/s)	
								800 ns GI	400 ns GI (see NOTE)
0	BPSK	1/2	1	52	4	52	26	6.5	7.2
1	QPSK	1/2	2	52	4	104	52	13.0	14.4
2	QPSK	3/4	2	52	4	104	78	19.5	21.7
3	16-QAM	1/2	4	52	4	208	104	26.0	28.9
4	16-QAM	3/4	4	52	4	208	156	39.0	43.3
5	64-QAM	2/3	6	52	4	312	208	52.0	57.8
6	64-QAM	3/4	6	52	4	312	234	58.5	65.0
7	64-QAM	5/6	6	52	4	312	260	65.0	72.2

MCS Index	Modulation	R	$N_{\text{BPSCS}}(i_s)$	N_{SD}	N_{SP}	N_{CBP}_s	N_{DBP}_s	Data rate (Mb/s)	
								800 ns GI	400 ns GI (see NOTE)
8	BPSK	1/2	1	108	6	216	108	27.0	30.0
9	QPSK	1/2	2	108	6	432	216	54.0	60.0
10	QPSK	3/4	2	108	6	432	324	81.0	90.0
11	16-QAM	1/2	4	108	6	864	432	108.0	120.0
12	16-QAM	3/4	4	108	6	864	648	162.0	180.0
13	64-QAM	2/3	6	108	6	1296	864	216.0	240.0
14	64-QAM	3/4	6	108	6	1296	972	243.0	270.0
15	64-QAM	5/6	6	108	6	1296	1080	270.0	300.0

-IEEE 802.11ac

MCS	Modulation & Rate	20 M Hz 1 x SS	20 M Hz 2 x SS	20 M Hz 4 x SS	20 M Hz 8 x SS	40 M Hz 1 x SS	40 M Hz 2 x SS	40 M Hz 4 x SS	40 M Hz 8 x SS	80 M Hz 1 x SS	80 M Hz 2 x SS	80 M Hz 4 x SS	80 M Hz 8 x SS
0	BPSK 1/2	7.2	14.4	28.9	57.8	15.0	30.0	60.0	120.0	32.5	65.0	130.0	260.0
1	QPSK 1/2	14.4	28.9	57.8	115.6	30.0	60.0	120.0	240.0	65.0	130.0	260.0	520.0
2	QPSK 3/4	21.7	43.3	86.7	173.3	45.0	90.0	180.0	360.0	97.5	195.0	390.0	780.0
3	16-QAM 1/2	28.9	57.8	115.6	231.1	60.0	120.0	240.0	480.0	130.0	260.0	520.0	1040.0
4	16-QAM 3/4	43.3	86.7	173.3	346.7	90.0	180.0	360.0	720.0	195.0	390.0	780.0	1560.0
5	64-QAM 2/3	57.8	115.6	231.1	462.2	120.0	240.0	480.0	960.0	260.0	520.0	1040.0	2080.0
6	64-QAM 3/4	65.0	130.0	260.0	520.0	135.0	270.0	540.0	1080.0	292.5	585.0	1170.0	2340.0
7	64-QAM 5/6	72.2	144.4	288.9	577.8	150.0	300.0	600.0	1200.0	325.0	650.0	1300.0	2600.0
8	256 QAM 3/4	86.7	173.3	346.7	693.3	180.0	360.0	720.0	1440.0	390.0	780.0	1560.0	3120.0
9	256-QAM 5/6	–	–	–	–	200.0	400.0	800.0	1600.0	433.3	866.7	1733.3	3466.7

-Output Power tolerance

Output power \pm 1 dBm

-Simultaneous transmission

	BT	BT LE	2.4GHz Wi-Fi	5GHz Wi-Fi
BT		O	O	O
BT LE	O		O	O
2.4GHz Wi-Fi	O	O		X
5GHz Wi-Fi	O	O	X	

-Recommended Operating conditions

	Min	Typ.	Max	Unit
Operating voltage	4.5	5	5.5	V
Operating temperature(ambient)	-20	25	50	°C

-AS Information

Company Name:CHENGDU XUGUANG TECHNOLOGY CO.,LTD.

Fax: +86-28-84841628

Tel: +86-28-84841628

Add:2 section of park road Longquanyi Chengdu China

-Certification Information

1) Name(Model name):

2) Certification ID:

3) Company Name:

4) Production date

5) Vendor:



CE RF Radiation Exposure Statement:

Caution This equipment complies with European RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Declaration of conformity

We, Samsung Electronics Co., Ltd. of
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea declare under our sole responsibility that
our product

Manufacturer: Samsung Electronics Co., Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Contact Person: Hansung You / Staff Engineer
E-mail: digitalyou@samsung.com

OPERATING FREQUENCY:

WLAN 5 GHz (5 150 MHz ~ 5 725 MHz)	802.11a/n(HT20) /ac(VHT20)	Lower-sub band	5 180 MHz ~ 5 320 MHz
		Higher-sub band	5 500 MHz ~ 5 700 MHz
	802.11n(HT40) /ac(VHT40)	Lower-sub band	5 190 MHz ~ 5 310 MHz
		Higher-sub band	5 510 MHz ~ 5 670 MHz
	802.11ac(VHT80)	Lower-sub band	5 210 MHz ~ 5 290 MHz
		Higher-sub band	5 530 MHz ~ 5 610 MHz
WLAN 5 GHz (5 725 MHz ~ 5 850 MHz)	802.11a/n(HT20) /ac(VHT20)	5 745 MHz ~ 5 825 MHz	
	802.11n(HT40) /ac(VHT40)	5 755 MHz ~ 5 795 MHz	
	802.11ac(VHT80)	5 775 MHz	
WLAN 2.4 GHz	802.11b/g/n(HT20)	2 412 MHz ~ 2 472 MHz	
	802.11n(HT40)	2 422 MHz ~ 2 462 MHz	
Bluetooth	2 402 MHz ~ 2 480 MHz		
Bluetooth LE	2 402 MHz ~ 2 480 MHz		

OUTPUT POWER:

	Antenna 0	Lower-sub band	12.38 dBm(802.11a) 12.33 dBm(802.11n_HT20) 10.84 dBm(802.11n_HT40) 11.09 dBm(802.11ac_VHT80)
		Higher-sub band	11.98 dBm(802.11a) 11.69 dBm(802.11n_HT20) 10.92 dBm(802.11n_HT40) 10.84 dBm(802.11ac_VHT80)
		Lower-sub band	15.93 dBm(802.11a) 15.64 dBm(802.11n_HT20) 14.48 dBm(802.11n_HT40) 14.87 dBm(802.11ac_VHT80)

WLAN 5 GHz (5 150 MHz ~ 5 725 MHz)	Antenna 1	Higher-sub band	14.04 dBm(802.11a) 13.76 dBm(802.11n_HT20) 12.46 dBm(802.11n_HT40) 13.20 dBm(802.11ac_VHT80)
	Multiple Antenna	Lower-sub band	18.19 dBm(802.11a) 18.02 dBm(802.11n_HT20) 16.84 dBm(802.11n_HT40) 17.31 dBm(802.11ac_VHT80)
		Higher-sub band	16.62 dBm(802.11a) 16.34 dBm(802.11n_HT20) 15.28 dBm(802.11n_HT40) 15.65 dBm(802.11ac_VHT80)
WLAN 5 GHz (5 725 MHz ~ 5 850 MHz)	Antenna 0	6.79 dBm(802.11a) 6.73 dBm(802.11n_HT20) 5.93 dBm(802.11n_HT40) 6.08 dBm(802.11ac_VHT80)	
	Antenna 1	9.16 dBm(802.11a) 9.06 dBm(802.11n_HT20) 8.50 dBm(802.11n_HT40) 8.62 dBm(802.11ac_VHT80)	
	Multiple Antenna	11.83 dBm(802.11a) 11.76 dBm(802.11n_HT20) 11.09 dBm(802.11n_HT40) 11.23 dBm(802.11ac_VHT80)	
WLAN 2.4 GHz	Antenna 0	18.31 dBm(802.11b) 14.44 dBm(802.11g) 14.12 dBm(802.11n_HT20) 13.22 dBm(802.11n_HT40)	
	Antenna 1	17.95 dBm(802.11b) 14.24 dBm(802.11g) 14.21 dBm(802.11n_HT20) 13.07 dBm(802.11n_HT40)	
	Multiple Antenna	17.81 dBm(802.11g) 17.81 dBm(802.11n_HT20) 16.80 dBm(802.11n_HT40)	

Bluetooth	1 Mbps	11.96 dBm
	2 Mbps	9.87 dBm
	3 Mbps	9.86 dBm
Bluetooth LE	1 Mbps	7.77 dBm
	2 Mbps	7.81 dBm

FCC Product Description

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	WLAN 5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	WLAN 5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	WLAN 5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	WLAN 5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	11.26 dBm
		2 Mbps	11.15 dBm
	Bluetooth	1 Mbps	11.22 dBm
		2 Mbps	11.05 dBm
		3 Mbps	11.08 dBm
	WLAN 2.4 GHz	Antenna 0	16.69 dBm(802.11b) 12.83 dBm(802.11g) 12.70 dBm(802.11n_HT20) 10.93 dBm(802.11n_HT40)
		Antenna 1	17.51 dBm(802.11b) 13.75 dBm(802.11g) 13.63 dBm(802.11n_HT20) 11.59 dBm(802.11n_HT40)
		Multiple Antenna	16.32 dBm(802.11g) 16.20 dBm(802.11n_HT20) 14.28 dBm(802.11n_HT40)
	WLAN 5 150 MHz ~ 5 250 MHz Band	Antenna 0	12.39 dBm(802.11a) 12.48 dBm(802.11n_HT20) 10.15 dBm(802.11n_HT40) 8.75 dBm(802.11ac_VHT80)
		Antenna 1	12.80 dBm(802.11a) 12.63 dBm(802.11n_HT20) 10.10 dBm(802.11n_HT40) 9.08 dBm(802.11ac_VHT80)
		Multiple Antenna	15.53 dBm(802.11a) 15.50 dBm(802.11n_HT20) 13.09 dBm(802.11n_HT40) 11.93 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 250 MHz ~ 5 350 MHz Band	Antenna 0	12.47 dBm(802.11a) 12.35 dBm(802.11n_HT20) 11.08 dBm(802.11n_HT40) 7.81 dBm(802.11ac_VHT80)
		Antenna 1	13.15 dBm(802.11a) 13.18 dBm(802.11n_HT20) 11.86 dBm(802.11n_HT40) 8.48 dBm(802.11ac_VHT80)
		Multiple Antenna	15.83 dBm(802.11a) 15.80 dBm(802.11n_HT20) 14.50 dBm(802.11n_HT40) 11.17 dBm(802.11ac_VHT80)
	WLAN 5 470 MHz ~ 5 725 MHz Band	Antenna 0	12.40 dBm(802.11a) 12.32 dBm(802.11n_HT20) 11.38 dBm(802.11n_HT40) 8.18 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	9.55 dBm(802.11a) 9.78 dBm(802.11n_HT20) 9.69 dBm(802.11n_HT40) 5.92 dBm(802.11ac_VHT80)
		Antenna 1	13.23 dBm(802.11a) 13.26 dBm(802.11n_HT20) 11.56 dBm(802.11n_HT40) 8.66 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	11.34 dBm(802.11a) 10.85 dBm(802.11n_HT20) 10.66 dBm(802.11n_HT40) 6.74 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 470 MHz ~ 5 725 MHz Band	Multiple Antenna	15.77 dBm(802.11a) 15.73 dBm(802.11n_HT20) 14.48 dBm(802.11n_HT40) 11.44 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	13.55 dBm(802.11a) 13.36 dBm(802.11n_HT20) 13.21 dBm(802.11n_HT40) 9.36 dBm(802.11ac_VHT80)
	WLAN 5 725 MHz ~ 5 850 MHz Band	Antenna 0	11.78 dBm(802.11a) 11.93 dBm(802.11n_HT20) 11.13 dBm(802.11n_HT40) 10.55 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	2.36 dBm(802.11a) 2.57 dBm(802.11n_HT20) -2.23 dBm(802.11n_HT40) -8.75 dBm(802.11ac_VHT80)
		Antenna 1	13.20 dBm(802.11a) 13.34 dBm(802.11n_HT20) 12.30 dBm(802.11n_HT40) 11.66 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	3.84 dBm(802.11a) 3.43 dBm(802.11n_HT20) -0.99 dBm(802.11n_HT40) -7.34 dBm(802.11ac_VHT80)
		Multiple Antenna	15.56 dBm(802.11a) 15.70 dBm(802.11n_HT20) 14.76 dBm(802.11n_HT40) 14.15 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	6.17 dBm(802.11a) 6.03 dBm(802.11n_HT20) 1.44 dBm(802.11n_HT40) -4.98 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna		
ANTENNA GAIN	Bluetooth LE	0.62 dBi	
	Bluetooth	0.62 dBi	
	WLAN 2.4 GHz	Antenna 0	-0.42 dBi
		Antenna 1	-1.71 dBi
		Multiple Antenna	1.99 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-0.72 dBi
		Antenna 1	1.83 dBi
		Multiple Antenna	3.75 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	-0.80 dBi
		Antenna 1	0.37 dBi
		Multiple Antenna	2.83 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	-1.33 dBi
		Antenna 1	-0.17 dBi
		Multiple Antenna	2.30 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-1.43 dBi
		Antenna 1	0.26 dBi
		Multiple Antenna	2.51 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

– Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

OEM INTEGRATION INSTRUCTIONS:

This device is intended only for OEM integrators under the following conditions:

The module must be installed in the host equipment such that 20 cm is maintained between the antenna and users, and the transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the internal on-board antenna that has been originally tested and certified with this module. External antennas are not supported. As long as these 3 conditions above are met, further transmitter test will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.). The end-product may need Verification testing, Declaration of Conformity testing, a Permissive Class II Change or new Certification. Please involve a FCC certification specialist in order to determine what will be exactly applicable for the end-product.

Validity of using the module certification:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. In such cases, please involve a FCC certification specialist in order to determine if a Permissive Class II Change or new Certification is required.

Upgrade Firmware:

The software provided for firmware upgrade will not be capable to affect any RF parameters as certified for the FCC for this module, in order to prevent compliance issues.

End product labeling:

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: A3LWCB735M".

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

“CAUTION : Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.

IC Information

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The end product must be labeled to display the Industry Canada certification number of the module. Contains transmitter module IC: 649E-WCT731M

*** This device is going to be operated in 5 150 MHz ~ 5 250 MHz frequency range, it is restricted in indoor environment only.**

Information for OEM Integrator

This device is intended only for OEM integrators under the following conditions:

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- 2) The transmitter module may not be co-located with any other transmitter or antenna.

End product labelling

The label for end product must include

“Contains FCC ID: A3LWCB735M, Contains IC: 649E-WCB735M”.

” CAUTION: Exposure to Radio Frequency Radiation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20cm between the radiator and your body. This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm

may be maintained between the antenna and users.”

Requirement per KDB996369 D03

2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.³ Explanation: This module meets the requirements of FCC part 15C(15.247).Part 15E(15.407)

2.3 Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer’s instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

Explanation: The EUT has a Chip Antenna, and the antenna use a permanently attached antenna which is not replaceable.

2.4 Limited module procedures

If a modular transmitter is approved as a “limited module,” then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

Explanation: The Module is not a limited module.

2.5 Trace antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ

- Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects:

layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);

b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the

- wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
 - d) Appropriate parts by manufacturer and specifications;
 - e) Test procedures for design verification; and
 - f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

Explanation: Yes, The module with trace antenna designs, and This manual has been shown the layout of trace design, antenna, connectors, and isolation requirements.

2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

Explanation: This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: A3LWCB735M.

2.7 Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an "omni-directional antenna" is not considered to be a specific "antenna type")). For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

Explanation: The EUT has a Chip Antenna, and the antenna use a permanently attached antenna which is unique.

2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating "Contains FCC ID" with their finished product. See Guidelines for Labeling and User Information for RF Devices KDB Publication 784748.

Explanation: The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: A3LWCB735M." "Contains IC: 649E-WCB735M"

2.9 Information on test modes and additional testing requirements⁵

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide.

Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product. The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer’s determination that a module as installed in a host complies with FCC requirements.

Explanation: Top band can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

2.10 Additional testing, Part 15 Subpart B disclaimer

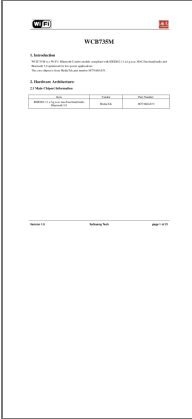
The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Explanation: The module without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.

Version 1.0

XuGuang Tech

Documents / Resources

The thumbnail shows the cover of a technical manual. At the top, there are logos for Wi-Fi and Bluetooth. Below them, the title 'WCB735M' is prominently displayed. The cover includes a table of contents and a list of features or specifications.

[WIFI WCB735M Bluetooth Combo module compliant](#) [pdf] User Manual
WCB735M, A3LWCB735M, Bluetooth Combo module compliant, module compliant