



WOLF LMX Linear Range Luminaire User Guide

[Home](#) » [Wolf](#) » WOLF LMX Linear Range Luminaire User Guide



WITHOUT COMPROMISE
Linear Range Luminaire
User Guide
LMX LINEAR ZONES 1, 2, 21, 22


Contents [[hide](#)]

- [1 PRODUCT INFORMATION](#)
- [2 FEATURES & BENEFITS](#)
- [3 TECHNICAL INFORMATION](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

PRODUCT INFORMATION

The LMX installed linear range is ATEX, IECEx and UKCA certified for safe use in Zones 1 and 21 potentially explosive atmospheres. Ideal for illuminating hazardous area walkways, corridors, and long and large open areas, all products are IP67 rated, tough, reliable and ideal for indoor or outdoor use in new installations and for replacing existing fluorescent or LED installations for improved performance and lower energy consumption.

Available in 2 versions, Forward Facing Array (FFA) models are ideal for illuminating larger areas and for when lights are mounted high up and out of operators' eyeline; Directional Linear Optics (DLO) versions offer market leading low glare performance and the ability to direct light exactly where it's needed with no light over spill or wasted light output.

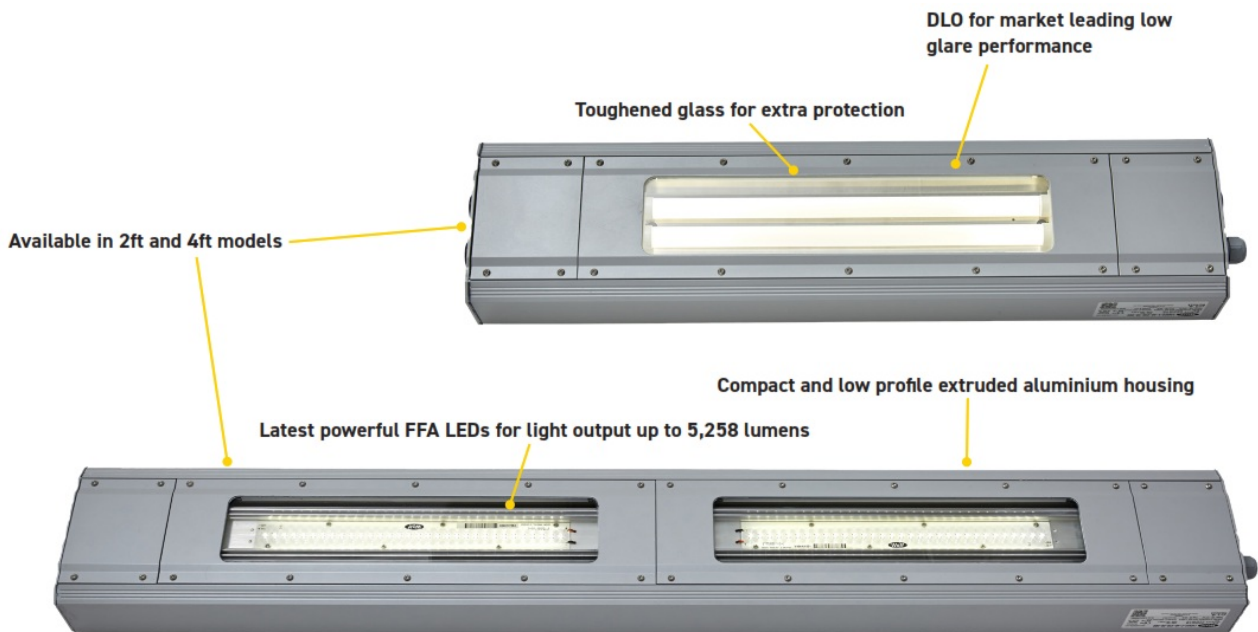

FEATURES & BENEFITS

LIGHT OUTPUT/POWER

Forward Facing Array (FFA) models:

Up to 5,258 lumens (LMX4)

5000K for bright, crisp lighting that's ideal for general work area illumination

Directional Linear Optics (DLO) models:

Up to 3,976 lumens

Directional light – light directed exactly where needed with no over-spill and no wasted lumens

Low glare – for workers' comfort and well being 4600 K for maximum comfort and ease for more detailed operations

CERTIFICATION/SPECIFICATION

ATEX, IECEx and UKCA certified for gas Zone 1 and dust zone 21 T4 temperature class

An IP67 rating means the LMX Linear is suitable for both indoor and outdoor use

With all models having a lower ambient limit of – 50°C and high temperature versions up to 60°C being available, the LMX range is ideal for even the most extreme environments

FEATURES

Simple design ensures quick and easy installation

Standard industry sizes allow easy retrofit of existing installations Four gland apertures (2x each end) to support through wiring arrangements

Available as 110V and 230V versions

The extruded aluminium body and strengthened glass ensure long life and resistance to damage

Ultra long life LEDs – configured for 100,000+ hours life

The modular LED system allows easy, quick and efficient servicing, repair and replacement if necessary through easy access and rapid part replacement

Advanced thermal management technology ensures a lifetime of 10 years+

5 year warranty


IES files available upon request

TECHNICAL INFORMATION



PRODUCT DIMENSIONS

LMX LINEAR

MEASUREMENT MM

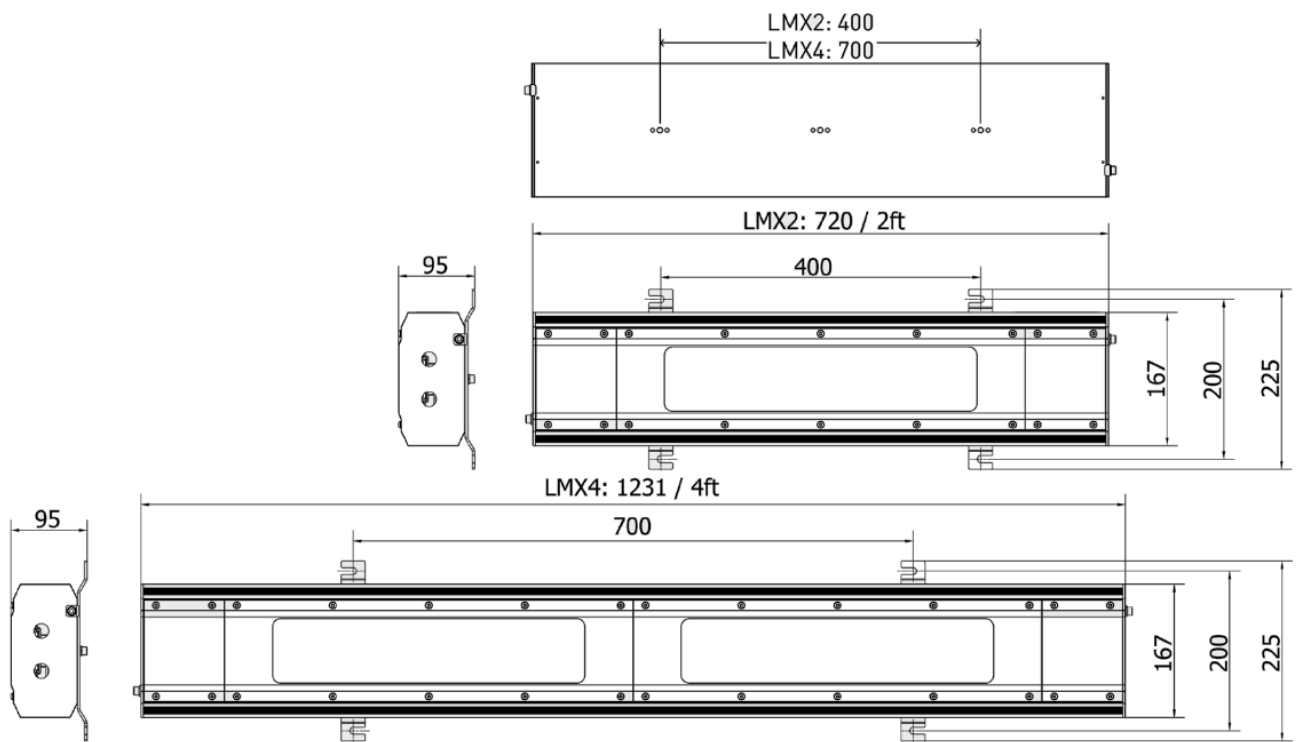

LIGHT OUTPUT DIAGRAM

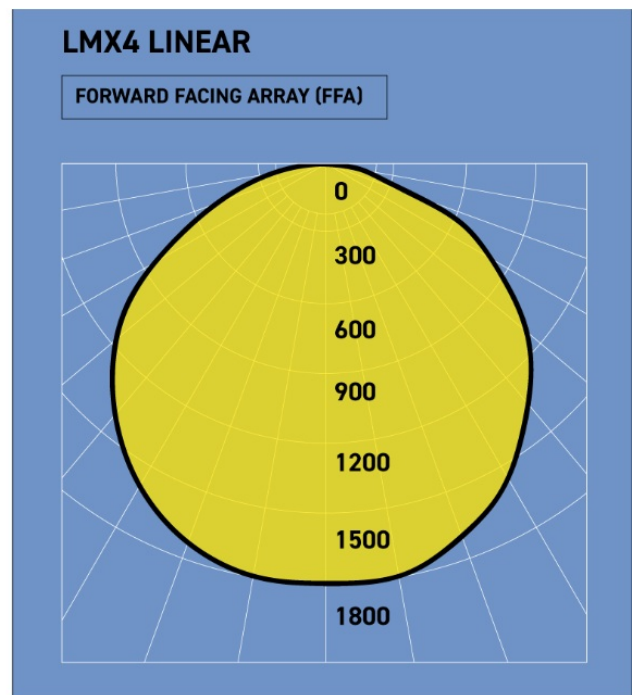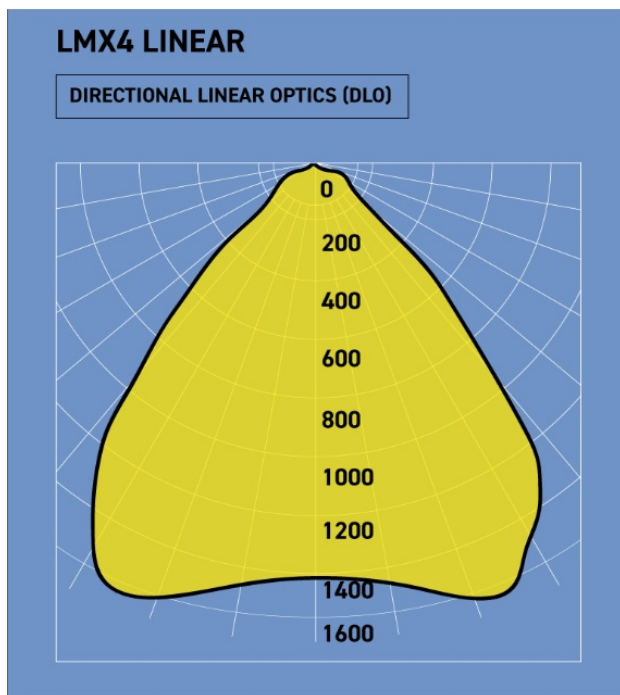

LMX LINEAR TECHNICAL TABLE

LMX LINEAR								
PRODUCT REFERENCE	LMX2S-F-50	LMX2S-F-60	LMX2S-L-50	LMX2S-L-60	LMX4S-F-50	LMX4S-F-60	LMX4S-L-50	LMX4S-L-60
Code	II 2 G D Ex eb mb IIC T4 Gb Ex tb IIIC T T80°C..90°C Db							
Certificate	ExVeritas 19 ATEX 0433X / IECEx EXV 19.0001X / ExVeritas 21 UKEX 0946X							
Input Voltage Range	88 – 140 V AC; 180 – 277 V AC							
Input Power (230V) (W)	23		24		46		48	
Frequency	50 – 60 Hz							
Power Factor	>0.90							
Enclosure Size	2 ft				4 ft			
Lumen Output (Max)*	2,629	2,629	1,988	1,988	5,258	5,258	3,976	3,976
LED Module & Quantity	1 x FFA	1 x FFA	1 x DLO	1 x DLO	2 x FFA	2 x FFA	2 x DLO	2 x DLO
Beam Angles	115°		90° (110° upon request)		115°		90° (110° upon request)	
Ingress Protection	IP67							
Gas Temp. Classes	T4							
Dust Surface Temp.	T 80 °C	T 90 °C	T 80 °C	T 90 °C	T 80 °C	T 90 °C	T 80 °C	T 90 °C
Lower Temp. Limit	-50 °C							
Upper Temp. Limit	50 °C	60 °C	50 °C	60 °C	50 °C	60 °C	50 °C	60 °C

*Lumen output figures stated are for 230V AC


All information has been gathered under laboratory conditions, the user must regard the values given as approximate. Changes may be made to the above specification without notification, details are available on request. E&OE.



WITHOUT COMPROMISE
Wolf Safety Lamp Company
 Saxon Road Works, Sheffield S80YA, UK
 T: +44 (0) 114 255 1051
 E: info@wolfsafety.com
www.wolfsafety.com



Documents / Resources

	<p>WOLF LMX Linear Range Luminaire [pdf] User Guide</p> <p>LMX, Linear Range Luminaire, LMX Linear, Luminaire, LMX Linear Range Luminaire</p>
---	---

References

- [W HOME | Wolf Safety](#)