

XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System



XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System Instruction Manual


[Home](#) » [XTC POWER PRODUCTS](#) » XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System Instruction Manual 

Contents

- [1 XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System](#)
- [2 INSTRUCTION](#)
- [3 INSTALLATION](#)
- [4 CONTACT](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System

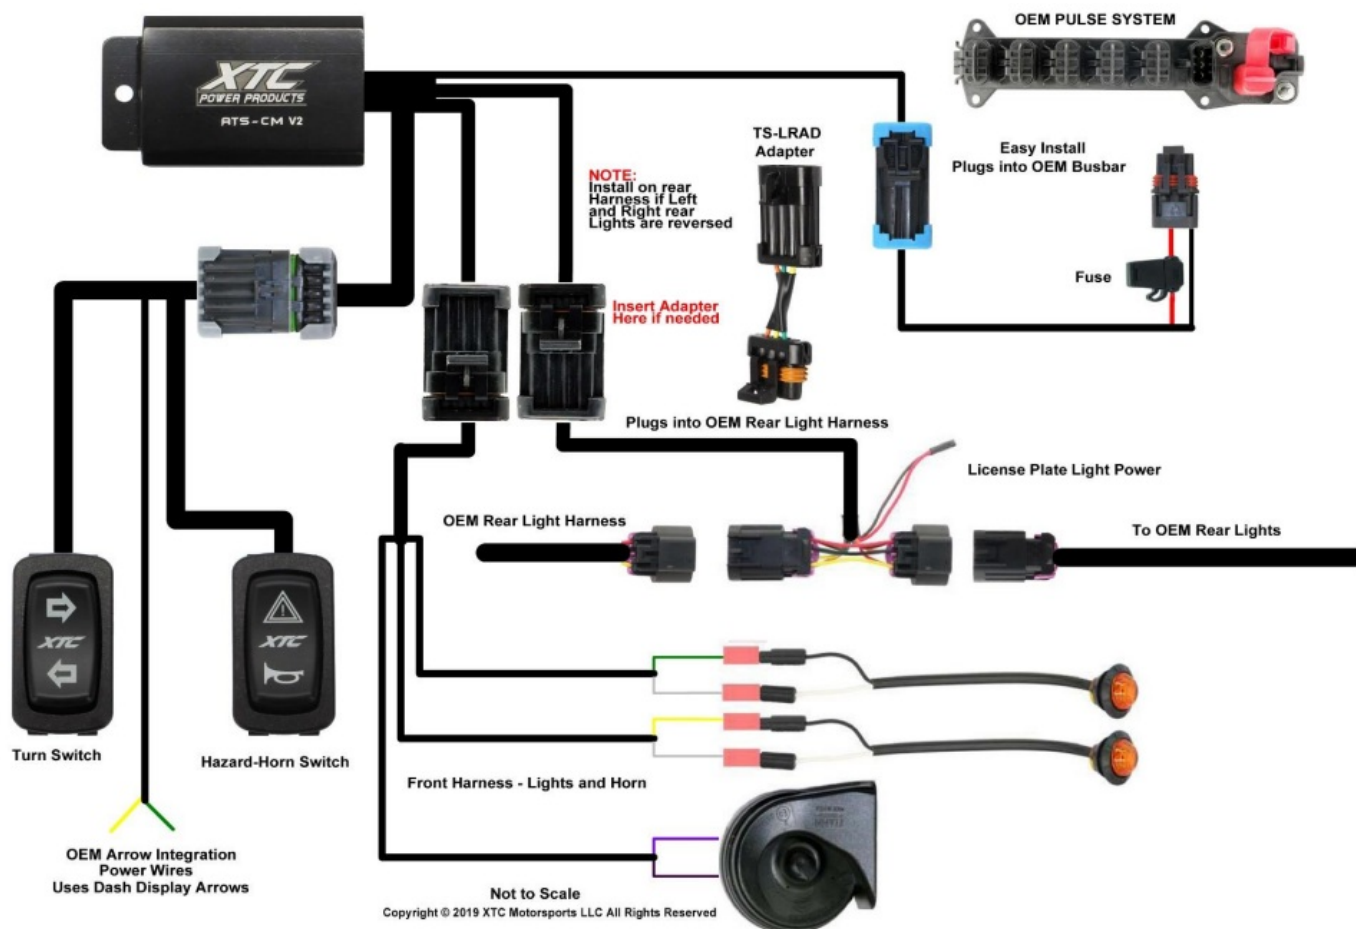

INSTALLATION


1. Remove the hood and Dash cover if installing under the dash, and the center console or panel.



2. Mount the Control Module using the self-tapping screw provided. The Control Box may be mounted under the dash or the hood. Make sure before mounting the Control Module, that the turn switch harness can make it to the dash where you want the switches mounted.

WARNING! Make sure to keep the harness away from any hot or moving parts

3. Under the rear bed is the OEM rear taillight harness, unplug the connector and plug our long harness into it. Run the 4-pin connector to the front of the car. Follow the air intake tube down to the center of the car, the cable can be pulled through the inspection area in the cab up the firewall to the Control Module. Insert this connector into the mating module connector. See Note in section 13 if OEM rear lights do not flash correct direction after installation.

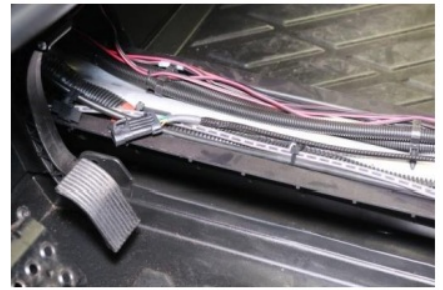

WARNING! Verify that there is clearance where you want to mount the front LED lights before drilling the holes.

4. Front LED Turn Lights – The front LED Turn Indicators can be mounted with the rubber grommet or without. If the grommet is not being used drill 5/8" holes. If the grommet is being used drill 3/4" holes. Remove and install the rubber grommet from the LED into the hole if being used. Insert LED into the hole with the Top marking up. **NOTE:** the TOP marking is on the front of the LED lens. The Lights may be mounted anywhere on the front of the car, for the sample we chose the corner of the trim because it can be seen from both the front and side of the car, on the General clearance is very tight. If choosing this location use the rubber grommet as a template and mark as far forward and as low as you can to avoid lip on the inside.



5. Plug the short Front Harness into the Control Module. Run the front right and left wire harness through the center grommet as shown, the green and white wire go to the right side of the car and the yellow and white go to the left side, connect the green wire to right black wire and yellow wire to left black wire and white to white on both.


NOTE: The Black LED wire is positive and goes to the yellow and green wires, they will not work if reversed, white is ground. Secure the Harness using the provided cable ties.

6. Install the Turn and Horn/Hazard Switches. On Pre 2021 models, use a new sharp razor, and cut two switch rectangles out. Do not over-cut, try inserting the switch and trim as necessary. It helps to rock the razor to cut. On newer models, remove two switch plugs. Run Switch Harness – Plug the Switch Harness into the Control Module, run the two connectors through the rectangle switch cutouts, and use the included grease on terminals, connect to the turn switch, and slide the switch into the dash.



Connect to OEM Dash Indicators – Note: The connector has power in it, disconnect the battery during installation. There is a 2-wire harness that has green and yellow wires coming out of it. The Ranger uses the green and yellow wires to light the Arrows in the OEM instrument cluster.


7. **Unplug Connector** – From the rear of the Instrument Cluster

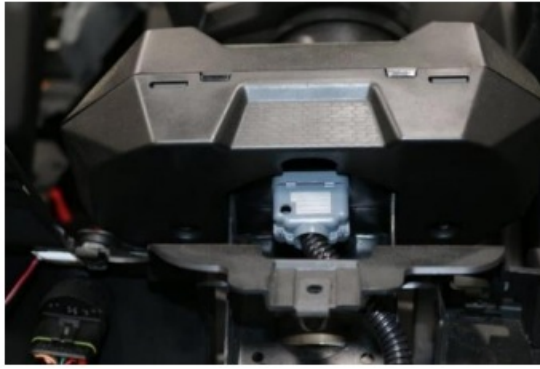

8. **Remove Connector Lock** – Using a small screwdriver push in on both sides at the white connector shown below and slide lock off




9. **Remove Plugs** – Using a pair of needle nose pliers remove the plugs from wire port 6 and 7, insert the green wire terminal into 6 and the yellow wire terminal into port 7.

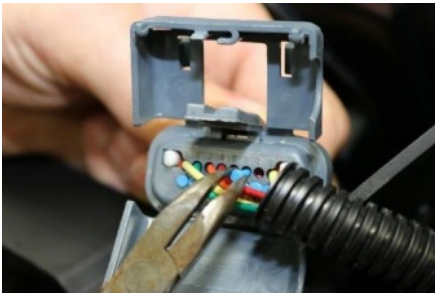

10. **Close Cover** – Run ATS wires alongside the OEM harness and snap shut, re-install the plastic locking cover, and plug back in.
11. **Install the Horn**. Install the Horn mounting bracket to the horn. Pull out a Busbar Torx screw or using the included #10 x 1" screw, mount the horn in one of the plastic holes as shown above. Connect the violet wire to one of the horn terminals and the black wire to the other terminal.



12. Plug the Power Harness into the Control Module. Run the power wire to the Busbar, remove one of the blanks and plug into the Busbar.

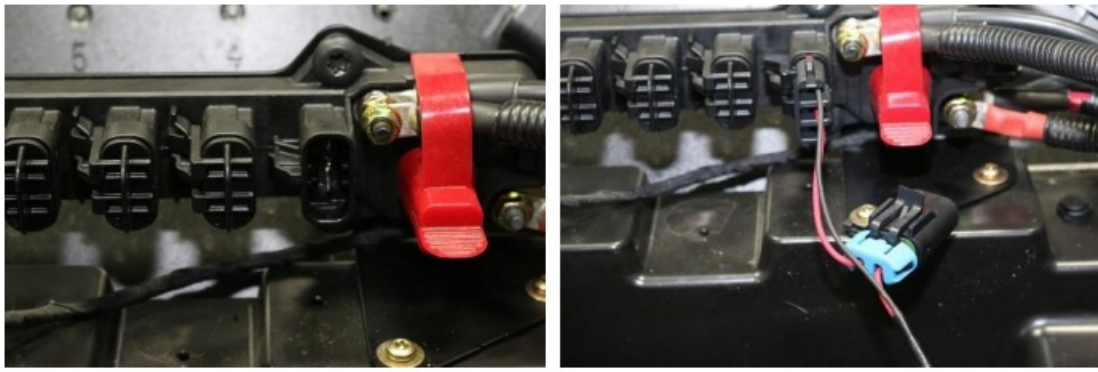

13. **Verify Operation:** The System uses momentary switches to activate. Press the Right or Left Actuator accordingly. You can cancel the signal at any time by pushing the activated switch a second time or it will cancel as follows:

- Press 1 Second for Lane Change, which will stay on approx. 8 Seconds / 10 Flashes
- Press 2 Seconds for Slowing to Turn Corners, will stay on approx. 20 Seconds / 30 Flashes
- Press 5 Seconds for Traffic Lights when stopping and waiting, will stay on approx. 75 Seconds / 110 Flashes

The system's Automatic Self-Cancelling may be overridden/Shut Off at any time by pushing the activated switch. Hazard Lights – press to activate and press again to deactivate, it does not self-cancel.

Note: If after testing the OEM rear taillights are working backward, install the optional TS-LRAD adapter on the rear harness at the control module. See diagram on page 1.

14. Using the provided Cable Tie secure the harness completely. Reinstall the removed parts and re-attach the battery.


We can be reached by email at support@xtcpowerproducts.com

CONTACT

- XTC Power Products
- **A Division of XTC Motorsports LLC**
- **ADDRESS:** 380 E Comstock Dr. Chandler AZ 85225 480-558-8588
- **WEBB:** www.xtcpowerproducts.com

Disclaimer: This kit is intended for off-road use only and XTC Motorsports claims no responsibility for it use. It is up to the purchaser to make sure it complies with all Federal, State, and Local laws. R3.1
Copyright © 2023 XTC MOTORSPORTS LLC, all rights reserved.

Documents / Resources

	<p>XTC POWER PRODUCTS ATS-POL-RCBU Automatic Self Canceling Turn Signal System [pdf] Instruction Manual</p> <p>ATS-POL-RCBU, ATS-POL-RCBU Automatic Self Canceling Turn Signal System, Automatic Self Canceling Turn Signal System, Self Canceling Turn Signal System, Turn Signal System, Signal System, System</p>
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.