



Z TAGS DATAMARS C33766 Feedlot Tags Installation Guide

[Home](#) » [Z TAGS DATAMARS](#) » Z TAGS DATAMARS C33766 Feedlot Tags Installation Guide 

Contents



- [1 Z TAGS DATAMARS C33766 Feedlot Tags](#)
- [2 Knowing your One Piece No snag tagger](#)
- [3 Applying No snag feedlot tag](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)



Z TAGS DATAMARS C33766 Feedlot Tags




Knowing your One Piece No snag tagger

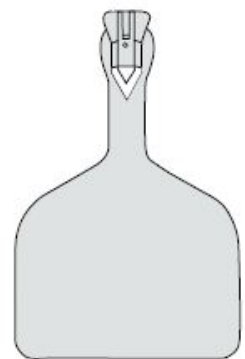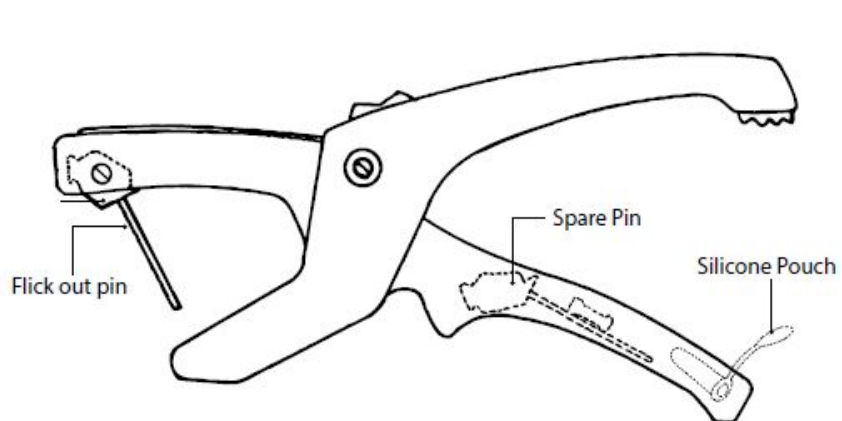


No snag feedlot tags™
One piece tags

Applying No snag feedlot tag


1. Flip the pin up into the loading position and insert the pin into the head of the tag.

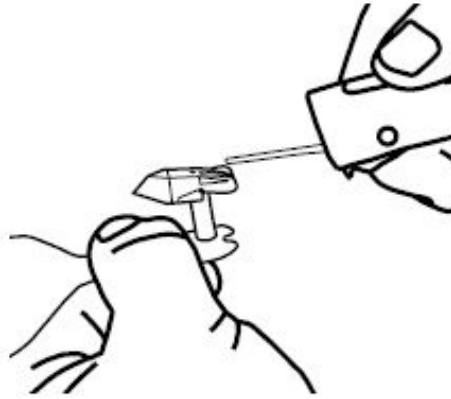

2. Rotate the tag to the side and flip the pin down into the tagging position as shown. Now the tag is ready to apply.

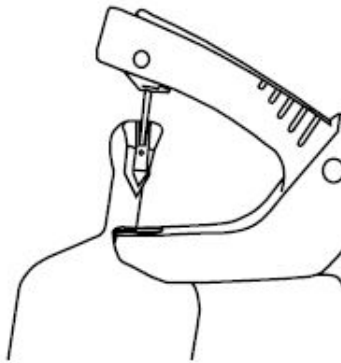

3. Remove the tagger without opening handles, pulling tagger away from the animal's ear in one smooth motion.

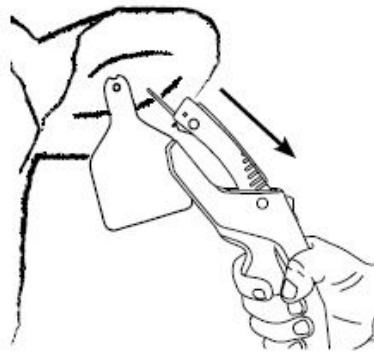

1300 594 696 info@zeetags.com.au www.ztags.com

Documents / Resources

	Z TAGS DATAMARS C33766 Feedlot Tags [pdf] Installation Guide C33766 Feedlot Tags, C33766, Feedlot Tags
--	---