



# ZENEC ZE-RVSC62-MK2 Rear View Camera Instruction Manual

[Home](#) » [ZENEC](#) » ZENEC ZE-RVSC62-MK2 Rear View Camera Instruction Manual 




## MOUNTING INSTRUCTIONS ZE-RVSC62-MK2 REAR VIEW CAMERA

### Contents

- [1 CONNECTION DIAGRAM](#)
- [2 KEY FEATURES](#)
- [3 DESCRIPTION:](#)
  - [4 Technical Specifications](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## CONNECTION DIAGRAM

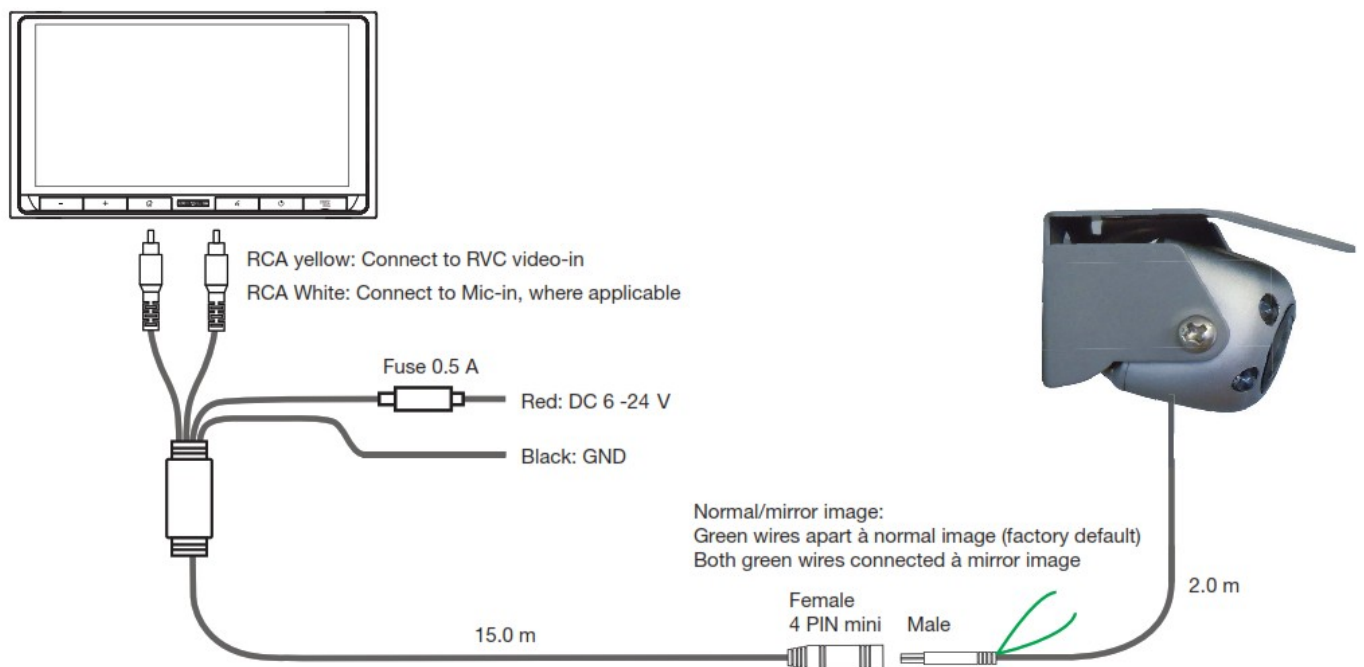

## KEY FEATURES

- Compact high resolution rear view camera
- Automatic day and night mode with four night vision IR LED's
- Built-in microphone
- Normal or mirrored image output
- Aluminum die cast housing
- 2 m length of main wire harness with 15 m extension wire included

## DESCRIPTION:


This ZENEC rear view camera model has been developed for use with mobile homes and caravans. The use of high quality parts and materials for best weather resistance and longevity, as well as the clever construction according to IP69K protection class allow for a perfect operation in the afore mentioned target vehicles.

## Technical Specifications



|                           |                                    |
|---------------------------|------------------------------------|
| Image device:             | 6.09 mm SONY IMX225LQR CMOS sensor |
| Lens focal length:        | f 2.3                              |
| TV system:                | NTSC / 30 fps                      |
| View angle:               | 170° (D) x 135° (H) x 90° (V)      |
| Native sensor resolution: | 1305 (H) x 977 (V) pixels          |
| Resolution of video-out:  | > 420 TV lines                     |
| Signal to noise ratio:    | > 48 dB                            |
| Light sensitivity:        | 0.3 Lux                            |
| Video output:             | 1.0 Vp-p, 75 ohms CVBS             |
| White balance:            | Auto                               |
| Backlight compensation:   | Auto                               |
| Gamma correction:         | 0.45                               |
| Gain control:             | Auto                               |
| Sync system:              | Auto                               |
| Power supply:             | DC 6 – 24 V                        |
| Current consumption:      | 70 mA @12 VDC, ≤ 840 mW            |
| IP protection rating:     | IP69K                              |
| Operating temperature:    | -30° C ~ +75°C, RH 95% max.        |
| Dimensions (WxHxD):       | 36 x 31 x 40 mm                    |
| Weight:                   | 60 g                               |

## CAUTION

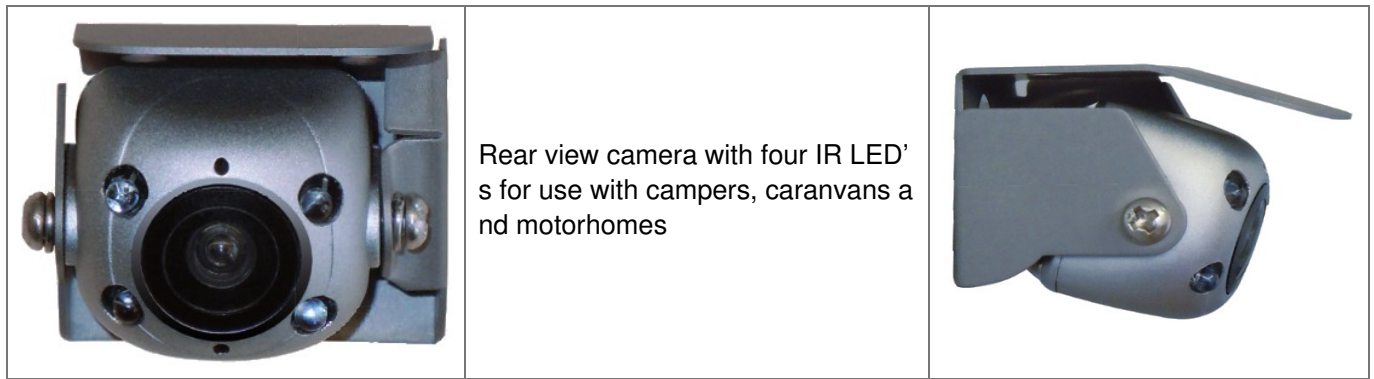
- Use the included connection cable exclusively. Modifying the cable will void your warranty.
- The camera is water- and dustproof and has been licensed according to the international standard IP69K. However, vehicle cleaning using high pressure water and steam jet devices may still lead to damage of IP69K rated camera models by intrusion of water.
- If the vehicle is treated with a water jet high pressure cleaning device, make sure to keep a distance of at least one meter between the water nozzle and the camera sensor / housing.



ZENEC by ACR AG Bohrturmweg 1 CH-5330 Bad Zurzach Switzerland  
 EU Legal Representative: ACR S & V GmbH Industriestr. 35 D-79787 Lauchringen Germany  
[www.zenec.com](http://www.zenec.com)

 10R-06/01 16368   
 Rev. A

## Documents / Resources

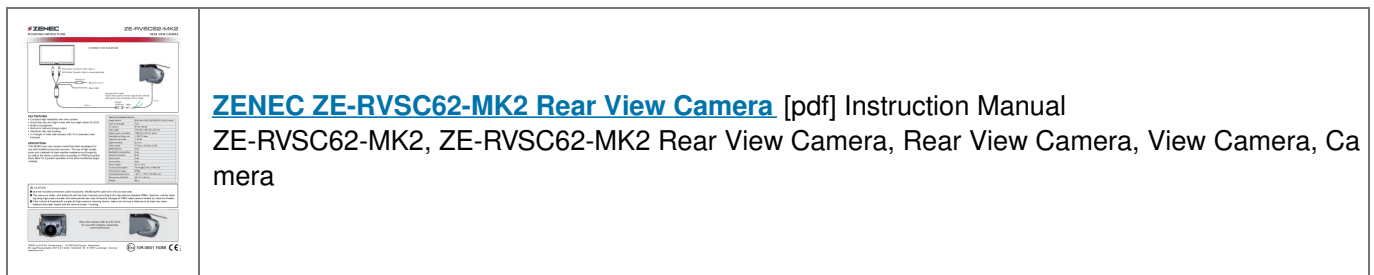

## References

-  [ZENEC – Touch another World](#)

[Manuals+](#).