



Zhejiang Dahua Vision Technology DH-SD2AY Network PT Camera Web 3.0 User Manual

[Home](#) » [Zhejiang Dahua Vision Technology](#) » Zhejiang Dahua Vision Technology DH-SD2AY Network PT Camera Web 3.0 User Manual 



Contents

- 1 DH-SD2AY Network PT Camera Web 3.0
- 2 Network Configuration
- 3 Live
- 4 AI Live
- 5 Playback
- 6 Setting
- 7 Access Platform
- 8 ONVIF
- 9 Storage
- 10 Destination
- 11 Account Settings
- 12 Safety
- 13 System Service
- 14 Default
- 15 Import/Export
- 16 System Maintenance
- 17 Upgrade
- 18 Information
- 19 Logout
- 20 Appendix 1 Cybersecurity Recommendations
- 21 Documents / Resources
 - 21.1 References
- 22 Related Posts

DH-SD2AY Network PT Camera Web 3.0






Foreword

General

This manual introduces the functions and operations of the network speed dome and PTZ camera (hereinafter referred to as “the Device”).

Safety Instructions

The following signal words might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, reductions in performance, or unpredictable results.
 TIPS	Provides methods to help you solve a problem or save time.
 NOTE	Provides additional information as a supplement to the text.

Revision History

Revision Version	Release Content	Revision Time
V3.0.3	Added sleep mode function.	January-22
V3.o.2	<ul style="list-style-type: none"> •Updated illuminator function. •Added legal information function. 	September-21
V3.0.3.	Added Configuring User Group function.	July-21
V3.o.o	<ul style="list-style-type: none"> •Modified overlay, audio, network settings, and destination sections. •Added Bluetooth settings, construction monitoring, battery exception, screen off settings, emergency maintenance, life statistics, and battery status sections. 	March-21
V2.0.2	Added the note to provide international calling codes for 4G models.	June-20
V2.0.1	Updated OSD info, TCP/IP and smart plan, and delete life statistics.	April April 2020
V2.0.0	Added some functions of the Baseline, and refine the whole manual.	Jan-20
V1.1.1	Updated some functions of the Security Baseline.	Sep-19
V1.0.0	First release.	May-18

Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

Interface Declaration

This manual mainly introduces the relevant functions of the device. The interfaces used in its manufacture, the procedures for returning the device to the factory for inspection and for locating its faults are not described in this manual. Please contact technical support if you need information on these interfaces.

About the Manual

- The manual is for reference only. Slight differences might be found between the manual and the product.
- We are not liable for losses incurred due to operating the product in ways that are not in compliance with the manual.
- The manual will be updated according to the latest laws and regulations of related jurisdictions. For detailed information, see the paper user's manual, use our CD-ROM, scan the QR code or visit our official website. The manual is for reference only. Slight differences might be found between the electronic version and the paper version.
- All designs and software are subject to change without prior written notice. Product updates might result in some differences appearing between the actual product and the manual. Please contact customer service for the latest program and supplementary documentation.

- There might be errors in the print or deviations in the description of the functions, operations and technical data. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and company names in the manual are properties of their respective owners.
- Please visit our website, contact the supplier or customer service if any problems occur while using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Important Safeguards and Warnings

This section introduces content covering the proper handling of the Device, hazard prevention, and prevention of property damage. Read carefully before using the Device, comply with the guidelines when using it, and keep the manual safe for future reference.



Operation Requirements

- Make sure that the power supply of the device works properly before use.
- Do not pull out the power cable of the device while it is powered on.
- Only use the device within the rated power range.
- Transport, use and store the device under allowed humidity and temperature conditions.
- Prevent liquids from splashing or dripping on the device. Make sure that there are no objects filled with liquid on top of the device to avoid liquids flowing into it.
- Do not disassemble the device.

Installation Requirements



WARNING

- Connect the device to the adapter before power on.
- Strictly abide by local electrical safety standards, and make sure that the voltage in the area is steady and conforms to the power requirements of the device.
- Do not connect the device to more than one power supply. Otherwise, the device might become damaged.
- Observe all safety procedures and wear required protective equipment provided for your use while working at heights.
- Do not expose the device to direct sunlight or heat sources.
- Do not install the device in humid, dusty or smoky places.
- Install the device in a well-ventilated place, and do not block the ventilator of the device.
- Use the power adapter or case power supply provided by the device manufacturer.
- The power supply must conform to the requirements of ES1 in IEC 62368-1 standard and be no higher than PS2. Note that the power supply requirements are subject to the device label.
- Connect class I electrical appliances to a power socket with protective earthing.

Network Configuration

1.1 Network Connection

To view the web page on your PC, connect the Device to the PC first. There are mainly two connection modes between the Device and PC.



The models presented in the figures are for reference only, and the actual product shall prevail.

Figure 1-1 Direct connection by using a network cable


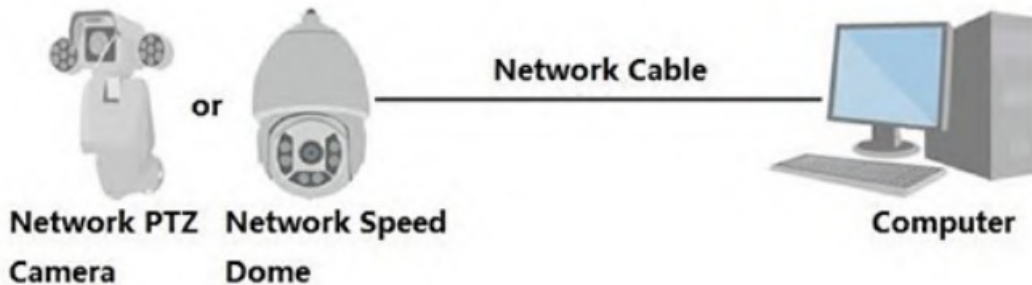


Figure 1-2 Connection by using a switch or router

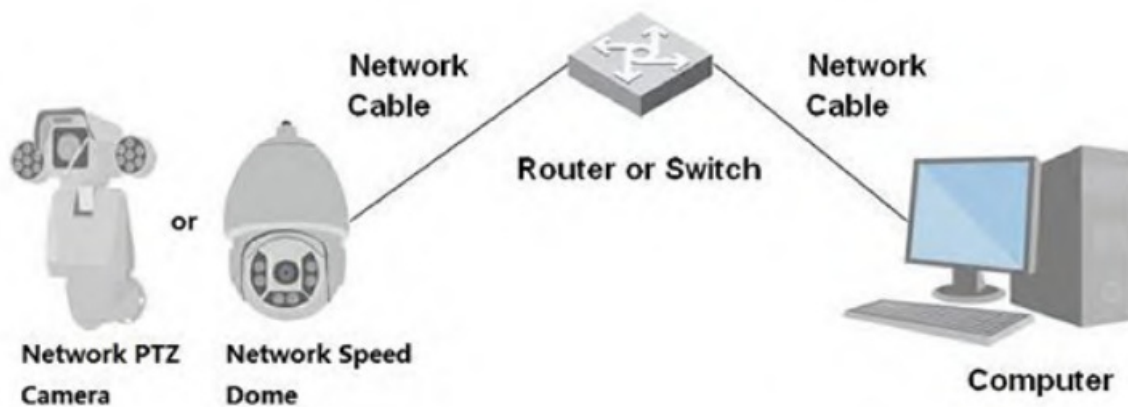

All devices have the same IP address (192.168.1.108 by default) when they are delivered out of factory. To make the Device get access to network smoothly, plan available IP segment reasonably according to practical network environment.

1.2 Log in to the Web Page


1.2.1 Device Initialization

For first-time use or after you have restored the Device to defaults, you need to initialize the Device by performing the following steps.

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press the Enter key.

Step 2 Set the Country/Region, Language and Video Standard, and then click Save.

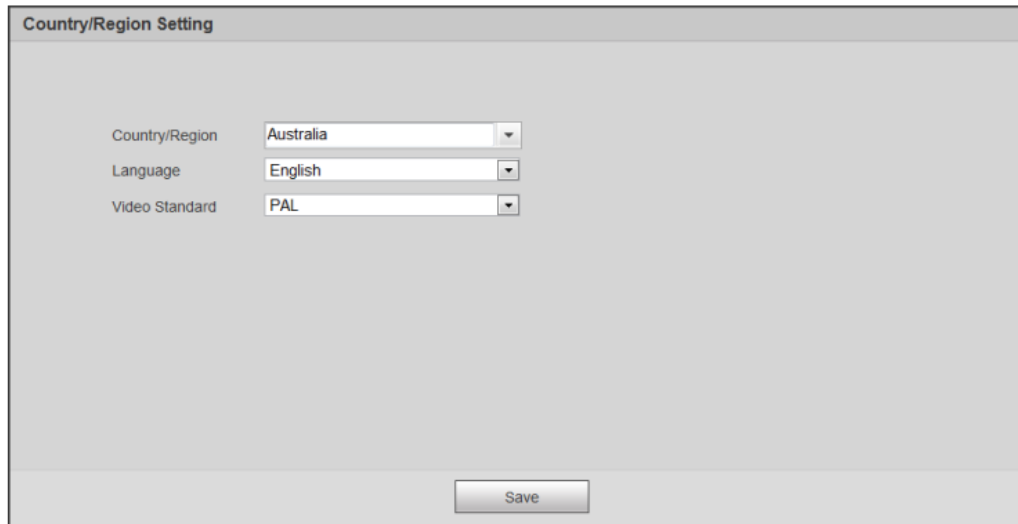Figure 1-3 Country/region setting




The 'Country/Region Setting' window contains three dropdown menus. The first is labeled 'Country/Region' and is set to 'Australia'. The second is labeled 'Language' and is set to 'English'. The third is labeled 'Video Standard' and is set to 'PAL'. A 'Save' button is located at the bottom center of the window.

Country/Region	Australia
Language	English
Video Standard	PAL

Save

Step 3 Configure time parameters, and then click Next.

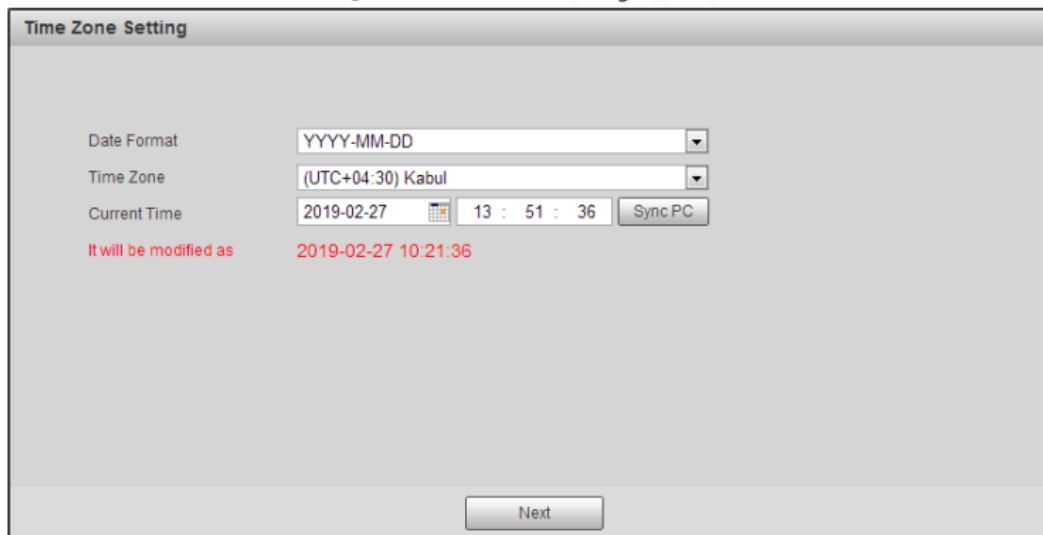Figure 1-4 Time zone setting



The 'Time Zone Setting' window displays configuration options for time. 'Date Format' is set to 'YYYY-MM-DD'. 'Time Zone' is set to '(UTC+04:30) Kabul'. 'Current Time' shows '2019-02-27' with a calendar icon, and a digital clock showing '13 : 51 : 36'. A 'Sync PC' button is next to the clock. Below the clock, red text reads 'It will be modified as 2019-02-27 10:21:36'. A 'Next' button is at the bottom.

Date Format	YYYY-MM-DD
Time Zone	(UTC+04:30) Kabul
Current Time	2019-02-27 13 : 51 : 36


Sync PC

It will be modified as 2019-02-27 10:21:36

Next

Step 4 Set the password for admin account, and then click Save.

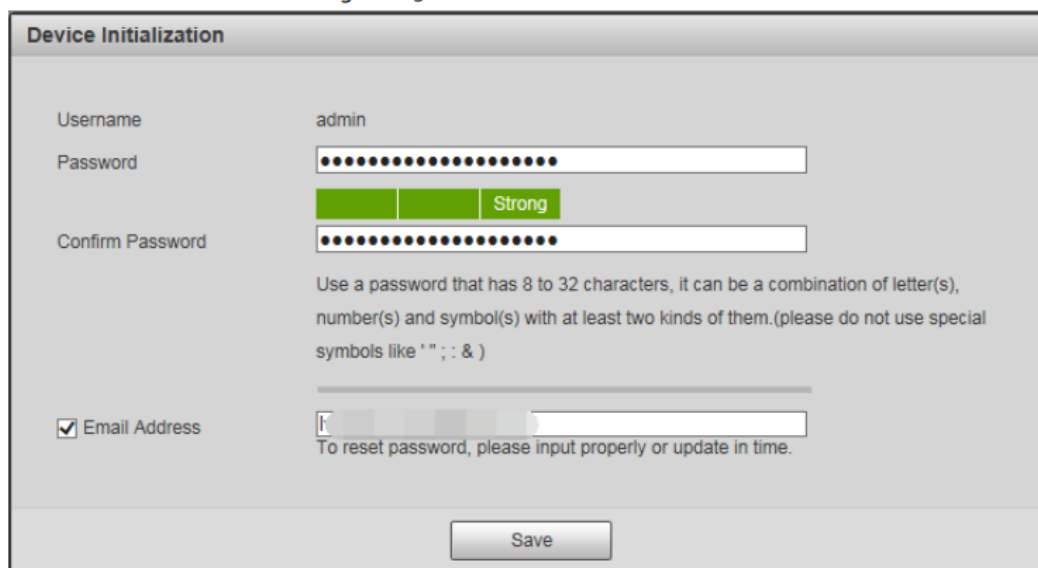Figure 1-5 Device initialization



The 'Device Initialization' window is for setting up the admin account. 'Username' is pre-filled with 'admin'. 'Password' and 'Confirm Password' fields are masked with dots. A strength indicator shows three green bars and the word 'Strong'. A note below explains password requirements: 'Use a password that has 8 to 32 characters, it can be a combination of letter(s), number(s) and symbol(s) with at least two kinds of them.(please do not use special symbols like " " ; : &)'. There is a checkbox for 'Email Address' which is checked, followed by an email input field. A note at the bottom says 'To reset password, please input properly or update in time.' A 'Save' button is at the bottom.

Username	admin
Password
Confirm Password

Strong


Use a password that has 8 to 32 characters, it can be a combination of letter(s), number(s) and symbol(s) with at least two kinds of them.(please do not use special symbols like " " ; : &)

☒ Email Address

To reset password, please input properly or update in time.

Save

Table 1-1 Device initialization parameter description

Parameter	Description
Username	It is admin by default.
Password	The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ' " ; : &). Set a high security password according to the prompt of password strength. Make sure that the new password is the same as the confirming password.
Confirm Password	Enter the confirming password that shall be the same as the password you entered.
Email Address	Set the email address which is used to reset password.  Email address is enabled by default. You can disable the function as needed.

Step 5 Select P2P checkbox, and then click Next.


Figure 1-7 P2P page



Step 6 Scan the QR code on the page, download the app, and then finish configurations according to the instructions on your mobile device. After that, click Next.

The Online Upgrade page is displayed.

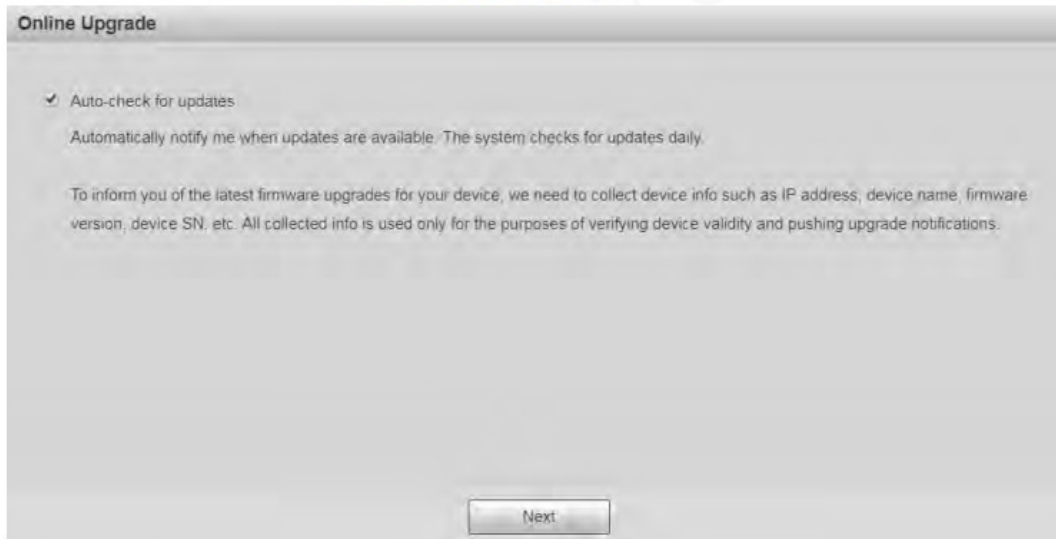Figure 1-9 Online upgrade



Step 7 Select Auto-check for updates checkbox.

After the function is enabled, the Device will check for updates once a day automatically.

There will be system notice if any update is available.

Step 8 Click Next, and the login page is displayed.

Figure 1-10 Login page



1.2.2 First-time Login

You need to download and install the plug-in for the first-time login.

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press Enter.

Step 2 Enter the username and password, and then click Login.


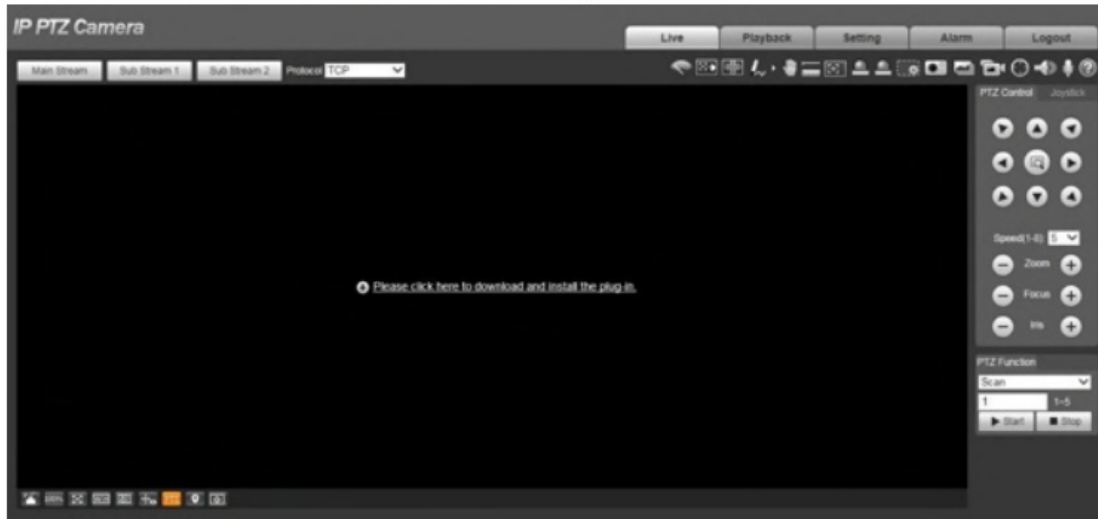
-  If you enter the wrong password for 5 times, the account will be locked for 5 minutes.
After the locked time, you can log in to the web page again.
 - You can set the number of allowed password attempts and locked time in "5.5.12.3 Illegal Access".
- Step 3 Download and install the plug-in according to the on-screen instruction after logging in to the web page.

Figure 1-11 Install the plug-in



Step 4 After the plug-in is installed, the web page will be refreshed automatically, and the video is displayed on the Live page.

Figure 1-12 Live page



The Live page shown in the manual is for reference only, and functions might be different depending on the model.


1.2.3 Device Login

Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press Enter.

Figure 1-13 Device login




Step 2 Enter the username and password, and then click Login.
The video is displayed on the Live page.

-  If you enter the wrong password for 5 times, the account will be locked for 5 minutes.
After the locked time, you can log in to the web page again.
- You can set the number of allowed password attempts and locked time. For details, see "5.5.12.3 Illegal Access".

1.2.4 Resetting Password

If you forget the password of the admin user, you can set the password through the provided email address.

 Before resetting the password, you need to provide the email address in advance. For details, see "1.2.1 Device Initialization" or "5.7.3.2 System Service".


Step 1 Open the browser, enter the IP address of the Device in the address bar, and then press Enter.
The Login page is displayed.

Figure 1-14 Login



Step 2 Click Forgot password?, and the Prompt page is displayed.

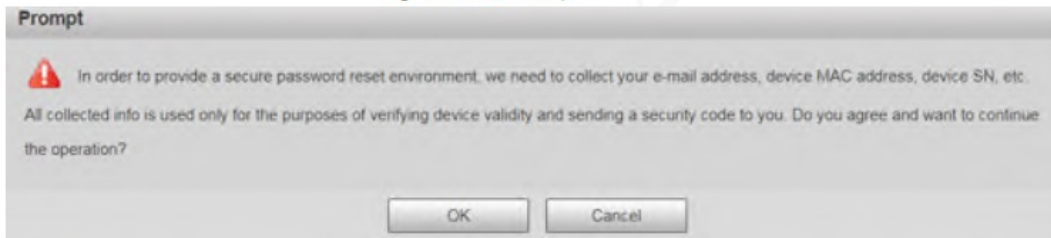Figure 1-15 Prompt



Step 3 Click OK to reset the password.

The Reset the password (1/2) page is displayed.



 If you click OK, your email address, MAC address, device serial number, and other information might be collected.

Figure 1-16 Reset the password (1)



Step 4 Scan the QR code on the actual page according to the instructions, and then enter the security code received in the mailbox.

 Reset the password with the security code you received within 24 hours, otherwise the code will be invalid.

Step 5 Click Next.

The Reset the password (2/2) page is displayed.

Figure 1-17 Reset the password (2)

Reset the password(2/2)

Username

admin

Password

The minimum pass phrase length is 8 characters

Weak

Middle

Strong


Use a password that has 8 to 32 characters, it can be a combination of letter(s), number(s) and symbol(s) with at least two kinds of them.(please do not use special symbols like ' " ; : &)

Confirm Password

Cancel

Save

Step 6 Set the password of the admin user again.

 The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ‘ ” ; : &). Set a high security password according to the prompt of password strength.
Step 7 Click Save.

Live

Click the Live tab, and the Live page is displayed.

Figure 2-1 Live page



Table 2-1 Function bars description

No.	Description
1	Encoding setting
2	Video window adjustment
3	System menu
4	Video window functions
5	PTZ configuration
6	PTZ status

2.1 Encoding Setting

Click , and then select the stream as needed.


 Some devices do not support two sub streams.

Figure 2-2 Encoding setting




Table 2-2 Description of encoding setting parameter

Parameter	Description
Main Stream	It has large bit stream value and image with high resolution, but requires large bandwidth. This option can be used for storage and monitoring.
Sub Stream 1	It has small bit stream value and smooth image, and requires little
Sub Stream 2	bandwidth. This option is normally used to replace main stream when bandwidth is not enough.
Protocol	Select a protocol for video monitoring. The supported protocols include TCP (Transmission Control Protocol), UDP (User Datagram Protocol), and Multicast.

2.2 Video Window Adjustment

This section introduces the adjustment of video window.

Figure 2-3 Video window adjustment



Table 2-3 Description of Video window adjustment parameter

No.	Parameter	Description
1	Image Adjustment	Click this button, and the Image Adjustment interface is displayed on the right side of the Live interface. You can adjust parameters such as brightness, contrast, hue, and saturation on the interface.
2	Original Size	Adjust the video image to original size.
3	Full Screen	Click this button, and the video is displayed in full screen. To exit full screen, double-click the screen or press the Esc key.
4	W:H	Adjust the video image to original ratio or a proper window.
5	Fluency	Click this button, and you can select Realtime, General, or Fluent. General is selected by default.
6	Rules Info	Click this button, and smart rules are displayed on the Live interface after the function is enabled. The function is enabled by default.
7	PTZ	Click this button, and PTZ configurations are displayed on the Live interface after the function is enabled.
8	Face	Click this button, and images are displayed on the screen. See Figure 2-8.
9	Video Metadata	Click this button, and information about motor vehicles, non-motor vehicles, and people is displayed on the screen in real time. See Figure 2-11.
10	Anti-aliasing	Click this button to enable anti-aliasing, and then aliasing can be avoided when video windows are small.
11	Panorama	Click this button, and a panorama window is displayed on the Live interface. You can perform operations such as positioning, calling presets, and setting tours.

Image Adjustment

This section introduces the adjustment of image.

Figure 2-4 Image adjustment


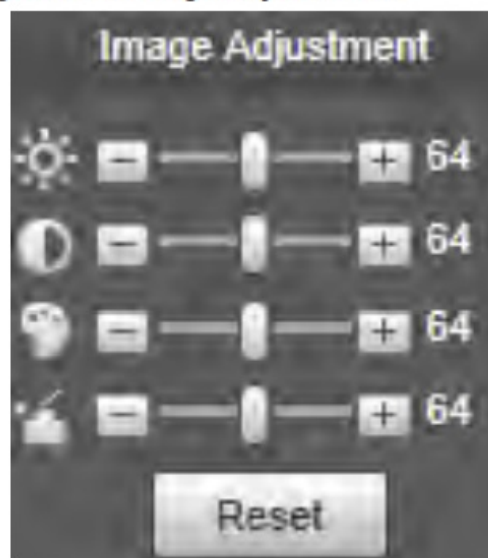






Table 2-4 Image adjustment parameter description

Parameter	Description
   	Adjust the image brightness.
	Adjust the image contrast.
	Adjust the image hue.
	Adjust the image saturation.
	Restore brightness, contrast, saturation and hue to default values.



Only brightness, contrast, hue, and saturation of live view image on the web interface can be adjusted with this function. To adjust the brightness, contrast, hue, and saturation of the Device, you can go to Setting > Camera > Conditions.

Panorama

Figure 2-5 Panorama interface





- You can perform positioning in this window by drawing a box with the left mouse button. The located area is displayed on the Live interface and enlarged.
- After you click Refresh, the Device rotates from 0 to 360 degrees horizontally and from 6 to 65 degrees vertically to obtain a new panoramic image.
- You can adjust the size of the panoramic image by dragging the screen ratio bar .
- You can click  to call a corresponding preset on the right side of the window. For how to set a preset, see “5.4.2.1 Preset”.

Figure 2-6 Preset




- You can click  to call a corresponding tour on the right side of the window. For how to set a tour, see “5.4.2.2 Tour”.


Figure 2-7 Tour



Face

Face recognition result is displayed on the left side, and the captured face image and attributes are displayed on the right side.

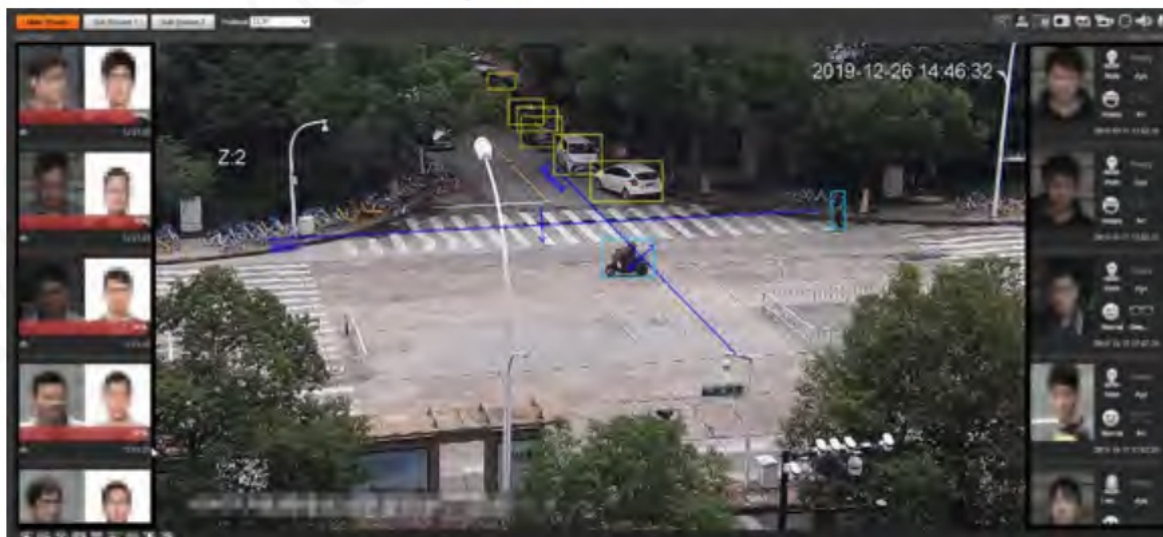Figure 2-8 Face




- Face recognition result display area: Displays the captured small face images, the corresponding face images in the database, and the similarities between them. After you click the image the attributes and details are displayed.

Figure 2-9 Face recognition result display



- Face and attributes display area: Displays the captured small face pictures and information such as gender, age, and expression. After you click the picture, the details are displayed.

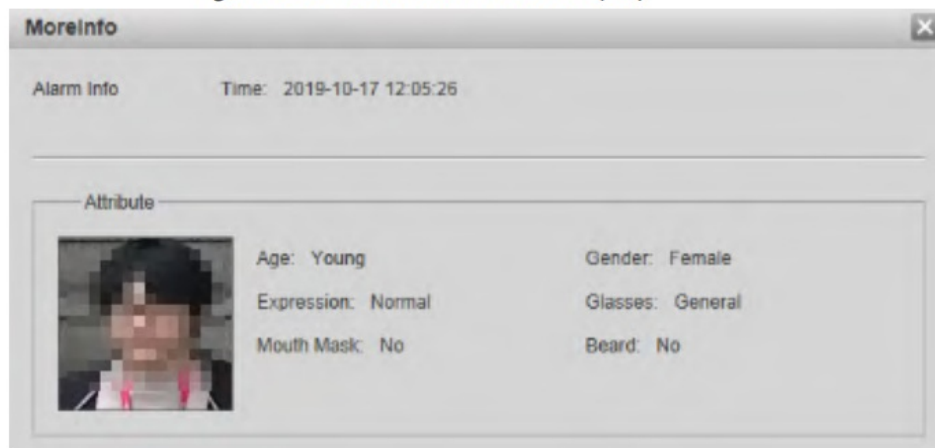Figure 2-10 Face and attributes display



Video Metadata

Motor vehicle information is displayed on the right side, and the information about human and nonmotor vehicles is at the bottom of the interface.

For details, see “5.5.10 Video Metadata”.


Figure 2-11 Video metadata



2.3 System Menu

To access a certain page, click the corresponding tab on the system menu.

Figure 2-12 System menu



2.4 Video Window Functions

This section introduces the function of video window.

Figure 2-13 Video window function buttons



Table 2-5 Description of video window function button

No.	Parameter	Description
1	Wiper Control	<p>Click this button to select wiper operation.</p> <ul style="list-style-type: none"> ● Start: Click this button, and the wiper starts and waves continuously. ● Stop: Click this button, and the wiper is turned off and stops waving. ● Once: Click this button, and the wiper starts and waves from left to right for one time.


2	Mark	<p>Click this button, right-click on the Live interface, and the function menu is displayed. See Figure 2-14. You can add information on the Live interface, and also manage added comments.</p> <ul style="list-style-type: none"> ● Add info: Select Add Info from the pop-up menu, and enter the comment. For the interface, see Figure 2-15. ● Manage comments: Select Info Management from the pop-up menu to display, hide, or delete added comments. For the interface, see Figure 2-16.
3	Regional Focus	Click the button, draw a box with the mouse on the live view, and then the Device will automatically focus on the area in the box.
4	Relay-out	Click the button, and an alarm will be triggered. When an alarm is triggered, the icon turns red; and when an alarm is canceled, the icon turns grey.
5	Gesture Control	Click the button, and you can drag the live view by pressing and holding the left mouse button to control PTZ; and you can also zoom in or out through the mouse wheel.
6	Digital Zoom	<ul style="list-style-type: none"> ● Click the button, and then select an area in the live view to zoom in; right-click on the image to restore to the original status. In enlarged status, drag the image to check other area. ● Click the button, and then scroll the mouse wheel in the live view to zoom in or out.
7	Snapshot	Click the button to capture one image of the current image, and it will be saved to the live snapshot storage path set in "5.1.2.5 Path."
8	Triple Snapshot	Click the button, and three images of the current image are captured with one snapshot per second. These snapshots will be saved to the live snapshot storage path set in "5.1.2.5 Path."
9	Record	Click the button to record videos. The recording will be saved to the live recording storage path set in "5.1.2.5 Path."
10	Manual Track	Click the button and select any area by dragging the left mouse button in the video window; the Device tracks objects in this area intelligently.
11	Audio	<p>Click the button to enable or disable audio output of the monitoring stream.</p>  Before using the function, you need to enable the audio of the corresponding stream in Setting > Camera > Audio first.
12	Talk	Click the button to enable or disable the two-way audio.

Figure 2-14 Mark—menu



Figure 2-15 Mark—add comments



Figure 2-16 Mark—manage comments



2.5 PTZ Configuration

You can control PTZ by using the PTZ Control panel or joystick. You can also set preset, scanning, and other functions in the PTZ Function area.

PTZ Control



Before using the PTZ Control panel, you need to set the PTZ protocol by selecting Setting > PTZ > Protocol.

Figure 2-17 PTZ control

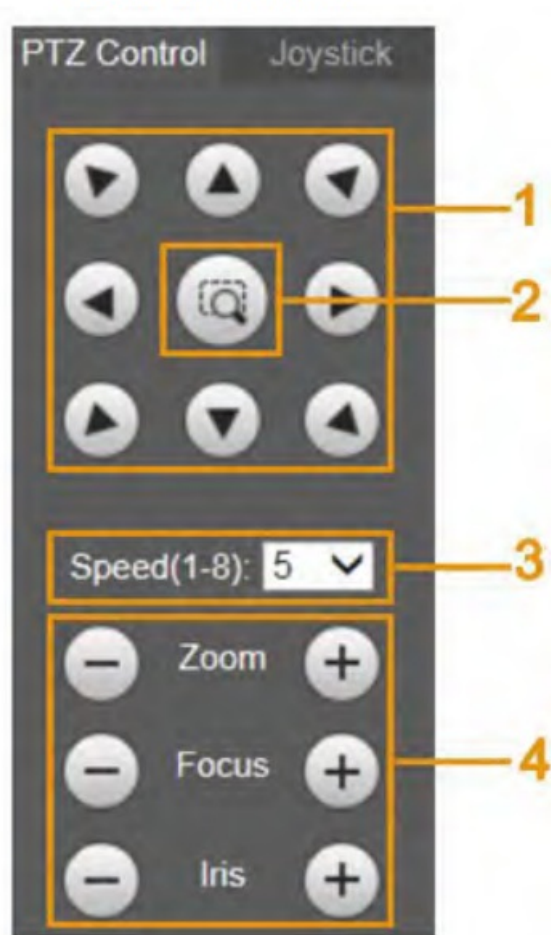


Table 2-6 Description of PTZ control parameter

No.	Parameter	Description
1	Direction Buttons	There are 8 directions: Up, down, left, right, upper left, upper right, lower left, and lower right.
2	Position	Provides quick positioning function. Draw a box in the live view with the mouse, and then the PTZ rotates to and focuses on the selected area rapidly.
3	Speed	The changing speed of PTZ direction. The higher the value, the faster the speed.
4	Zoom/Focus/Iris	Click + to increase the value, and click – to decrease the value.

Joystick

You can drag the middle button to simulate joystick operations to control device rotation. Speed, zoom, focus, and iris configurations are the same as that of PTZ Control panel.

Figure 2-18 Joystick



PTZ Functions





The PTZ supports multiple functions. Select a function, click  or  to start using the function, and then click  to stop using the function.

Figure 2-19 PTZ functions



Table 2-7 Description of PTZ function

Parameter	Description
Scan	Select Scan from the list, enter a scan number, and then click Start. The PTZ starts scanning, and the default number is 1.
Preset	Select Preset from the list, enter a preset number, and then click Go to. The PTZ will rotate to the preset position.
Tour	Select Tour from the list, enter a tour number, and then click Start. The PTZ starts to tour.
Pattern	Select Pattern from the list, enter a pattern number, and then click Start. The PTZ starts to pattern.
Assistant	Reserved for special requirements.  If necessary, enable this function under the guidance of professionals.
Pan	Select Pan from the list, and then click Start. The PTZ starts to pan.
Go to	<ul style="list-style-type: none"> ● Select Go to from the list, enter horizontal angle value, vertical angle value and zoom, and then click Go to. The Device will turn to the position you want. ● One unit of the horizontal angle value or vertical angle value you enter equals 0.1 degree.

Menu

Figure 2-20 Menu page



Table 2-8 Description of menu parameter

Parameter	Description
Direction Buttons	Click the up and down buttons to select parameters, and click the left and right buttons to select parameter values.
OK	Confirmation button.
Open	Open the OSD menu.
Close	Close the OSD menu.

Click Open to open the OSD menu. The OSD menu is displayed on the live view.

Figure 2-21 OSD menu



You can finish the following settings through the menu.

- Camera settings: For details, see “5.1 Camera”.
- PTZ settings: For details, see “5.4 PTZ Settings”.
- System management: For details, see “5.7 System Management”.


2.6 PTZ Status

On the Live page, the PTZ status is displayed at the lower right corner.



The function is available on select models.

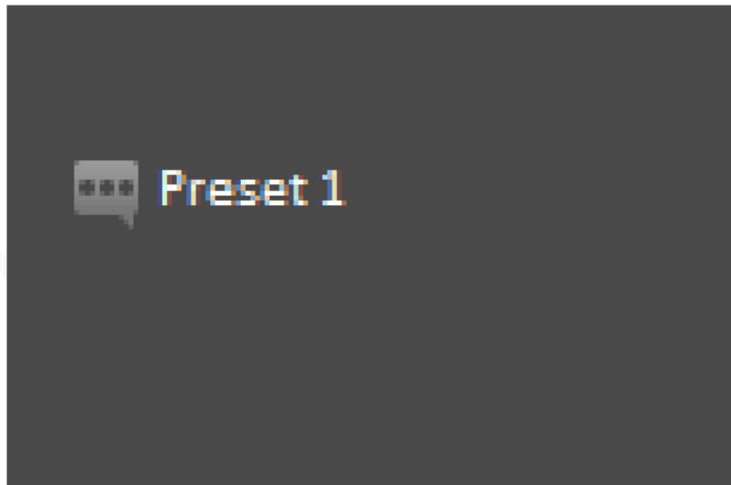Figure 2-22 PTZ status



When the PTZ lifespan is close to the threshold, a warning will be displayed on the Live page.

Figure 2-23 Warning (1)

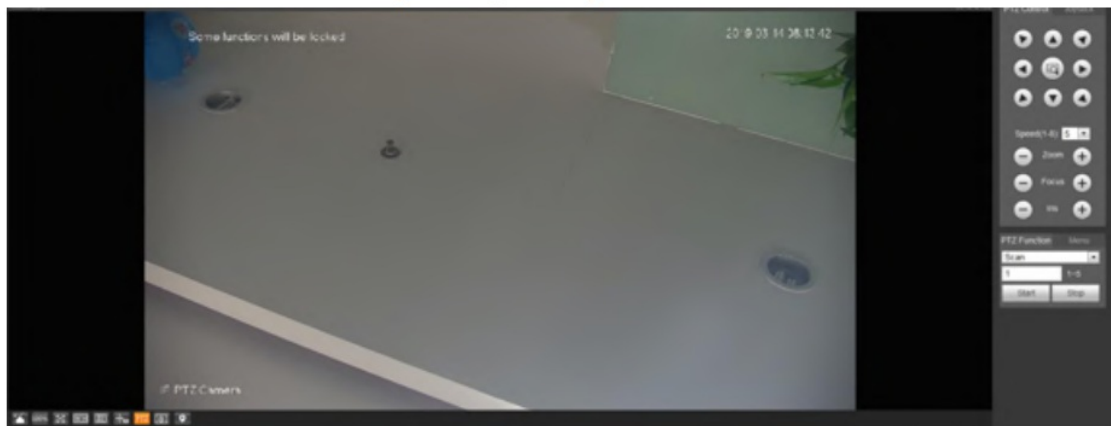


Figure 2-24 Warning (2)



AI Live

You can check the information of the detected human faces, human bodies, motor vehicles, and nonmotor vehicles.



This function is available on select models.

3.1 AI Live Page

Log in and click the AI Live tab.

Page might vary with different models.

Figure 3-1 AI live page

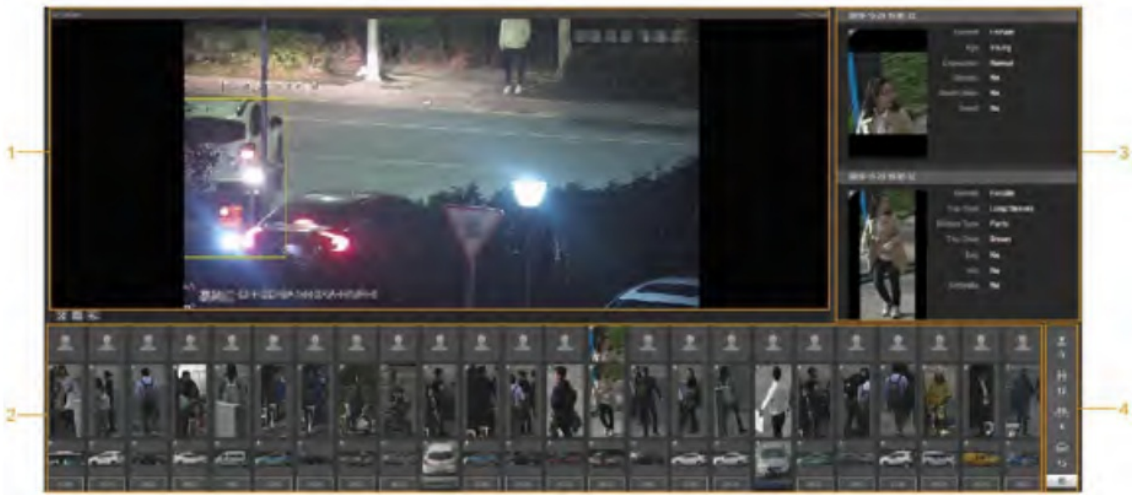



Table 3-1 Description of AI live page

No.	Function
1	Live view
2	Snapshot display area
3	Information display area of detected targets
4	Statistics area of the detected targets

3.1.1 Information Display Area of Detected Targets

This area displays the information of the captured targets in real time.

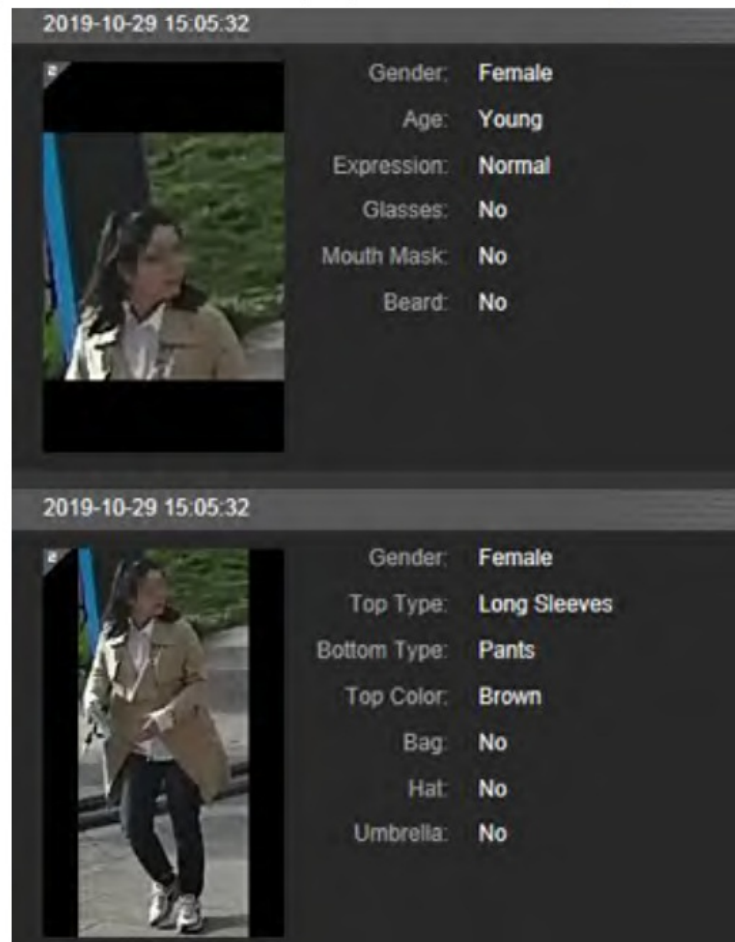
Figure 3-2 Information display of the detected targets



3.1.2 Snapshot Display Area

This area displays the snapshots of the detected targets. Click any snapshot to view the information of the detected target in information display area.

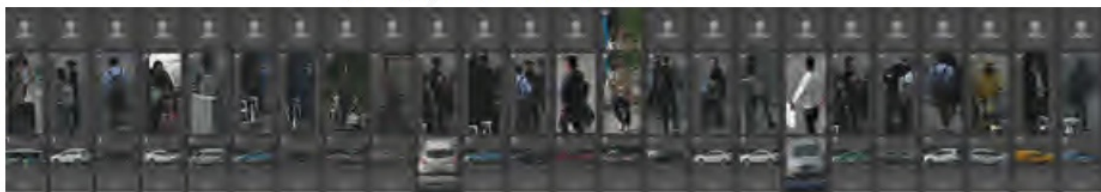Figure 3-3 Snapshot display area









3.1.3 Statistics Area of the Detected Targets

This area displays the number of the captured target in real time.

Figure 3-4 Statistics area of the detected targets



Table 3-2 Statistics area description of the detected targets

Icon	Detected Target	Description
	Face	Available detection items: Gender, age, expression, glasses, mouth mask, and beard.
	Human	Available detection items: Top, bottom, top color, bottom color, bag, hat, and umbrella.
	Non-motor vehicle	Available detection items: Vehicle type, vehicle body color, top, top color, occupancy, and hat.
	Motor vehicle	Available detection items: License plate, vehicle body color, vehicle type, vehicle logo, vehicle series, sunshield, seatbelt, smoking, calling, ornament, and annual inspection mark.  Up to 7 items can be selected at the same time for motor vehicle detection.
	Settings	Click the button to select the detection items.

3.2 AI Live Settings

Prerequisites

Select Setting > Event > Smart Plan, and then enable Face Detection, Face Recognition or Video Metadata. For the method to enable the function, see “5.5.4 Smart Plan”. For the operations, see “5.5.7 Face Recognition” or “5.5.10 Video Metadata”.


Procedure

Step 1 Click the AI Live tab.

The information display area of detected targets is on the right side; the snapshot display area is on the bottom;

the statistics area of the detected targets is on the lower right corner.

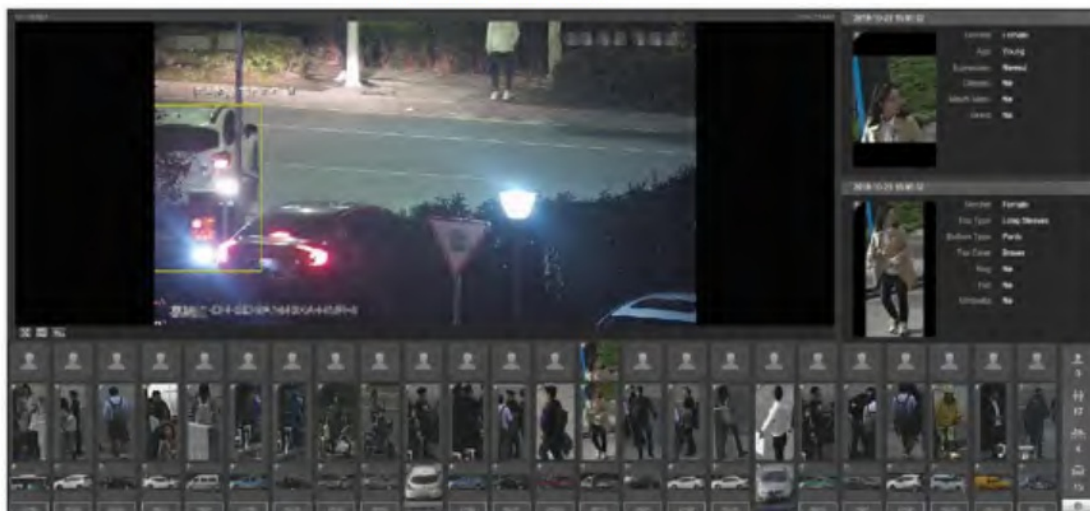Figure 3-5 AI live page




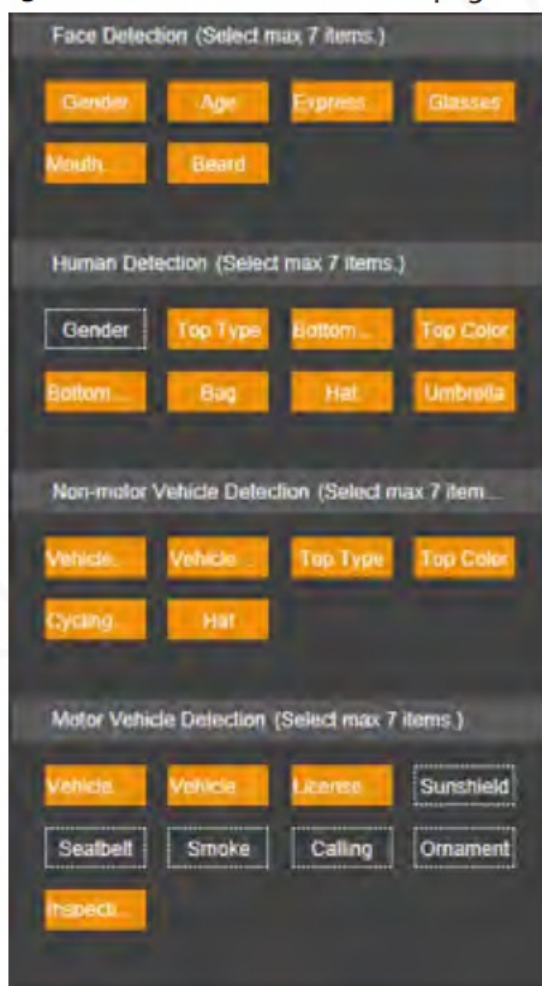

Step 2 Click  to set the detection items of the targets.

Figure 3-6 Detection items selection page



Step 3 Click  to complete the configuration.

Playback

You can view the saved images and videos on the Playback page


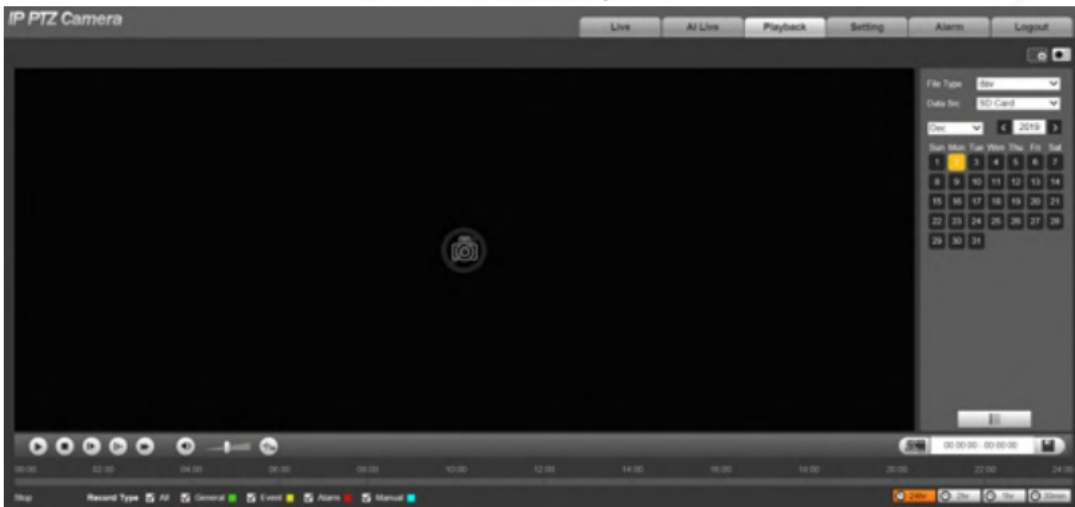
 Before using the function, you need to set the period, storage method, and record control of recording and snapshot first. For details, see “5.6 Storage”.
Click the Playback tab, and the Playback page is displayed.

Figure 4-1 Playback page



4.1 Video Playback

Select dav from the File Type list, and the video playback interface is displayed.

Figure 4-2 Video playback

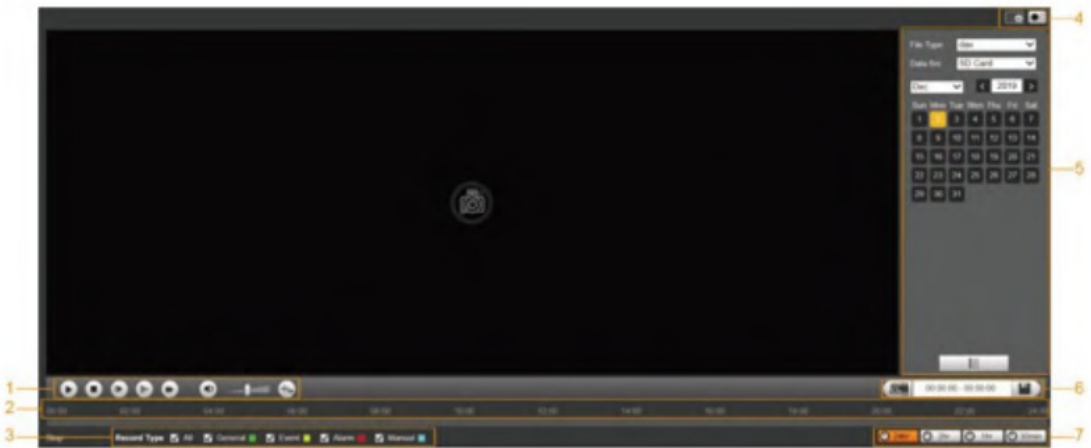


Table 4-1 Description of video playback parameter


No.	Description
1	Video playing function bar
2	Progress bar
3	Recording types
4	Auxiliary functions
5	Video playback file search and display area
6	Video clipping area
7	Progress bar time formats

4.1.1 Video Play Function Bar

This section introduces the function of video play function bar.




Table 4-2 Description of video play function bar

No.	Parameter	Description
1	Play	Play the video.
2	Stop	Stop playing the video.
3	Next Frame	Play the next frame.  You need to pause the playback before playing the next frame.
4	Slow	Slow down video playing.
5	Fast	Speed up video playing.
6	Sound	Mute or unmute the sound.
7	Volume	Adjust the volume.
8	Rules Info	Click this button, and smart rules will be displayed on the video playback interface if the smart rules are enabled.

4.1.2 Recording Type

Select a recording type, and then only files of the selected types will be displayed in the progress bar and file list.

Figure 4-4 Recording type



4.1.3 Auxiliary Functions

This section introduces auxiliary function.

Figure 4-5 Auxiliary functions

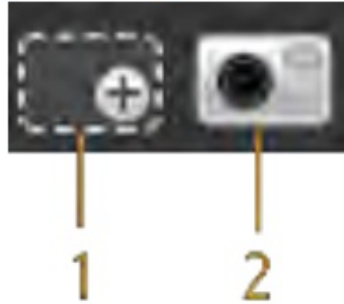


Table 4-3 Description of auxiliary functions parameter

No.	Parameter	Description
1	Digital Zoom	<ul style="list-style-type: none">● Click the button, and then select an area in the live view to zoom in; right-click on the image to restore to the original status. In zoomed-in status, drag the image to check other areas.● Click the button, and then scroll the mouse wheel in the live view to zoom in or out.
2	Snapshot	Click the button, and then you can take snapshots of the video in playback, and save them in the playback snapshot path set in "5.1.2.5 Path".

4.1.4 Video Playback File Search and Display Area

This section introduces the operation of searching video playback file. There are videos and snapshots on days with blue shading.

Figure 4-6 Playback file (1)

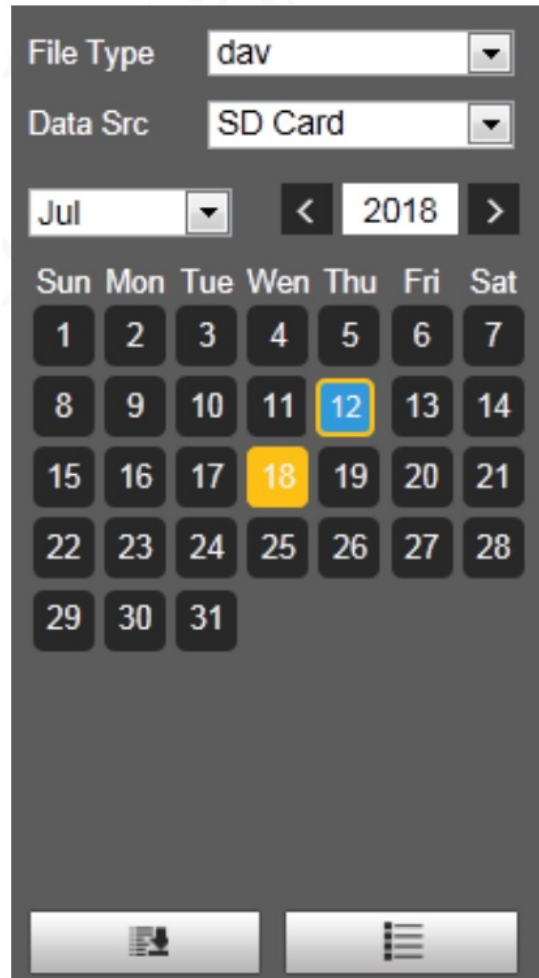





Table 4-4 Description of playback file parameter (1)


Parameter	Description
File Type	<ul style="list-style-type: none"> ● To play back a recording, select dav. ● To play back an image, select jpg.
Data Src	The SD Card is used by default.
	<p>Click this button, and recordings or images of a certain type on specific dates can be downloaded in batches.</p> <p> The function is available on select models.</p>
	File list. Click this button, and the recording files on the selected day will be displayed in the list.

4.1.4.1 Downloading Files in Batches

Step 1 Click .

The Batch Download interface is displayed.

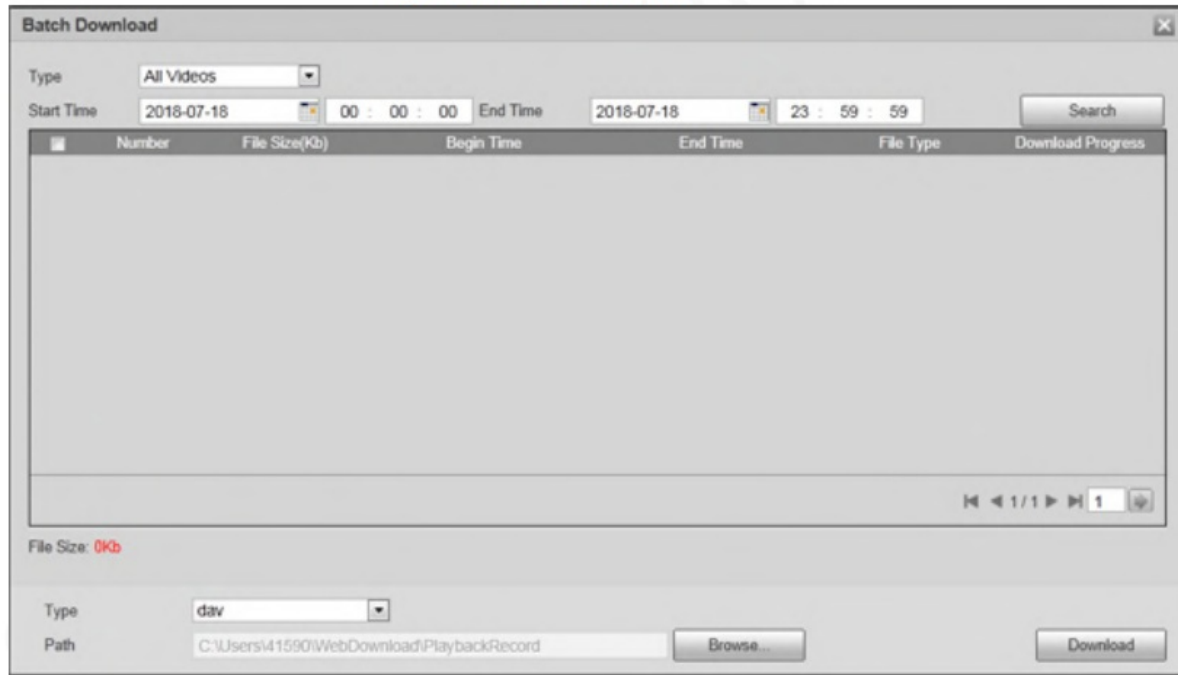Figure 4-7 Batch download



Step 2 Configure batch download parameters.

Table 4-5 Description of batch download parameter

Parameter	Description
Type	Select the event type that triggers video recording. All Videos, General, Event, Alarm , Manual, and Snapshot are selectable. It is All Videos by default.
Start Time/End Time	Select the start time and end time for video searching.
File Type	Select the video type. dav and mp4 are selectable. It is dav by default.
Path	Click Browse, and set the saving path for video files. The default path is C:\Users\admin\WebDownload\PlaybackRecord.

Step 3 Click Search to search for the video files that meets the requirements.

Step 4 Select the video, and then click Download.

The video files are downloaded and saved in the saving path.



You can select multiple files to download them.


4.1.4.2 Displaying File List


Step 1 Click a day with blue shading, and recording file progress bar with different colors is displayed on the time axis.

- Green: Represents general videos.
- Yellow: Represents motion detection videos.
- Red: Represents alarm videos.
- Blue: Represents manually recorded videos.

Step 2 Click anywhere on the progress bar, and the video will be played from that time.

Figure 4-8 Progress bar



Step 3 Click , and videos recorded on the selected day will be displayed in a list.



To play back a file in the list, double-click the file.

Figure 4-9 Playback file (2)

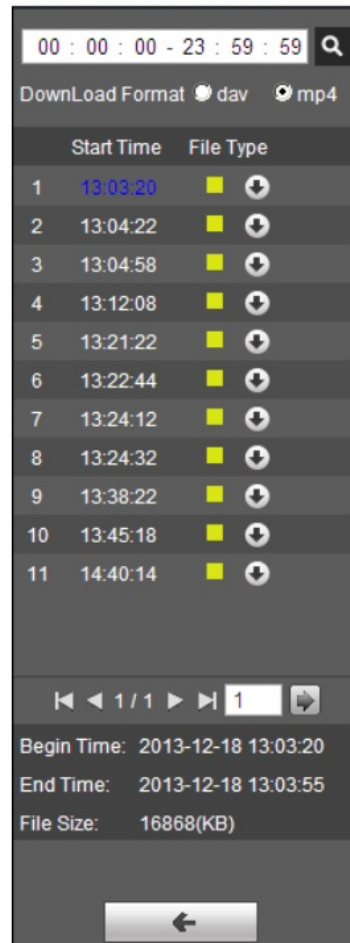







Table 4-6 Description of playback file parameter (2)

Parameter	Description
	Search all the recorded files from the start time to the end time on the selected date.
Download Format	There are two options: dav and mp4.
	Click the download button, and the files will be saved to the storage path set in “5.1.2.5 Path”.  Downloading and playing video at the same time is not supported.
	Click the button to go back to the calendar interface.


4.1.5 Video Clipping Area


You can clip the videos in this area.

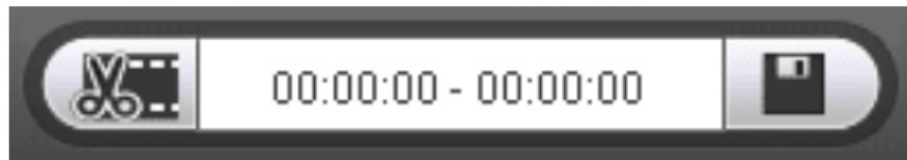Figure 4-10 Video clipping





Step 1 Click the time axis to select the start time for video clipping. The time must be within the progress bar range.


Step 2 Hover over , and then Select start time is displayed.


Step 3 Click  to set the start time for video clipping.

Step 4 Click the time axis to select the end time for video clipping.

 The time must be within the progress bar range.

Step 5 Hover over , and then Select end time is displayed.

Step 6 Click  to set the end time for video clipping.

Step 7 Click , and the clipped video will be saved in the path set in “5.1.2.5 Path”.





4.1.6 Progress Bar Time Formats

This section introduces the time format of progress bar.

Figure 4-11 Progress bar time formats



Table 4-7 Description of progress bar time format

Parameter	Description
	Click the button, and then the progress bar displays the recordings in 24hour mode.
	Click the button, and then the video within the selected 2-hour period is displayed.
	Click the button, and then the video within the selected 1-hour period is displayed.
	Click the button, and then the video within the selected 30-minute period is displayed.

4.2 Image Playback

This section introduces the operations of image playback.

Select jpg from the File Type list.

Figure 4-12 Image playback

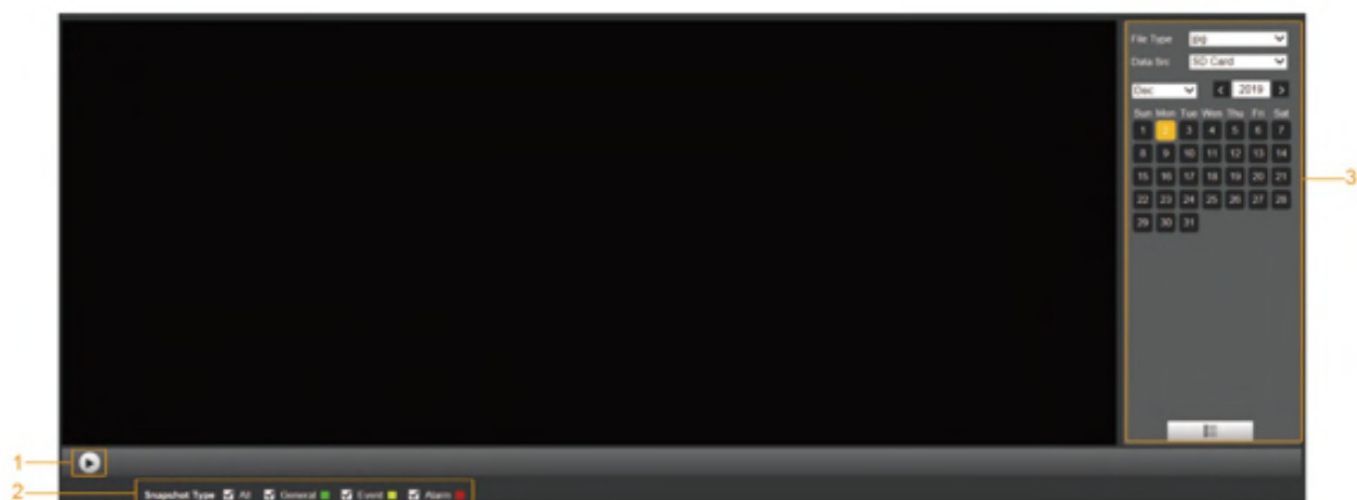



Table 4-8 Description of image playback parameter


No.	Description
1	Image playing functions
2	Snapshot types
3	Image playback file search and display area




4.2.1 Image Playing Functions

This section introduces the function of image playing.

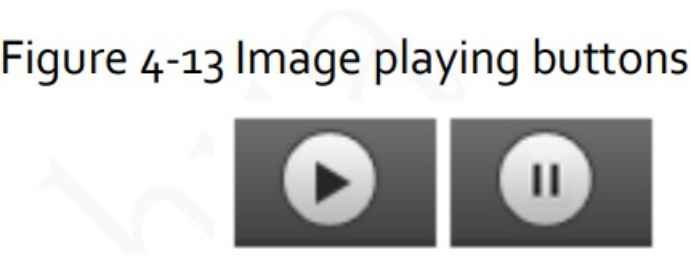Figure 4-13 Image playing buttons



The status button is displayed as  by default, indicating the image play is paused or no image is being played.

- To play the image, click , and the button is switched to .
- To pause the image play, click .

4.2.2 Image Playback File Search and Display Area

This section introduces the operation of searching video playback file. There are videos and snapshots on days with blue shading.

Figure 4-14 Playback file (1)

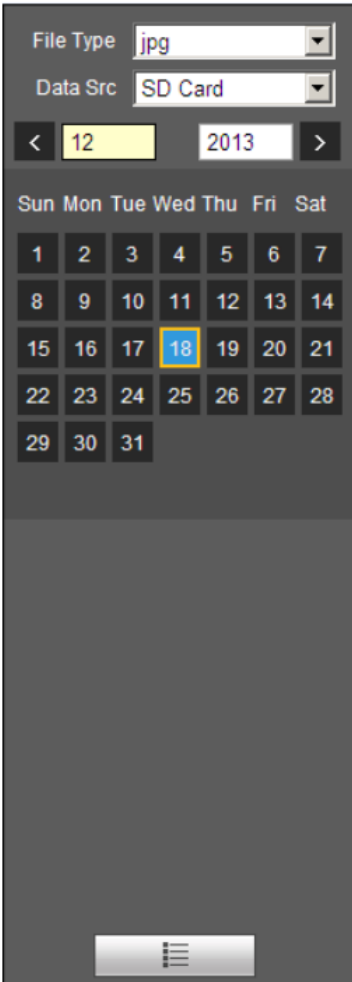


Table 4-9 Description of playback file parameter


Parameter	Description
File Type	Select jpg from the File Type list, and the image will be played in jpg..
Data Src	The SD Card is selected by default.
	file list. Click this button, and the recording files on the selected day will be displayed i n the list.

Figure 4-15 Playback file (2)








- Step 1 Click , and the snapshots on a selected day will be displayed in a list.
- Step 2 To play back a snapshot, double-click the corresponding file.

Table 4-10 Description of playback file parameter

Parameter	Description
	Search all the snapshots from the start time to the end time on the selected date.
	Click the button to download the snapshot to local storage.
	Click the button to go back to the calendar page.

4.2.3 Snapshot Types

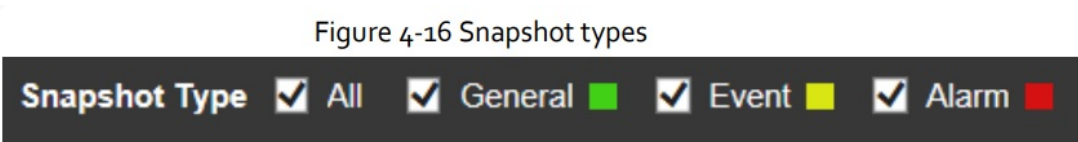After you select a snapshot type, only the files of the selected type are displayed in the file list.




5.1 Camera
5.1.1 Conditions Settings

This section describes how to set camera attributes and manage profiles.





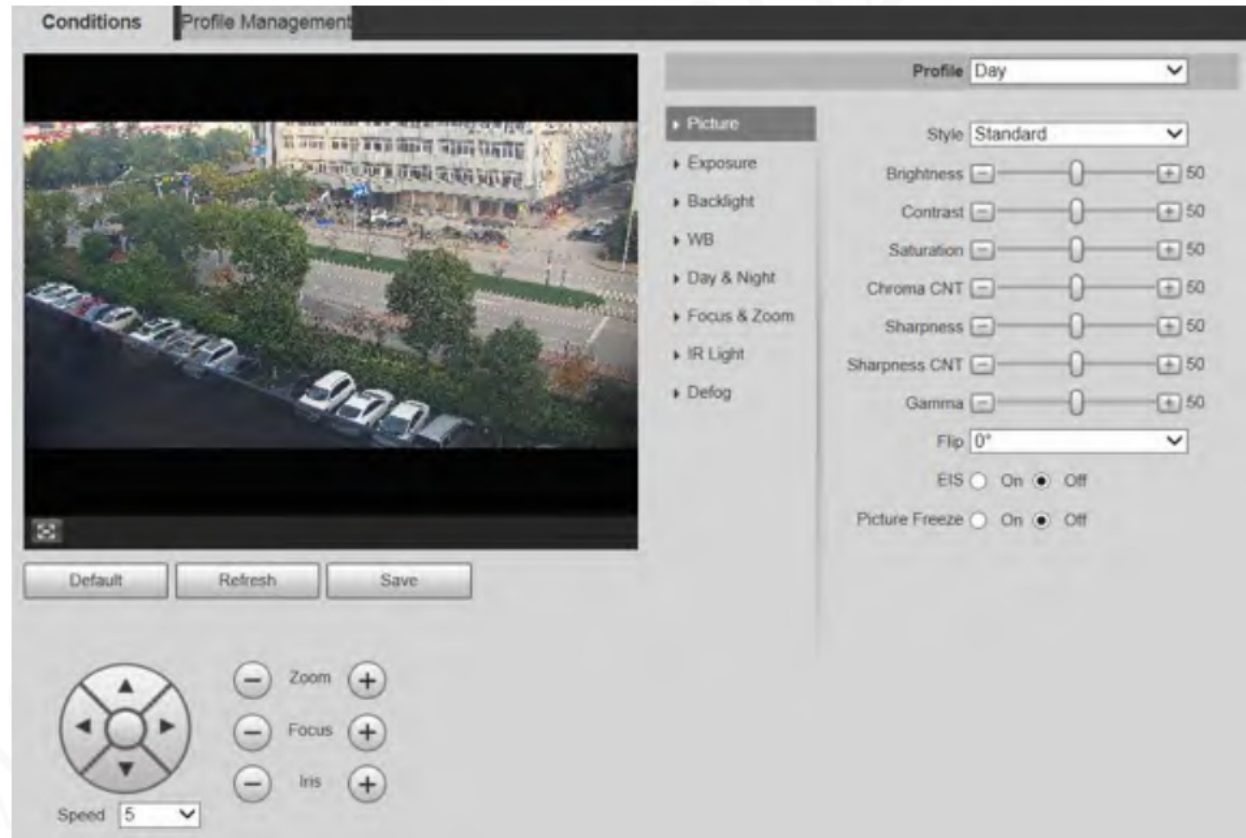5.1.1.1 Conditions
5.1.1.1.1 Picture

You can set camera attributes and picture parameters to achieve the best display effect.
Step 1 Select Setting > Camera > Conditions > Conditions > Picture.

Figure 5-1 Picture interface



Step 2 Configure image setting parameter.
Table 5-1 Description of image setting parameter

Parameter	Description
Profile	There are three options: General, Day, and Night. You can view the configurations and the effect of the selected mode. Day is selected by default.
Style	Set the image display style. There are three options: Soft, Standard, and Vivid. Standard is selected by default.
Brightness	Set the overall image brightness. The larger the value is, the brighter the image will be. The value ranges from 0 to 100.
Contrast	Set the image contrast. The larger the value is, the greater the contrast will be. The value ranges from 0 to 100.
Saturation	Set the intensity of colors. The larger the value is, the brighter the colors will be. The value ranges from 0 to 100.
Chroma CNT	<p>The larger the value, the higher suppression on image colors. The value ranges from 0 to 100.</p>  This parameter takes effect only when the Device is in the environment with low luminance.
Sharpness	<p>Set the sharpness of picture edges. The larger the value is, the more obvious the edge will be. The value ranges from 0 to 100.</p>  If the value is too large, there might be image noise. Set the value according to the actual condition.
Sharpness CNT	<p>The larger the value is, the stronger the sharpness CNT will be. The value ranges from 0 to 100.</p>  This parameter takes effect only when the Device is in the environment with low luminance.
Gamma	Change image brightness through non-linear tuning to expand the dynamic display range of images. The larger the value is, the brighter the image will be. The value ranges from 0 to 100.
Flip	<p>Monitoring videos can be flipped over. There are two options.</p> <ul style="list-style-type: none"> ● 0°: The monitoring video is normally displayed. It is 0° by default. ● 180°: The monitoring video is flipped over.
EIS	<p>Electronic image stabilization (EIS) is used to effectively solve the problem of image shaking during use, thus presenting clearer images. It is Off by default.</p>  <ul style="list-style-type: none"> ● This function is available on select models. ● This parameter takes effect only when the Device is in the environment with low luminance. ● Optical image stabilization and electronic image stabilization cannot be enabled at the same time.
Picture Freeze	After you select On, the image at the called preset is displayed directly if you call a preset or tour, and no images during the rotation of the Device are displayed.

Step 3 Click Save.

5.1.1.1.2 Exposure

You can control the amount of light per unit area reaching the electronic image sensor by adjusting parameters on the Exposure interface.

Step 1 Select Setting > Camera > Conditions > Conditions > Exposure.

Figure 5-2 Exposure—auto mode

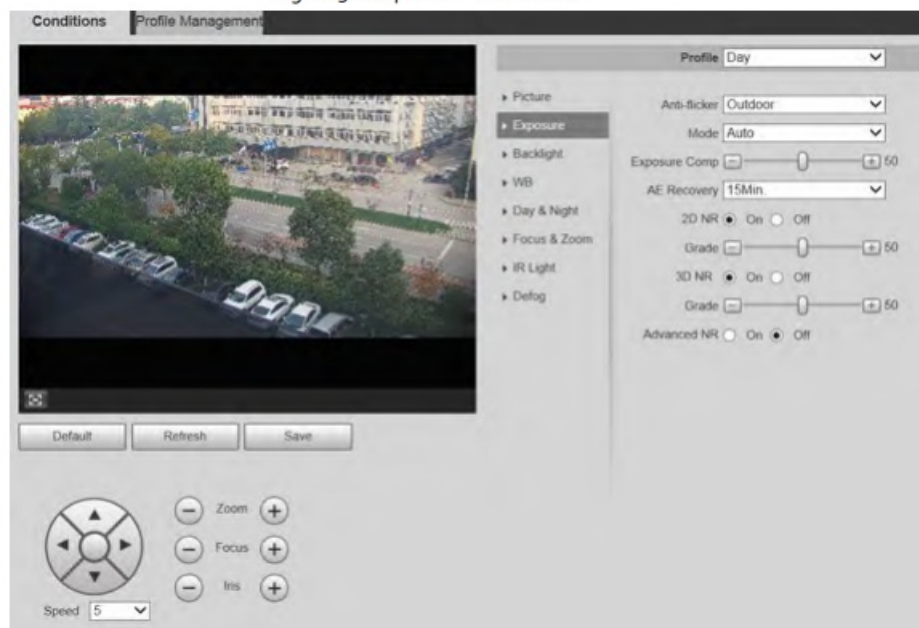


Figure 5-3 Exposure—aperture priority mode

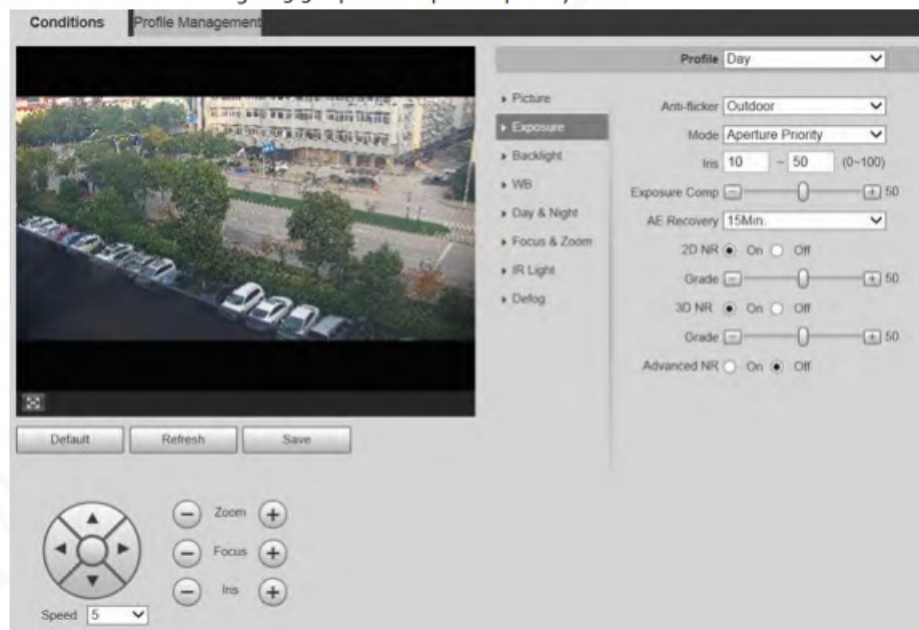


Figure 5-4 Exposure—shutter priority mode

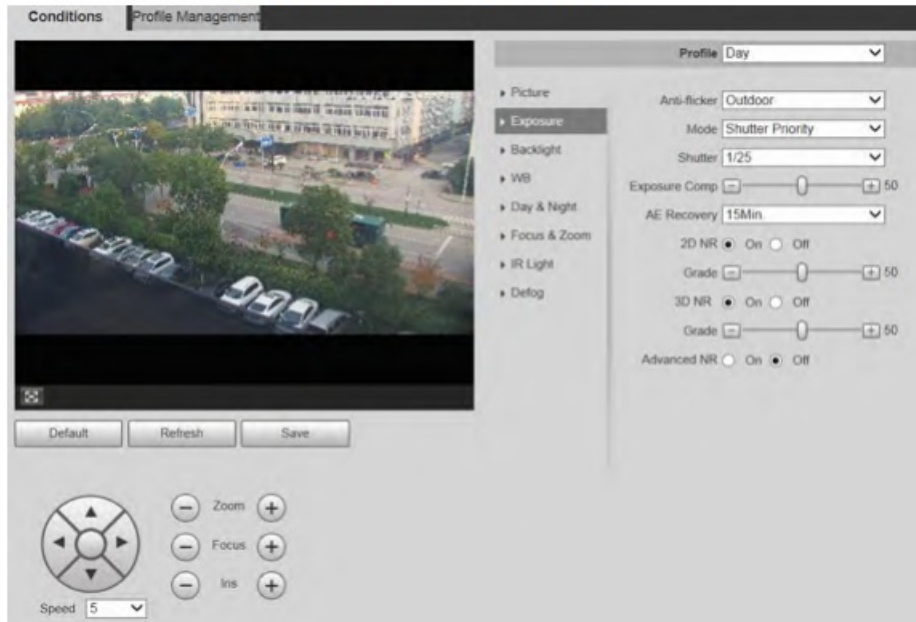


Figure 5-5 Exposure—gain priority mode


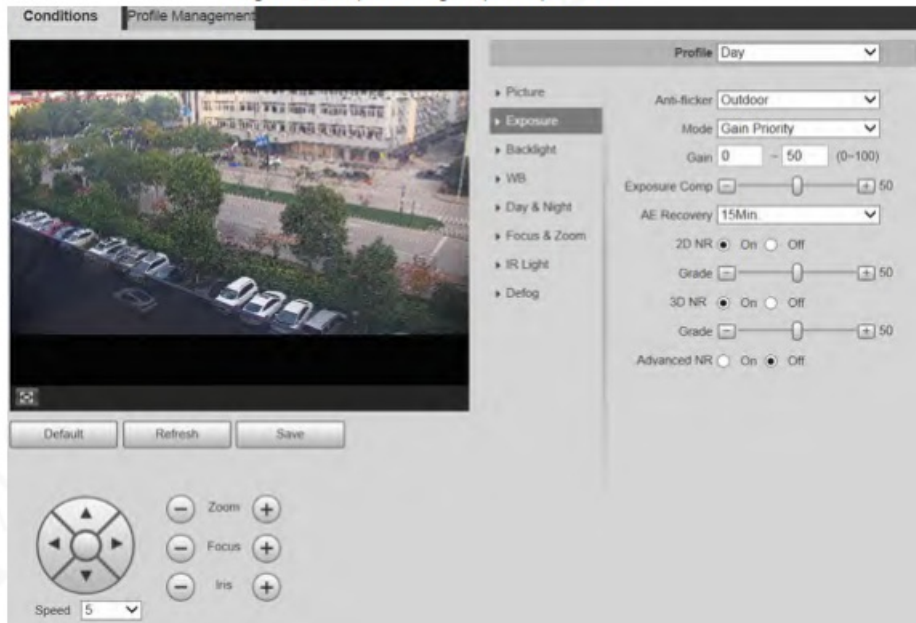



Figure 5-6 Exposure—manual mode

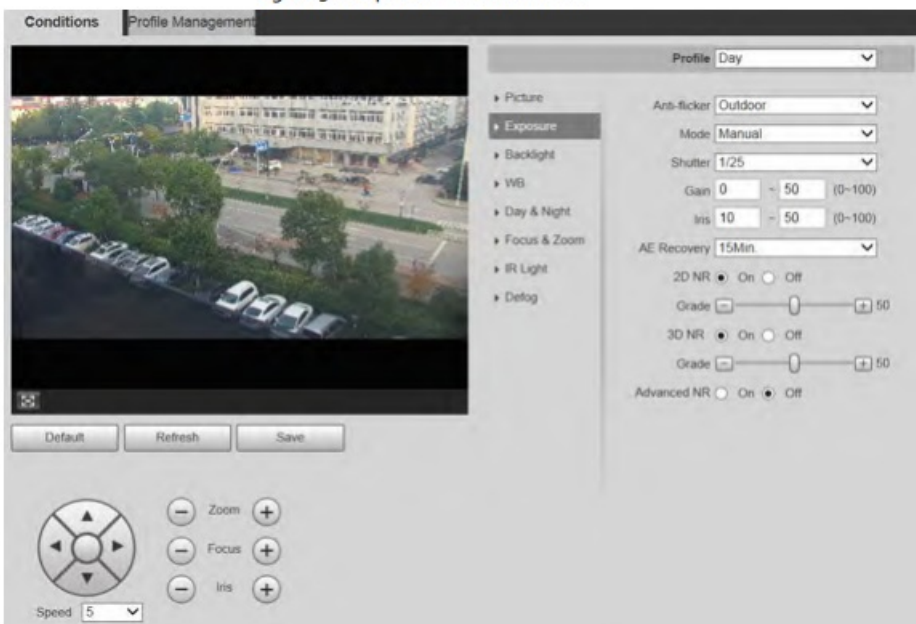

Step 2 Configure exposure setting parameter.

Table 5-2 Description of exposure setting parameter

Parameter	Description
Anti-flicker	<p>You can select 50Hz, 60Hz, or Outdoor from the list.</p> <ul style="list-style-type: none">● 50Hz: When the alternating current is 50Hz, the exposure is automatically adjusted to make sure that there are no stripes on images.● 60Hz: When the alternating current is 60Hz, the exposure is automatically adjusted to make sure that there are no stripes on images.● Outdoor: You can switch the modes to achieve the effect you want.
Mode	<p>Set the exposure modes. You can select Auto, Manual, Aperture Priority, Shutter Priority, or Gain Priority. The Auto mode is selected by default.</p> <ul style="list-style-type: none">● Auto: Exposure is automatically adjusted according to scene brightness if the overall brightness of images is in the normal exposure range.● Manual: You can adjust the Gain, Shutter, and Iris value manually.● Aperture Priority: You can set the iris to a fixed value, and the Device adjusts shutter value then. If the image brightness is not enough and the shutter value has reached upper or lower limit, the system adjusts gain value automatically to ensure the image is at ideal brightness.● Shutter Priority: You can customize the shutter range. The Device automatically adjusts the aperture and gain according to the scene brightness.● Gain Priority: Gain value and exposure compensation value can be adjusted manually.
Gain	<p>You can set the exposure gain. The value ranges from 0 to 100.</p>
Shutter	<p>You can adjust the exposure time of the Device. The larger the shutter value, the brighter the image.</p>
Iris	<p>You can set the Device luminous flux. The larger the iris value, the brighter the image.</p>
Exposure Comp	<p>You can set the exposure compensation value. The value ranges from 0 to 100.</p>
AE Recovery	<p>Automatic exposure is an automated digital camera system that adjusts the aperture and shutter speed, based on the external lighting conditions for images and videos. If you have selected an AE Recovery time, the exposure mode will be restored to the previous mode after you adjust the iris value. There are five options: Off, 5Min, 15Min, 1 Hour, and 2Hour.</p>

2D NR	2D noise reduction is the process of removing noise from a signal. The higher the grade is, the less the noise will be, and images appear to be blurrier.
3D NR	3D noise reduction is the process of removing noise from a signal. The higher the grade is, the less the noise will be, and images appear to be blurrier.
Grade	Noise reduction grade. The value ranges from 0 to 100. The larger the value is, the less the noise will be.
Advanced NR	Realize noise suppression effect through 3D and 2D video filtering method.  The function is available on select models.

Step 3 Click Save.

5.1.1.1.3 Backlight




The backlight function cannot be configured if defog function is enabled. There will be a prompt on the interface.

You can use this function to adjust the backlight compensation mode of the monitoring screen.

Step 1 Select Setting > Camera > Conditions > Conditions > Backlight.

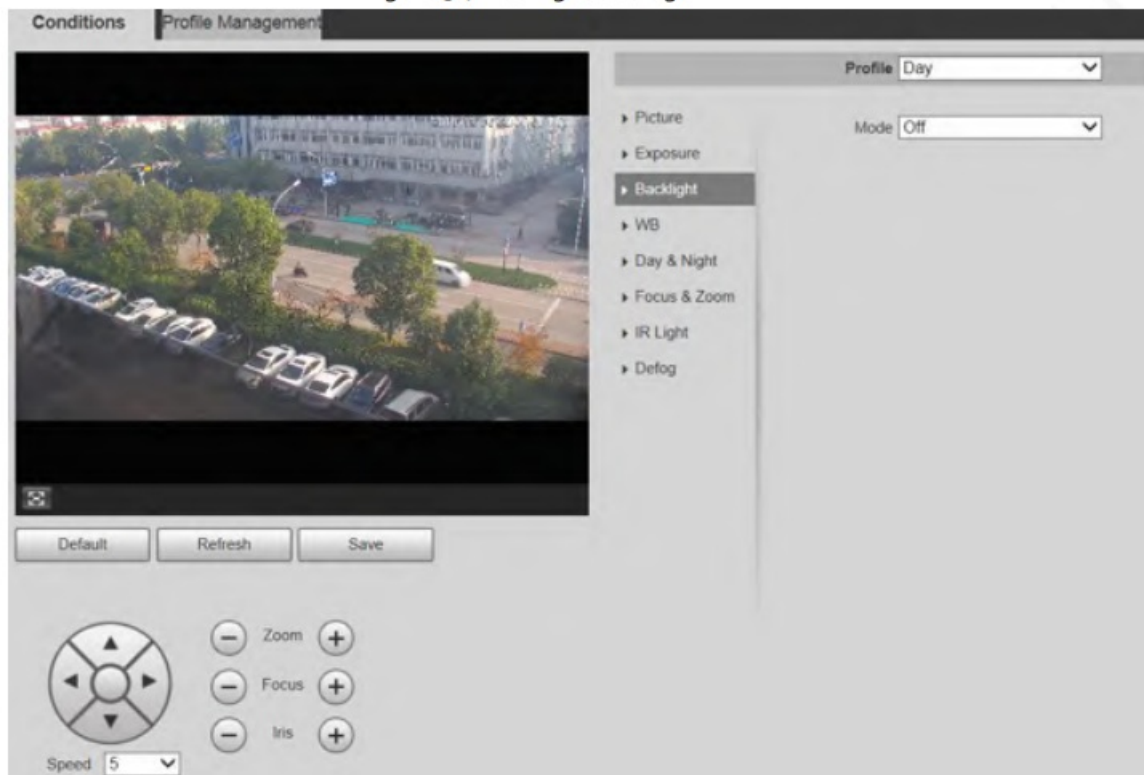Figure 5-7 Backlight settings



Step 2 Select a backlight mode from the list.
There are 4 options: Off, BLC, HLC, and WDR.

- Off: Backlight is disabled.
- BLC: Backlight compensation corrects regions with extremely high or low levels of light to maintain a normal and usable level of light for the object in focus.
- HLC: Highlight compensation dims strong light, so that the Device can capture details of faces and license plates in extreme light conditions. It is applicable to the entrance and exit of toll stations or parking lots.
- WDR: When in WDR (Wide Dynamic Range) mode, the Device constrains over bright areas and compensates dark areas to improve the image clarity.

Step 3 Click Save.




If you select Off, other backlight mode configurations will not be effective.

5.1.1.1.4 WB

In this mode, you can make a white object displaying itself clearly on the video image in all environments.

Step 1 Select Setting > Camera > Conditions > Conditions > WB.

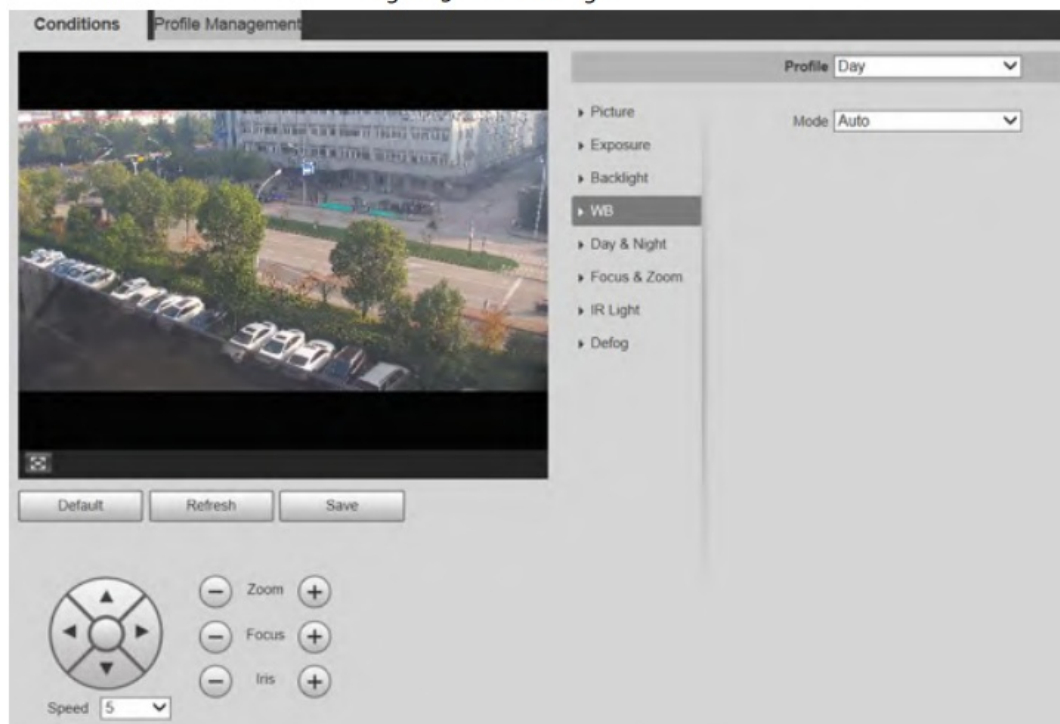Figure 5-8 WB settings



Step 2 Select WB mode from the list.

You can select from Auto, Indoor, Outdoor, ATW, Manual, Sodium Lamp, Natural, and Street Lamp. Auto is selected by default.

Step 3 Click Save.

5.1.1.1.5 Day & Night


This function allows you to switch between the color mode and the black & white mode, ensuring clear monitoring screen in a dim environment.



Defog function cannot be configured if Day & Night function is enabled. There will be a prompt on the interface.



Step 1 Select Setting > Camera > Conditions > Conditions > Day & Night.

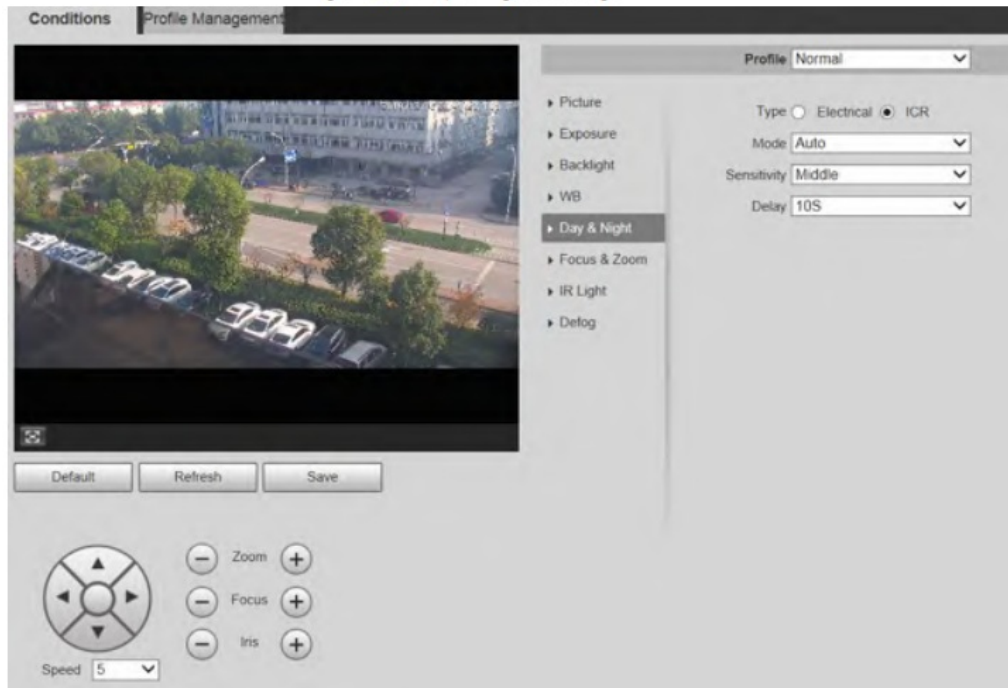Figure 5-9 Day & night settings



Step 2 Configure day & night parameter.

Table 5-3 Description of day & night parameter

Parameter	Description
Type	There are two options: Electrical and ICR. ICR is selected by default. <ul style="list-style-type: none"> ● Electrical Image processing method is used for day & night switch. ● ICR: IR filter is used for day & night switch.
Mode	Select a mode from the list (Your selection is independent from the profile). Auto is selected by default. <ul style="list-style-type: none"> ● Color: The Device only outputs color images. ● Auto: The Device outputs color images or black-and-white images according to ambient conditions. ● B/W: The Device only outputs black-and-white images.
Sensitivity	Adjust the sensitivity to switch between different modes. There are three options: Low, Middle, and High.  You can set sensitivity only when Day & Night mode is set to Auto.
Delay	Adjust the delay time to switch between different modes. The value ranges from 2 s to 10 s.  You can set Delay only when Day & Night mode is set to Auto.


Step 3 Click Save.

5.1.1.1.6 Focus & Zoom

Digital zoom refers to capturing a part of the image to magnify it. The higher the magnification is, the blurrier the images will become.

Step 1 Select Setting > Camera > Conditions > Conditions > Focus & Zoom.

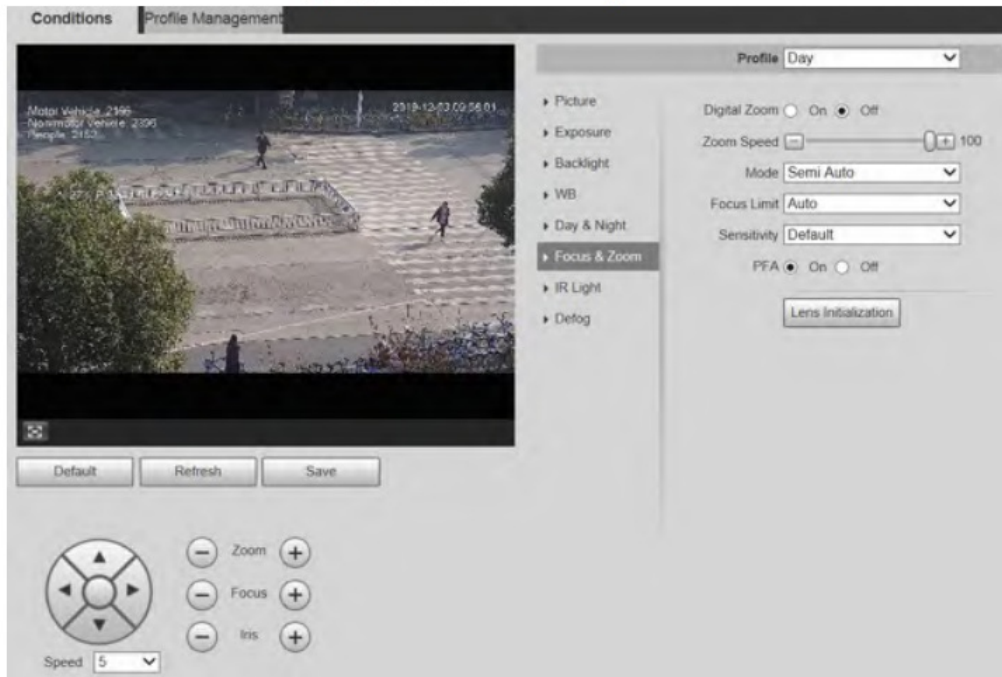Figure 5-10 Focus & zoom settings



Step 2 Configure focus & zoom parameter.

Table 5-4 Description of focus & zoom parameter

Parameter	Description
Digital Zoom	Select On or Off to enable or disable digital zoom. Off is selected by default.
Zoom Speed	The larger the value is, the faster the Device zooms.
Mode	Select the focus triggering mode. There are three options: Semi Auto, Auto, and Manual. Semi Auto is selected by default. <ul style="list-style-type: none"> ● Semi Auto: The Device focuses automatically when zoom or ICR switch is detected. ● Auto: The Device focuses automatically when scene changes, zoom, or ICR switch are detected. ● Manual: The Device cannot focus automatically. You need to adjust the focus manually.
Focus Limit	You can select the shortest focus distance, which means the Device will focus on objects farther than the shortest focus distance. If you select Auto, the Device will select an appropriate shortest distance according to the zoom value.
Sensitivity	Sensitivity is the capacity of resisting interference of the Device when focusing. The smaller the value is, the more capable the Device can resist interference when focusing.
PFA	If you enable this function, the image is relatively clear during zoom. If you disable this function, the speed is relatively high during zoom.
Lens Initialization	Click this button, and the lens will be initialized automatically. The lens will be extended to calibrate the zoom and focus.

5.1.1.1.7 Illuminator

This configuration is available only when the device is equipped with illuminators. Common illuminators are classified into IR lights, white lights, laser lights, and full-spectrum lights. Different device models support different types of illuminators.



This section is for reference only, and might differ from the actual interface.

IR Light/White Light

These are the conditions for using IR light and white light.


- When the day & night mode is set to B/W, the monitoring screen is black and white. In this case, IR light is used.
- When the day & night mode is set to Color, the monitoring screen is colored. In this case, white light is used.
- When the day & night mode is set to Auto, the monitoring screen color changes with the ambient light condition, and the illuminator varies with the monitoring screen. In B/W mode, the IR light is turned on; in Color mode, the white light is turned on.
- Full-spectrum IR light supports the infrared IR light and white-light IR light at the same time.



Some models are equipped with photoresistor that can turn on different types of illuminators based on the ambient brightness.

Step 1 Select Setting > Camera > Conditions > Conditions > Illuminator.

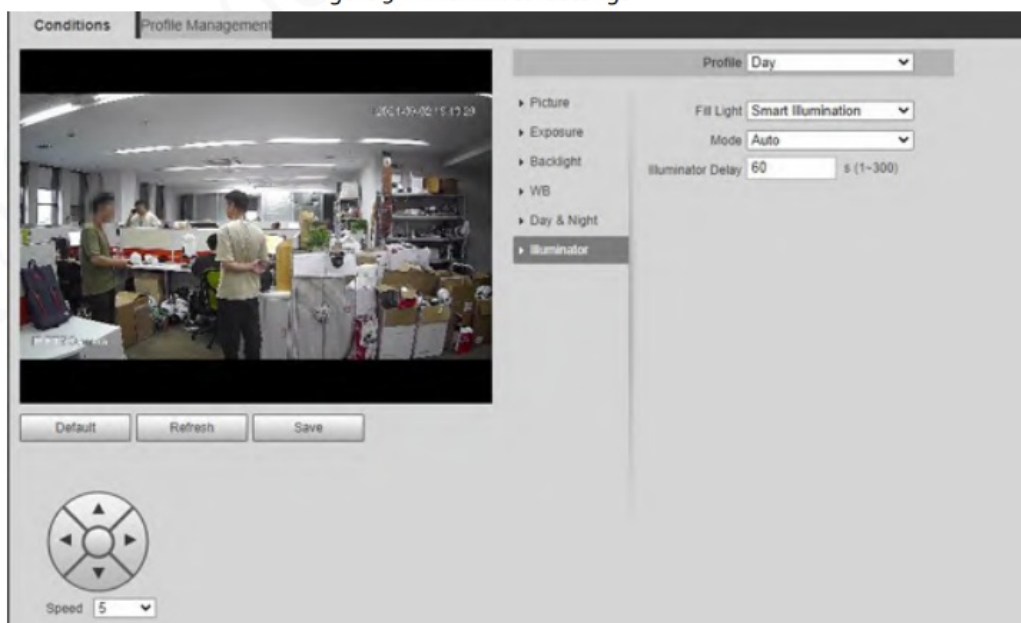Figure 5-11 Illuminator settings



Step 2 Configure illuminator parameters.

Table 5-5 Description of illuminator parameters

Parameter	Description
-----------	-------------

Fill Light Mode	IR Mode White Mode Smart Illumination	<p>When the device is equipped with illuminators, you can configure the fill light mode, including IR mode, white light and smart illumination.</p> <ul style="list-style-type: none"> ● IR Mode: Enable the IR light, and then the white light is disabled. You can only capture black and white images after enabling this function. <p>The IR light is turned off for cameras with low power consumption by default. Turn on the IR light if necessary.</p> <ul style="list-style-type: none"> ● White Mode: Enable the white light, and the IR light is disabled. You can capture clear scene image after enabling this function. ● Smart Illumination: This function is mainly used at night. <p>Smart illumination applies IR mode in most situations. When an event occurs (for example, motion detection and human detection), the camera automatically switches to white light mode to link image capturing and video recording under the full color mode. The white light turns off when the event stops, and then the mode switches to IR mode according to the ambient brightness.</p> <p>The status of the illuminator mainly depends on time and environment. If the smart illumination is triggered at night and the event continues during the day, the illuminator configured for the daytime will be turned off.</p>
	Manual	<p>Adjust the brightness of illuminator manually, and then the system will supply illumination to the image accordingly.</p> <p>This function is available on select models.</p>
	Timing	<p>Enable different light types in different time periods according to actual condition. You can set four periods with different light types.</p> <p>This function is available on select models.</p>
	Auto	<p>The system adjusts the illuminator intensity according to the ambient lighting condition. Some devices support setting the brightness upper limit and sensitivity of the illuminator.</p> <ul style="list-style-type: none"> ● Sensitivity: The higher the sensitivity setting, the higher the brightness can turn on the illuminator when the actual scene darkens. When the actual scene becomes bright, a higher brightness is required to turn off the illuminator. ● Brightness upper limit: If the filling light is too bright, the center of the image might be overexposed, and the actual image cannot be seen clearly. It is suggested to adjust the brightness upper limit according to the actual scene. The value range is 0100, and the default is 100.
	Smart IR	<p>The system adjusts the illuminator intensity according to the ambient lighting condition.</p> <p>Only infrared IR light supports the Smart IR mode.</p>
	Zoom Priority	<p>The system adjusts the illuminator intensity automatically according to the change of the ambient light. You can configure light compensation manually to fine-tune the brightness of the illuminator.</p> <ul style="list-style-type: none"> ● When the ambient light turns darker, the system turns on the near light first, if the brightness is still not enough, then it turns on the far light. ● When the ambient light turns brighter, the system dims far light until they are off, and then the near light. ● When the focus reaches certain wide angle, the system will not turn on far light in order to avoid over-exposure in short distance. <p>In ZoomPrio mode, IR light and white light are supported, and IR light is selected by default.</p>

	Off	Illuminator is off.
Light Type	You can select IR Light or White Light.	
Correction	Compensate for the brightness of the IR light. The value ranges from 0 to 100.	
Near Light	Set the brightness of the short-range light. The value ranges from 0 to 100.	
Far Light	Set the brightness of the long-range light. The value ranges from 0 to 100.	


Step 3 Click Save.

Laser Light

Laser light makes compensation for the ambient environment when it is used for long-distance monitoring.

Step 1 Select Setting > Camera > Conditions > Conditions > IR Light.

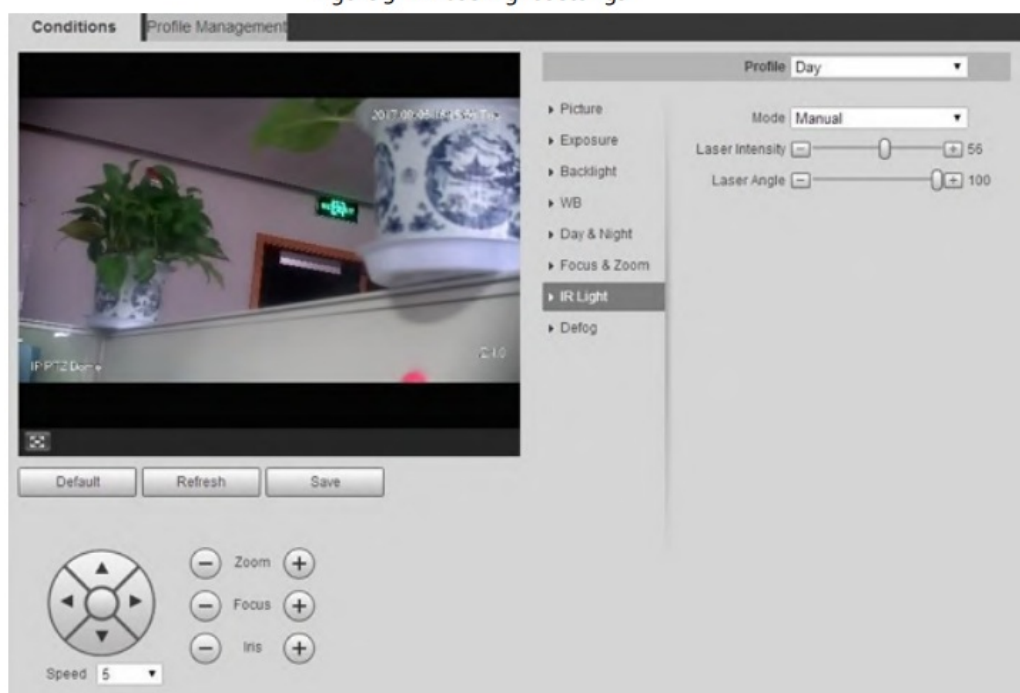Figure 5-12 Laser light settings



Step 2 Configure laser light setting parameter.

Table 5-6 Description of laser light setting parameter



Parameter	Description
Mode	Select the laser light mode from ZoomPrio and Manual. It is ZoomPrio by default. <ul style="list-style-type: none"> ● ZoomPrio: The Device can automatically adjust laser light brightness according to the zoom times. ● Manual: Manually set laser light brightness and angle value.
Laser Intensity	Set the intensity of the laser light. The value ranges from 0 to 100.
Laser Angle	Set the angle value from 0 to 100.

5.1.1.1.8 Defog





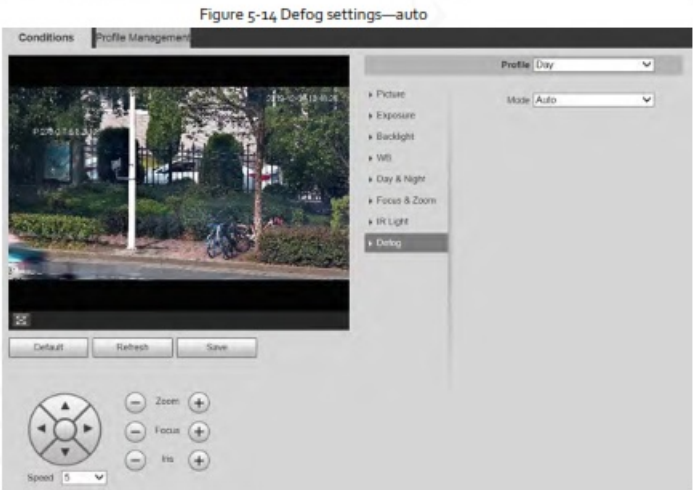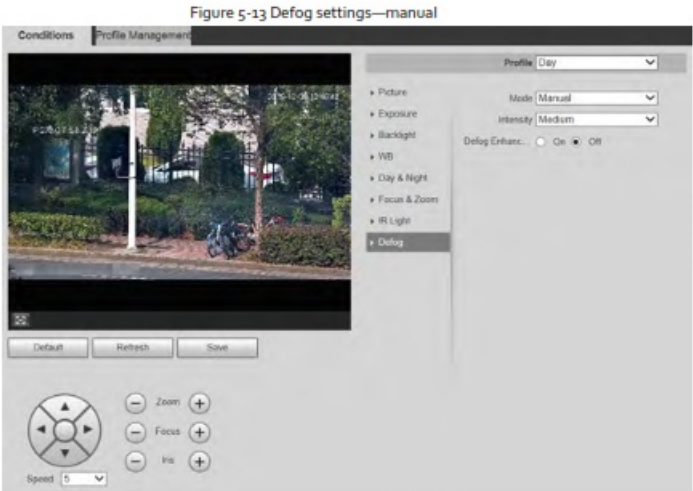The defog function cannot be configured if backlight function is enabled. There will be a prompt on the

interface.
Image quality drops if the Device is installed in foggy or hazy environment. You can enable defog to improve image quality.
Step 1 Select Setting > Camera > Conditions > Conditions > Defog.



Step 2 Configure defog parameter.

Table 5-7 Description of defog parameter

Parameter	Description
Mode	Select the defog mode of the Device. You can select Auto , Manual , or Off . It is Off by default.  For the Device that supports optical defog, in Auto mode, optical defog and electronic defog switch automatically according to the algorithm. And in Off mode, electronic defog is enabled by default.
Intensity	Set the defog intensity of the Device. You can select from Low , Medium , or High .
Defog Enhancement	In Manual mode, if you enable this function, both optical defog and electronic defog are enabled. (You need to enable Auto mode for Day & Night to use the function.)  Only the Device that supports optical defog has this parameter.

5.1.1.2 Profile Management

Step 1 Select Setting > Camera > Conditions > Profile Management.

Step 2 Select the profile management mode.

There are three options: General, Full Time and Schedule.

- If you select General, monitoring is based on the general configuration of the Device.

Figure 5-15 Profile management—general

The screenshot shows the 'Profile Management' tab selected in the 'Conditions' menu. Under 'Profile Management', the 'General' radio button is selected. Below the radio buttons are three buttons: 'Default', 'Refresh', and 'Save'.

- If you select Full Time, Day and Night are selectable, and the corresponding camera property profile is day or night.

Figure 5-16 Profile management—full time

The screenshot shows the 'Profile Management' tab selected in the 'Conditions' menu. Under 'Profile Management', the 'Full Time' radio button is selected. Below the radio buttons, there is a label 'Always Enable' followed by a dropdown menu currently showing 'Day'. At the bottom are three buttons: 'Default', 'Refresh', and 'Save'.

- If you select Schedule, you can select one period for day configuration and another period for night configuration. For example, you can set the day-time configuration from 6:00 to 18:00, and set the night-time configuration from 18:00 to 6:00 on the next day.

Figure 5-17 Profile management—schedule

The screenshot shows the 'Profile Management' tab selected in the 'Conditions' menu. Under 'Profile Management', the 'Schedule' radio button is selected. Below the radio buttons, there is a 'Period setting' section with a timeline from 0:00 to 24:00. A yellow bar indicates the 'Day' period from approximately 6:00 to 18:00. Below the timeline are two checkboxes: 'Day' (checked) and 'Night'. At the bottom are three buttons: 'Default', 'Refresh', and 'Save'.

Step 3 Click **Save**.

5.1.2 Video


You can set the video stream, snapshot stream, video overlay, ROI, and storage path of the Device.

5.1.2.1 Video Stream

This section describes how to set the video stream for the monitoring screen.

Step 1 Select Setting > Camera > Video > Video.


Figure 5-18 Video stream settings

-  The stream configuration interfaces might vary depending on devices, and the actual interface shall prevail.
- The default bit rate of different devices might vary, and the actual product shall prevail.

Step 2 Configure video stream parameter.

Table 5-8 Description of video stream parameters

Parameter	Description
Enable	You can select the checkbox to enable sub stream. The sub stream is enabled by default .
Encode Mode	You can select H.264 , H.264H , H.264B , H.265 , MJPEG , MPEG4 , or SVAC .

Parameter	Description
Smart Codec	<p>Enable Smart Codec to improve video compressibility and save storage space.</p> <p> After Smart Codec is enabled, the Device does not support the third stream, ROI , smart event, and other functions.</p>
Resolution	Multiple resolution types are available for you to choose, and each type corresponds to a unique recommended stream value.

Frame Rate (FPS)	PAL: 1–25 frames/s or 1–50 frames/s. The frame rate changes with the resolution.
Bit Rate Type	<p>There are two options: CBR (constant bit rate) and VBR (variable bit rate).</p> <ul style="list-style-type: none"> ● Image quality can be set only in VBR mode, and cannot be set in CBR mode. ● In MJPEG encode mode, CBR is the only option for Bit Rate Type.
Reference Bit Rate	The recommended bit rate range is based on the resolution and frame rate.
Bit Rate	It is the upper limit of stream in VBR. In CBR, the value is fixed.
I Frame Interval	The number of P frames between two I frames. The range varies with the frame rate, and the maximum value is 150. It is recommended to set the interval twice the frame rate.
SVC	Layered encoding can be done for FPS. SVC is a scalable encoding method on time domain. It is 1 by default, which means no layered coding. You can set 2, 3 or 4 layered encoding.
Watermark Settings	You can verify the watermark to check if the video has been tampered.

Watermark Character	<p>You can verify the watermark to check if the video has been tampered. Select Watermark Settings checkbox to enable Watermark Character. The watermark character is DigitalCCTV by default, and you can modify it. Watermark character consists of up to 128 characters from letters, standard symbols, spaces, and special characters.</p>
---------------------	--

Step 3 Click Save.

5.1.2.2 Snapshot

This section describes how to set streams for snapshots.

Step 1 Select Setting > Camera > Video > Snapshot.

Figure 5-19 Snapshot stream settings

Video	Snapshot	Overlay	ROI	Path
Snapshot Type	General			
Image Size	1080P (1920*1080)			
Quality	5			
Interval	1S			
<div> <div>Default</div> <div>Refresh</div> <div>Save</div> </div>				

Step 2 Configure snapshot stream parameter.

Step 2 Configure snapshot stream parameter.

Table 5-9 Description of snapshot stream parameters

Parameter	Description
Snapshot Type	<p>You can select General or Event.</p> <ul style="list-style-type: none"> ● General refers to capturing images within the time range set in the schedule. For details, see “5.6.1 Schedule”. ● Event means capturing images when motion detection, video tampering, or local alarms are triggered. For how to enable snapshots for motion detection, video tampering, or local alarms, see “5.5 Event Management”.
Image Size	It is the same as the resolution of the selected snapshot main stream, and cannot be modified on this page.
Quality	You can set the snapshot quality from 1 to 6 levels. Level 1 is the lowest level, and level 6 is the highest level.
Interval	Set the snapshot frequency. You can select from 1 s through 7 s or Customized .

Step 3 Click Save.

5.1.2.3 Overlay

Configure overlay information, and it will be displayed on the Live page.


5.1.2.3.1 Privacy Masking

You can enable this function when you need to protect privacy of some areas on the video image.

Procedure

Step 1 Select Setting > Camera > Video > Overlay > Privacy Masking.

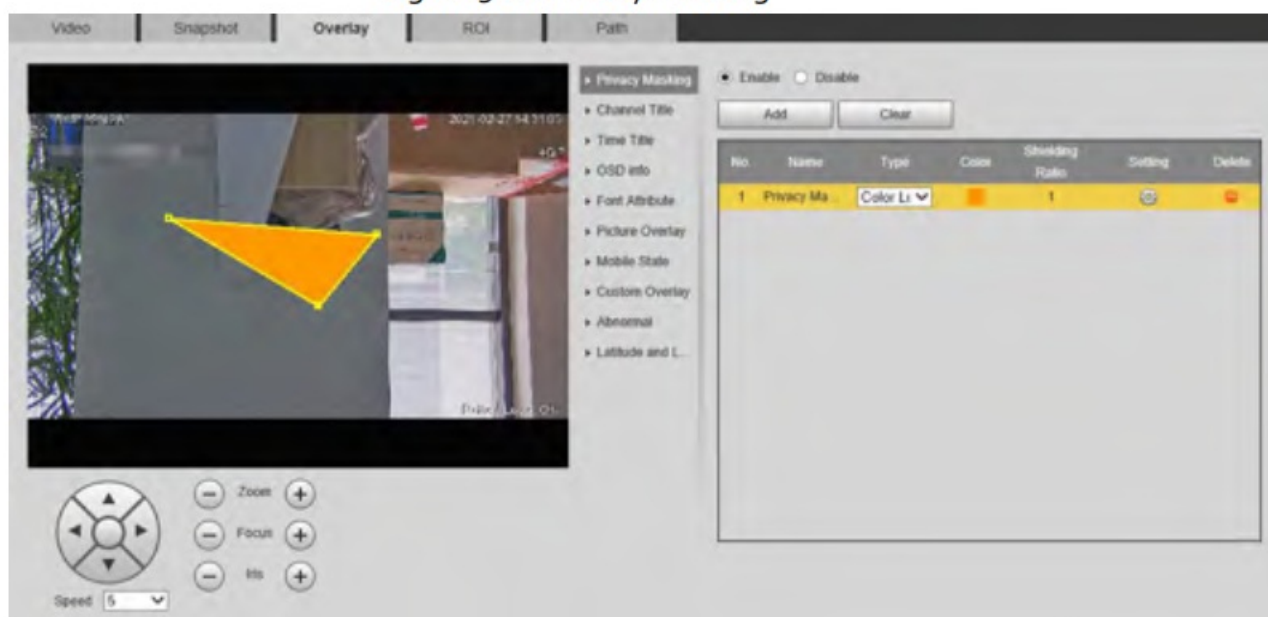Figure 5-20 Privacy masking



Step 2 Select **Enable**.

Step 2 Select Enable.

Step 3 Click Add, select the masking type and color, set the shielding ratio, and then draw blocks on the image.



You can select the masking type from Color Lump and Mosaic.

- When selecting Color Lump only, you can draw triangles and convex quadrilaterals as blocks. You can drag 8 blocks at most.
- When selecting Mosaic, you can draw rectangles as blocks with mosaic. You can draw 4 blocks at most.
- When selecting both Color Lump and Mosaic, you can draw 8 blocks at most.

Related Operations


- View and edit the block.

Select the privacy masking rule to be edited in the list, then the rule is highlighted, and the block frame is displayed in the image. You can edit the selected block as needed, including moving the position, and adjusting the size.

- Edit the block name.

Double-click the block name to edit it.

- Delete the block.


- ◇ Click  to delete blocks one by one.
- ◇ Click Clear to delete all blocks.

5.1.2.3.2 Channel Title

You can enable this function when you need to display channel title in the video image.

Step 1 Select Setting > Camera > Video > Overlay > Channel Title.

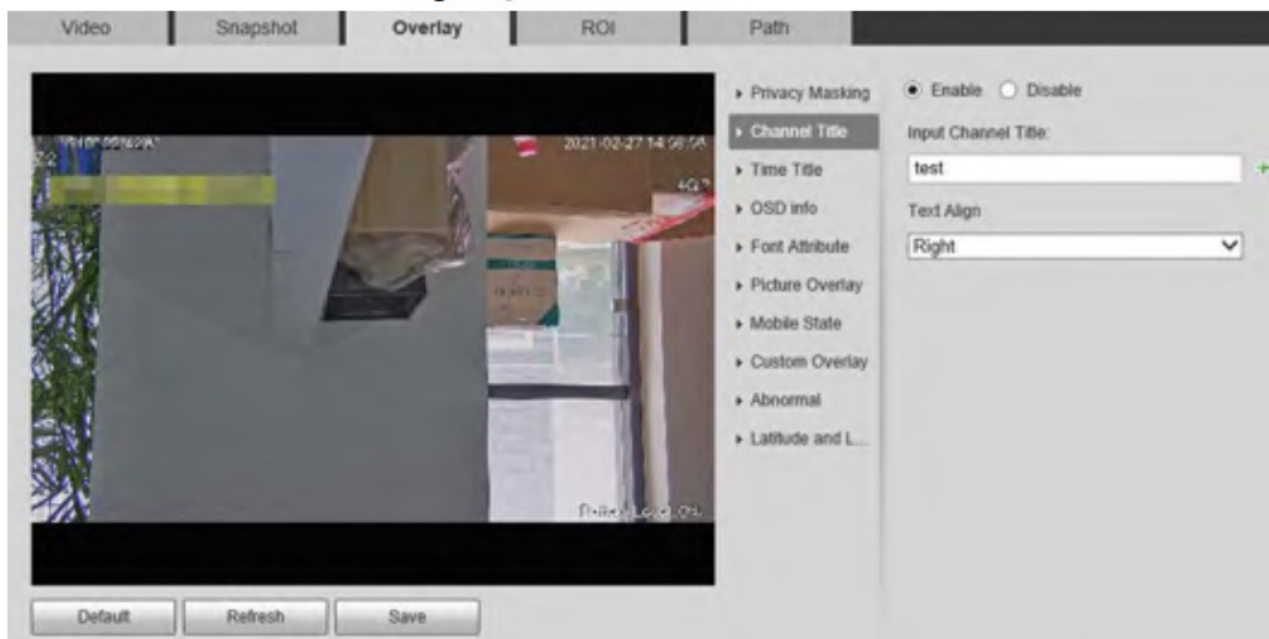Figure 5-21 Channel title



Step 2 Select the Enable checkbox, enter the channel title, and then select the text alignment.

Click + to expand the channel title, and you can expand 1 line at most.

Step 3 Move the title box to the position that you want in the image.


Step 4 Click Save.

5.1.2.3.3 Time Title

You can enable this function when you need to display time in the video image.

Step 1 Select Setting > Camera > Video > Overlay > Time Title.

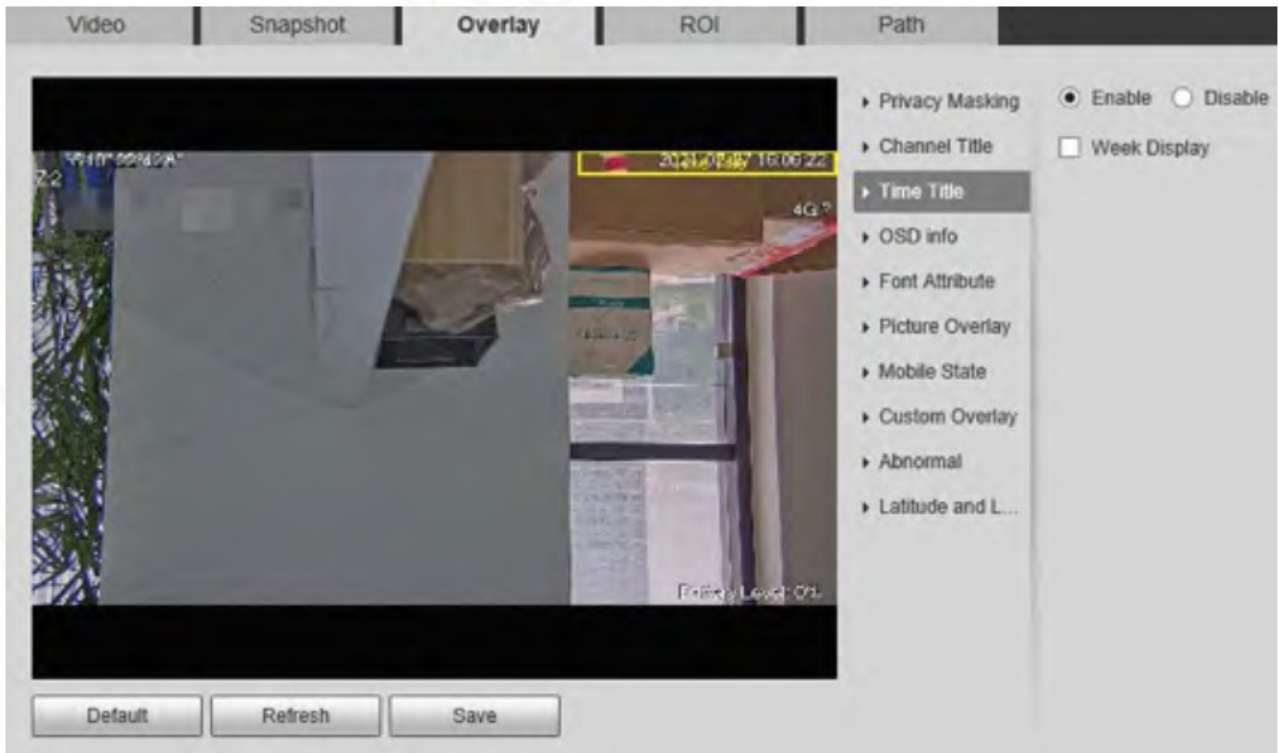Figure 5-22 Time title



Step 2 Select the Enable checkbox.

Step 3 Select the Week Display checkbox.

Step 4 Move the time box to the position that you want in the image.


Step 5 Click Save.

5.1.2.3.4 OSD Info

You can enable this function if you want to display preset title, temperature, PTZ life warning, coordinates, zoom, north direction, pattern, RS-485, battery information, and other information on the video image.


Step 1 Select Setting > Camera > Video > Overlay > OSD Info.

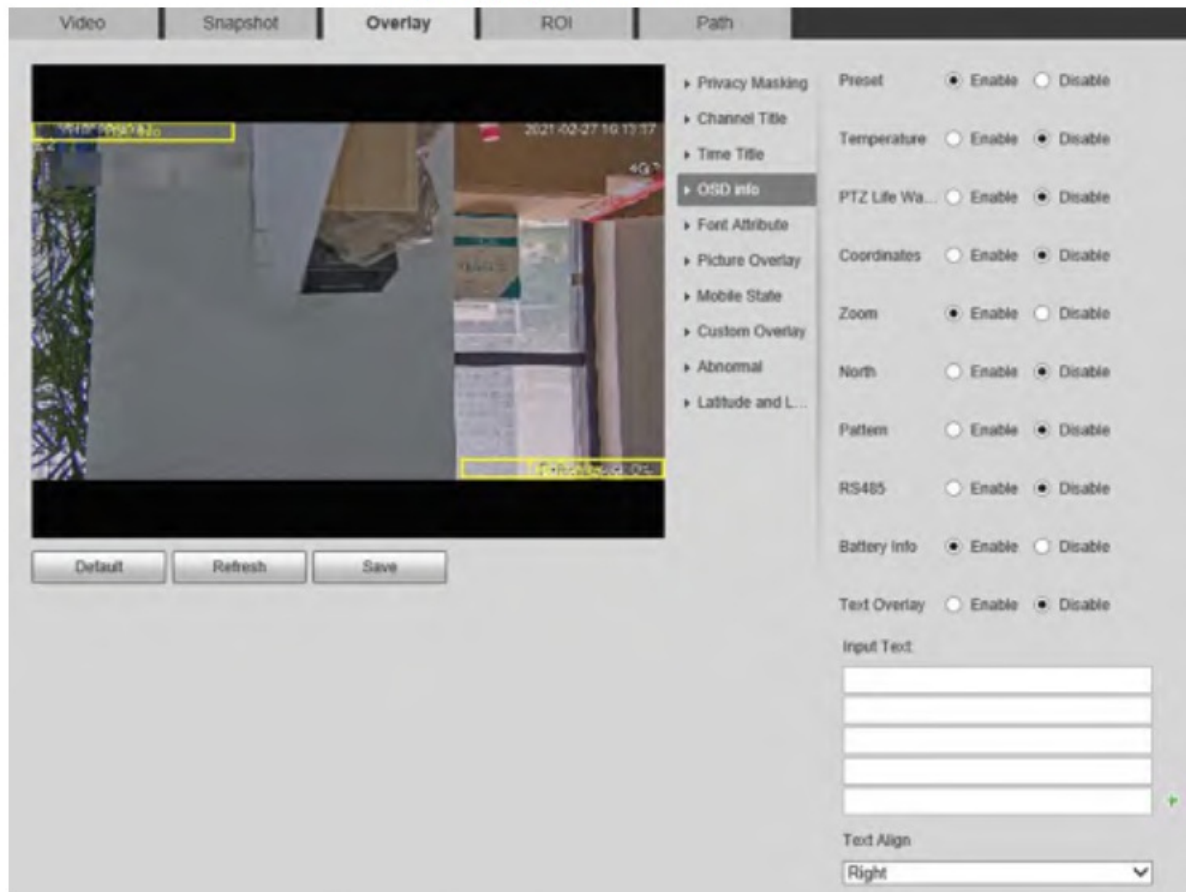Figure 5-23 OSD info



Step 2 Configure OSD information.

Table 5-10 Description of OSD information

Parameter	Description
Preset	<p>Select Enable, and the preset name is displayed on the image when the camera turns to the preset, and it will disappear 3 s later.</p>  For some devices, you can set the duration of the preset title displaying on the screen. You can select from Disable , 5s , 15s , Display Permanently , and Custom .
Temperature	Select Enable , and the internal temperature of the current device is displayed.
PTZ Life Warning	When the PTZ lifespan is close to the threshold, a warning will be displayed on the video image. This OSD info is enabled by default.
Coordinates	Select Enable , and the PTZ coordinates information is displayed on the image.
Zoom	Select Enable , and the zoom information is displayed on the image. For example, means 12x zoom rate.
North	Select Enable , and the north direction is displayed on the image.
Pattern	Select Enable , and the pattern information is displayed on the image.

Parameter	Description
RS485	Select Enable , and the RS-485 communication information is displayed on the image.
Battery Info	Select Enable , and the battery level is displayed on the image.
Text Overlay	Select Enable and enter text, and the text is displayed on the image.
Input Text	
Text Align	Set the alignment mode of the displayed information on the image.

Step 3 Move the OSD box to the position that you want on the image.

Step 4 Click Save.

5.1.2.3.5 Font Attribute

You can enable this function if you need to adjust the font size and color on the video image.

Step 1 Select Setting > Camera > Video > Overlay > Font Attribute.

Figure 5-24 Font attribute



Step 2 Select the font color and size.

Click More Color to customize the font color.

Step 3 Click Save.

5.1.2.3.6 Picture Overlay


You can enable this function if you need to display image on the video image.



Text overlay and picture overlay cannot be enabled at the same time.

Step 1 Select Setting > Camera > Video > Overlay > Picture Overlay.

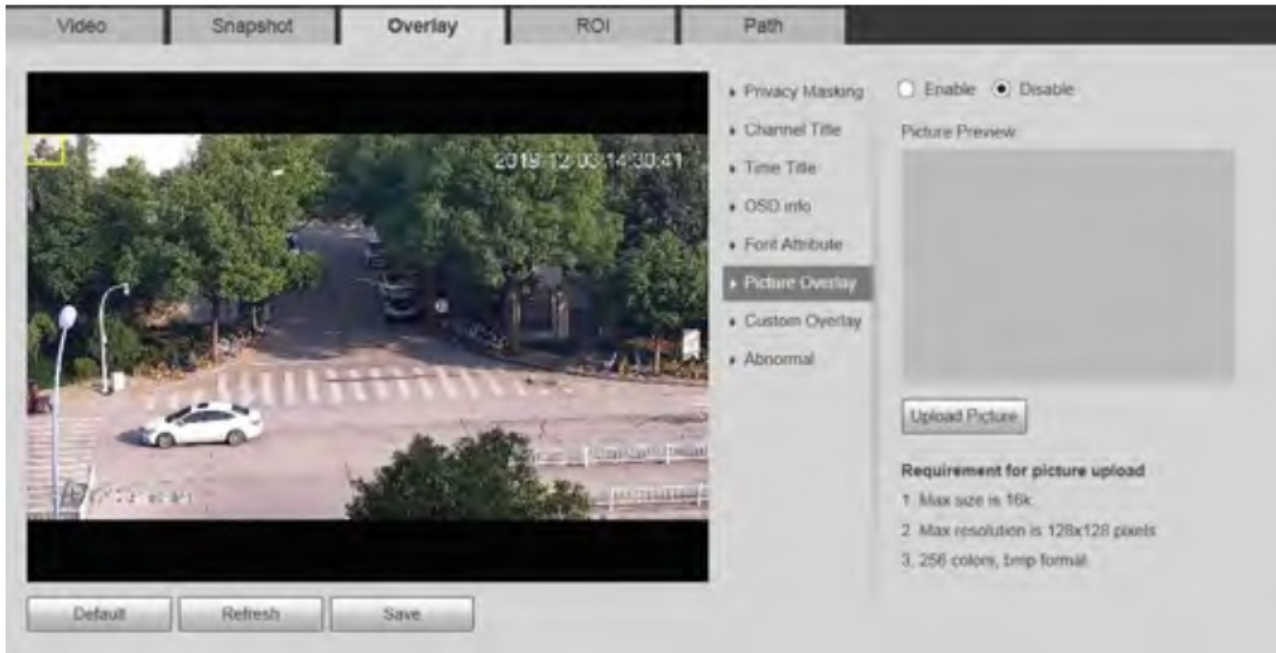Figure 5-25 Picture overlay



Step 2 Select the Enable checkbox, click Upload Picture, and then select the image to be overlaid.

The image is displayed on the video image.

Step 3 Move the overlaid image to the position that you want on the image.


Step 4 Click Save.

5.1.2.3.7 Mobile State

You can enable this function if you want to display mobile state on the image.

Step 1 Select Setting > Camera > Video > Overlay > Mobile State.

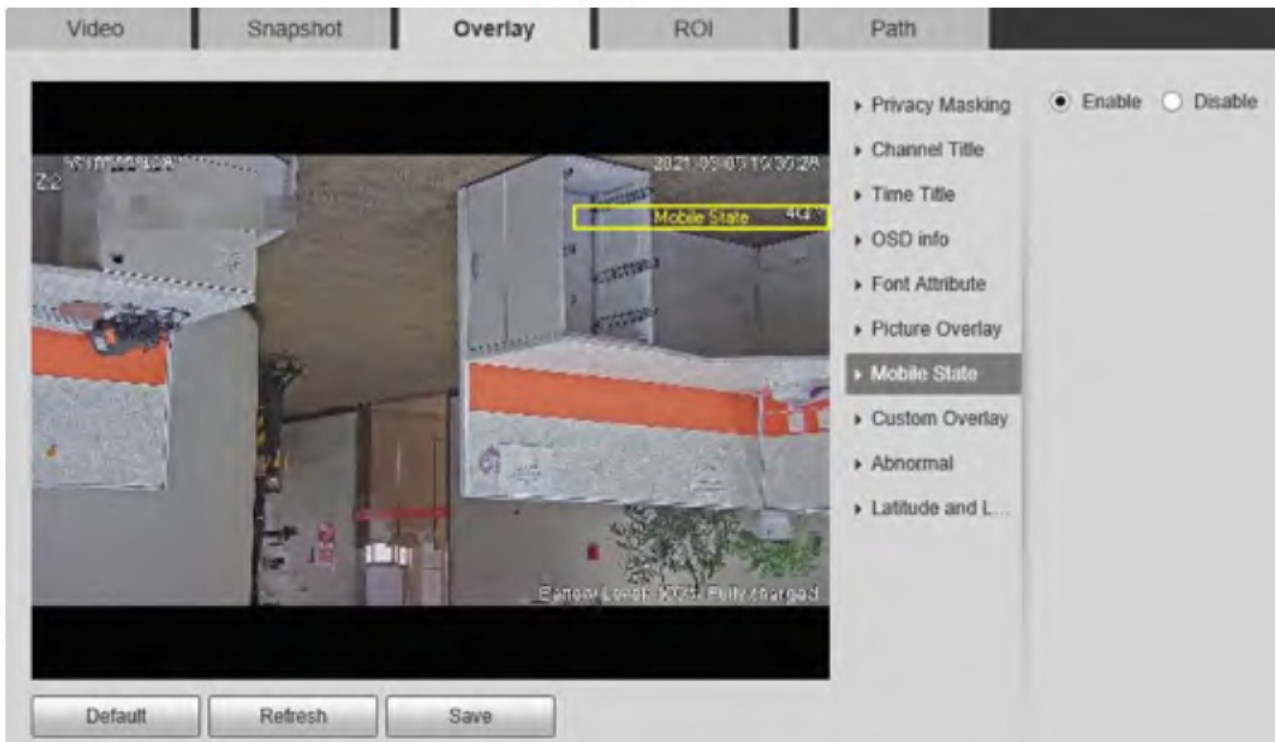Figure 5-26 Mobile state



Step 2 Select the Enable checkbox.

Step 3 Drag the mobile state box to the position that you want on the image.

Step 4 Click Save.


The mobile state information is displayed on the image.

5.1.2.3.8 Custom Overlay

You can enable this function if you need to display custom information on the video image.

Step 1 Select Setting > Camera > Video > Overlay > Custom Overlay.

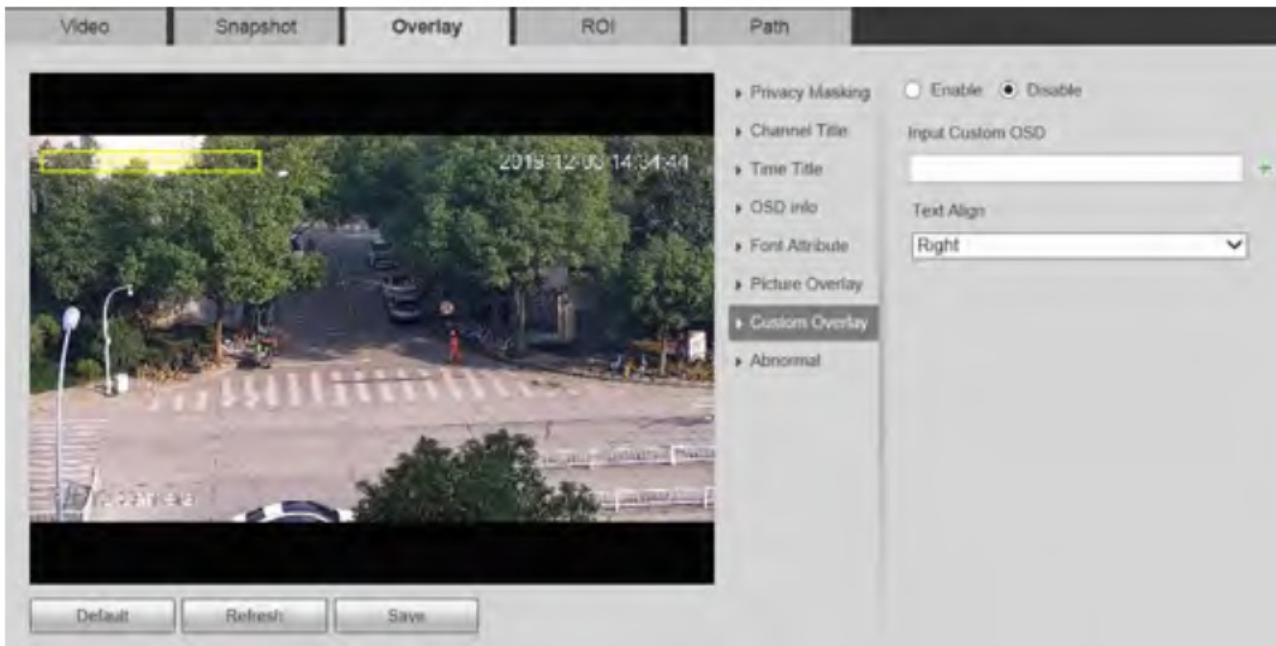Figure 5-27 Custom overlay



Step 2 Select the Enable checkbox, and then select the text alignment.



Click + to expand the custom overlay, and you can expand 1 line at most.

Step 3 Drag the custom overlay box to the position that you want on the image.


Step 4 Click Save.

5.1.2.3.9 Abnormal

You can enable this function if you want to display exception information on the image.

Step 1 Select Setting > Camera > Video > Overlay > Abnormal.

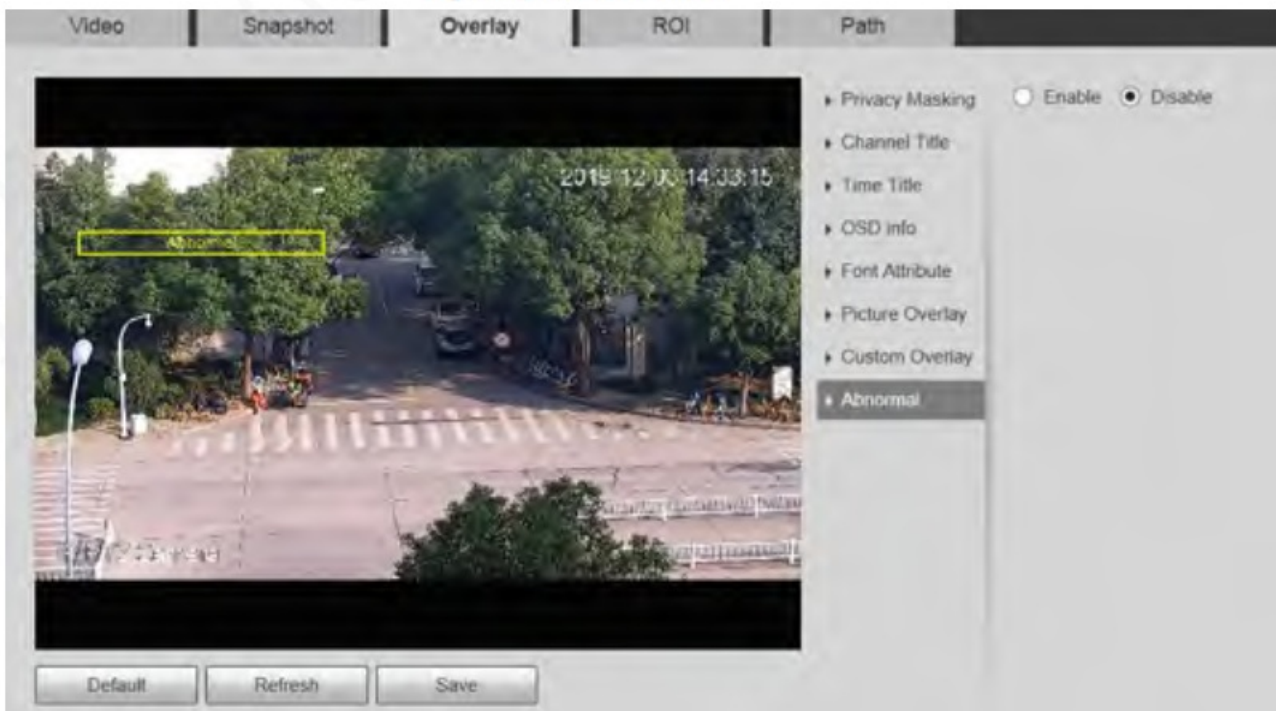Figure 5-28 Abnormal



Step 2 Select the Enable checkbox.

Step 3 Drag the box to the position that you want on the image.

Step 4 Click Save.


The exception information is displayed on the image.

5.1.2.3.10 Latitude and Longitude

You can enable this function if you need to display latitude and longitude on the video image.

Step 1 Select Setting > Camera > Video > Overlay > Latitude and Longitude.

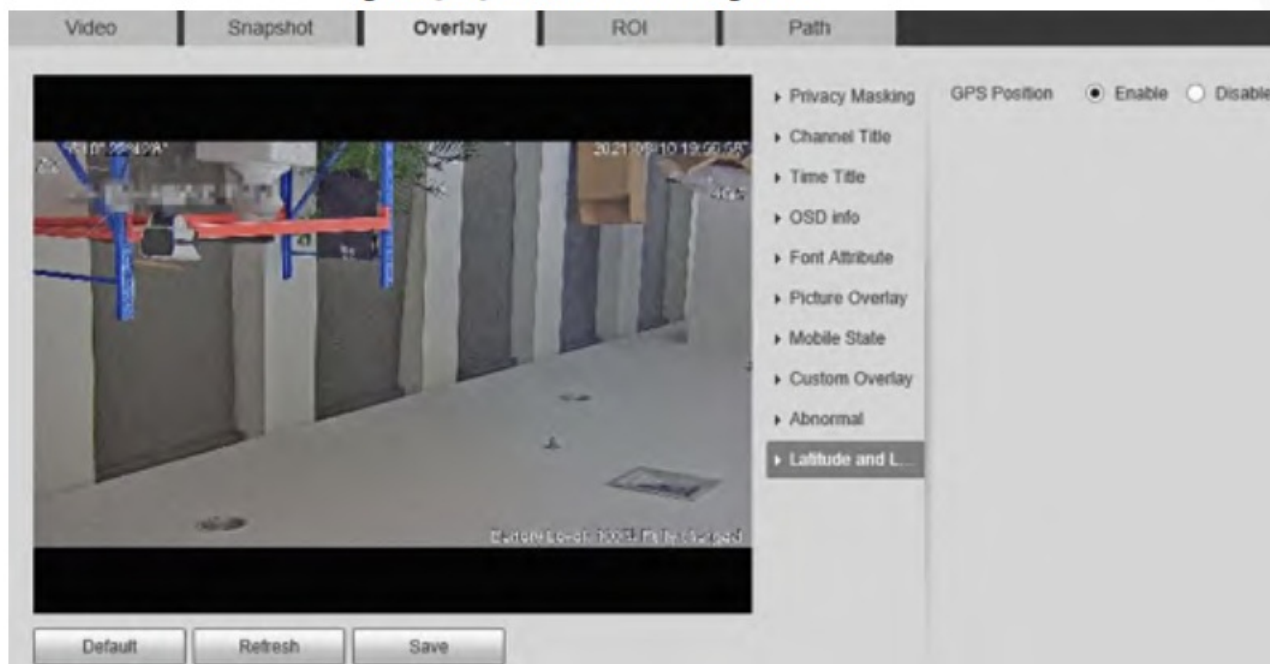Figure 5-29 Latitude and longitude



Step 2 Select the Enable checkbox.

Step 3 Drag the box to the position that you want on the image.

Step 4 Click Save.

5.1.2.4 ROI


You can set a key monitoring region as a ROI (region of interest), and configure the image quality of this region.



ROI is available on select models.

Step 1 Select Setting > Camera > Video > ROI.

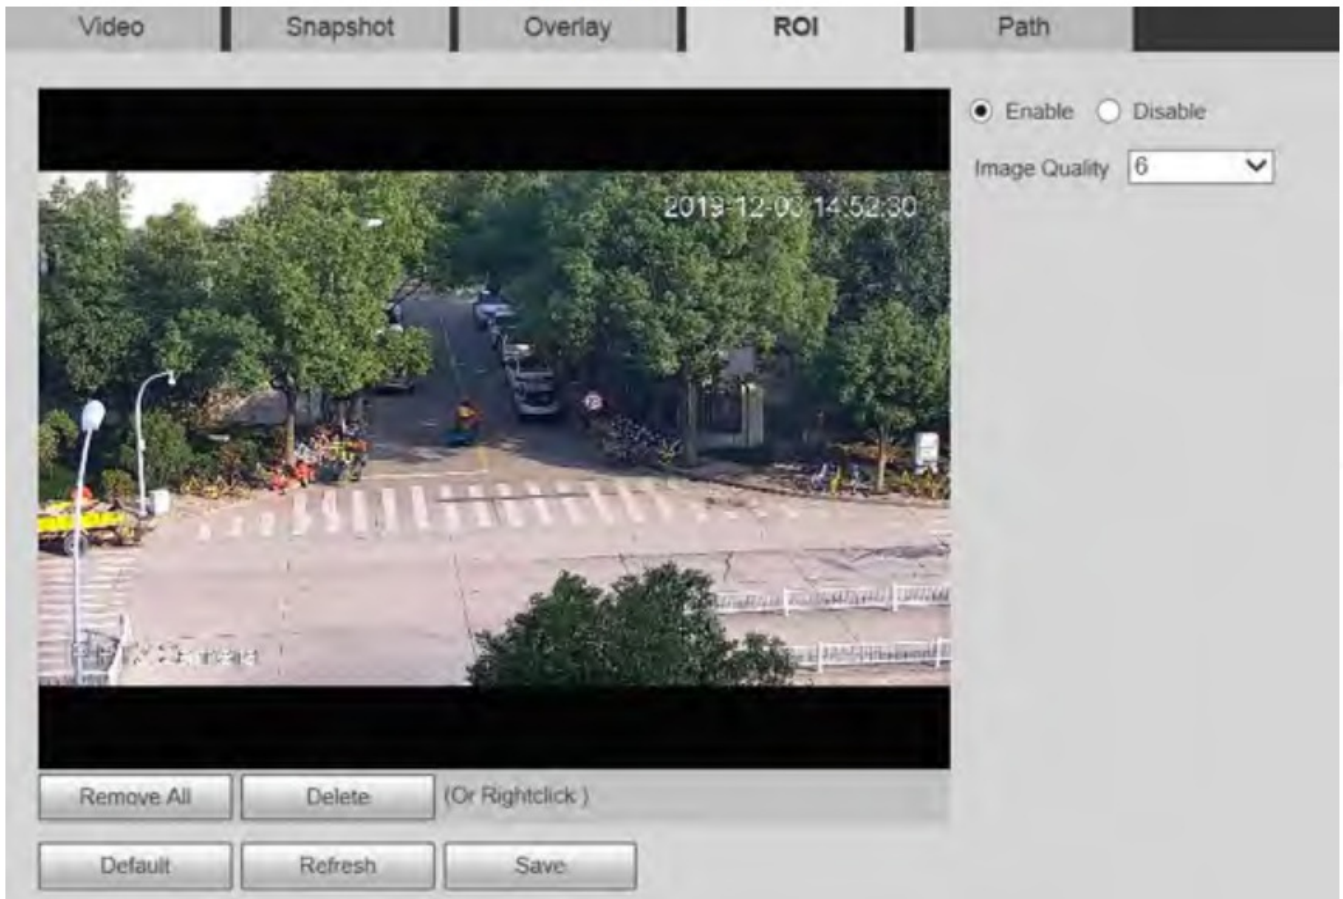Figure 5-30 ROI settings



Step 2 Select Enable to enable this function.

Step 3 Press and hold the left mouse button to draw boxes on the monitoring screen. You can draw up to 4 boxes.

- Click Delete or right click to delete the drawn boxes.
- Click Remove All to clear all boxes.

Step 4 Set the image quality of the ROI.

Step 5 Click Save.

5.1.2.5 Path

The storage path is associated with the snapshot and recording on the Live page. You can set the path of Live Snapshot and Live Record respectively.

The storage path is associated with the snapshot, downloaded and clipped files on the Playback page. You can set the path of Playback Snapshot, Playback Download, and Video Clips respectively. Step 1 Select Setting > Camera > Video > Path.

Figure 5-31 Path settings

Video	Snapshot	Overlay	ROI	Path
Live Snapshot	C:\Users\...WebDownload\LiveSnapshot			Browse...
Live Record	C:\Users\...WebDownload\LiveRecord			Browse...
Playback Snapshot	C:\Users\...WebDownload\PlaybackSnapshot			Browse...
Playback Download	C:\Users\...WebDownload\PlaybackRecord			Browse...
Video Clips	C:\Users\...WebDownload\VideoClips			Browse...
<div>Default</div> <div>Save</div>				

Step 2 Set each storage path.

- Default storage path for snapshots: C:\Users\admin\WebDownload\LiveSnapshot.
- Default storage path for recording: C:\Users\admin\WebDownload\LiveRecord.
- Default storage path for playback snapshot:
C:\Users\admin\WebDownload\PlaybackSnapshot.
- Default storage path for playback download:
C:\Users\admin\WebDownload\PlaybackRecord.
- Default storage path for video clips: C:\Users\admin\WebDownload\VideoClips.

Step 3 Click Save.

5.1.3 Audio

You can configure audio parameters and alarm audio.



The function is available on select models.

5.1.3.1 Configuring Audio Parameters

You can set the audio input type, volume and more. After you enable main stream or sub stream, the network stream contains both audio and video; otherwise it is only video stream.



Before enabling sub stream audio, go to Setting > Camera > Video > Video to enable video in sub stream.

Step 1 Select Setting > Camera > Audio > Audio.

Figure 5-32 Audio

The screenshot displays the 'Audio' configuration window with two tabs: 'Audio' and 'Alarm Audio'. The 'Audio' tab is active. The window is divided into three main sections: 'Encode', 'Attribute', and a bottom control bar.

Encode Section:

- Main Stream:**
 - ☒ Enable
 - Encode Mode: G.711A
 - Sampling Frequency: 8000
- Sub Stream:**
 - ☒ Enable
 - Sub Stream 1
 - Encode Mode: G.711A
 - Sampling Frequency: 8000

Attribute Section:

- AudioIn Type: LineIn
- Audio Output Type: LineOut
- Noise Filter: Disable
- Microphone Volume: Slider from - to + 0
- Speaker Volume: Slider from - to + 0



Bottom Control Bar:


- Default
- Refresh
- Save

Step 2 Enable audio in main stream or sub stream.

Step 3 Configure audio parameters.

Table 5-11 Description of audio parameter

Parameter	Description
Enable	<p>Enable audio in main stream or sub stream.</p> <p> Audio can be enabled only when video has been enabled.</p>
Encode Mode	The audio encoding mode selected here applies to both audio streams and voice talks. We recommend you to keep the default value.
Sampling Frequency	The number of audio signals sampled per second. The higher the sampling frequency, the more samples obtained per unit time, and the more accurate the restored audio signals.
AudioIn Type	<p>Set the audio input type.</p> <ul style="list-style-type: none"> ● LineIn: The Camera collects audio signals through an external audio device. ● Mic: The Camera collects audio signals through the built-in microphone. ● Bluetooth: The Camera collects audio signals through a Bluetooth device. <p> Bluetooth is available on select models.</p>

Parameter	Description
Audio Output Type	<p>Set the audio output type.</p> <ul style="list-style-type: none"> ● LineOut: The Camera outputs audio signals through an external audio device. ● Speaker: The Camera outputs audio signals through the built-in speaker. ● Bluetooth: The Camera outputs audio signals through a Bluetooth device.  Bluetooth is available on select models.
Noise Filter	After the function is enabled, noise in the environment will be filtered.
NR (Noise Reduction) Level	<p>Adjust the noise reduction level.</p> <p>This parameter takes effect when noise filter is enabled.</p>
Microphone Volume	Adjust the microphone volume.
Speaker Volume	Adjust the speaker volume.

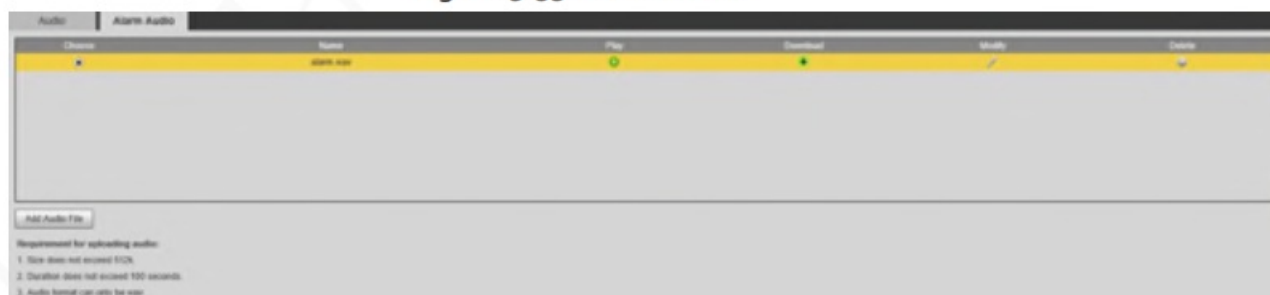
5.1.3.2 Configuring Alarm Audio

You can set the alarm audio to be played when an alarm is triggered. For some devices, you can record or upload alarm audios.

Procedure

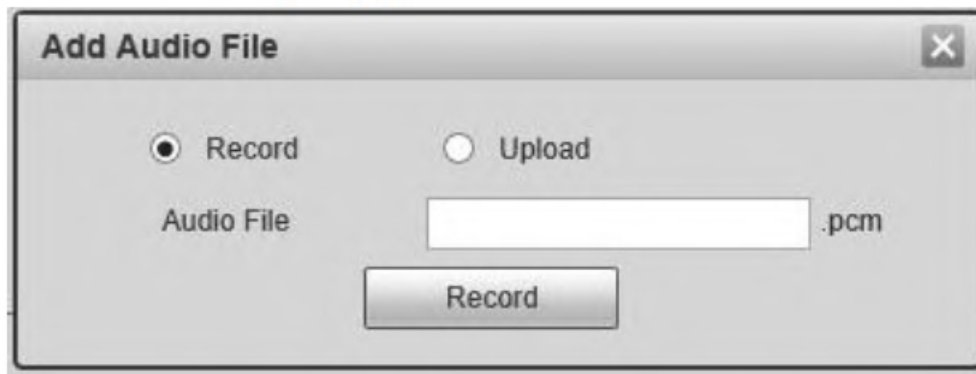
Step 1 Select **Setting > Camera > Audio > Alarm Audio**.

Figure 5-33 Alarm audio







Step 2 Click **Add Audio File**.

Figure 5-34 Add audio file




Step 3 Configure the audio file.

- Select Record, enter the audio file name, and then click Record. Click Stop to complete recording.
- Select Upload, click , select the audio file to be uploaded, and then click Upload.
-  The format of recorded audio is .pcm. Audio recording is only supported by some devices.
- Audio file in the format of .wav can be uploaded.
- You can edit and delete recorded or uploaded audio.
 - ◇ Click to  edit audio file.
 - ◇ Click to  delete audio file.

Step 4 Select the audio file that you need.

Related Operations

- Play audio: Click to play the alarm audio.
- Download audio: Click  to download the alarm audio to local storage. The audio is saved to the default download path of the browser.

5.2 Network Settings

5.2.1 TCP/IP

You can configure the IP address and DNS server of the Device to connect it to other devices in the network.

Prerequisites

Before configuring network parameters, make sure that the Device is connected to the network properly.

- If there is no router in the network, assign an IP address in the same network segment.
- If there is a router in the network, set the corresponding gateway and subnet mask.

Procedure

Step 1 Select Setting > Network > TCP/IP.

Figure 5-35 TCP/IP settings

TCP/IP

Host Name

SD

Ethernet Card

Wire(Default)

Set as Default C...

Mode

☒ Static ☐ DHCP

MAC Address

IP Version

IPv4

IP Address

Subnet Mask

Default Gateway

Preferred DNS

Alternate DNS

MTU

1500

(600~1500)


☒ Enable ARP/Ping to set IP address service


Default



Refresh

Save

Step 2 Set TCP/IP parameters.
Table 5-12 Description of TCP/IP parameter

Parameter	Description
Host Name	Set the name of the current device. The host name can be English or Chinese within 63 bytes.
Ethernet Card	<p>Select the Ethernet card to be configured. Wire is selected by default.</p>  <p>If the Device is configured with multiple Ethernet cards, the default Ethernet card can be changed. If you reset the default Ethernet card, restart the Device.</p>
Set as Default Card	Click to set the current Ethernet card as the default card.
Mode	<p>Static and DHCP modes are available.</p> <ul style="list-style-type: none"> ● If DHCP is selected, the IP address is obtained automatically. In this case, the IP address, subnet mask, and gateway cannot be set. ● If Static is selected, you need to set the IP address, subnet mask, and gateway manually.
MAC Address	Display the MAC address of the Device.

Parameter	Description
IP Version	You can select IPv4 or IPv6 . Both versions are supported and can be accessed.
IP Address	Enter correct digits to change the IP address.
Subnet Mask	<p>Set the subnet mask according to actual conditions. The subnet prefix is a number in the range of 1 to 255. The subnet prefix identifies a specific network link, and usually contains a hierarchical structure.</p>  <p>The Device checks the validity of all IPv6 addresses. The IP address and the default gateway must be in the same network segment.</p> <p>Make sure that a certain part of the subnet prefix in the IP address and default gateway are the same.</p>

Default Gateway	Configure as needed. The default gateway must be in the same network segment as the IP address.	 For IPv6 version, in the IP Address , Default Gateway , Preferred DNS , and Alternate DNS fields, enter 128 bits, and these fields cannot be blank.
Preferred DNS	IP address of the DNS server.	
Alternate DNS	Alternate IP address of the DNS server.	
MTU	<p>You can set the MTU value to ensure good data transmission according to the network. The value is 1500 by default. Modifying MTU value causes Ethernet card restarting and network disconnection.</p> <p> Here are some suggested values for your reference.</p> <ul style="list-style-type: none">● 1500: It is the maximum and default value of Ethernet packet, typical setting of the network connection without PPPOE or VPN, and is the default setting of some routers, network adapters, and switches.● 1492: The optimal value for PPPOE.● 1468: The optimal value for DHCP.● 1450: The optimal value for VPN.	
Enable ARP/Ping to set IP address service	<p>Select the checkbox, and then you can modify and set the device IP address through ARP/Ping command if the MAC address is known.</p> <ul style="list-style-type: none">● The function is enabled by default. During reboot, you will have no more than 2 minutes to configure the Device IP address by a ping packet with certain length.● The server will be turned off in 2 minutes, or it will be turned off immediately after the IP address is successfully configured. If the function is not enabled, the IP address cannot be configured with ping packet.	

Step 3 Click Save.

Related Operations

An Example of Configuring IP Address with ARP/Ping

1. To obtain a usable IP address, make sure that the Device and your PC are in the same LAN.
2. Get the MAC address from the Device label.
3. Open command editor on the PC and enter the following command.

Table 5-13 Command list

System	Command
Windows syntax	arp -s <IP Address> <MAC> ping -l 480 -t < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.0.125
UNIX/Linux/Mac syntax	arp -s <IP Address> <MAC> ping -s 480 < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -s 480 192.168.0.125
Win7 syntax	netsh i i show in netsh -c“i i” add neighbors ldx <IP Address> <MAC> ping -l 480 -t < IP Address > Example: netsh i i show in netsh -c“i i” add neighbors 1 2 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.1.125

4. Power off the Device and then restart it, or restart the Device over the network.
5. Check the PC command line. If there is information such as “Reply from 192.168.1.125...”, it means the configuration succeeds. In this case, you can close the command editor.
6. Enter http://<IP address> in the browser address bar to log in.
7. 5.2.1.1 An Example of Configuring IP Address with ARP/Ping
 - Step 1 To obtain a usable IP address, make sure that the Device and your PC are in the same LAN.
 - Step 2 Get the MAC address from the Device label.
 - Step 3 Open command editor on the PC and enter the following command.

Table 5-14 Command list

System	Command
Windows syntax	arp -s <IP Address> <MAC> ping -l 480 -t < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.0.125
UNIX/Linux/Mac syntax	arp -s <IP Address> <MAC> ping -s 480 < IP Address > Example: arp -s 192.168.1.125 11-40-8c-18-10-11 ping -s 480 192.168.0.125
Win7 syntax	netsh i i show in netsh -c“i i” add neighbors ldx <IP Address> <MAC> ping -l 480 -t < IP Address > Example: netsh i i show in netsh -c“i i” add neighbors 12 192.168.1.125 11-40-8c-18-10-11 ping -l 480 -t 192.168.1.125

Step 4 Power off the Device and then restart it, or restart the Device over the network.
Step 5 Check the PC command line. If there is information such as “Reply from 192.168.1.125...”, it means the configuration succeeds. In this case, you can close the command editor.

Step 6 Enter http://<IP address> in the browser address bar to log in.

5.2.2 Port

You can configure the maximum port numbers and values on this page.

Step 1 Select Setting > Network > Port.

Figure 5-36 Port page

The screenshot shows a web-based configuration interface for the 'Port' settings. The interface includes a title bar 'Port' and a list of configuration items with input fields and ranges. The '5000 Port' item has radio buttons for 'Enable' and 'Off'. At the bottom, there are three buttons: 'Default', 'Refresh', and 'Save'.

Parameter	Value	Range
Max Connection	10	(1~20)
TCP Port	37777	(1025~65534)
UDP Port	37778	(1025~65534)
HTTP Port	80	
RTSP Port	554	
HTTPS Port	443	
5000 Port	<input checked="" type="radio"/> Enable <input type="radio"/> Off	

Buttons: Default, Refresh, Save



Step 2 Configure each port value of the Device.

- Except Max Connection, modifications of other parameters will take effect after restart.
- 0–1024, 1900, 3800, 5000, 5050, 9999, 37776, 37780–37880, 39999, and 42323 are occupied for specific uses.
- It is not recommended to use the default values of other ports during port configuration.

Table 5-15 Description of port parameter

Parameter	Description
Max Connection	The maximum number of users that can log in to the web page of the Device simultaneously. The value ranges from 1 to 10, and it is 10 by default.
TCP Port	TCP service port. The value is 37777 by default. You can set this parameter as needed.

UDP Port	User Datagram Protocol port. The value is 37778 by default. You can set this parameter as needed.
HTTP Port	HTTP communication port. The value is 80 by default. You can set this parameter as needed.
RTSP Port	<p>Real Time Streaming Protocol port. Keep the default value 554 if it is displayed. If you play live view through Apple's QuickTime or VLC, the following format is available. This function is also supported by Blackberry mobile phone.</p> <p>When the URL format requiring RTSP, you need to specify channel number and bit stream type in the URL, and also username and password if needed.</p> <p>When playing live view with Blackberry mobile phone, you need to disable the audio, and then set the stream encoding mode to H.264B and resolution to CIF.</p> <p>URL format example:</p> <p><code>http://username:password@ip:port/cam/realmonitor?channel=1&subtype= 0</code></p> <ul style="list-style-type: none"> ● Username: Your username. For example, admin. ● Password: Your password. For example, admin. ● IP: Your device IP. For example, 192.168.1.122. ● Port: Leave it if the value is 554 by default. ● Channel: Channel number starting from 1. For example, if it is channel 2, then enter channel=2. ● Subtype: stream type. The main stream is 0 (subtype=0); the sub stream is 1 (subtype=1). <p>For example, if you require the sub stream of channel 2 from a certain device, then the URL shall be:</p> <p><code>rtsp://admin:admin@192.168.1.123:554/cam/realmonitor?channel=2&subtype=1</code></p> <p>If certification is not required, you do not need to specify the username and password. Use the following format:</p> <p><code>rtsp://ip:port/cam/realmonitor?channel=1&subtype=0</code></p>


Parameter	Description
RTMP	A network protocol for real-time data communication. The value is 1935 by default. You can enter the value as needed.  Enable RTMP to push audio and video data to the third-party server. Make sure that the address is trusted; otherwise it might cause data leakage.
HTTPS Port	HTTPS communication port. The value is 443 by default. You can set this parameter as needed.
5000 Port	The port is disabled by default. If you need to connect the Camera to intelligent transportation box through 5000 port, enable this port.  There might be network risk if the port is enabled. Be cautious.

Step 3 Click Save.

5.2.3 PPPoE

You can enable PPPoE (Point-to-Point Protocol over Ethernet) to establish network connection. In this case, the Device obtains a dynamic IP address. To use this function, you need to obtain the PPPoE username and password from the Internet Service Provider (ISP). Step 1 Select Setting > Network > PPPoE.

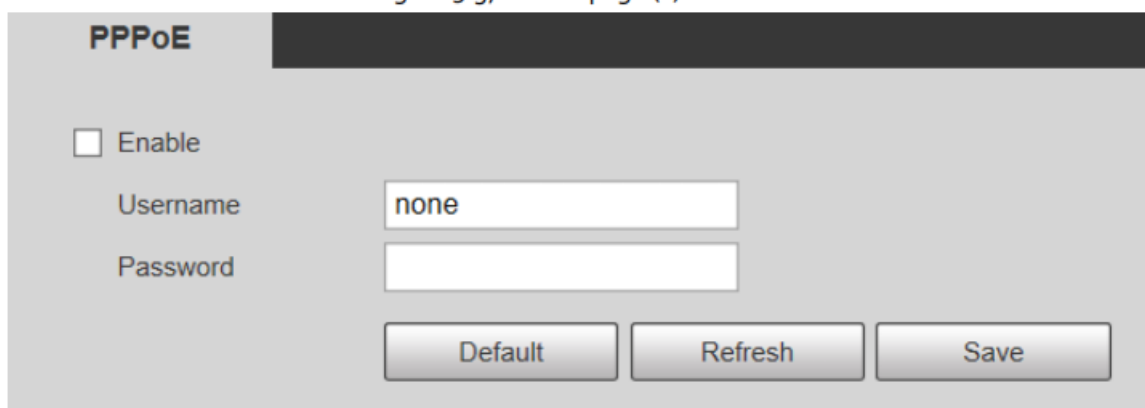Figure 5-37 PPPoE page (1)




Step 2 Select Enable, and then enter PPPoE username and password.

Step 3 Click Save.


Save Succeeded! is displayed, and the obtained IP address of public network is displayed in real time. You can access the Device through the IP address.

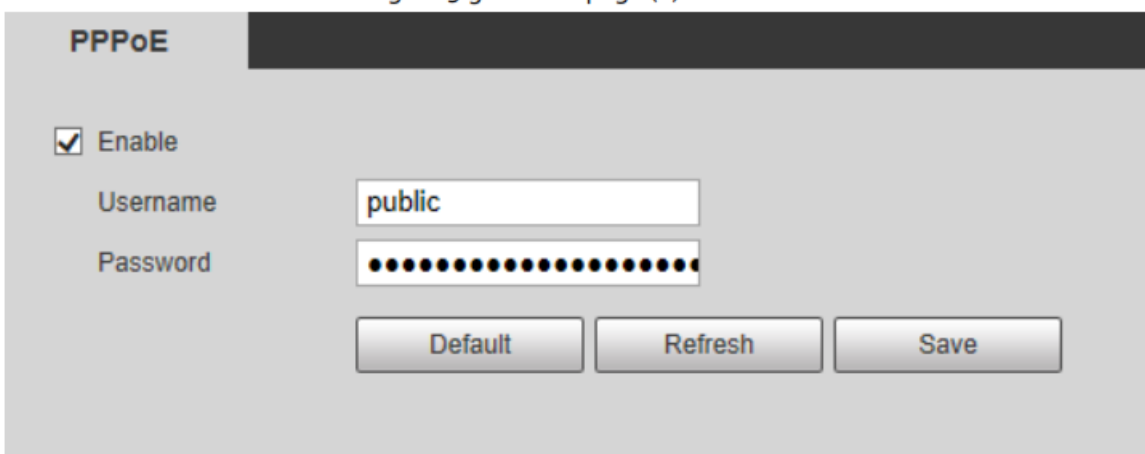Figure 5-38 PPPoE page (2)




5.2.4 DDNS

Properly configure DDNS, and then the domain name on the DNS server matches your IP address and refresh the matching relation in real time. You can always access your device with the same domain name no matter how much your device IP address changes. Before making any changes, check whether your device supports the DNS server.

-  The third party servers might collect your device information if DDNS is enabled.
- Register and log in to the DDNS website, and then you can view the information of all the connected cameras in your account.

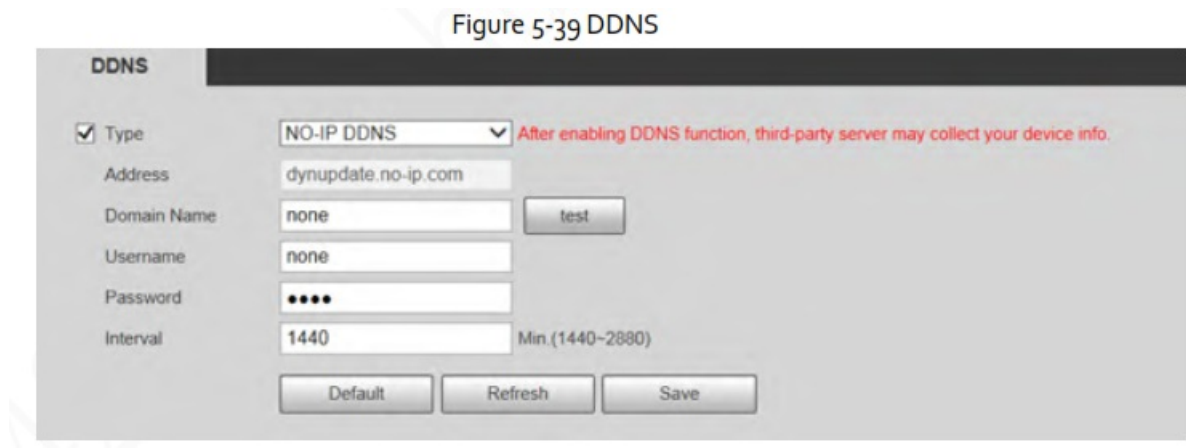Step 1 Select Setting > Network > DDNS.



Step 2 Select Type, and then configure DDNS parameter.

Table 5-16 Description of DDNS parameter

Parameter	Description
Type	The name and website of the DDNS service provider. Here is the matching

Parameter	Description
Server Address	<p>relationship.</p> <ul style="list-style-type: none"> ● CN99 DDNS Server address: www.3322.org ● NO-IP DDNS Server address: dynupdate.no-ip.com ● Dyndns DDNS Server address: members.dyndns.org
Domain Name	The domain name you registered on the DDNS website.
Username	Enter the username and password obtained from DDNS service provider. You need to register an account (including username and password) on the website of DDNS service provider.
Password	
Interval	The update cycle of the connection between your device and the server, and the time is 10 minutes by default.

Step 3 Click Save.

Open the browser, enter the domain name in the address bar, and then press the Enter key.

The login page is displayed.

5.2.5 SMTP (Email)



After this function is enabled, the device data will be sent to the given server. There is data leakage risk. Think twice before enabling the function.

After you configure SMTP (Email), when alarms, video detection and abnormal events are triggered, an email will be sent to the recipient server through SMTP server. The recipient can log in to the incoming mail server to receive emails.

Step 1 Select Setting > Network > SMTP (Email).

Figure 5-40 SMTP (Email)

SMTP(Email)

SMTP Server

none

Port

25

☐ Anonymity

Username

anonymity

Password

••••

Sender

none

Authentication

TLS

Title

Message

☒ Attachment

Mail Receiver

☐ Health Mail

Update Period

60

s(1~3600)

Test

Default

Refresh

Save

Step 2 Configure SMTP (Email) parameter.
Table 5-17 Description of SMTP (Email) parameter

Parameter	Description	
SMTP Server	IP address of the outgoing mail server complying with SMTP protocol.	For the detailed configuration, see Table 5-18 .
Port	Port number of the outgoing mail server complying with SMTP protocol. It is 25 by default.	
Username	Username of sender mailbox.	
Password	Password of sender mailbox.	
Anonymity	For servers supporting anonymous email, you can log in anonymously without entering username, password, and sender information.	
Sender	Email address of the sender.	




Parameter	Description
Authentication	<p>Select authentication type from None, SSL and TLS. TLS is selected by default.</p> <ul style="list-style-type: none">  For the detailed configuration, see Table 5-18. There might be risks if you select the authentication type other than TLS. TLS is recommended.
Title	You can enter no more than 63 characters in Chinese, English, and Arabic numerals.
Mail Receiver	Email address of the receiver. Support 3 addresses at most.
Attachment	Select the checkbox to support attachment in the email.
Health Mail	The system sends test mail to check if the connection is successfully configured. Select the Health Mail checkbox and configure the Update Period , and then the system sends test mail according to the defined period.
Test	Test whether the email function is normal. If the configuration is correct, the email address of the receiver will receive the test email. Save the email configuration before running test.

Table 5-18 Description of common email configuration

Type	SMTP Server	Authentication	Port	Description
QQ	smtp.qq.com	SSL	465	<ul style="list-style-type: none"> The authentication type cannot be None. You need to enable SMTP service in your mailbox. The authentication code is required; either the QQ password or email password is not applicable.  Authentication code is the code you receive when enabling SMTP service.
		TLS	587	
163	smtp.163.com	SSL	465/994	<ul style="list-style-type: none"> You need to enable SMTP service in your
		TLS	25	

Type	SMTP Server	Authentication	Port	Description
		—		<p>mailbox.</p> <ul style="list-style-type: none"> The authentication code is required; the email password is not applicable. <p> Authentication code is the code you receive when enabling SMTP service.</p>
Sina	smtp.sina.com	SSL	465	You need to enable SMTP service in your mailbox.
		—	25	
126	smtp.126.com	—	25	You need to enable SMTP service in your mailbox.

Step 3 Click Save.

5.2.6 UPnP



After UPnP is enabled, Intranet service and port of the Device will be mapped to Extranet. Think twice before enabling it.

UPnP (Universal Plug and Play) allows you to establish the mapping relationship between Intranet and Extranet. Extranet users can access Intranet device by visiting Extranet IP address. Intranet port is device port and Extranet port is router port. Users can access the Device by accessing Extranet port. When you are not using routers for UPnP, disable UPnP to avoid affecting other functions. Once UPnP is enabled, the Device supports UPnP protocol. In Windows XP or Windows Vista, after UPnP is enabled, the Device can be automatically searched by Windows network.

Adding UPnP Network Service in Windows System

1. Open Control Panel, and then select Add or Remove Programs.
2. Click Add/Remove Windows Components.
3. Select Network Service from the Windows Components Wizard and click Details button.
4. Select Internet Gateway Device Discovery and Control Client, and UPnP User Interface, and then click OK to start installation.

Configuring UPnP

1. Select Setting > Network > UPnP.

Figure 5-41 UPnP

	Service Name	Protocol	Internal Port	External Port	Status	Modify
<input checked="" type="checkbox"/>	HTTP	WebService TCP	80	8080	Mapping Failed	
<input checked="" type="checkbox"/>	TCP	ProService TCP	37777	37777	Mapping Failed	
<input checked="" type="checkbox"/>	UDP	ProService UDP	37778	37778	Mapping Failed	
<input checked="" type="checkbox"/>	RTSP	RTSPService TCP	554	554	Mapping Failed	

2. Select Enable.
3. Select a mode from the drop-down list.
There are 2 mapping modes: Custom and Default.
 - In Custom mode, users can modify the external port.
 - Select Default, and then the system finishes mapping with unoccupied port automatically. In this case, you do not need to modify mapping relation.
4. Select Start Device Discover.
5. Click Save.

5.2.7 Bonjour Introduction

Bonjour is also called zero-configuration networking, which can automatically discover computers, devices and services on IP networks. Bonjour is a protocol of industry standard which allows devices to search and find each other. IP address or DNS server is not required during the process. Enable this function, and the network camera will be automatically detected by the OS and client with Bonjour function. When the network camera is automatically detected by Bonjour, server name you have set will be displayed.

Configuring Bonjour

1. Select Setting > Network > Bonjour.

Figure 5-42 Bonjour page

Bonjour

☒ Enable

Server Name:

Default Refresh Save

2. Select Enable, and then set Server Name.
3. Click Save.

Visiting Web Page with Safari Browser

In the OS and clients that support Bonjour, perform the following steps to visit the web page of the Device with Safari browser.

1. Click Show all bookmarks in Safari.

2. The OS or client automatically detects the network cameras with Bonjour enabled in the LAN.
3. Click to visit the corresponding web page.

5.2.8 SNMP

After setting SNMP (Simple Network Management Protocol) and connecting to the Device through certain software (such as MIB Builder and MG-SOFT MIB Browser), you can manage and monitor the Device with the software.

Prerequisites

- Install SNMP monitoring and management tool such as MIB Builder and MG-SOFT MIB Browser.
- Get the MIB file of the matched version from technical support.

Procedure

Step 1 Select Setting > Network > SNMP.

Figure 5-43 SNMP (1)

The interface shows the SNMP configuration page. At the top, there are three radio buttons for Version: v1, v2, and v3 (Recommended). Below this, there are input fields for SNMP Port (161), Read Community, Write Community, Trap Address, and Trap Port (162). There is a checkbox for 'Keep Alive'. At the bottom, there are three buttons: Default, Refresh, and Save.

Figure 5-44 SNMP (2)

The interface shows the SNMP configuration page with Version v3 selected. Below the basic settings, there are two sections for authentication and encryption. The first section is for 'Read-only Username' (public) with MD5 authentication and CBC-DES encryption. The second section is for 'Read&write Username' (private) with MD5 authentication and CBC-DES encryption. All passwords are masked with dots. At the bottom, there are three buttons: Default, Refresh, and Save.

Step 2 Select SNMP version to enable SNMP.




- Select V1, and the system can only process information of V1 version.
- Select V2, and the system can only process information of V2 version.
- Select V3, and then V1 and V2 become unavailable. You can configure username, password and authentication type. It requires corresponding username, password and authentication type to access your device from the server.



Using V1 and V2 might cause data leakage, and V3 is recommended.

In Trap Address, enter the IP address of the PC that has MIB Builder and MG-SOFT MIB Browser installed, and leave other parameters to the default.

Table 5-19 Description of SNMP parameters

Parameter	Description
SNMP Port	The listening port of the software agent on the Device.
Read Community, Write Community	The read and write community string that the software agent supports.  The name must consist of numbers, letters, underlines and strikethroughs.
Trap Address	The target address of the Trap information sent by the software agent on the Device.
Trap Port	The target port of the Trap information sent by the software agent on the Device.
Keep Alive	After you select the checkbox, the Device can send data packet to ensure continuous network connection.
Read-only Username	Set the read-only username used to access the Device, and it is public by default.  The name must consist of numbers, letters or underlines.
Read/Write Username	Set the read/write username used to access the Device, and it is public by default.  The name must consist of numbers, letters or underlines.
Authentication Type	You can select MD5 or SHA . The default type is MD5 .
Authentication Password	It cannot be less than 8 digits.
Encryption Type	It is CBC-DES by default.
Encryption Password	It cannot be less than 8 digits.

Step 3 Click Save.

Result

View device configuration through MIB Builder or MG-SOFT MIB Browser.

1. Run MIB Builder and MG-SOFT MIB Browser.
2. Compile the two MIB files with MIB Builder.
3. Load the generated modules with MG-SOFT MIB Browser.
4. Enter the IP address of the Device you need to manage in the MG-SOFT MIB Browser, and then select version to search.
5. Unfold all the tree lists displayed in the MG-SOFT MIB Browser, and then you can view the configuration information, video channel amount, audio channel amount, and software version.



Use PC with Windows OS and disable SNMP Trap service. The MG-SOFT MIB Browser will display prompt when an alarm is triggered.

5.2.9 Multicast

You can access the Device by network to see live view. If the access times exceed its upper limit, preview might fail. You can set multicast IP to access by multicast protocol to solve the problem. The Device supports two multicast protocols: RTP and TS. RTP is enabled by default when main stream and sub stream are used. TS is disabled by default.

5.2.9.1 RTP

Step 1 Select Setting > Network > Multicast > RTP.

Figure 5-45 RTP page

The screenshot shows the RTP configuration interface. It features two main sections: 'Main Stream' and 'Sub Stream'. In the 'Main Stream' section, the 'Enable' checkbox is checked, the 'Multicast Address' is set to 224.0.0.1, and the 'Port' is set to 40000. In the 'Sub Stream' section, the 'Enable' checkbox is also checked, the 'Multicast Address' is set to 224.0.0.1, and the 'Port' is set to 40016. Below these sections are three buttons: 'Default', 'Refresh', and 'Save'.

Step 2 Enable main stream or sub stream.

Step 3 Enter multicast address and port number.

Step 4 Click Save.

5.2.9.2 TS

Step 1 Select Setting > Network > Multicast > TS.

Figure 5-46 TS page

The screenshot shows the TS configuration interface. It features two main sections: 'Main Stream' and 'Sub Stream'. In the 'Main Stream' section, the 'Enable' checkbox is unchecked, the 'Multicast Address' is set to 224.0.0.1, and the 'Port' is set to 20000. In the 'Sub Stream' section, the 'Enable' checkbox is also unchecked, the 'Multicast Address' is set to 224.0.0.1, and the 'Port' is set to 20016. Below these sections are three buttons: 'Default', 'Refresh', and 'Save'.

Step 2 Enable main stream or sub stream.

Step 3 Enter multicast address and port number.

Step 4 Click Save.

5.2.10 Auto Register

After you enable this function, when the Device is connected to Internet, it will report the current location to the specified server which acts as the transit to make it easier for the client software to access the Device.

Step 1 Select Setting > Network > Auto Register.

Figure 5-47 Auto register

Step 2 Select the Enable checkbox to enable Auto Register.

Step 3 Enter IP Address, Port and Sub-Device ID.


Table 5-20 Description of auto register parameter

Parameter	Description
IP Address	The IP address of server that needs to be registered to.
Port	The port for auto-registration.
Sub-Device ID	Sub device ID assigned by server.

Step 4 Click Save.

5.2.11 Wi-Fi

Devices with Wi-Fi function can access network through Wi-Fi.

-  Wi-Fi and WPS are available on select models.
- All devices with WPS button support WPS function.

5.2.11.1 Wi-Fi Settings

The name, status and IP information of current hotspot are displayed in the Wi-Fi information bar.

Click Refresh after reconnection to make sure that the operating status is displayed in real time.


Connecting Wi-Fi hotspot takes some time depending on network signal strength.

Step 1 Select the Enable checkbox.

Figure 5-48 Wi-Fi settings (1)


Step 2 Click Search SSID, and Wi-Fi hotspots in the environment of current network camera are displayed.

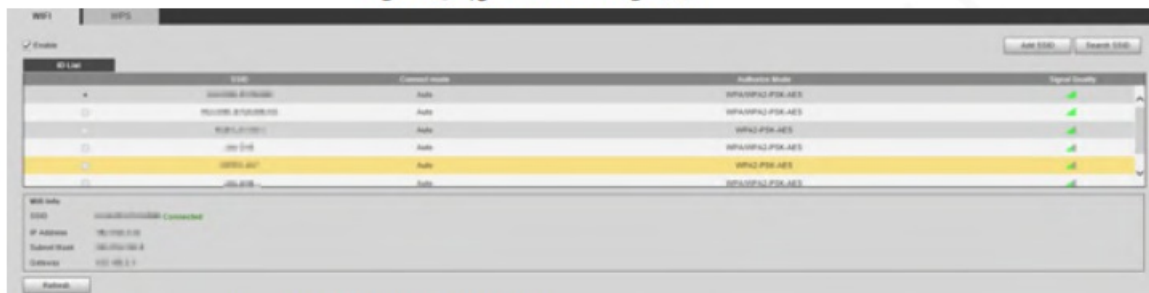Figure 5-49 Wi-Fi settings (2)



Step 3 To manually add Wi-Fi, click **Add SSID**.

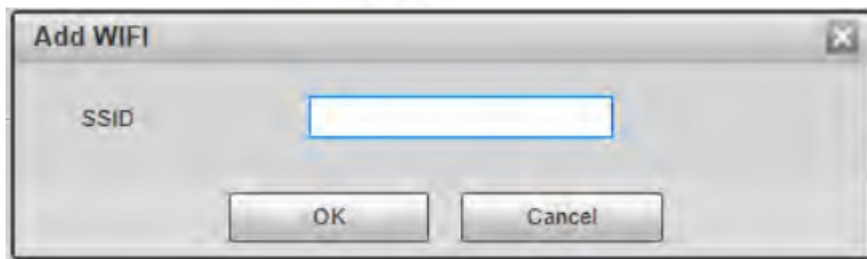Figure 5-50 Add Wi-Fi



Step 4 Enter a network name in the dialog box.




It is recommended to set a secure encryption method for the Device to connect routers.

Step 5 Double-click one hotspot to display the Signal Quality and the Authentication Manner.

- If the password is required, enter the password. When entering the password, its index number shall be consistent with that on the router.
- Click Connection if password is not required.

5.2.11.2 WPS Settings

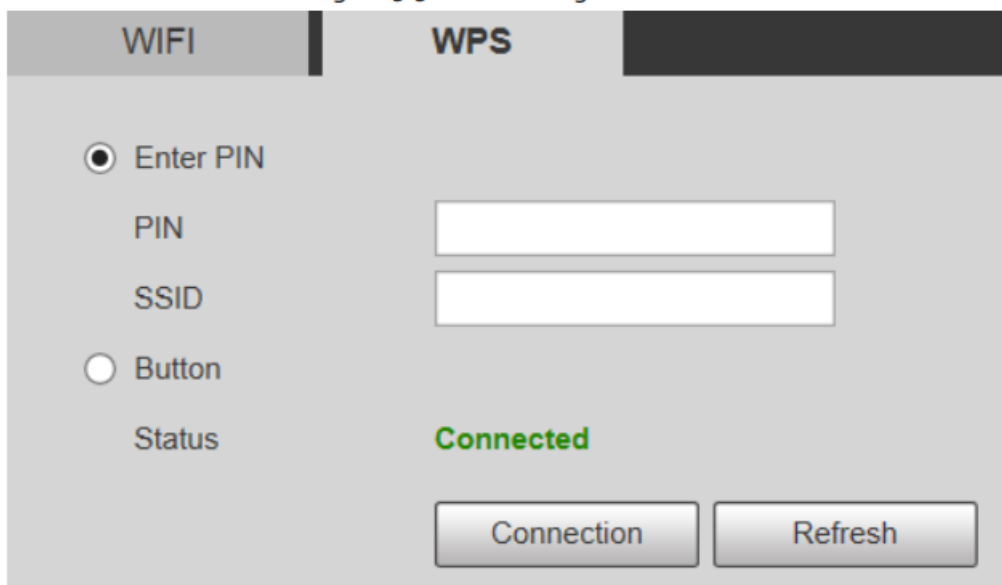Figure 5-51 WPS settings



PIN and SSID can be obtained from the router. Enter PIN and SSID, and then click Refresh to display operating status in real time.

5.2.11.3 AP Settings

You can use the Camera as wireless AP (Access Point), and other devices such as mobile phones can connect to the Camera by searching for the network name. You can then log in to the Camera through the browser on your

device. At most 5 accounts can log in to the Camera at the same time. AP and Wi-Fi cannot be both enabled at the same time, and AP is disabled by default.

Procedure

Step 1 Select Setting > Network > WIFI > AP.

Step 2 Select Enable, and then set AP information.

Figure 5-52 AP settings

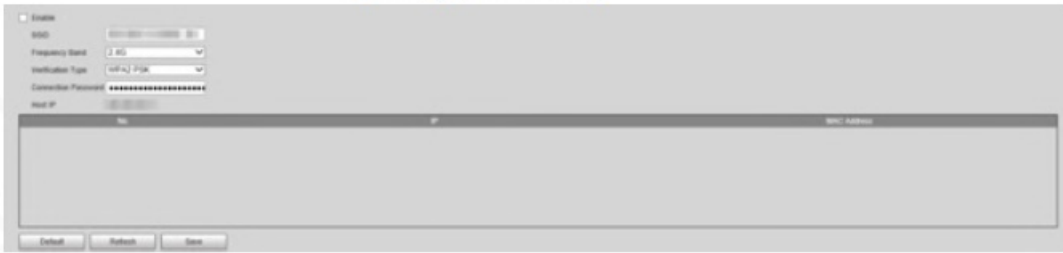


Table 5-21 AP parameter description

Parameter	Description
SSID	The default name is “device serial number_SD”.
Frequency Band	Both 2.4G and 5G are available.
Verification Type	It is WPA2 PSK by default, and cannot be changed.
Connection Password	Set the connection password which is required when other devices connect to the Camera. It is 12345678 by default.

Parameter	Description
Host IP	Displays the IP address of AP.

Step 3 Click Save.

Result

1. Open your device such as mobile phone, search for the network name of the AP in the wireless signal list, and then connect to the network.
After it is successfully connected, the IP address and MAC address of the device is displayed on the AP interface.
2. Open a browser on your device, enter the host IP on the AP interface or IP address on the TCP/IP interface, and then you can go to the login interface of the Camera.
3. Enter the username and password, and then log in to the Camera.



Live view is available on select devices.

5.2.12 802.1x

802.1x is a port-based network access control protocol. It allows users to manually select authentication mode to control device access to LAN, and meet authentication, billing, safety and management requirements of the network.

Step 1 Select Setting > Network > 802.1x.

Figure 5-53 802.1x ipage

Step 2 Select the Enable checkbox to enable 802.1x.

Step 3 Select an authentication mode, and then enter username and password.

Table 5-22 Description of 802.1x setting parameter

Parameter	Description
Realtime Monitor	Data packet of network video monitoring. The value ranges from 0 to 63.
Command	Data packet of device configuration and query. The value ranges from 0 to 63.
Open the WMM	Select the checkbox to enable wireless QoS.

Step 4 Click Save.

5.2.13 QoS

QoS (Quality of Service) is a network security mechanism, and is also a technology to solve network delay, congestion, and other problems.

For network business, QoS includes transmission bandwidth, time delay in transmission, and packet loss of data. In network, QoS can be improved by ensuring transmission bandwidth, and reducing time delay in transmission, packet loss rate, and delay jitter.

For DSCP (Differentiated Services Code Point), there are 64 priority degrees (0–63) of data packets. 0 represents the lowest priority, and 63 the highest priority. Based on the priority, the packets are classified into different groups. Each group occupies different bandwidth and has different discard percentage when there is congestion so as to improve service quality. Step 1 Select Setting > Network > QoS.

Figure 5-54 QoS page

Step 2 Configure QoS setting parameters.

Table 5-23 Description of QoS setting parameter

Parameter	Description
Realtime Monitor	Data packet of network video monitoring. The value ranges from 0 to 63.
Command	Data packet of device configuration and query. The value ranges from 0 to 63.
Open the WMM	Select the checkbox to enable wireless QoS.

Step 3 Click Save.

5.2.14 4G/5G

After installing SIM card, you can connect the Device to 4G/5G network through dialing or mobile setting.

- Dialing setting: Connect the Device to 4G/5G network in specified period.
- Mobile setting: Receive alarm linkage messages on your mobile phone. When receiving alarm messages, you can activate the Device to connect to 4G/5G network through SMS or phone calls.
- The function is available on devices with 4G/5G module. This section uses 4G as an example.
- Dual 4G is supported by select models, but only one 4G network adapter can be enabled simultaneously.

5.2.14.1 Dialing Setting

Log in to web page, select Setting > Network > 4G > Dialing Setting.

Figure 5-55 Dialing setting page



Some devices only support certain mobile carriers, and only the supported carriers are displayed in Network Support.

Step 1 Select the Enable checkbox.

Step 2 Enter APN, Authorize Mode, Dial-up Number, Username, and Password according to the SIM card inserted.



These parameters might vary by countries. Contact local carrier or customer service for details.

Step 3 Set the period to use 4G.

- If the current time is in the period you set, 4G network connection will be enabled. The IP address of the SIM card will be displayed in IP Address. And you can access the device through 4G after finishing the rest steps.
- If the current time is not in the period you set, 4G network connection will not be enabled. Only the corresponding Wireless Signal is displayed on the page. And you cannot access the device through 4G.

Figure 5-56 Period setting

Period

0 2 4 6 8 10 12 14 16 18 20 22 24

Sun Mon Tue Wed Thu Fri Sat

Setting Setting Setting Setting Setting Setting Setting

☐ All ☒ Sun ☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat

☒ Period1 00 : 00 : 00 - 23 : 59 : 59

☐ Period2 00 : 00 : 00 - 23 : 59 : 59

☐ Period3 00 : 00 : 00 - 23 : 59 : 59

☐ Period4 00 : 00 : 00 - 23 : 59 : 59

☐ Period5 00 : 00 : 00 - 23 : 59 : 59

☐ Period6 00 : 00 : 00 - 23 : 59 : 59

Save Cancel

Step 4 Set the interval to enable 4G through message or phone call if you want to use 4G outside the period set in Step3.



The value range is 0–7200 s and it is 30 s by default. If the interval is 30 s, after activating 4G, you can use it for 30 s. After 30 s, you need to activate 4G again. If you set the interval to 0 s, you can use 4G without disconnection and you do not need to activate it again. For the method to activate 4G through message or phone call, see “5.2.14.2 Mobile Setting”.

Step 5 Click Save.

5.2.14.2 Mobile Setting


Log in to web page, select Setting > Network > 4G > Mobile Settings.


You can add the phone number to receive alarms. You also can add phone number used to activate 4G through message or phone call if you want to use 4G outside the period set in Step3 of “5.2.14.1 Dialing Setting”.



Make sure that you add international calling codes before the phone number to avoid unnecessary charges caused by phone calls or messages to other countries or regions.

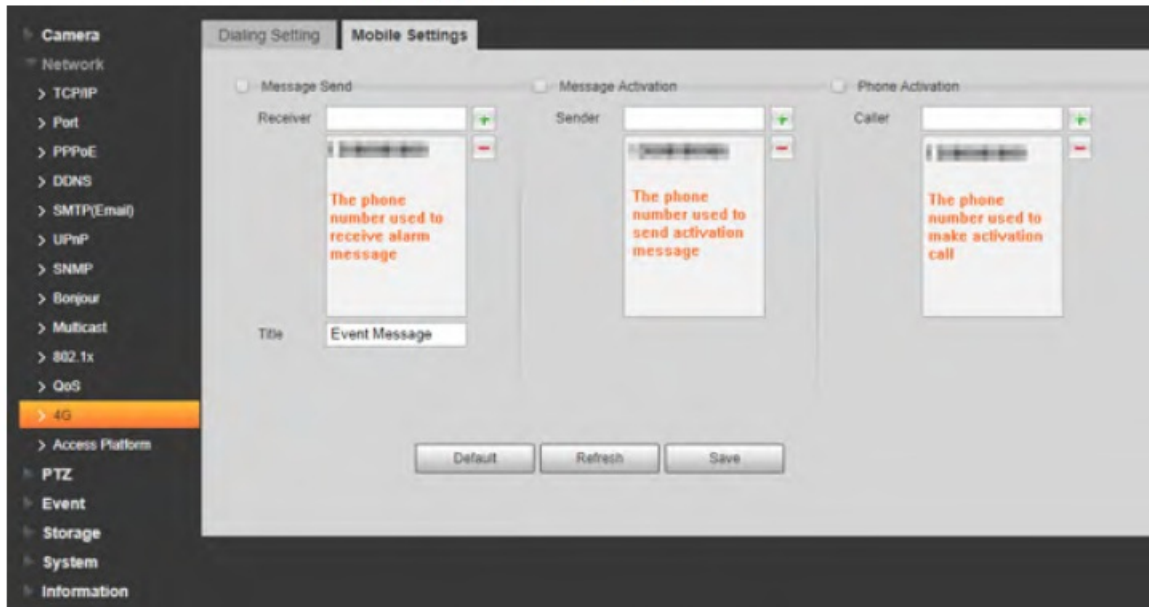Figure 5-57 Mobile setting page



- Message Send: When alarms are triggered, the phone number added will receive message.
- Message Activation: You can enable 4G through message outside the period you set to use 4G. You need to send “ON” or “OFF” to phone number of the SIM card in the Device. “ON” indicates enabling, and “OFF” indicates disabling.
- Phone Activation: You can enable 4G through phone calls outside the period you set to use 4G. You need to call the phone number of the SIM card in the Device. If the call gets through, it means 4G has been enabled.
-  Make sure that your SIM card supports making phone calls and sending messages, and it can be used normally.
- Make sure that you use activation function outside the time range you set; otherwise it does not work.


Step 1 Select the checkbox of the service you need to enable. You can select one or more services.

Step 2 Enter the phone number and click to add it.

Step 3 Click Save.

Step 4 Select the Message Link checkbox on the page of the event for which you want to receive message. Take Face Detection for example. Click Setting > Event > Face Detection, and then select the Message Link checkbox.

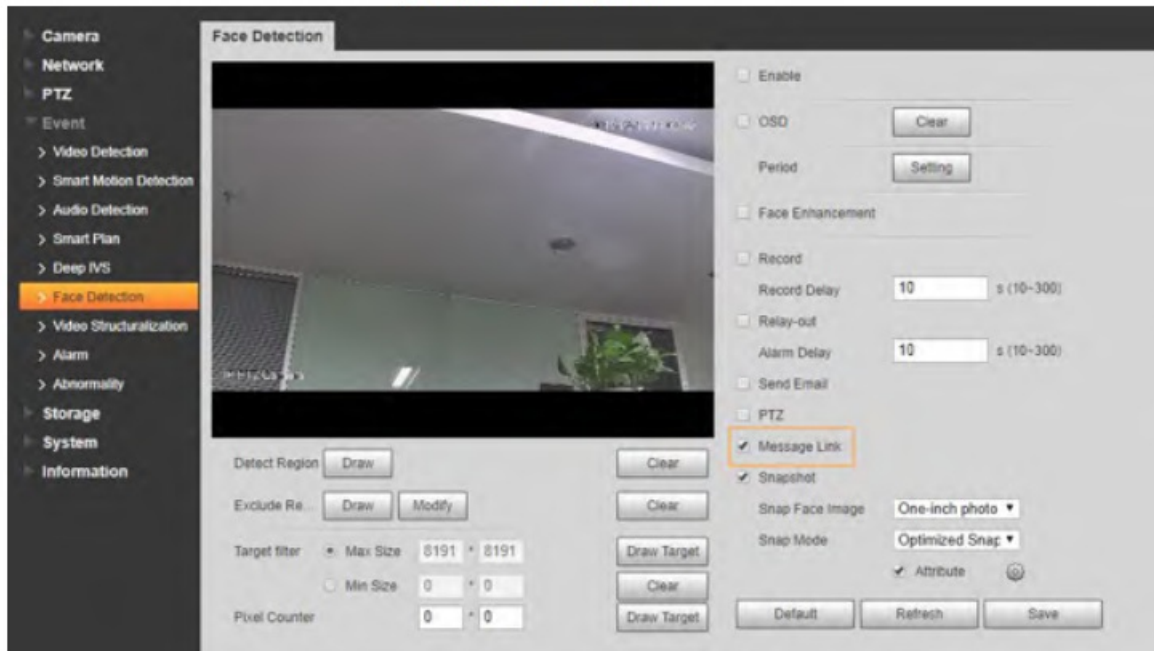Figure 5-58 Message link



Step 5 Click Save on the page of the corresponding event. You will receive message if the alarm is triggered.


Access Platform

5.2.15.1 P2P

P2P is a private network traversal technology which enables users to manage devices easily without requiring DDNS, port mapping or transit server. Scan the QR code with your smart phone, and then you can add and manage more devices on your mobile client.

Step 1 Select Setting > Network > Access Platform > P2P.

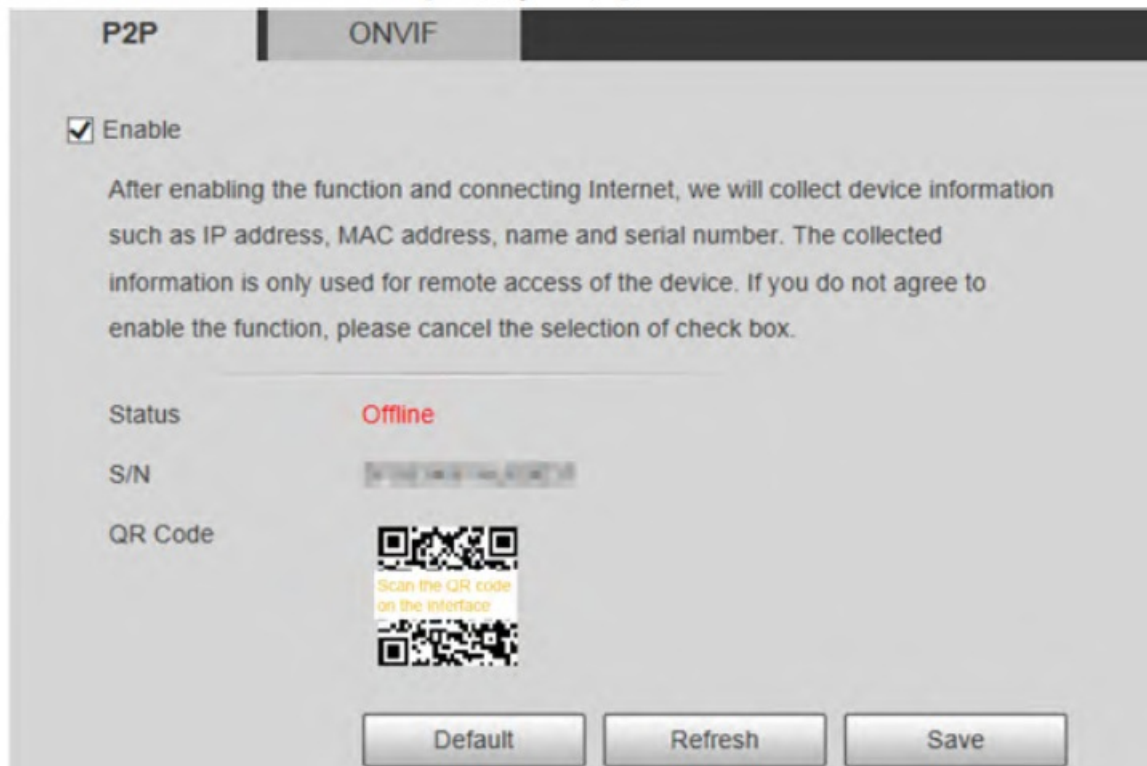Figure 5-59 P2P page



- P2P is enabled by default. You can manage the devices remotely.
- When P2P is enabled and the device is connected to network, the status is displayed as Online. We might

collect the information including IP address, MAC address, device name, and serial number. The information collected is for remote access only. If you do not agree with this, you can clear the Enable checkbox.

Step 2 Log in to mobile phone client, and then tap Device Management.

Step 3 Tap Add + at the upper-right corner.


Step 4 Scan the QR code on the P2P page.

Step 5 Follow the onscreen instructions to finish settings.

ONVIF

The ONVIF authentication is On by default, which allows the network video products (including video recording device and other recording devices) from other manufacturers to connect to the service. Step 1 Select Setting > Network > Access Platform > ONVIF.

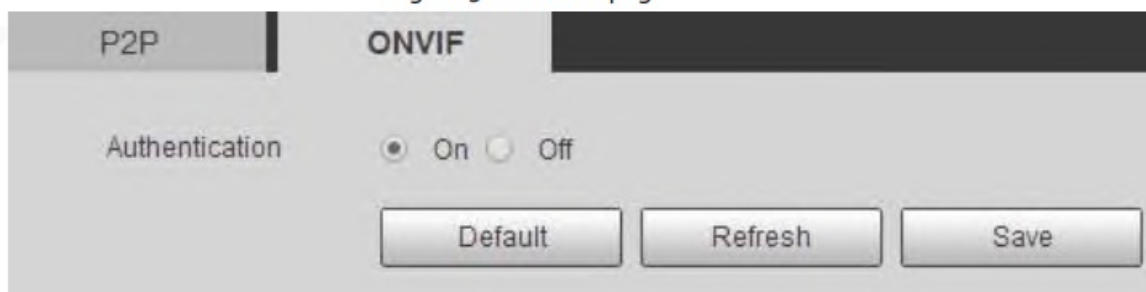Figure 5-60 ONVIF page



Step 2 Select On for Authentication.

Step 3 Click Save.


5.2.15.3 RTMP

You can connect the third party platforms (such as YouTube) to play live video through RTMP protocol.

- Only admin user can configure RTMP.
- RTMP only supports H.264, H.264B and H.264H video formats, and Advanced Audio Coding (AAC) audio format.

Step 1 Select Setting > Network > Access Platform > RTMP.

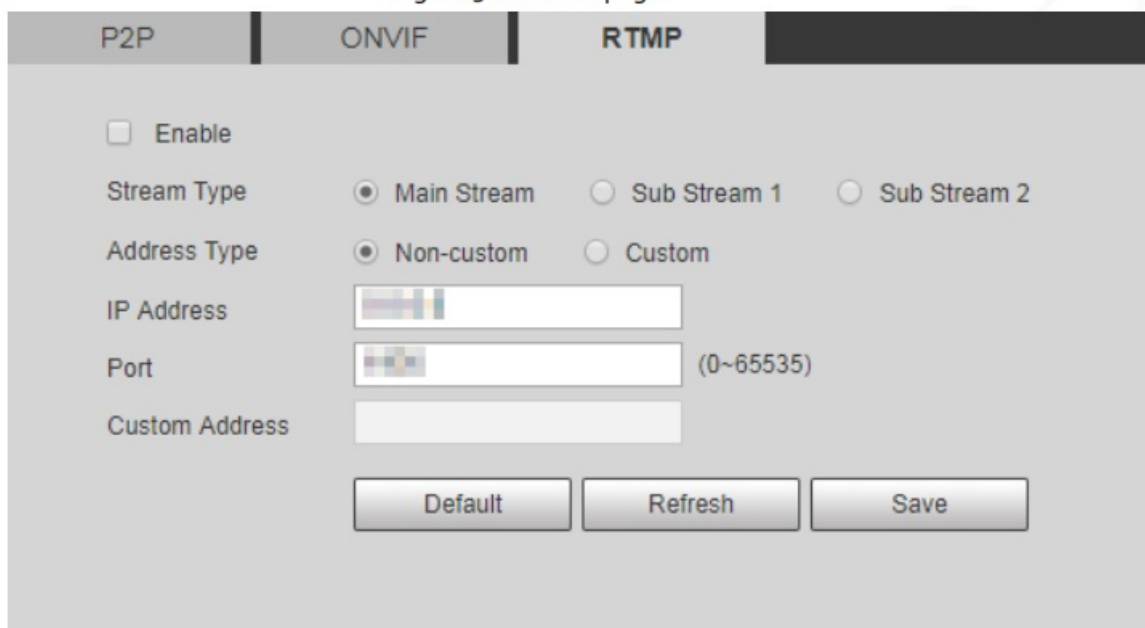Figure 5-61 RTMP page



Step 2 Select the Enable checkbox to enable RTMP.



When enabling RTMP, make sure that the address can be trusted.

Step 3 Set RTMP parameters.

Table 5-24 Description of RTMP parameter configuration

Parameter	Description
Stream Type	Select live video stream type. Make sure that the video format of the stream is H.264, H.264B or H.264H, and the audio format is AAC.
Address Type	There are two options: Non-custom and Custom . <ul style="list-style-type: none">● Non-custom: You need to fill in the IP address or domain name.● Custom: You need to fill in the address allocated by the server.
IP Address	If you have selected Non-custom , IP address and port need to be filled in. <ul style="list-style-type: none">● IP Address: IPv4 or domain name is supported.● Port: It is recommended to use the default value.
Port	
Custom Address	If you have selected Custom , the address allocated by the server needs to be filled in.

5.3 Bluetooth Settings

You can connect the Camera to Bluetooth devices such as Bluetooth headset for voice broadcast of alarms and voice intercom with the platform.



The function is available on select models.


Procedure

Step 1 Select Setting > Connection Settings > Bluetooth.

Step 2 Select Enable.

The searched Bluetooth devices are displayed in the Bluetooth List. Click Refresh at the lower-right corner of the list to search for Bluetooth devices again.

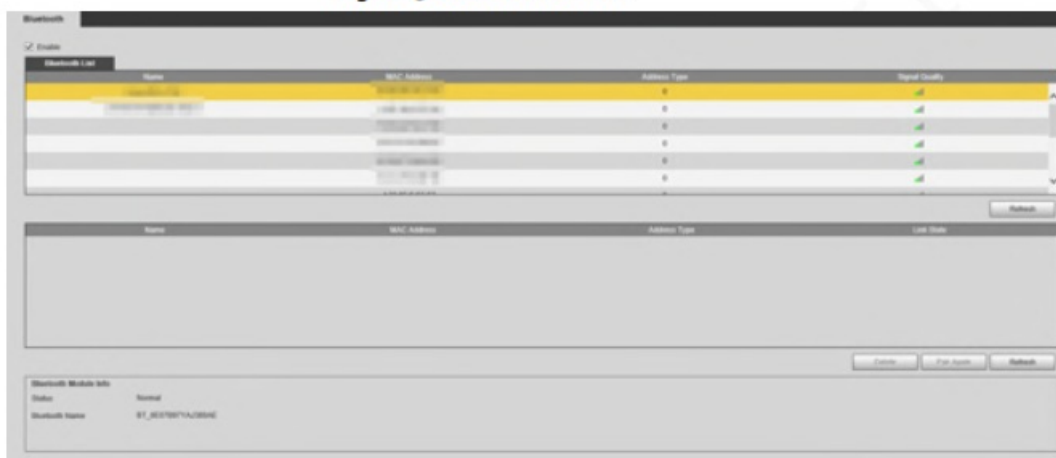Figure 5-62 Bluetooth list



Step 3 Double-click the name of Bluetooth device, and then set PIN on the Setup interface.

For the PIN of the Bluetooth device, see the corresponding user's manual.

Figure 5-63 Connect to Bluetooth device

Setup

Name

MAC Address

Address Type 0

PIN

Save Cancel

Step 4 Click Save.

The connected Bluetooth device is displayed in the list below.

Step 5 Select Setting > Camera > Audio > Audio, and then set audio input and audio output types to Bluetooth.

Figure 5-64 Set audio

Audio | Alarm Audio

Encode

Main Stream

☒ Enable

Encode Mode G.711A

Sampling Frequency 8000

Sub Stream

☒ Enable Sub Stream 1

Encode Mode G.711A

Sampling Frequency 8000

Attribute

AudioIn Type Bluetooth

Audio Output Type Bluetooth

Noise Filter Disable

Microphone Volume 0

Speaker Volume 0

Default Refresh Save

Related Operations

- Click Refresh at the lower-right corner of the list to get information of paired Bluetooth devices again.
- Click Pair Again to quickly connect to Bluetooth devices paired before.
- Click Delete to delete the Bluetooth device.

5.4 PTZ Settings

5.4.1 Protocol



Network PTZ setting and analog PTZ setting are available on select models.

5.4.1.1 Network PTZ Settings

Step 1 Select Setting > PTZ > Protocol > Network PTZ.

Figure 5-65 Network PTZ setting

Network PTZ

Analog PTZ

Protocol

PELCOD

Default

Refresh

Save

Step 2 Select a protocol.

You can select DH-SD1, DH-SD3, PELCOD, or PELCOP. DH-SD1 is selected by default. DH-SD1 protocol supports up to 80 presets, and DH-SD3 protocol supports up to 300 presets.

Step 3 Click Save.

5.4.1.2 Analog PTZ Settings

Step 1 Select Setting > PTZ > Protocol > Analog PTZ.

Figure 5-66 Analog PTZ setting

Network PTZ

Analog PTZ

Address

1

Baud Rate

9600

Data Bit

8

Stop Bit

1

Parity


NONE

Default

Refresh

Save


Step 2 Configure analog PTZ parameter.
Table 5-25 Description of analog PTZ parameter

Parameter	Description
Address	Enter the address of the Device.  Make sure that the address is the same as the device address; otherwise you cannot control the device.
Baud Rate	Select the baud rate of the Device.
Data Bit	It is 8 by default.
Stop Bit	It is 1 by default.
Parity	It is NONE by default.

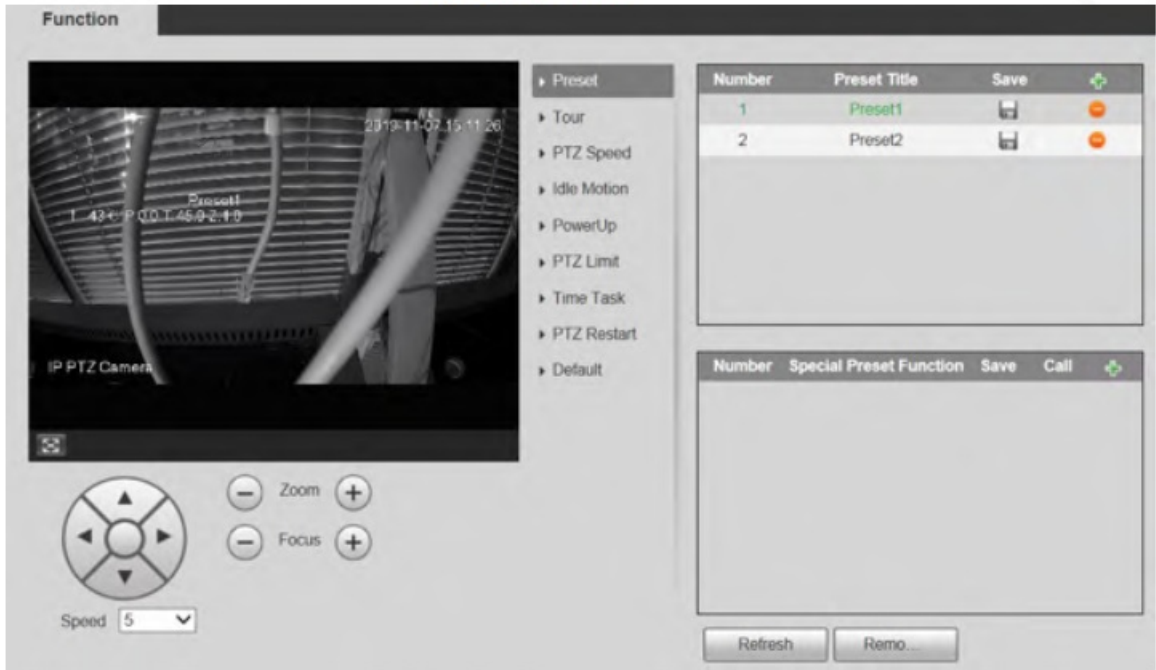5.4.2 Function
5.4.2.1 Preset


Select Setting > PTZ > Function > Preset. The Preset page is displayed.
If you click Remove All, all presets and special presets will be cleared.

Figure 5-67 Preset



5.4.2.1.1 Preset Settings



Preset means a certain position to which the Device rotates. Users can adjust the PTZ and camera to the location quickly through calling presets.

Step 1 On the lower left corner of the Preset interface, click the direction buttons, ,  , -and+ to adjust the PTZ direction, speed, zoom, and focus of the Device.

Step 2 Click + to add a preset.


The current position is set to a preset and is displayed in the list.

Figure 5-68 Add presets

Number	Preset Title	Save	+
1	Preset1		
2	Preset2		

Step 3 Click  to save the preset.

Step 4 Perform operations on presets.

- Double-click the preset title to edit the title displayed on the monitoring screen.
- Click  to delete the preset.

5.4.2.1.2 Special Preset Settings

Special presets serve as the shortcut for some special functions switch or calling, and they no longer represent


the location of the PTZ camera.

Step 1 Click+ to add a special preset. The added special preset will be displayed in the list.



The number of special presets starts from 51 by default, and 100 is the largest number.

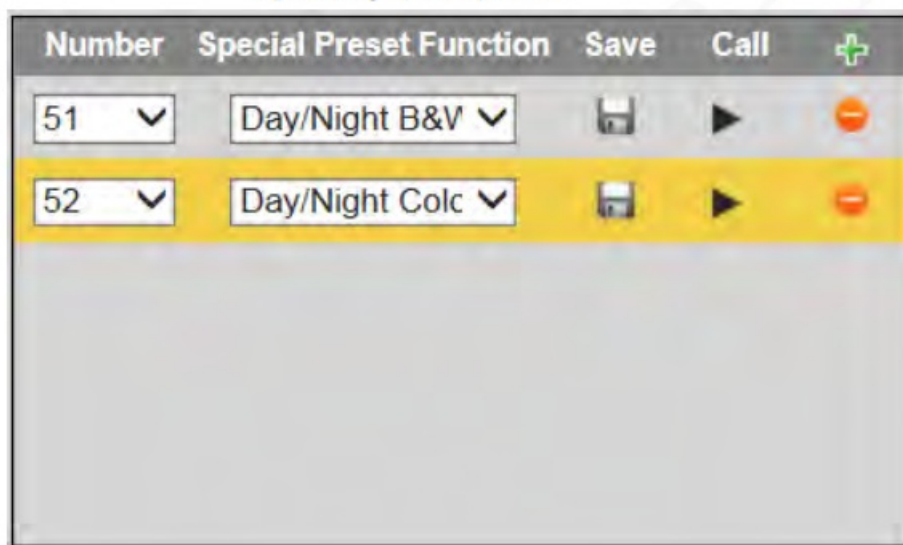Figure 5-69 Special presets



Step 2 Click  to save the added special preset.




Step 3 Perform operations on special presets.



If the PTZ is restored to default settings, all preset configurations will be cleared, but the called function will remain.

Related Operations



- Click  to modify the special preset function.
- Click  to delete the special preset.
- Click  to quickly call the function configured for the special preset.

5.4.2.2 Tour

Tour means a series of movements that the Device makes along several presets.

5.4.2.2 Tour

Tour means a series of movements that the Device makes along several presets.

Figure 5-70 Tour settings



Step 2 Select the Tour Mode from Original Path and Shortest Path. Original Path is selected by default.

- Original Path: Tour in the order of adding presets.
- Shortest Path: Starting from the preset with largest horizontal zoom value and vertical zoom value, pass all presets in the tour to ensure the shortest path. The Device reaches the corresponding preset and ensure the minimum number of rotation.

Step 3 Click Add at the bottom of the list on the upper right corner of the page to add a tour path.

Step 4 Click Add at the bottom of the list on the lower right corner of the page to add several presets.

Step 5 Perform tour operations.

- Double-click tour name to edit the name of the corresponding tour.
- Double-click duration to set the time that the Device stays at the corresponding preset.
- Double-click speed to modify the tour speed. The default value is 7, and the value range is 1–10. The larger the value, the faster the speed.

Step 6 Click Start to start the tour.



The ongoing tour stops if any operation is made to the PTZ.


5.4.2.3 Scan

Scan means the Device moves horizontally at a certain speed between the defined left and right limits.

Step 1 Select Setting > PTZ > Function > Scan.

Figure 5-71 Scan settings

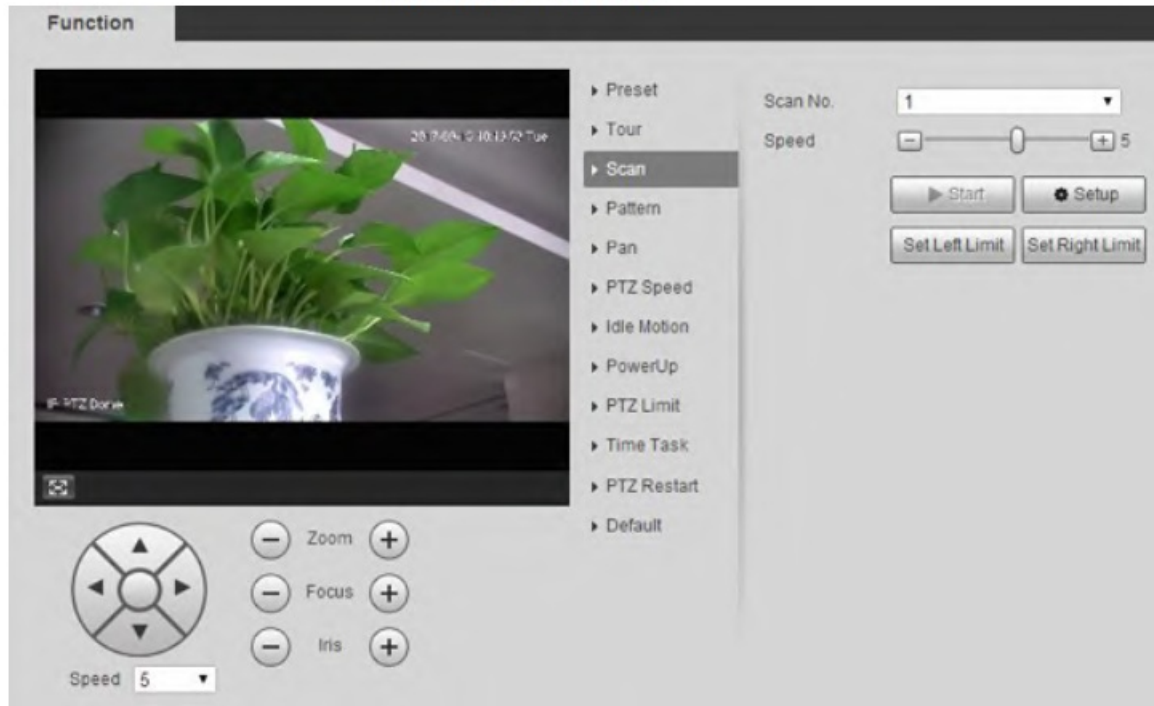Figure 5-71 Scan settings



Step 2 Select the Scan No..

Step 3 Drag the slider to adjust the scan speed.

Step 4 Click Setup to adjust the Device to an ideal position.

Step 5 Click Set Left Limit and Set Right Limit to set the left and right boundaries of the Device.

Step 6 Click Start, and then the Device starts scanning.


Step 7 Click Stop, and then the scanning stops.

5.4.2.4 Pattern

Pattern means a record of a series of operations that users make to the Device. The operations include horizontal and vertical movements, zoom and preset calling. Record and save the operations, and then you can call the pattern path directly.

Step 1 Select Setting > PTZ > Function > Pattern.

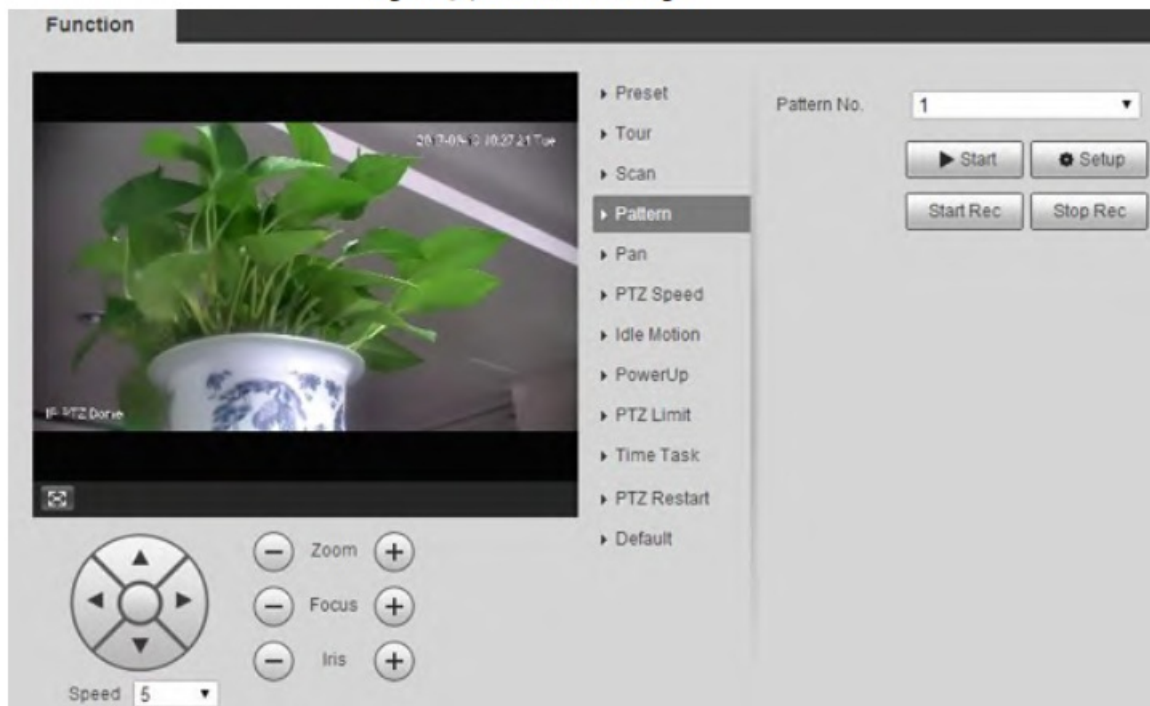Figure 5-72 Pattern settings



Step 2 Select the Pattern No..

Step 3 Click Setup and Start Rec, and then operate the PTZ.

Step 4 Click Stop Rec to stop recording.

Step 5 Click Start, and then the Device starts patterning.

Step 6 Click Stop, and then the patterning stops.

5.4.2.5 Pan

Pan refers to the continuous 360° rotation of the Device at a certain speed.

Step 1 Select Setting > PTZ > Function > Pan.

Figure 5-73 Pan settings



Step 2 Drag the slider to set the Pan Speed.

Step 3 Click Start, and the Device starts to rotate horizontally at this speed.

5.4.2.6 PTZ Speed

You can adjust the manual control speed of the PTZ by setting PTZ speed. This speed does not apply to tour, pattern, or auto tracking.

Step 1 Select Setting > PTZ > Function > PTZ Speed.

Figure 5-74 PTZ speed settings



Step 2 Select Low, Middle or High.

5.4.2.7 Idle Motion

Idle motion refers to a set motion when the Device does not receive any valid command within a certain period.



Set Preset, Tour, Scan or Pattern in advance.

Step 1 Select Setting > PTZ > Function > Idle Motion.

Figure 5-75 Idle motion settings



Step 2 Select the Enable checkbox to enable the idle motion.

Step 3 Select idle motion from Preset, Tour, Scan and Pattern.

Step 4 Select the action number of the selected motion.

Step 5 Set Idle Time for the selected motion.

Step 6 Click Save.

5.4.2.8 PowerUp


PowerUp means the automatic operation of the Device after it is powered on.



Set Preset, Tour, Scan or Pattern in advance.

Step 1 Select Setting > PTZ > Function > PowerUp.

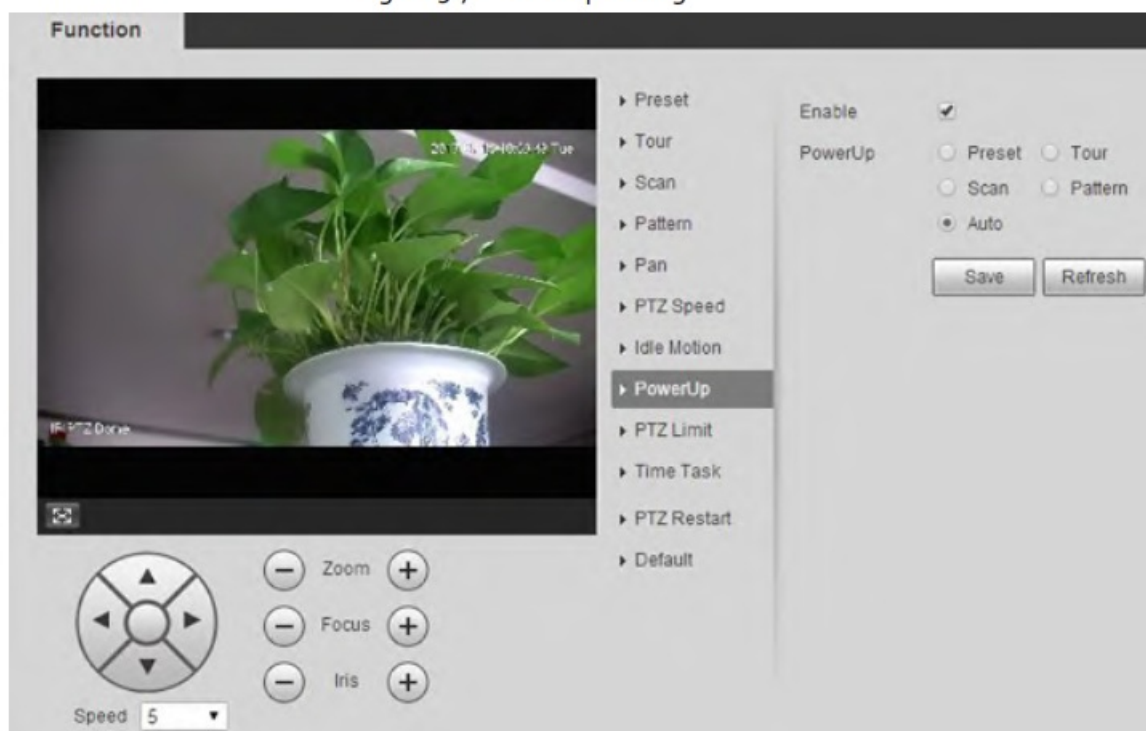Figure 5-76 PowerUp settings



Step 2 Select the Enable checkbox to enable power up motion.

Step 3 Select power up motion from Preset, Tour, Scan, Pattern or Auto.

Select Auto and the last motion before you shut down the Device last time will be performed.

Step 4 Select the action number of the selected motion.


Step 5 Click Save.

5.4.2.9 PTZ Limit

After you set the PTZ limit, the Device can only move in the defined area.

Step 1 Select Setting > PTZ > Function > PTZ Limit.

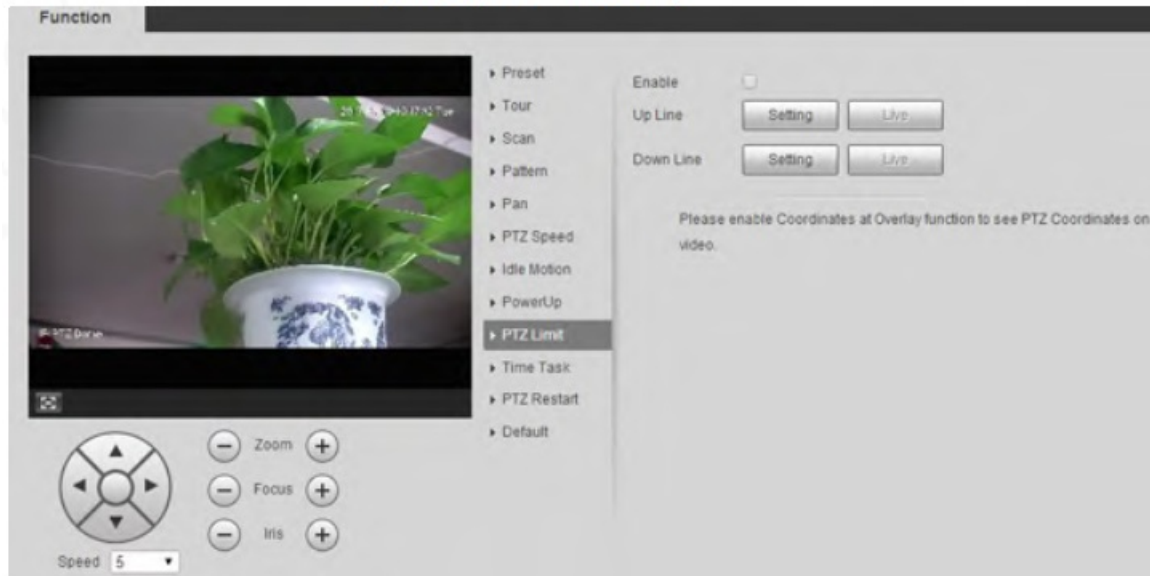Figure 5-77 PTZ limit settings



Step 2 Adjust the PTZ direction, and then click Setting to set the Up Line.

Step 3 Adjust the PTZ direction, and then click Setting to set the Down Line.

Step 4 Click Live to preview the already-set up line and down line.

Step 5 Select the Enable checkbox to enable the PTZ limit function.


5.4.2.10 Time Task

After you set time task, the Device performs the selected motions during the defined period.

Set Preset, Tour, Scan or Pattern in advance.

Step 1 Select Setting > PTZ > Function > Time Task.

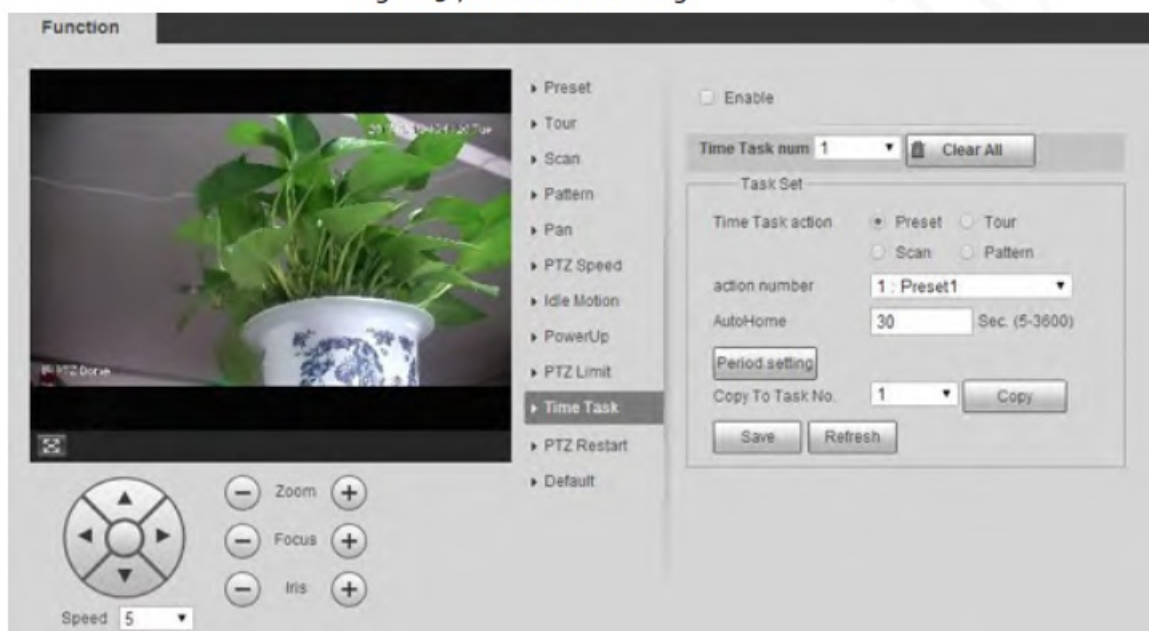Figure 5-78 Time task settings



Step 2 Select the Enable checkbox to enable time task function.

Step 3 Set the time task number.

Click Clear All to delete all set time tasks.

Step 4 Select Time Task action such as Preset, Tour, Scan or Pattern.

Step 5 Select the action number of the selected motion.

Step 6 Set the time for AutoHome.



AutoHome refers to the time needed to automatically recover the time task in case of manually calling the PTZ to stop the time task.

Step 7 Click Period setting to set the period to perform time tasks.

Step 8 Select the task number to copy settings to the selected task, and then click Copy.

Step 9 Click Save.

5.4.2.11 PTZ Restart

Step 1 Select Setting > PTZ > Function > PTZ Restart.

Figure 5-79 PTZ restart



Step 2 Click PTZ Restart.

The PTZ is restarted.

5.4.2.12 Default

With the function, you can restore the PTZ to factory defaults.



This function will restore the Device to defaults. Think twice before performing the operation.

Step 1 Select Setting > PTZ > Function > Default.

Figure 5-80 Default setting



Step 2 Click Default.

The PTZ will be restored to factory defaults.

5.5 Event Management

5.5.1 Video Detection


Video detection includes three event types: Motion Detection, Video Tamper and Scene Changing.

5.5.1.1 Motion Detection

When the moving object appears and moves fast enough to reach the preset sensitivity value, alarms will be triggered.

Step 1 Select Setting > Event > Video Detection > Motion Detection.

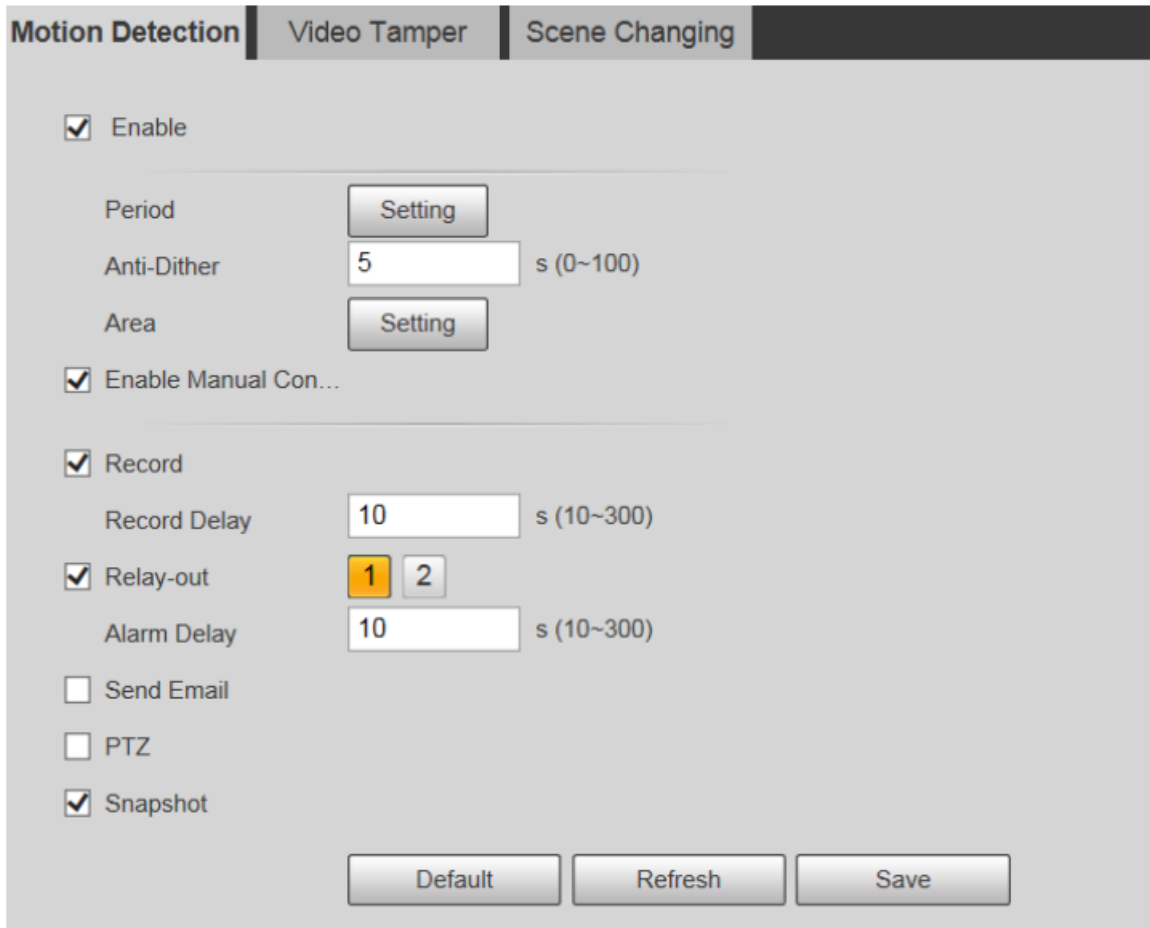Figure 5-81 Motion detection settings



The 'Motion Detection' settings window features a tabbed interface with 'Motion Detection', 'Video Tamper', and 'Scene Changing'. The 'Motion Detection' tab is active, showing various configuration options. At the top, there are three tabs: 'Motion Detection' (selected), 'Video Tamper', and 'Scene Changing'. Below the tabs, the settings are organized into sections. The first section includes a checked 'Enable' checkbox, a 'Period' field with a 'Setting' button, an 'Anti-Dither' field set to '5' with a unit of 's (0~100)', and an 'Area' field with a 'Setting' button. The second section has a checked 'Enable Manual Con...' checkbox. The third section includes a checked 'Record' checkbox, a 'Record Delay' field set to '10' with a unit of 's (10~300)', a checked 'Relay-out' checkbox with two buttons labeled '1' and '2' (button '1' is highlighted), and an 'Alarm Delay' field set to '10' with a unit of 's (10~300)'. The fourth section contains unchecked checkboxes for 'Send Email' and 'PTZ', and a checked 'Snapshot' checkbox. At the bottom, there are three buttons: 'Default', 'Refresh', and 'Save'.

Motion Detection | Video Tamper | Scene Changing

☒ Enable

Period Setting

Anti-Dither s (0~100)

Area Setting

☒ Enable Manual Con...

☒ Record

Record Delay s (10~300)

☒ Relay-out 1 2

Alarm Delay s (10~300)

☐ Send Email

☐ PTZ

☒ Snapshot


Default Refresh Save

Step 2 Select the Enable checkbox, and then configure motion detection parameters.

- Set arming and disarming period.

1. Click Setting, and then set the arming period on the page.

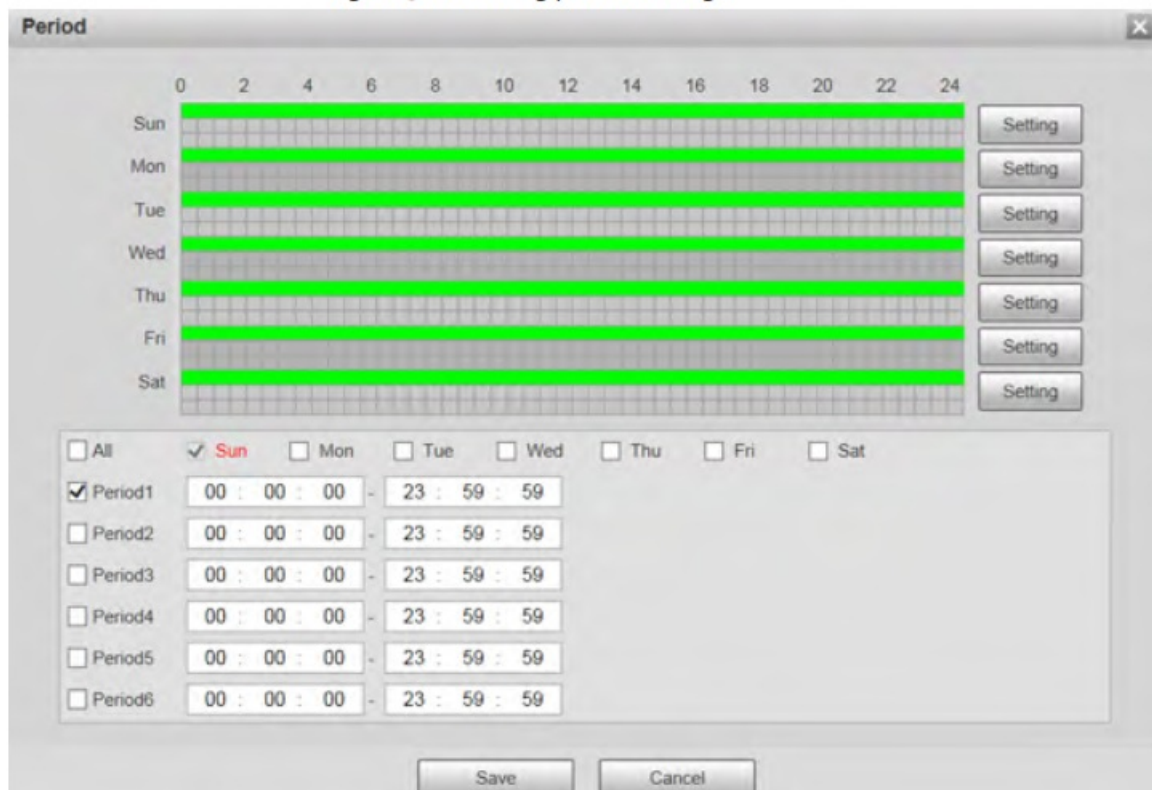Figure 5-82 Arming period settings



The 'Arming period settings' window, titled 'Period', displays a 24-hour timeline at the top with markers every 2 hours. Below the timeline, there are seven rows representing the days of the week: Sun, Mon, Tue, Wed, Thu, Fri, and Sat. Each row has a green bar indicating the arming period and a 'Setting' button to the right. Below the days, there are checkboxes for each day: 'All', 'Sun' (checked), 'Mon', 'Tue', 'Wed', 'Thu', 'Fri', and 'Sat'. Underneath, there are six rows for 'Period1' through 'Period6'. Each row has a checkbox and a time range selector. 'Period1' is checked and shows a time range from '00 : 00 : 00' to '23 : 59 : 59'. The other periods are unchecked and also show the same time range. At the bottom, there are 'Save' and 'Cancel' buttons.

Period

0 2 4 6 8 10 12 14 16 18 20 22 24

Sun Setting

Mon Setting

Tue Setting

Wed Setting

Thu Setting

Fri Setting

Sat Setting

☐ All ☒ Sun ☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat

☒ Period1 -

☐ Period2 -

☐ Period3 -

☐ Period4 -

☐ Period5 -

☐ Period6 -

Save Cancel

2. Set the alarm period to enable alarm events in the period you set. ◇
- There are 6 time periods for each day. Select the check box for the time period to enable it.
- ◇ Select the day of week (Sunday is selected by default; If All is selected, the setting is applied to the whole week. You can also select the check box next to the day to set it separately).

3. After completing the settings, click Save.

You will return to the Motion Detection page.

● Set the area.

Click Setting, and the Area page is displayed. Refer to Table 5-26 and Table 5-27 for parameters description. Each color represents a certain region, and you can set different motion detection regions for each area. The detection region can be irregular and discontinuous.

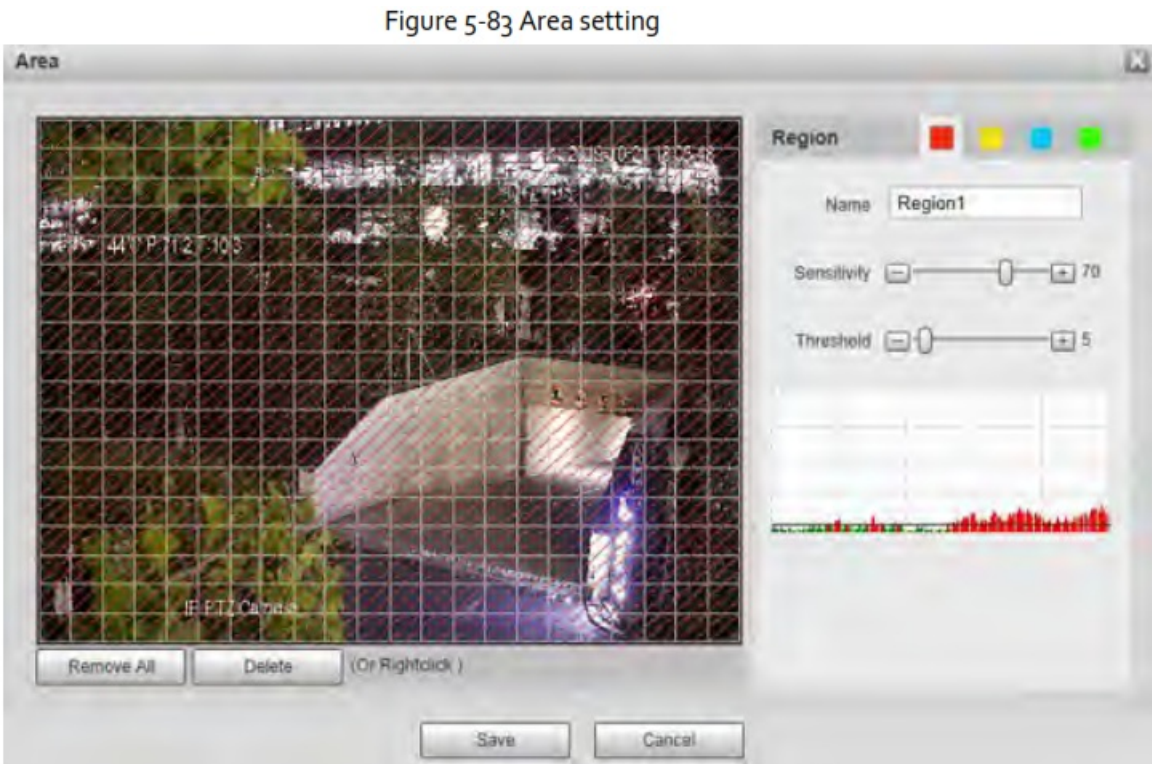


Table 5-26 Description of area setting parameter

Parameter	Description
Name	The default names are Region1, Region2, Region3 and Region4, and the names can be customized.
Sensitivity	<p>Sensitivity to brightness change. The higher the sensitivity is, the easier the motion detection event will occur.</p> <p>You can set different sensitivities for each region, with values ranging from 0 to 100, and 30 to 70 is recommended.</p>
Threshold	<p>Detect the relation between the object and the region. The smaller the threshold is, the easier the motion detection will occur.</p> <p>Set different thresholds for each region, with values ranging from 0 to 100, and 1 to 10 is recommended.</p>
Waveform graph	The red line indicates that motion detection is triggered, and the green line indicates that it is not triggered.
Remove All	Remove all detection regions.
Delete	Delete the detection region of the selected color block.

● Other parameters

Table 5-27 Description of video detection parameter

Parameter	Description
Anti-Dither	The system records only one motion detection event within the defined period. The value range is 0–100 s.
Enable Manual Control Trigger	After you enable the function, the motion detection events that occur when you control the PTZ manually will be excluded. In this way, you can reduce the false alarm rate of such events.

Parameter	Description
Record	After you enable the function, when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control page.
Record Delay	When the alarm is over, the alarm recording will continue for an extended period of time. The time unit is second, and the value range is 10–300.
Relay-out	Select the checkbox, and you can enable the alarm linkage output port, and link corresponding relay-out devices after an alarm is triggered.
Alarm Delay	When the alarm is over, the alarm will continue for an extended period of time. The time unit is second, and the value range is 10–300.
Send Email	After you select the checkbox, when an alarm is triggered, the system sends email to the specified email address. You can configure the email address in “5.2.5 SMTP (Email).”
PTZ	Select PTZ , and then configure the linkage action. When an alarm is triggered, the system links PTZ to rotate to the preset. The Activation options include None , Preset , Tour and Pattern .
Snapshot	Select the Snapshot check box, and then the system takes snapshot automatically when an alarm is triggered. You need to set the alarm snapshot period as described in “5.5.1.2 Snapshot.”

Step 3 Click Save.

5.5.1.2 Video Tamper

Alarms will be triggered if there is video tampering.

Step 1 Select Setting > Event > Video Detection > Video Tamper.

Figure 5-84 Video tamper settings

Motion Detection | **Video Tamper** | Scene Changing

☐ Enable

Period

☒ Record

Record Delay s (10~300)

☒ Relay-out

Alarm Delay s (10~300)

☐ Send Email

☐ PTZ

☒ Snapshot

Step 2 Select the Enable checkbox, and then configure video tamper parameters.



For parameters configuration, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.1.3 Scene Changing

Alarms will be triggered if there is scene changing.

Step 1 Select Setting > Event > Video Detection > Scene Changing.

Figure 5-85 Scene changing settings

Motion Detection | Video Tamper | **Scene Changing**

☐ Enable

Period

☒ Record

Record Delay s (10~300)

☒ Relay-out

Alarm Delay s (10~300)

☐ Send Email

☐ PTZ

☒ Snapshot

Step 2 Select the Enable checkbox, and then configure scene changing parameters.



For parameters configuration, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.2 Smart Motion Detection

After you set smart motion detection, when the human, non-motor vehicles and motor vehicles appear and move fast enough to reach the preset sensitivity value, the alarm linkage actions will be performed. The function can help you to avoid the alarms triggered by natural environment change.

- The function depends on the result of motion detection, and all other parameters (except sensitivity) of motion detection function are used, including arming period, area settings, and linkage configurations. If no motion detection is triggered, smart motion detection will not be triggered.
- If motion detection is not enabled, when smart motion detection is enabled, motion detection will also be enabled. If both functions are enabled, when motion detection is disabled, smart motion detection will also be disabled.
- When smart motion detection is triggered and recording is linked, back-end devices can filter recording with human or vehicles through smart search function. For details, see the corresponding user's manual.

Prerequisites

- Select Setting > Event > Video Detection > Motion Detection, and then enable the motion detection function.
- Set the arming period and detection area. The sensitivity of each region is larger than 0, and the threshold is not equal to 100.

Procedure

1. Select Setting > Event > Smart Motion Detection.

Figure 5-86 Smart motion detection

Smart Motion Detection

☒ Enable

Effective object ☒ Human ☒ Motor Vehicle

Sensitivity Medium

Default Refresh Save

2. Select the Enable checkbox to enable Smart Motion Detection.
3. Select the effective object and sensitivity.
 - Effective object: Select Human or Motor Vehicle. When Human is selected, both people and non-motor vehicles will be detected.
 - Sensitivity: Select High, Medium, or Low. The higher the sensitivity, the easier the alarm is triggered.
4. Click Save.

5.5.3 Audio Detection

Step 1 Select Setting > Event > Audio Detection > Audio Detection.

Figure 5-87 Audio detection settings

Step 2 Configure audio detection parameter.

Table 5-28 Description of audio detection parameter

Parameter	Description
Input Abnormal	Select Input Abnormal , and then an alarm is triggered when there is abnormal audio input.
Intensity Change	Select Intensity Change , and then an alarm is triggered when the change in sound intensity exceeds the defined threshold.
Sensitivity	The value ranges from 1 to 100. The smaller this value is, the larger the input sound volume changes are needed for it to be judged as an audio anomaly. You need to adjust it according to the actual condition.
Threshold	The value ranges from 1 to 100. Configure the ambient sound intensity you need to filter. The louder the ambient noise is, the larger this value shall be. You need to adjust it according to the actual condition.

For other parameters, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.


5.5.4 Smart Plan

Smart plans include IVS, face recognition, heat map, people counting, video metadata, construction monitoring and so on. Only after smart plans have been enabled, can the corresponding smart function come into effect.

Before configuring the smart plan, you need to set presets in advance. For setting methods, see “5.4.2.1 Preset”.

Step 1 Select Setting > Event > Smart Plan.

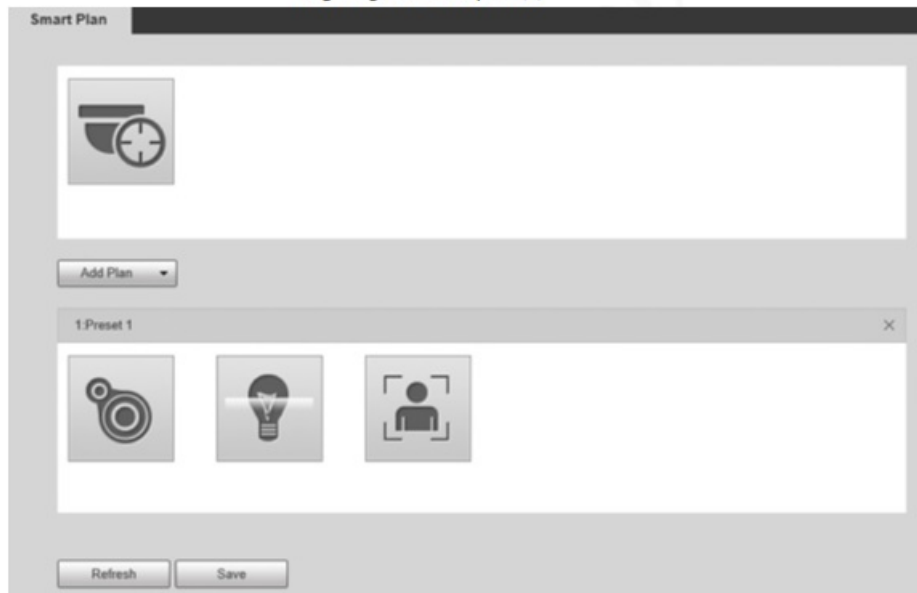Figure 5-88 Smart plan (1)



Step 2 (Optional) Click  to enable Auto Tracking.


When enabling auto tracking, you do not need to configure smart plans, and the Device performs auto tracking based on internal mechanism. If auto tracking and alarm track of the smart plan (such as IVS) are both enabled, the Device perform tracking in the order of triggering time.

It is recommended to disable auto tracking when alarm track is enabled to avoid disordered tracking. Step 3 Click to select the presets to be configured.

Step 4 Select smart plans.

The selected function will be highlighted. Click it again to cancel the selection.

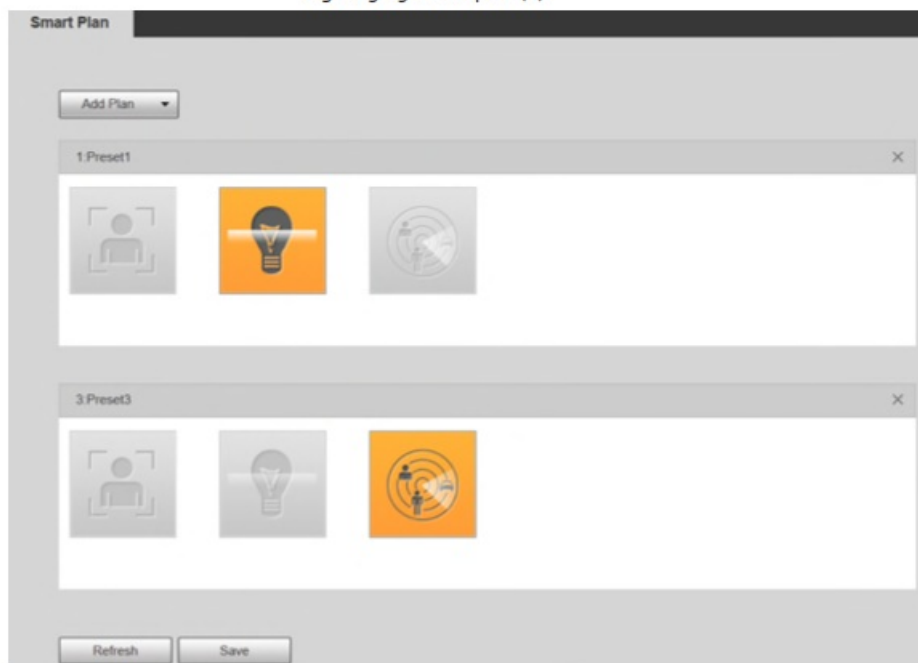Figure 5-89 Smart plan (2)



Step 5 Click **Save**.

Step 5 Click Save.

5.5.5 IVS

Basic Requirements for the Scene

- The target size shall not exceed 10% of the image.
- The pixel of the target shall be no less than 10×10; the pixel of abandoned object shall be no less than 15×15

(CIF image); the width and height of the target shall be no more than 1/3 of the image.

It is recommended that the height of the target is 10% of the image.


- The brightness difference between the target and the background is no less than 10 gray values.
- The target shall be present in the image for no less than 2 consecutive seconds, and the moving distance shall be larger than its width and no less than 15 pixels (CIF image).
- Try to reduce the complexity of monitoring scenes. It is not recommended to enable IVS in scenes with dense targets and frequent light changes.
- Try to avoid the following scenes: scenes with reflective surfaces such as glass, bright ground or water; scenes that disturbed by tree branches, shadows or winged insects; scenes that against light or under direct light exposure.

Before using the function, you need to set presets in advance. For setting methods, see “5.3.2.1 Preset.”

Rule Config

1. Select Setting > Event > IVS > Rule Config.

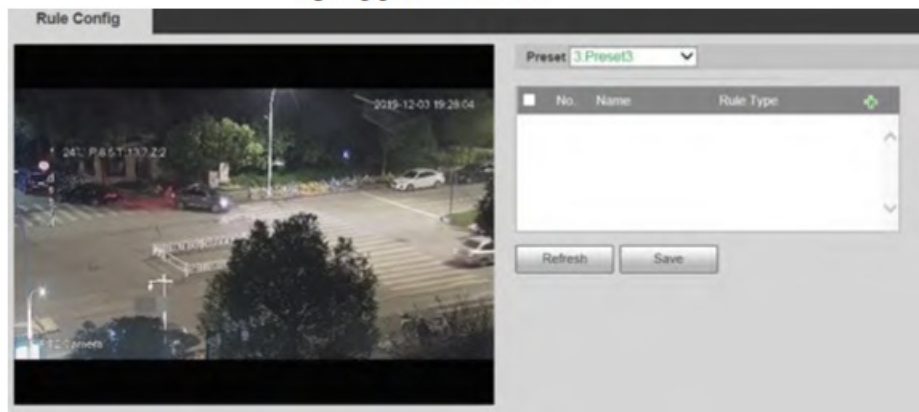Figure 5-90 Add smart rules



2. Select the presets to be configured with smart rules.
3. Click+ to add smart rules.
Double-click rule type to modify the type of rules.
4. Click Save.


5.5.5.1 Tripwire

Alarms are triggered when the target crosses the warning line in the defined direction. It requires certain stay time and moving space for the target to be confirmed, so you need to leave some space at both sides of the warning line during configuration and do not draw it near obstacles. Applicable scenes: Scenes with sparse targets and no occlusion between targets, such as perimeter protection of unattended areas.

Procedure

Step 1 Select Tripwire from the Rule Type list.

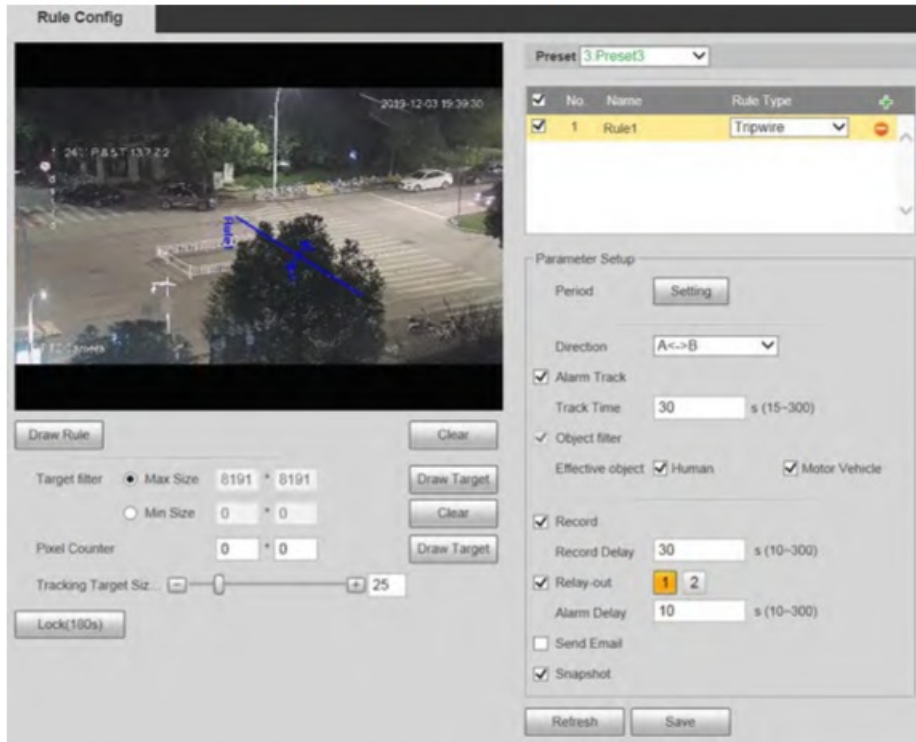Figure 5-91 Tripwire rule settings



Step 2 Click Draw Rule, and you can draw rules on the monitoring screen.

Click Clear to the right of Draw Rule to clear all drawn rules.

Table 5-29 Description of rule drawing parameter

Parameter	Description
Max Size	<p>Set the size range of detection targets to be filtered, and select the maximum or minimum size.</p> <ul style="list-style-type: none"> ● Max Size: Set the maximum size of targets to be filtered. When the target is larger than this size, the system will ignore it. The unit is pixel. ● Min Size: Set the minimum size of targets to be filtered. When the target is smaller than this size, the system will ignore it. The unit is pixel.
Min Size	
Pixel Counter	<p>Help to accurately draw the target area.</p> <p>Enter the length and width of the target area in Pixel Counter, and click Draw Target to generate the target area in the monitoring screen. The unit is pixel.</p>
Lock/Unlock	<p>Enter the rule configuration page, and the locking function will be automatically enabled, and the locking time is 180 s. During this period, the device cannot track the target. Click Unlock to release the control.</p> <p>The locking function only takes effect in the rule configuration page. After switching to the Live page, the Device can track the target normally.</p>

Step 3 Configure tripwire parameter.

Table 5-30 Description of tripwire parameter

Parameter	Description
-----------	-------------

Period	<p>Set the alarming period to enable alarm events in the defined period.</p> <ol style="list-style-type: none"> 1. Click Setting, and then the Period interface is displayed. 2. Enter the time value or press and hold the left mouse button, and drag directly on the setting interface. There are six periods for each day. Select the checkbox next to the period for it to take effect. 3. Select the day of week (Sunday is selected by default; If All is selected, the setting is applied to the whole week. You can also select the checkbox next to the day to set it separately). 4. After completing the setting, click Save to go back to the rule configuration interface.
Direction	Configure the tripwire direction. You can select A->B , B->A or A<->B .
Alarm Track	Select the checkbox, and there will be alarm tracking when a smart rule is triggered.
Track Time	Set the alarm tracking time.
Record	Select the checkbox, and when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control interface.
Record Delay	When the alarm is over, the recording will continue for an extended period of time. The value range is 10–300 s.

Relay-out	Select the checkbox, and you can enable the alarm linkage output port, and link corresponding relay-out devices when an alarm is triggered.
Alarm Delay	When the alarm is over, the alarm will continue for an extended period of time. The value range is 10–300 s.
Send Email	Select the Send Email checkbox, and when an alarm is triggered, the system sends an email to the specified mailbox. You can configure the mailbox in Setting > Network > SMTP (Email) .
Snapshot	Select the checkbox, and the system will automatically take snapshots in case of alarms. You need to set snapshot period in Storage > Schedule .

Step 4 Click Save.

5.5.5.2 Intrusion

Intrusion includes crossing areas and in-area functions.


- Crossing area means an alarm will be triggered when a target enters or leaves the area.
- In-area function means an alarm will be triggered when a specified number of targets appear in a set alarming area at a given time. In-area function only counts the number of targets in the detection area, regardless of whether they are the same targets.
- For the reporting time interval of the in-area functions, the system will trigger the first alarm and then detect whether the same event occurs in the interval period. If no same event occurs in this period, the alarm counter will be cleared.

Similar to the warning line, to detect an entry/exit event, a certain movement space should be reserved at the periphery of the area line.

Applicable scenes: Scenes with sparse targets and no occlusion between targets, such as perimeter protection of unattended areas.

Step 1 Select Intrusion from the Rule Type list.

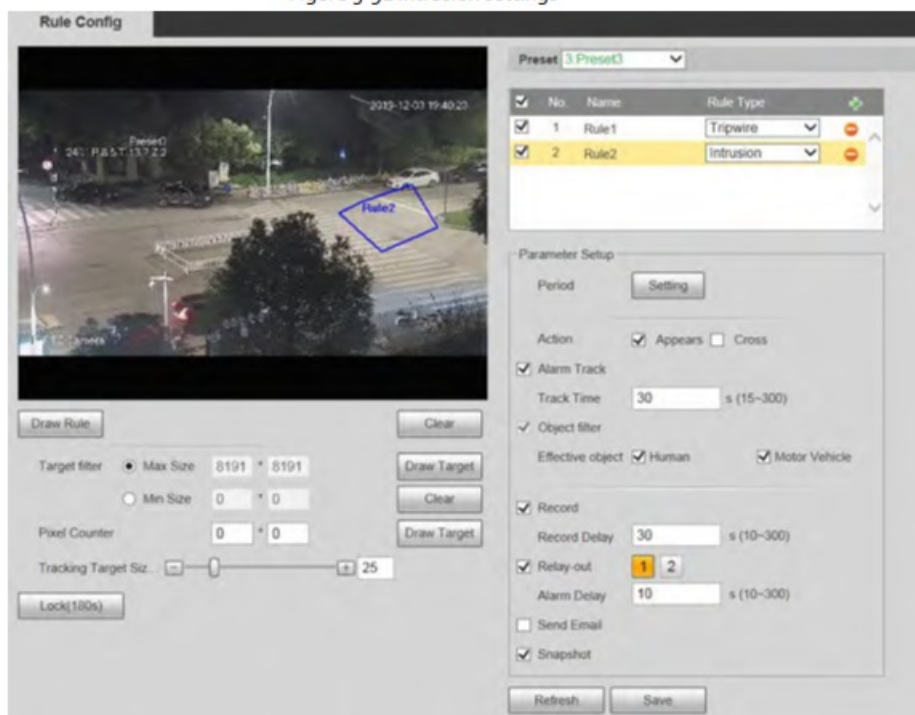Figure 5-92 Intrusion settings



Step 2 Click Draw Rule, and you can draw rules on the monitoring screen.

For parameter description, see Table 5-29.

Click Clear to the right of Draw Rule to clear all drawn rules.

Step 3 Configure intrusion parameter.

Table 5-31 Description of intrusion parameter

Parameter	Description
Action	Configure intrusion action, and you can select Appear or Cross .
Direction	Select the crossing direction from Enters , Exits , and Enter & Exit .



For other parameters, see “5.5.5.1 Tripwire”.

Step 4 Click Save.

5.5.5.3 Abandoned Object


An alarm will be triggered when the selected target in the monitoring scene stays in the screen for more than the defined time.

Pedestrians or vehicles that stay for too long would be regarded as abandoned objects. To filter out such alarms, you can use Target filter. In addition, the duration can be properly extended to avoid false alarm due to a short stay of people.

Applicable scenes: Scenes with sparse targets, no obvious and frequent light changes. For scenes with intensive targets or too many obstacles, missed alarms would increase; for scenes in which too many people stay, false alarms would increase. Select detection areas with simple texture, because this function is not applicable to scenes with complex texture.

Step 1 Select Abandoned Object from the Rule Type list.

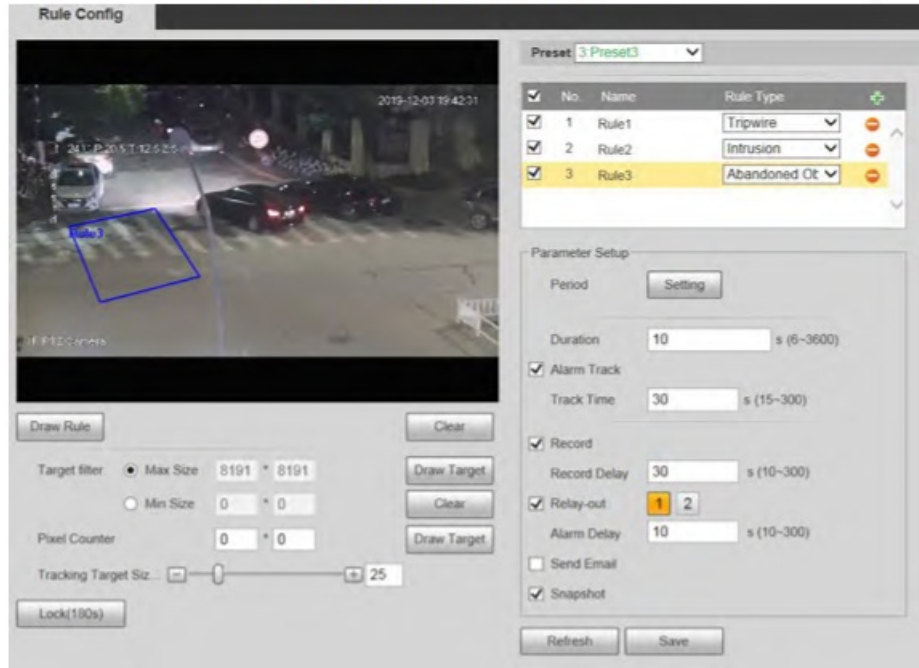Figure 5-93 Abandoned object settings



Step 2 Click Draw Rule, and you can draw rules on the monitoring screen.

For parameter description, see Table 5-29.

Click Clear to the right of Draw Rule, and you can clear all drawn rules.

Step 3 Configure abandoned object parameter.

Table 5-32 Description of abandoned object parameter

Parameter	Description
Duration	For abandoned object, the duration is the shortest time to trigger an alarm after an object is abandoned.

alarm after an object is abandoned.

For other parameters, see “5.5.5.1 Tripwire”.

Step 4 Click Save.


5.5.5.4 Missing Object

An alarm will be triggered when the selected target in the scene is taken away for the time longer than the set duration.

The system analyzes static areas from the foreground, and determines whether it is missing object or abandoned object from the similarity of its foreground and background. When the time exceeds the set period, an alarm is triggered.

Applicable scenes: Scenes with sparse targets, no obvious and frequent light changes. For scenes with intensive targets or too many obstacles, the missed alarm would increase; for scenes in which too many people stay, the false alarm would increase. Keep the detection area texture as possible simple as possible, because this function is not applicable to scenes with complex texture. Step 1 Select Missing Object from the Rule Type list.

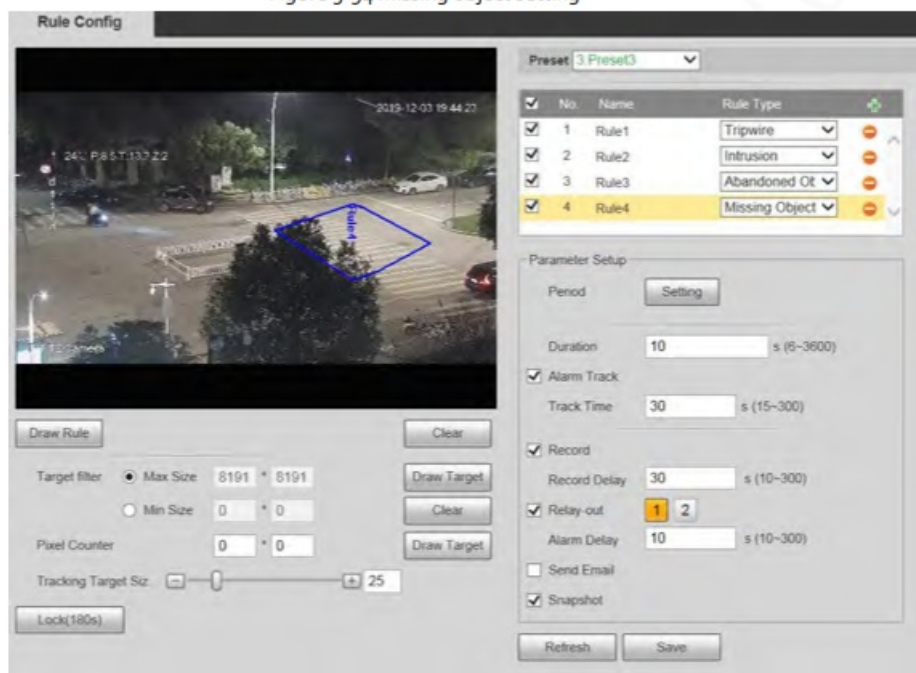Figure 5-94 Missing object setting



Step 2 Click Draw Rule, and you can draw rules on the monitoring screen.

For parameter description, see Table 5-29.

Click Clear to the right of Draw Rule to clear all drawn rules.

Step 3 Configure missing object parameter.

Table 5-33 Description of missing object parameter

Parameter	Description
Duration	Configure the shortest time from the object disappearing to the alarm being triggered.

For other parameters, see “5.5.5.1 Tripwire”.

Step 4 Click Save.

5.5.6 Construction Monitoring

The Device can be used for construction monitoring which include helmet detection, workwear detection, lone working detection and absence detection.

Prerequisites

Select Setting > Event > Smart Plan to enable Construction Monitoring.

Procedure

Step 1 Select Setting > Event > Construction Monitoring.

Step 2 Select Global or a preset from the Preset list.

- If global plan is selected, detection area and rule are set by default, and the detection area cannot be changed.
- If a preset is selected, you need to set detection area and rule manually. The following section uses selecting Preset 1 as an example.

Figure 5-95 Global plan



Figure 5-96 Plan by preset



Step 3 Click at the upper-right corner of the Area Config section.

Double click the rule name to modify it. Step 4 Click to draw rule box on the video image, and then right-click to complete drawing.

- After drawing is complete, drag the corners of the drawn area to adjust the detection area.
- If you select preset plan, 8 detection areas can be drawn at most.

Step 5 Select the checkbox before the event type to enable the corresponding detection rule.

Table 5-34 Rule description

Rule	Description
Helmet Detection	When the Device detects person not wearing helmet or not wearing helmet in the specified color, alarm linkage actions will be performed.
Workwear Detection	When the Device detects person not wearing workwear in accordance with the rule, alarm linkage actions will be performed. The rule for workwear is long-sleeved tops and trousers in the same color. If short-sleeved shirts, shorts or different colors are detected, it means the rule is not followed.
Lone Working Detection	When the Device detects a single person working in the detection area, alarm linkage actions will be performed.
Absence Detection	When the Device detects nobody working in the detection area, alarm linkage actions will be performed.

Step 6 Click next to the detection rule, configure parameters on the Advanced Parameter interface, and then click Save.



Figure 5-99 Lone working detection

The 'Advanced Parameter' dialog box for 'Lone working detection' contains the following settings:

- Rule Parameter:**
 - Duration: 100 s (1-3600)
 - Repeat Alarm Time: 30 s (10-3600)
 - ☐ Record
 - Record Delay: 10 s (10-300)
 - ☐ Relay-out
 - Alarm Delay: 10 s (10-300)
 - ☐ Send Email
 - ☒ Audio Linkage
 - Play Count: 1 (1-3)
 - File: alarm.wav
 - ☐ Message Link
 - ☒ Snapshot
 - Period: [Setup]

Buttons at the bottom: Save, Cancel.

Figure 5-100 Absence detection

The 'Advanced Parameter' dialog box for 'Absence detection' contains the following settings:

- Rule Parameter:**
 - Duration: 100 s (1-3600)
 - Repeat Alarm Time: 30 s (10-3600)
 - ☐ Record
 - Record Delay: 10 s (10-300)
 - ☐ Relay-out
 - Alarm Delay: 10 s (10-300)
 - ☐ Send Email
 - ☒ Audio Linkage
 - Play Count: 1 (1-3)
 - File: alarm.wav
 - ☐ Message Link
 - ☒ Snapshot
 - Period: [Setup]

Buttons at the bottom: Save, Cancel.

Parameter	Description
Allowed Color	When configuring helmet detection, you can set allowed colors. When the helmet detected is not in the selected colors, alarms will be triggered.
Duration	When events not following the rule are detected and the duration exceeds the defined value, alarms will be triggered. For example, when the duration of helmet detection is 5 seconds, if the Device detects a person not wearing helmet or the helmet color is not allowed for more than 5 seconds, an alarm will be triggered.

Parameter	Description
Repeat Alarm Time	After an alarm is triggered, when the event lasts for the time reaching repeated alarm time, an alarm will be triggered again.

Record	After you enable the function, when an alarm is triggered, the system will start recording automatically. Before using the function, you need to set the recording period of the alarm in Storage > Schedule , and select Auto for Record Mode on the Record Control interface.
Record Delay	When an alarm is over, the alarm recording will continue for an extended period of time.
Relay-out	Select the checkbox, and you can enable the alarm linkage output port, and link corresponding relay-out devices after an alarm is triggered.
Alarm Delay	When an alarm is over, the alarm will continue for an extended period of time.
Send Email	After you select the checkbox, when an alarm is triggered, the system sends email to the specified email address. You can configure the email address in “5.2.8 SNMP”.
Audio Linkage	Select the checkbox to play alarm audio when alarms are triggered. You can set the play count and select the audio file. For how to set the audio file, see “5.1.3.2 Configuring Alarm Audio”.

Message Link	Select the checkbox to receive message when alarms are triggered.
Snapshot	Select the checkbox, and the system will automatically take snapshots in case of alarms. You need to set snapshot period in Storage > Schedule .
Period	<p>Set the alarm period to enable alarm events in the defined period.</p> <ol style="list-style-type: none"> 1. Click Setup, and the Period interface is displayed. 2. Enter the time value or press and hold the left mouse button, and drag directly on the setting interface. There are six periods for each day. Select the checkbox next to the period for it to take effect. 3. Select the day of week (Sunday is selected by default; If All is selected, the setting is applied to the whole week. You can also select the checkbox next to the day to set it separately). 4. After completing the setting, click Save to go back to the rule configuration interface.

Step 7 Click Save on the Construction Monitoring interface.

If you want to see the alarm information on the Alarm tab, you need to subscribe the corresponding alarm type. For details, see “6 Alarm”.

Result

Click the AI Live tab to view construction monitoring results. For details, see “3.2 AI Live Settings”.

5.5.7 Face Recognition

The function can detect faces and compare them with those in the configured face database.


- Select Setting > Event > Smart Plan to enable face recognition.
- This function is available on select models.

5.5.7.1 Face Detection

When human face is detected in the monitoring screen, an alarm is triggered and the linked action is performed.

Step 1 Select Setting > Event > Face Recognition > Face Detection.

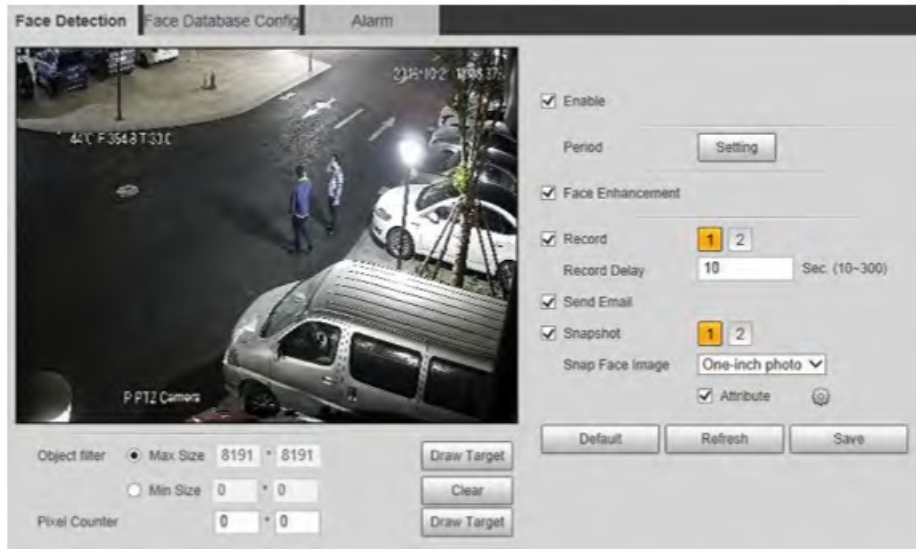Figure 5-101 Face detection page



Step 2 Select Enable to enable the face detection function.

Step 3 Configure face detection parameters.

Table 5-36 Description of face detection parameter

Parameter	Description
Period	Alarm event will be triggered only within the defined period. For details, see “5.5.1.1 Motion Detection” .
Face Enhancement	Select Face Enhancement to preferably guarantee clear faces with low stream.
Record	<p>Select Record, and the system records video when alarms are triggered.</p> <p>To enable video recording, you need to make sure that:</p> <ul style="list-style-type: none"> ● The motion detection recording is enabled. For details, see “5.6.1.1 Record”. ● The auto recording is enabled. For details, see “5.6.4 Record Control”.
Record Delay	The video recording will not stop until the record delay time you set has passed.

Parameter	Description
Send Email	Select Send Email , and when alarms are triggered, the system sends email to the specified mailbox. For the email settings, see “5.2.5 SMTP (Email)” .
Snapshot	<p>Select Snapshot, and the system takes snapshot when alarms are triggered.</p> <ul style="list-style-type: none"> ● Enable the motion detection snapshot first. For details, see “5.6.1.1 Record”. ● For searching and setting snapshot storage path, see “5.1.2.5 Path”.
Snap Face Image	Set the snapshot scope, including Face and One-inch photo .
Attribute	Select the Attribute checkbox, click , and then you can set the human attributes during face detection.

Step 4 Click Save.

5.5.7.2 Face Database Config

After you successfully configure the face database, the detected faces can be compared with the information in the face database. Configuring a face database includes creating a face database, adding face images, and face modeling.

5.5.7.2.1 Adding Face Database

Create a face database, and then register face images to add face images to the newly created face database.


Step 1 Select Setting > Event > Face Recognition > Face Database Config.

Figure 5-102 Face database config



Step 2 Click **Add Face Database**.

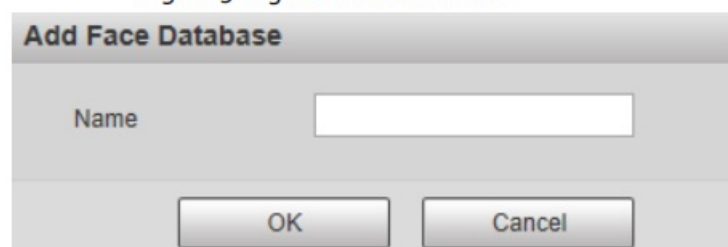
Figure 5-103 Add face database



Step 3 Set face database name.

Step 4 Click OK to complete the addition.

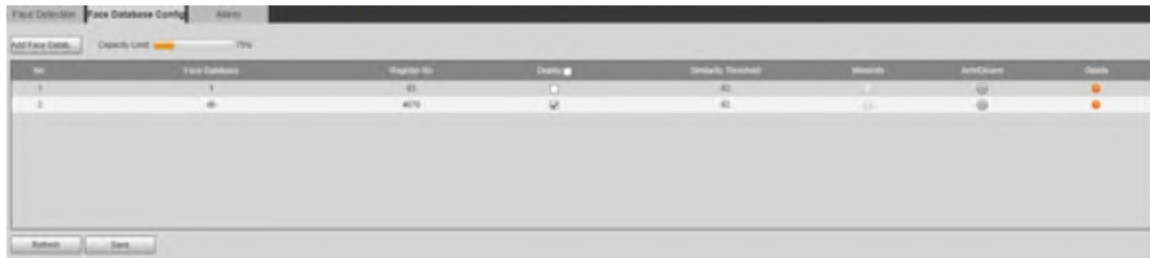Figure 5-104 Add face database completed



Step 5 Configure face database configuration parameters.

Table 5-37 Description of face database config parameter

Parameter	Description
Deploy	Select Deploy and the face database takes effect.
Similarity Threshold	The comparison is successful only when the similarity between the detected face and the face feature in face database reaches the set similarity threshold. After this, the comparison result is displayed on the Live page.
More Info	Click More Info to manage face database. You can set search conditions, register people, and modify people information.
Arm/Disarm	Alarm event will be triggered only within the defined time period. For details, see “5.1.1 Motion Detection” .
Delete	Delete the selected face database.

5.5.7.2.2 Adding Face Images

You can add face images to the created face database. Manual addition and batch import are supported.

Manual Addition

Add a single face image. Use this method when registering a small number of face images.

Step 1 Select Setting > Event > Face Recognition > Face Database Config.


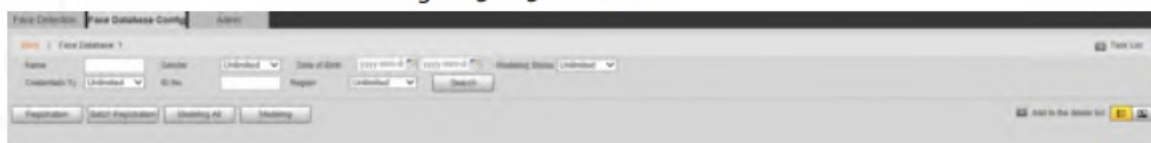
Step 2 Click  More Info for the face database to be configured.


Figure 5-105 More info



Set filtering conditions, and then click Search. The search result is displayed.

Step 3 Click Registration.

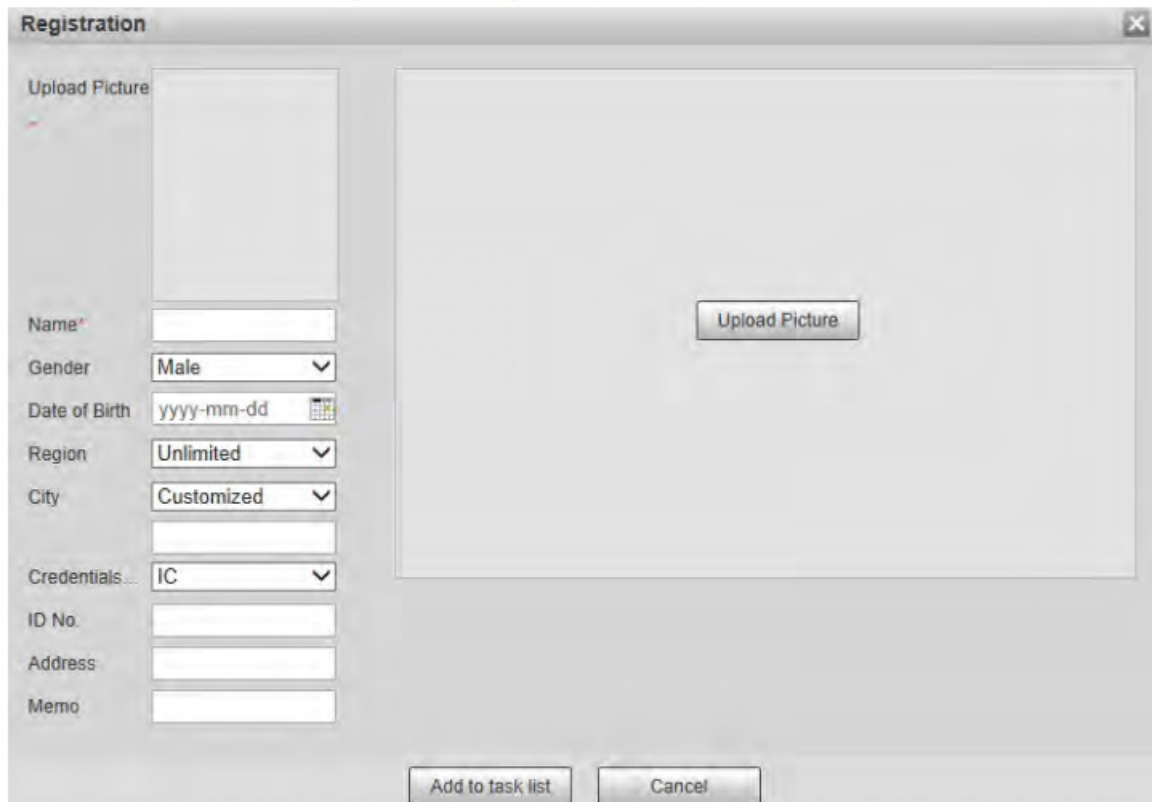Figure 5-106 Registration interface



The 'Registration' window contains a form on the left and a large image area on the right. The form fields are: 'Upload Picture' (with a red asterisk), 'Name*' (text box), 'Gender' (dropdown menu with 'Male' selected), 'Date of Birth' (calendar icon and 'yyyy-mm-dd' text), 'Region' (dropdown menu with 'Unlimited' selected), 'City' (dropdown menu with 'Customized' selected), 'Credentials...' (dropdown menu with 'IC' selected), 'ID No.' (text box), 'Address' (text box), and 'Memo' (text box). The right side features a large rectangular area for image upload, with an 'Upload Picture' button centered within it. At the bottom of the window are 'Add to task list' and 'Cancel' buttons.

Step 4 Click Upload Picture, and then import the face pictures to be uploaded.

You can manually select a face area. After uploading the picture, select a face area and click OK. If there are multiple faces in an image, select the target face and click OK to save the face image.

Figure 5-107 Addition completed




The 'Registration' window is shown after a face image has been uploaded. The 'Upload Picture' field now displays a small thumbnail of the uploaded image. The large image area on the right now shows the full face image, which is framed by a yellow border. Above this image area are 'OK' and 'Cancel' buttons. The form fields on the left remain the same as in Figure 5-106. The 'Add to task list' and 'Cancel' buttons are at the bottom.

Step 5 Fill in face image information.

Step 6 Click Add to task list.

Step 7 Click  Task List 1 .

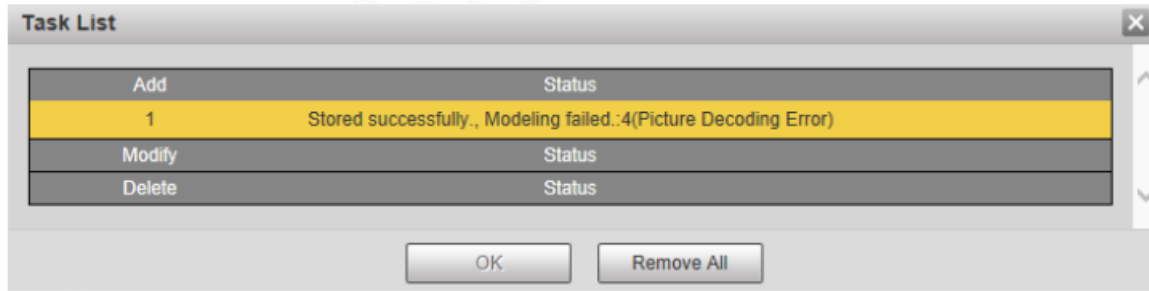Figure 5-108 Task list addition completed



Click **Remove All** to remove all the tasks.

Batch Registration

You can import multiple face images in batches. Use this method when registering a large number of face images.

Before importing images in batches, name the face images in the format of “Name#SGender#BDate of Birth#NRegion#TCredentials Type#MID No. jpg” (for example, “John#S1#B1990-0101#NCN#T1#M330501199001016222”).

Name is required and the rest are optional.

Table 5-38 Naming rules for batch import

Naming Rules	Description
Name	Enter the corresponding name.
Gender	Enter a number. 1: Male; 2: Female.
Date of Birth	Enter numbers in the format of yyyy-mm-dd. For example, 2017-11-23.
Region	Enter the region name.
Credentials Type	Enter a number. 1: ID card; 2: passport.
ID No.	Enter ID No.

Step 1 Select Setting > Event > Face Recognition > Face Database Config.


The Face Database Config interface is displayed.

Step 2 Click More Info for the face database to be configured.

The Face Database interface is displayed.


Step 3 Click Batch Registration.

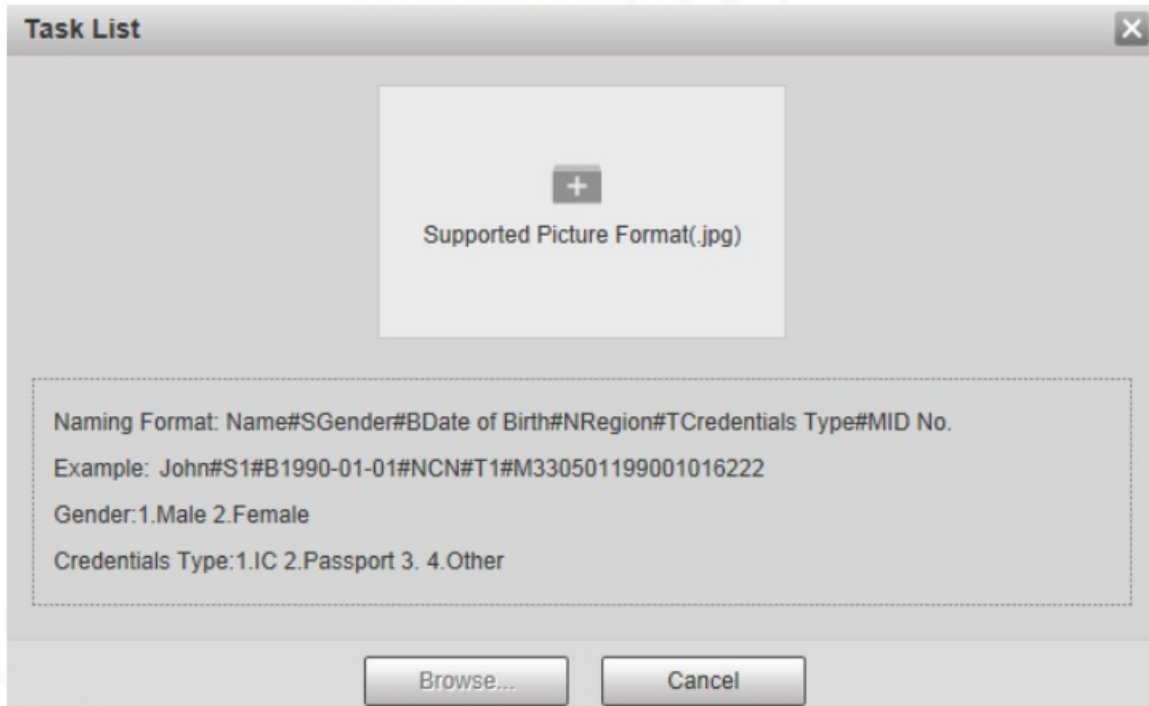Figure 5-109 Batch registration




Step 4 Click  to select the file path.

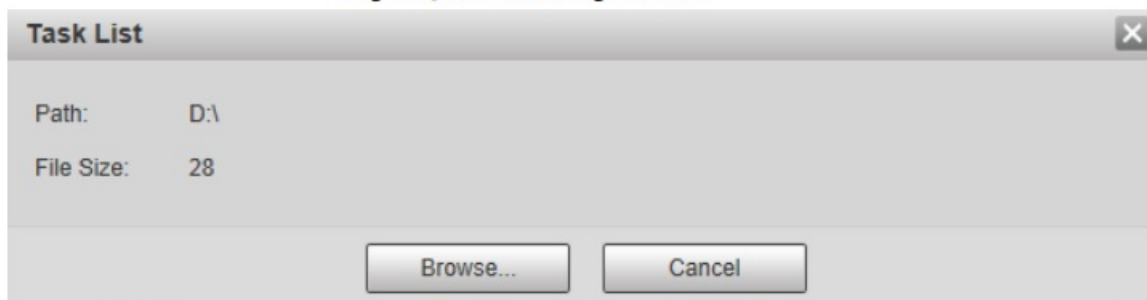Figure 5-110 Batch registration



Step 5 Click **Browse**.

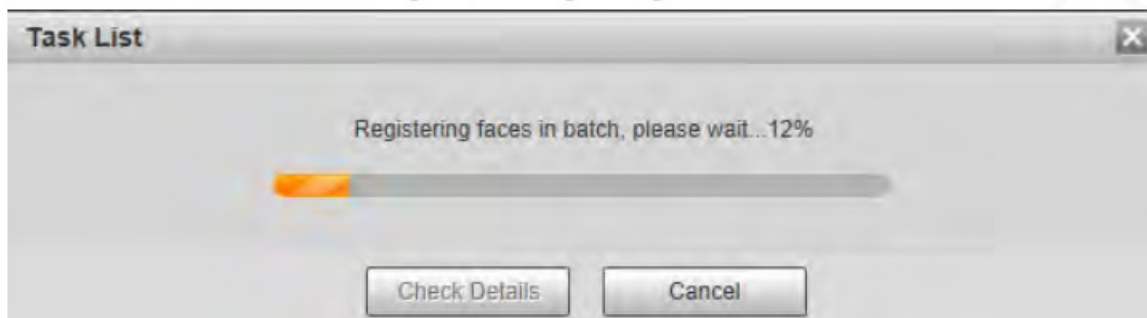Figure 5-111 Registering



Step 6 After the registration is completed, click **Next** to view the registration result.

Step 6 After the registration is completed, click Next to view the registration result.

5.5.7.2.3 Managing Face Images


You can add face images to face database; manage and maintain face images to ensure correct information.

Modifying Face Information

On the Face Database Config page, move the mouse pointer to the face image or person information line, and

then click  or . After modifying the face image information, click Add to task list.

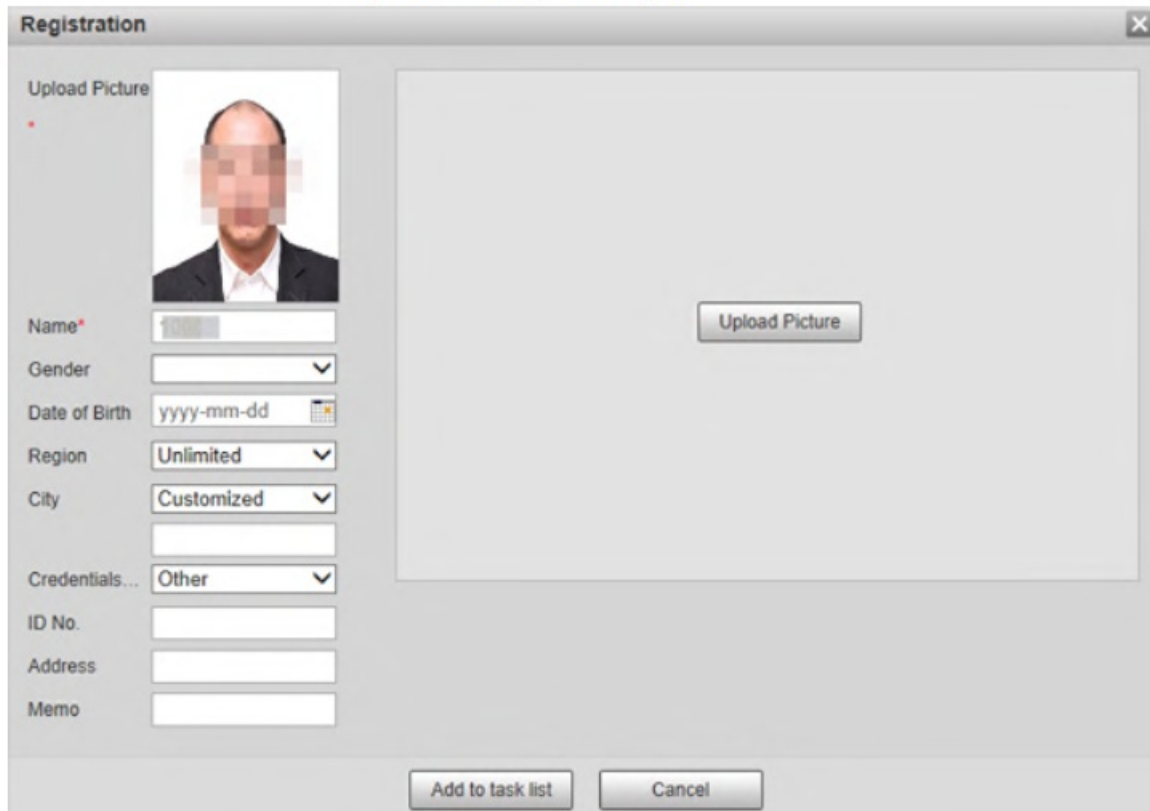
Figure 5-112 Registration page



The screenshot shows a 'Registration' window with a close button (X) in the top right corner. On the left, there is a vertical list of fields: 'Upload Picture' (with a red asterisk), 'Name*' (text input), 'Gender' (dropdown), 'Date of Birth' (text input with a calendar icon), 'Region' (dropdown), 'City' (dropdown), 'Credentials...' (dropdown), 'ID No.' (text input), 'Address' (text input), and 'Memo' (text input). To the right of these fields is a large rectangular area for the profile picture, containing a placeholder image of a man's face and an 'Upload Picture' button. At the bottom of the window are two buttons: 'Add to task list' and 'Cancel'.


Deleting Face Images

Enter face database, and then delete the created face image.

- Single deletion: Move the mouse pointer to the face image or people information line, and then click or  to delete the face image.
- Batch deletion: Move the mouse pointer to the face image or people information line, and then click at the upper right corner of the face images, or click ☐ on person information line. After selecting multiple items, click ☐ Add to the delete list, click , and then click OK to delete the selected face images.
- Delete all: When viewing face images in a list, click on people information line (or select All when viewing face images in images), click ☐ Add to the delete list, click , and then click OK to delete all face images.

5.5.7.2.4 Face Modeling

You can extract and import the relevant information of face images into the database through face modeling, and create a face feature mode for smart detection such as face comparison.

-  The more face images you choose, the longer the modeling time is.
- During the modeling process, some smart detection functions (such as face comparison) are temporarily unavailable and can be resumed after the modeling is complete.

Step 1 Select Setting > Event > Face Recognition > Face Database Config.



Step 2 Click  More Info for the face database to be configured.

Figure 5-113 Face database page

Step 3 Select the face images for modeling

Step 3 Select the face images for modeling Click  to view the face image in a list. Click to view the face image as a thumbnail.

- Modeling All Click Modeling All, and all face images in the face database will be modeled.
- Selective Modeling

If there are many face images in the face database, set filtering conditions and then click Search to select face images for modeling.

Figure 5-114 Modeling completed

5.5.7.3 Alarm Linkage

Set the alarm linkage mode for face comparison.

Step 1 Select Setting > Event > Face Recognition > Alarm.

Figure 5-115 Alarm linkage

Step 2 Configure alarm linkage parameter.

Table 5-39 Description of alarm linkage parameter

Parameter	Description
Face Database	Select the face database to be configured with alarm linkage.
Alarm Rule	Select the alarm rule as needed.
Relay-out	Select the Relay-out checkbox, and when an alarm is triggered, the system interacts with the linked alarm devices.
Alarm Delay	The alarm will continue for an extended period of time. The value range is 1–300 s.

5.5.8 People Counting

You can use this function to count the number of people in the area and generate reports.


- Before using this function, you need to enable People Counting in Smart Plan.
- The people counting data will be overwritten if the disk is full. Back up the data in time as needed.
- This function is available on select models.

5.5.8.1 People Counting Settings

With the function, the system can count the number of people appearing in the monitoring screen within a certain period.

Step 1 Select Setting > Event > People Counting > People Counting.

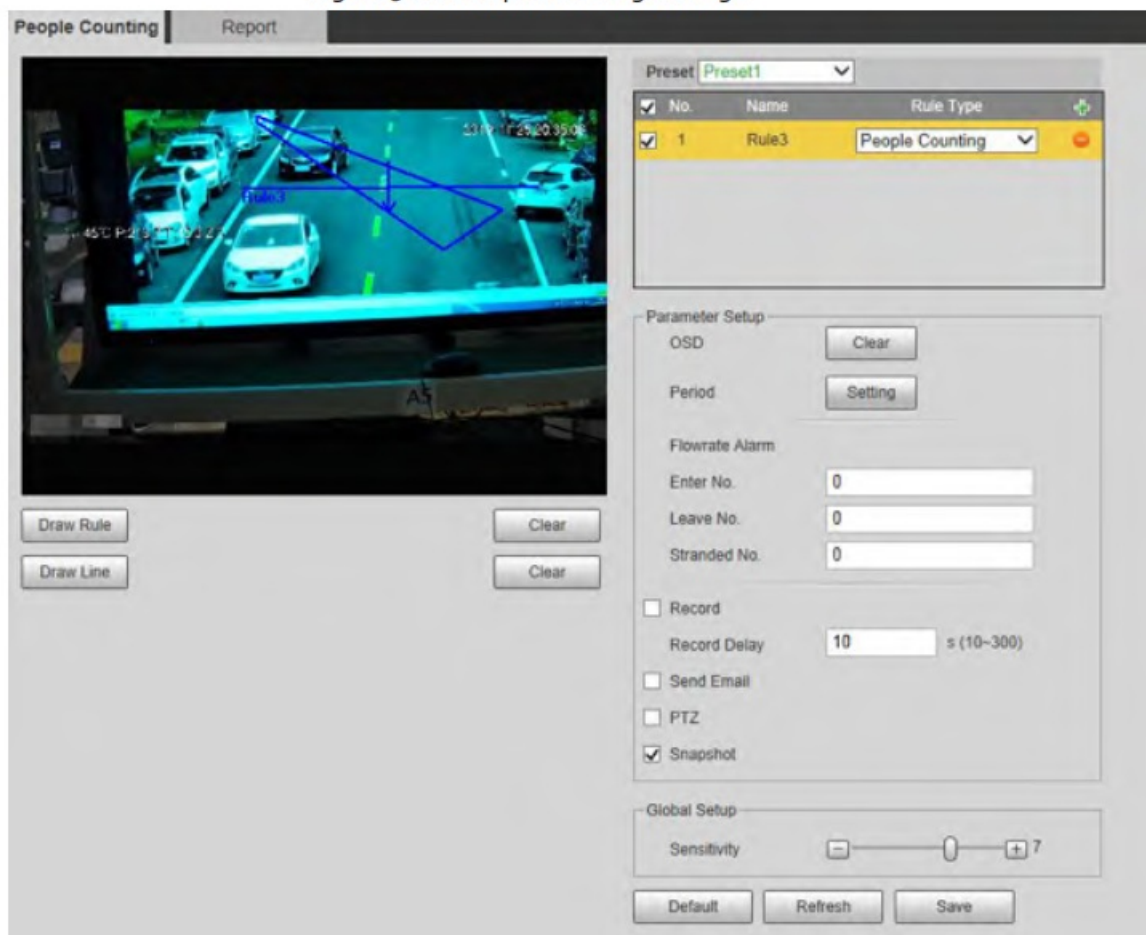Figure 5-116 People counting settings



Step 2 Select the presets to be configured.

Step 3 Click Draw Rule, and you can draw rules on the monitoring screen. For parameter description, see Table 5-29.

Click Clear to the right of Draw Rule, and you can clear all drawn rules.

Step 4 Configure people counting parameter.

Table 5-40 Description of people counting parameter

Parameter	Description
OSD	Display the number of people displayed in the area in real time. Click Clear , and the current number will be zero.
Enter No.	Set the Enter No. , and when the number of people entering reaches the set value, an alarm will be triggered.
Leave No.	Set the Leave No. , and when the number of people leaving reaches the set value, an alarm will be triggered.
Stranded No.	Set the Stranded No. , and when the number of people staying reaches the set value, an alarm will be triggered.

For other parameters, see “5.5.5.1 Tripwire”.

Step 5 Click Save.

5.5.8.2 Report

You can view the statistics results of people in the scene during the selected period.

Step 1 Select Setting > Event > People Counting > Report.

Figure 5-117 People counting report

Figure 5-117 People counting report



Step 2 Select a preset.

Step 3 Select the Rule, Statistics Type, and Time Range.

Step 4 Select the start time and end time for searching reports.

Step 5 Select Flow Direction and Chart Type.

Step 6 Click Search to generate reports, and then click Export to export the report to local storage.

5.5.9 Heat Map


- Before enabling Heat Map, you need to set presets in PTZ section, and select the function in the Smart Plan.
- The data will be overwritten if the disk is full. Back up the data in time.
- This function is available on select models.

5.5.9.1 Heat Map Settings

The function can be used to detect the activity level of moving objects in the scene during a certain period.

Step 1 Select Setting > Event > Heat Map > Heat Map.

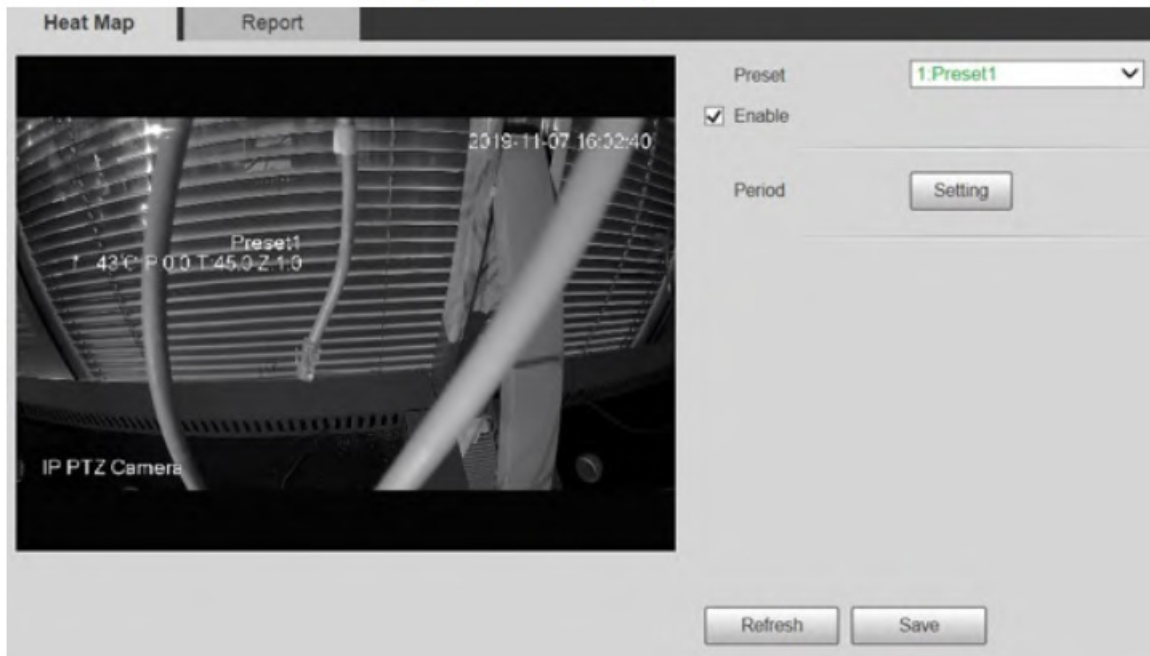Figure 5-118 Heat map



Step 2 Select the presets to be configured.

Step 3 Select the Enable checkbox to enable heat map function.

Step 4 Click Setting to set the arming period. For details, see “5.5.1.1 Motion Detection”.

Step 5 Click Save.

5.5.9.2 Report

You can view the heat map report for the scene in the selected period.

Step 1 Select Setting > Event > Heat Map > Report.

Step 2 Set the start time and end time to search for the heat map report.

Step 3 Select a preset.

Step 4 Click Search, and the search results will be displayed on the page.

Figure 5-119 Report



5.5.10 Video Metadata


With the function, the system can count the number of motor vehicles, non-motor vehicles and people in the monitoring screen, identify the features of the vehicles and people in the scene, and take snapshots.

- Before using video metadata, you need to enable the function in the Smart Plan.
- This function is available on select models.

5.5.10.1 Scene Setting

Set the parameters of snapshot, analysis and alarm in the scene.
Step 1 Select Setting > Event > Video Metadata.

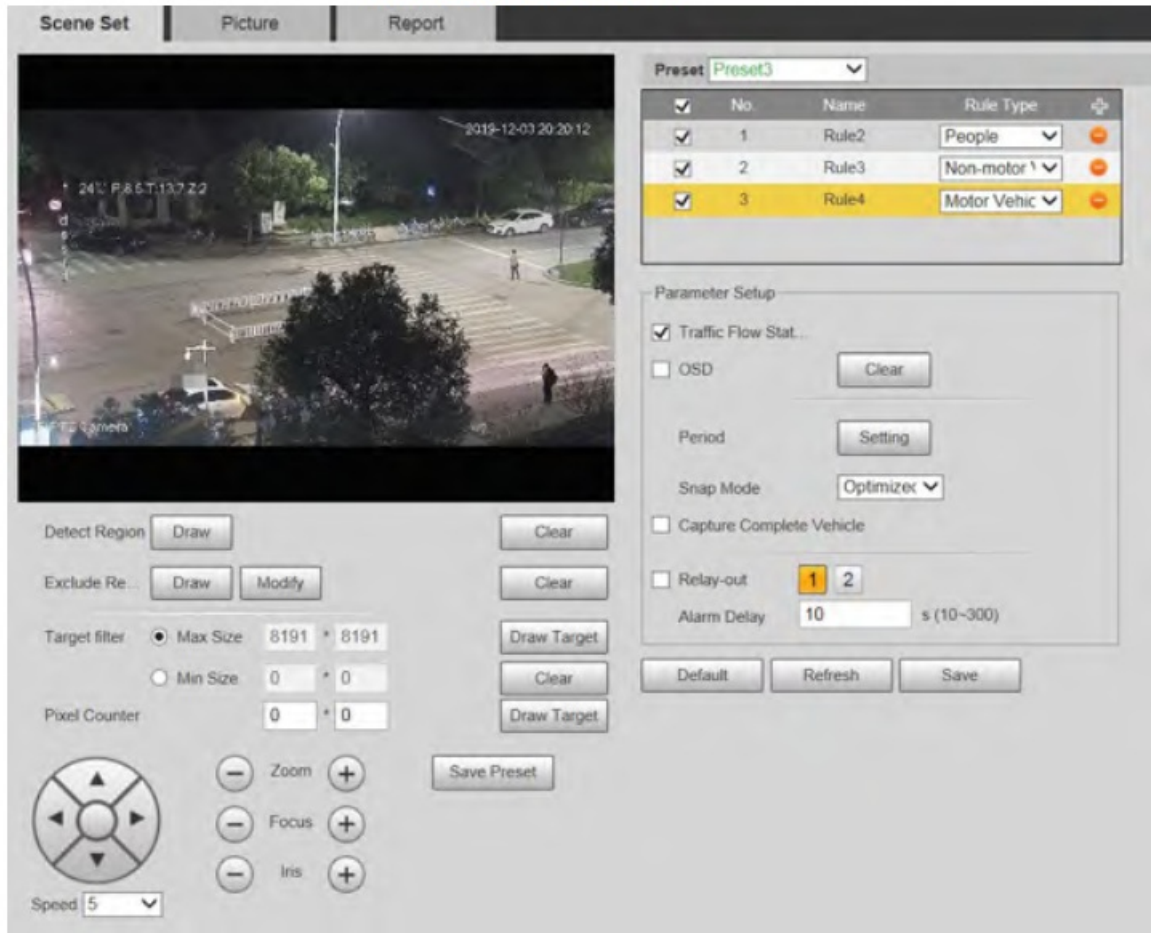Figure 5-120 Scene setting



Step 2 Click the Preset list to select the preset to configure video metadata.

Step 3 Click + to add a rule type.

Step 4 Modify the parameters.

- Double-click the name to modify the rule name.
- Select the rule type from People, Non-motor Vehicle and Motor Vehicle.

- Click the corresponding  to delete detection items.

Step 5 Configure scene setting parameters.

Table 5-41 Description of scene setting parameter

Parameter	Description
People Flow Statistics	After selection, traffic flow statistics will be displayed on the screen.
Non-motor Vehicle Flow Statistics	
Traffic Flow Statistics	
OSD	Select the checkbox to enable the OSD overlay. The statistics will be displayed on the Live page in the form of OSD information.
Clear	Click it to clear the statistics of motor vehicles, non-motor vehicles and people.

For other parameters, see “5.5.5.1 Tripwire”.

Step 6 Click Save.

5.5.10.2 Picture Overlay

Set the overlay information on the snapshot.

Step 1 Select Setting > Event > Video Metadata > Overlay.

Step 2 Select Picture Overlay Type from People, Non-motor Vehicle and Motor Vehicle.

Figure 5-121 Picture overlay–motor vehicle

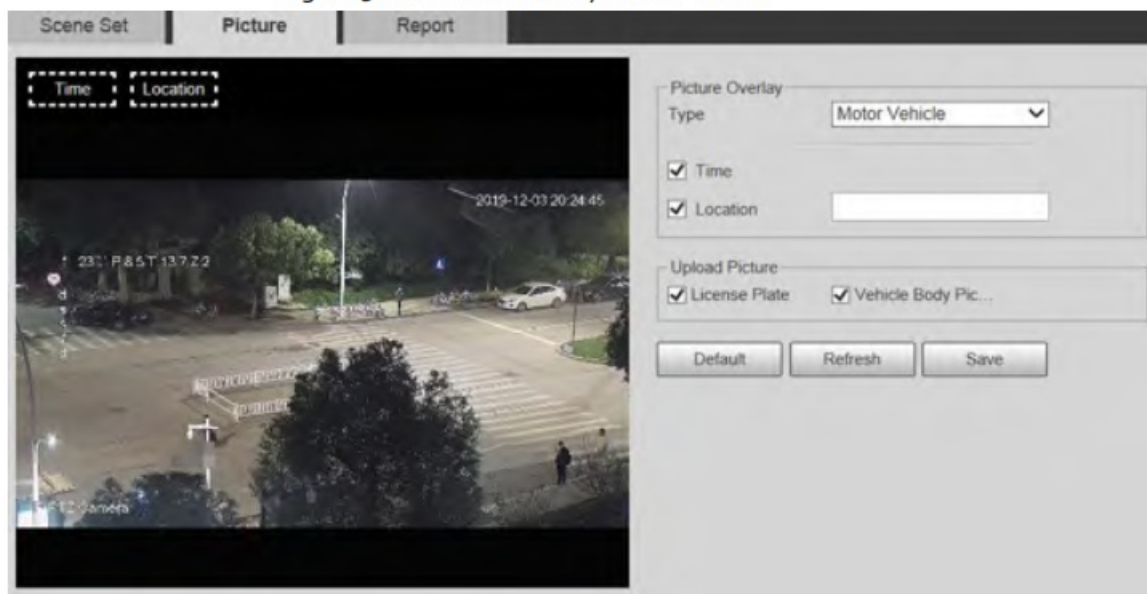


Figure 5-122 Picture overlay–non-motor vehicle

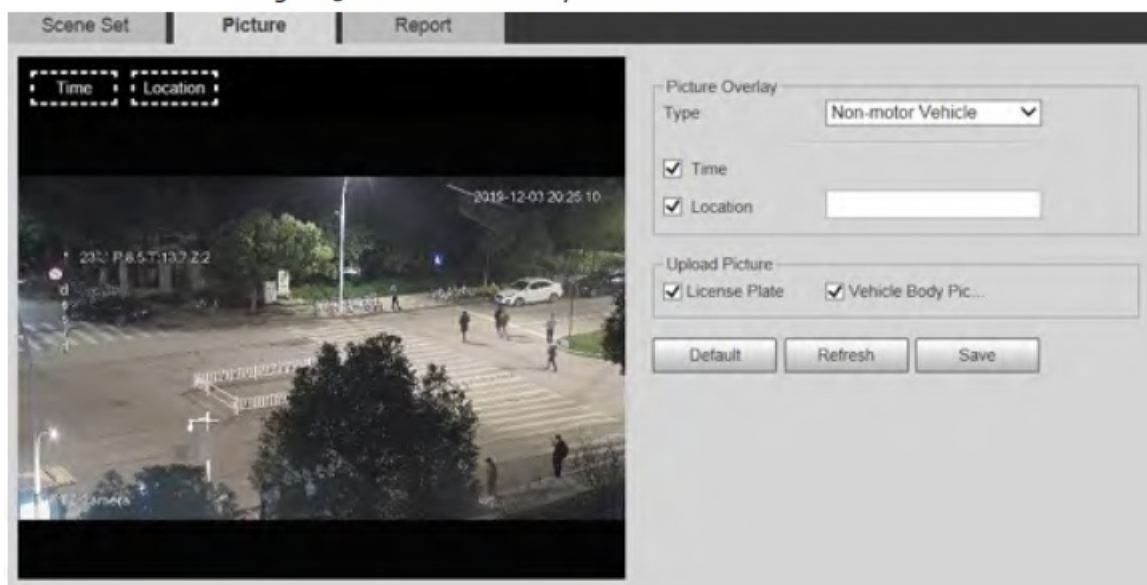


Figure 5-123 Picture overlay–people

Step 3 Select overlay information.

If you select Location, you need to manually enter the location of the Device.

Step 4 Click Save.

5.5.10.3 Report

You can view the number of vehicles, non-vehicles and people in the scene during the selected period.

Step 1 Select Setting > Event > Video Metadata > Report.


Step 2 Select the Report Type.

Step 3 Select the start time and end time for searching reports.

Step 4 Select Traffic Flow Statistics Type.

Step 5 Click Search to generate reports.

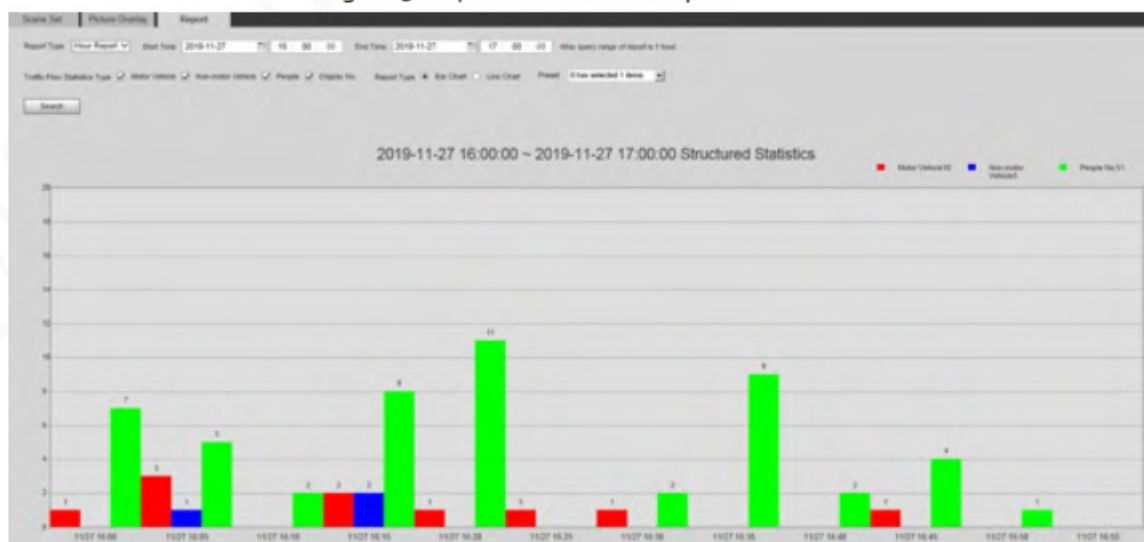Figure 5-124 Video metadata report



5.5.11 Alarm

Step 1 Select Setting > Event > Alarm.

Figure 5-125 Alarm

Alarm

☐ Enable

Relay-in Alarm1

Period Setting

Anti-Dither 0 s (0~100) Sensor Type NO

☒ Record

Record Delay 10 s (10~300)

☒ Relay-out 1 2

Alarm Delay 10 s (10~300)

☐ Send Email

☐ PTZ

☒ Snapshot

Default Refresh Save

Step 2 Configure alarm setting parameters.

Table 5-42 Description of alarm setting parameter

Parameter	Description
Enable	Select the Enable checkbox, and then the alarm linkage is enabled.
Relay-in	Select alarm input, and 7 alarm inputs are available.
Sensor Type	There are two types: NO (normally open) and NC (normally closed). Switch from NO to NC , and alarm event will be enabled. Switch from NC to NO , and alarm event will be disabled.

For other parameters, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.12 Abnormality

Abnormality includes 7 alarm events: No SD Card, Capacity Warning, SD Card Error, Disconnection, IP Conflict, Illegal Access, and Security Exception.

5.5.12.1 SD Card

In case of an SD card exception, an alarm will be triggered.

Step 1 Select Setting > Event > Abnormality > SD Card.

Figure 5-126 No SD card

SD Card | Network | Illegal Access | Security Exception

Event Type: No SD Card

☐ Enable

☒ Relay-out: 1 2

Alarm Delay: 10 s (10~300)

☐ Send Email

Default Refresh Save

Figure 5-127 SD card error

SD Card | Network | Illegal Access | Security Exception

Event Type: SD Card Error

☐ Enable

☒ Relay-out: 1 2

Alarm Delay: 10 s (10~300)

☐ Send Email

Default Refresh Save

Figure 5-128 Capacity warning

SD Card | Network | Illegal Access | Security Exception

Event Type: Capacity Warning

☐ Enable

Capacity Limit: 10 %(0~99)

☒ Relay-out: 1 2

Alarm Delay: 10 s (10~300)

☐ Send Email

Default Refresh Save

Step 2 Configure SD card exception parameters.

Table 5-43 Description of SD card exception parameter

Parameter	Description
Enable	Select the checkbox to enable this function.
Capacity Limit	Configure the free space percentage, and if the free space in the SD card is less than the defined percentage, an alarm is triggered.

For other parameters, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.12.2 Network Exception

In case of a network exception, an alarm will be triggered.

Step 1 Select Setting > Event > Abnormality > Network.

Figure 5-129 Disconnection

SD Card	Network	Illegal Access	Security Exception
Event Type: Disconnection			
<input checked="" type="checkbox"/> Enable			
<input type="checkbox"/> Record			
Record Delay: 10		s (10~300)	
<input type="checkbox"/> Relay-out: 1 2			
Alarm Delay: 10		s (10~300)	
<input type="button" value="Default"/> <input type="button" value="Refresh"/> <input type="button" value="Save"/>			

Figure 5-130 IP conflict

SD Card	Network	Illegal Access	Security Exception
Event Type: IP Conflict			
<input checked="" type="checkbox"/> Enable			
<input type="checkbox"/> Record			
Record Delay: 10		s (10~300)	
<input type="checkbox"/> Relay-out: 1 2			
Alarm Delay: 10		s (10~300)	
<input type="button" value="Default"/> <input type="button" value="Refresh"/> <input type="button" value="Save"/>			

Step 2 Configure network exception parameters.

Table 5-44 Description of network exception parameter

Parameter	Description
Enable	Select the checkbox to enable this function.

For other parameters, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.12.3 Illegal Access

Illegal access alarm is triggered when the login password has been wrongly entered for more than the times you set.

Step 1 Select Setting > Event > Abnormality > Illegal Access.

Figure 5-131 Illegal access

SD Card	Network	Illegal Access	Security Exception
<input checked="" type="checkbox"/> Enable			
Login Error: 5		time (3~10)	
<input checked="" type="checkbox"/> Relay-out: 1 2			
Alarm Delay: 10		s (10~300)	
<input type="checkbox"/> Send Email			
<input type="button" value="Default"/> <input type="button" value="Refresh"/> <input type="button" value="Save"/>			

Step 2 Configure illegal access parameters.

Table 5-45 Description of illegal access parameter

Parameter	Description
Enable	Select the checkbox to set the illegal access alarm.
Login Error	After entering a wrong password for the set times, the alarm for illegal access will be triggered, and the account will be locked.

For other parameters, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.12.4 Security Exception

When an event affecting the Device safety occurs, an alarm for safety exception will be triggered.

Step 1 Select Setting > Event > Abnormality > Security Exception.

Figure 5-132 Security exception

SD Card | Network | Illegal Access | **Security Exception**

☐ Enable

☒ Relay-out 1 2

Alarm Delay s (10~300)

☐ Send Email

Default Refresh Save

Step 2 Configure security exception parameter.

For details, see “5.5.1.1 Motion Detection”.

Step 3 Click Save.

5.5.12.5 Battery Exception

When overtemperature of the battery is detected, alarm linkage actions are performed.

Step 1 Select Setting > Event > Abnormality > Battery Exception.

Figure 5-133 Battery exception

SD Card | Network | Illegal Access | Security Exception | **Battery Exception**

Event Type

☐ Enable

☐ Record

Record Delay s (10~300)

☒ Relay-out

Alarm Delay s (10~300)

☐ Send Email

☒ Audio Linkage

Play Count (1~3)

File

☐ Message Link

Default Refresh Save

Step 2 Select the Enable checkbox to enable battery exception detection.

Step 3 Set alarm linkage actions.

Step 4 Click Save.

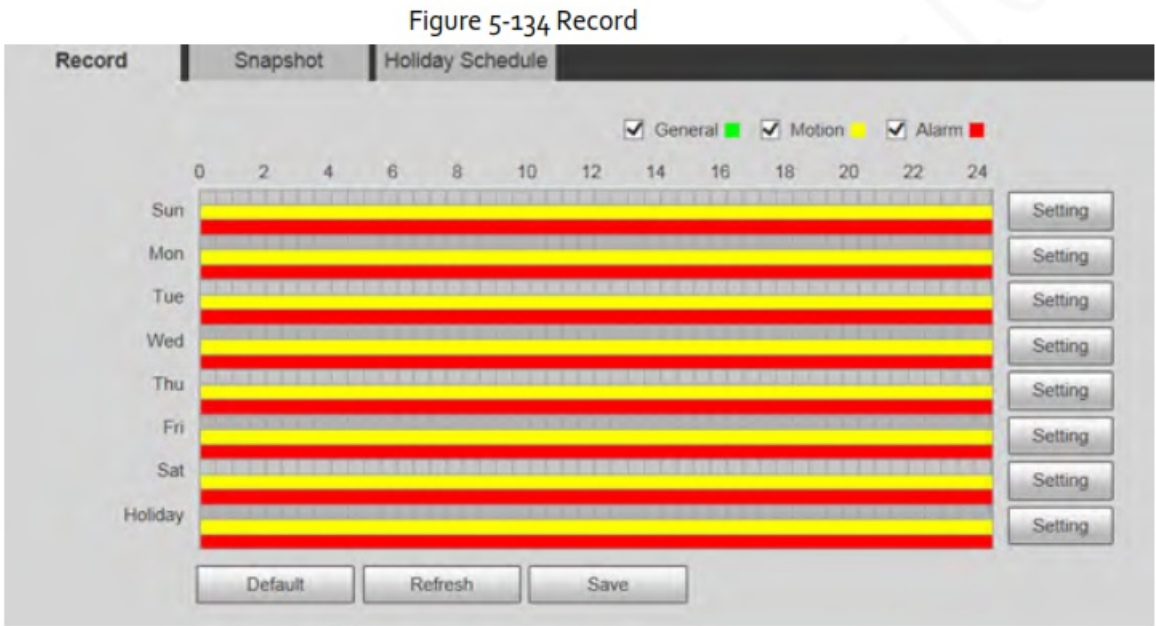
Storage

5.6.1 Schedule

Before setting the schedule, make sure that the Record Mode is Auto in Record Control.
If the Record Mode is Off, the Device will not record or take snapshots according to the schedule.

5.6.1.1 Record


Step 1 Select Setting > Storage > Schedule > Record.



Step 2 Select the day for recording from Monday to Sunday, and then click Setting on the right.

- Set the recording period. You can set up to six periods for one day.
- You can select 3 types of recording: General, Motion and Alarm.

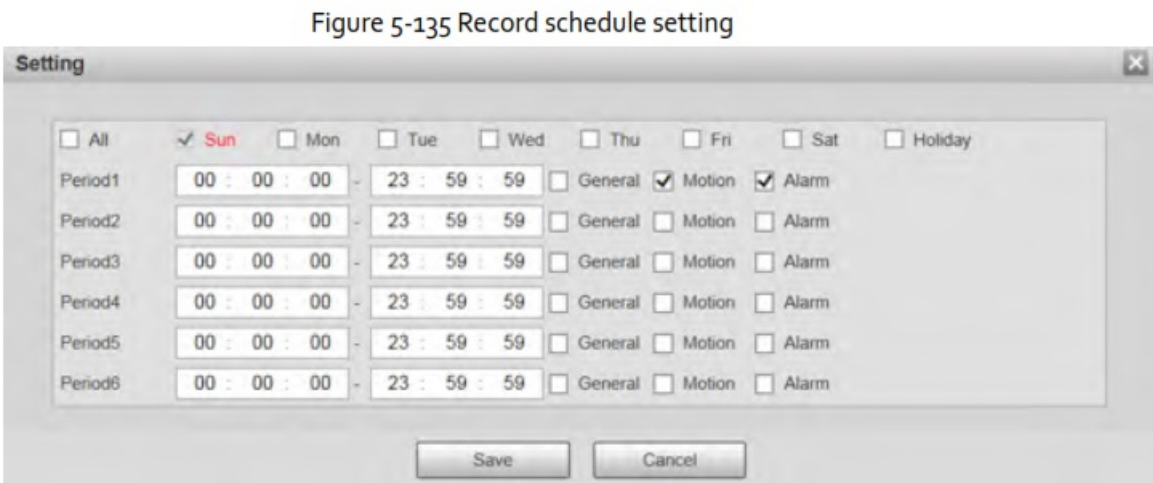To set the time period, you can also press and hold the left mouse button and drag directly on the Record page.



Step 3 Click Save to return to the Record page.
At this time, the colored chart visually displays the defined period.




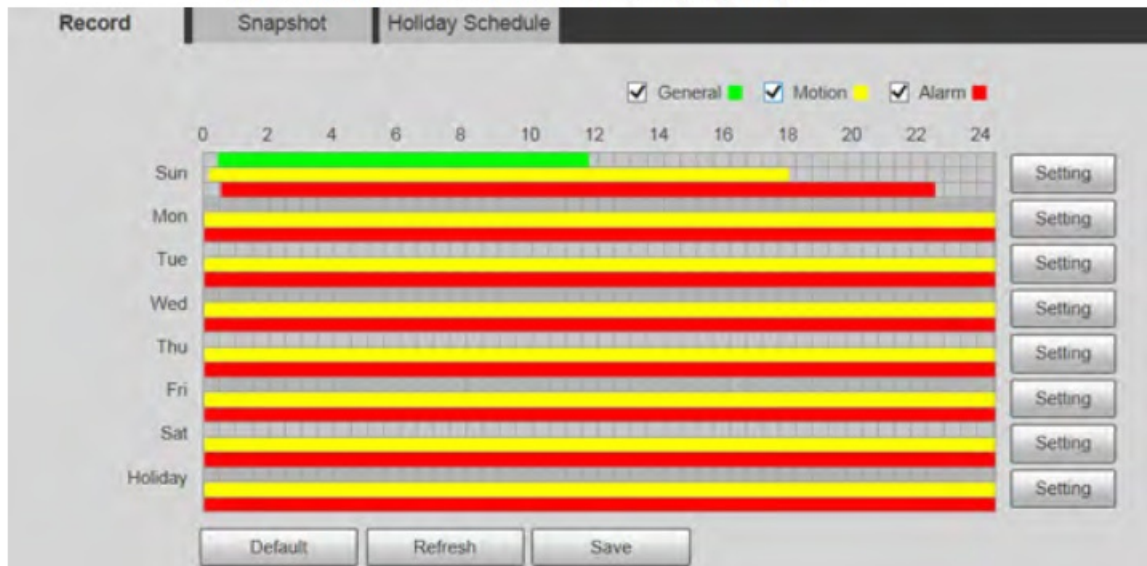
	● : Represents general recording.
	● : Represents motion detection recording.
	● : Represents alarm recording.

Figure 5-136 Recording schedule setting completed




Step 4 On the Record page, click Save, and the Save Succeeded! prompt will be displayed, which means the recording schedule has been set.

5.6.1.2 Snapshot

Step 1 Select Setting > Storage > Schedule > Snapshot.

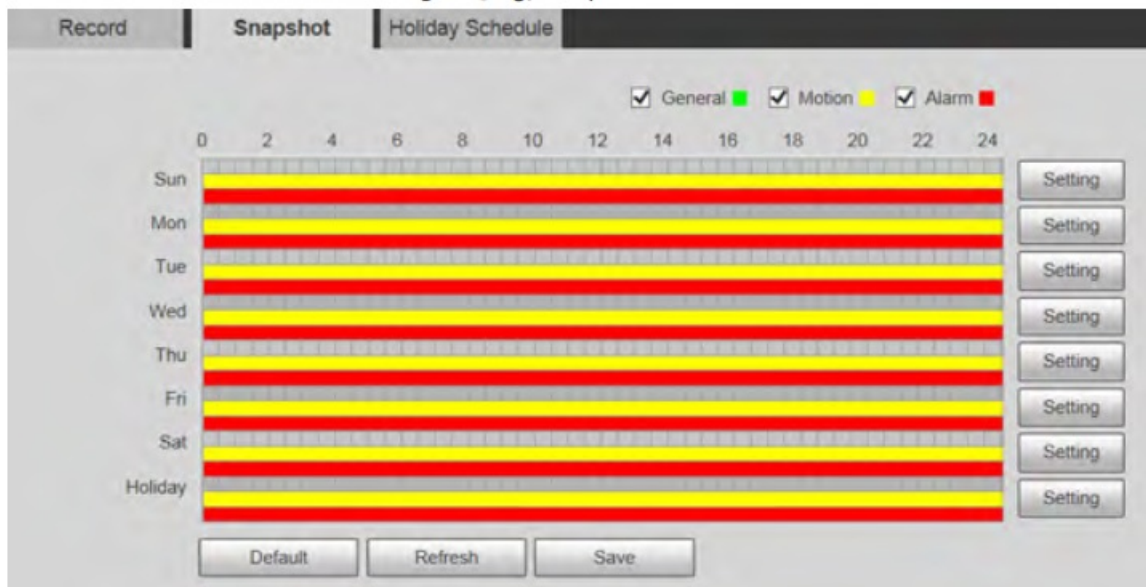Figure 5-137 Snapshot



Step 2 Set snapshot schedule.

For details, refer to Step2 and Step3 in “5.6.1.1 Record”.

Step 3 Click Save, and the Save Succeeded! prompt will be displayed, which means the snapshot schedule has been set.

5.6.1.3 Holiday Schedule

You can set specific dates as holidays.

Step 1 Select Setting > Storage > Schedule > Holiday Schedule.

Figure 5-138 Holiday schedule

Record Snapshot **Holiday Schedule**

☐ Record ☐ Snapshot

Calendar Dec ▼

Sun	Mon	Tue	Wen	Thu	Fri	Sat
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

Refresh Save

Step 2 Select a date.

The selected date will be a holiday and displayed in yellow.

Step 3 Select Record or Snapshot, and then click Save.

The Save Succeeded! prompt will be displayed.

Step 4 On the Record or Snapshot page, click Setting to the right of Holiday.

The setting method is the same as that of Monday to Sunday.

Step 5 Set the period of one day for the Holiday, and the recording or snapshot will be taken according to the holiday time period.

5.6.2 Snapshot by Location

The system can take snapshots when the Device rotates to certain presets.

You need to set presets in advance.

Step 1 Select Setting > Storage > Snapshot by Location.





Figure 5-139 Snapshot by location

Snapshot by Location

Preset	Preset Title	Snapshot ▼
1	Preset1	<input type="checkbox"/>
2	Preset2	<input type="checkbox"/>

Refresh Save

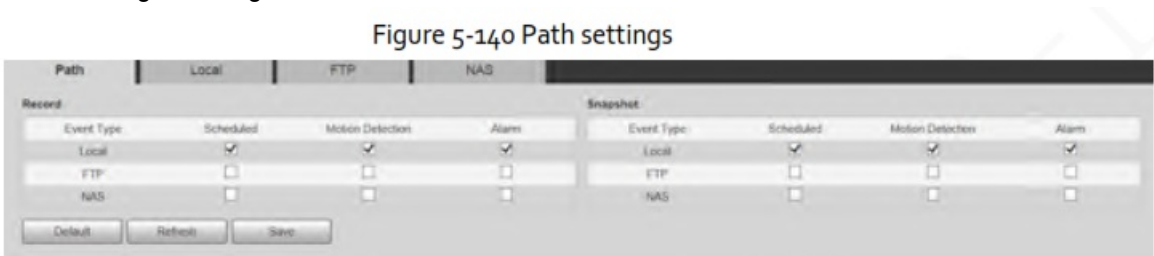
Step 2 Select presets.

- Enable snapshot by location.
 - ◇ Click  to enable the function for the corresponding preset.
 - ◇ Click , and then select All Enabled to enable the function for all presets.
 - Disable snapshot by location.
 - ◇ Click  to disable the function for the corresponding preset.
 - ◇ Click , and then select All Disabled to disable the function for all presets.
- Step 3 Click Save.

Destination

5.6.3.1 Path

Configure the storage path of recordings and snapshots of the Device, and select local SD card, FTP and NAS for storage. Store recordings and snapshots according to the event type, respectively corresponding to General, Motion and Alarm in the schedule, and then select the corresponding type of recordings or snapshots for storage. Step 1 Select Setting > Storage > Destination > Path.



Step 2 Select the corresponding event type and storage method.

Table 5-46 Description of path parameter

Parameter	Description
Event Type	Select Scheduled , Motion Detection or Alarm .
Local	Save recordings or snapshots to the SD card.
FTP	Save recordings or snapshots to the FTP server.
NAS	Save recordings or snapshots to the NAS server.

Step 3 Click Save.

5.6.3.2 FTP

FTP function can be enabled only when it is selected as a destination path. When the network is disconnected or does not work, you can save recordings and snapshots to the SD card by using Emergency (Local) function. Step 1 Select Setting > Storage > Destination > FTP.

Figure 5-141 FTP settings

Step 2 Select the Enable checkbox to enable FTP function.

- There might be risks if the FTP function is enabled. Think twice before enabling the function.
- SFTP is recommended to ensure network security.

Step 3 Configure FTP parameters.

Table 5-47 FTP parameter description

Parameter	Description
Server Address	The IP address of the FTP server.
Port	The port number of the FTP server.
Username	The username to log in to the FTP server.
Password	The password to log in to the FTP server.
Remote Directory	The destination path on the FTP server.
Emergency (Local)	If you enable the function, in case of FTP storage exception, the recordings and snapshots will be stored on the local SD card.

Step 4 Click test to verify the username and password, and test whether FTP is connected to the Device.

Step 5 Click Save.

5.6.3.3 Local

SD card information is displayed in the local storage list. You can set it as read only or read & write.


You can also hot swap or refresh it.

Dual SD cards are supported by some devices. For such devices, the SD card first inserted is called Local Disk 1, and the SD card inserted later is called Local Disk 2.

- If no recordings in both cards, the recording will be saved to Local Disk 1, and then saved to Local Disk 2 when Disk 1 is full.
- If there are recordings in both cards, the recording will be saved to the card with the latest recordings, and then saved to the other card when this card is full.

Step 1 Select Setting > Storage > Destination > Local.

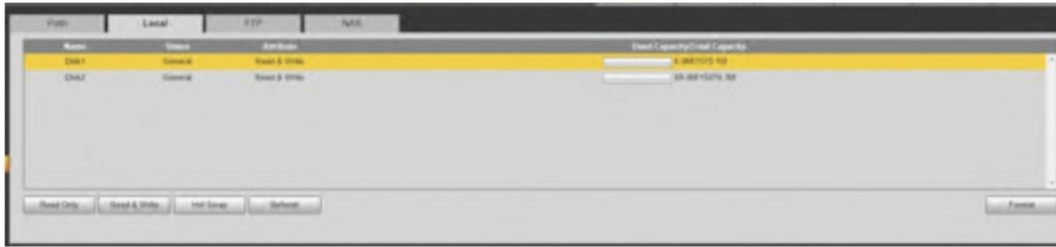Figure 5-142 Local storage



Step 2 Select the SD card to be set, and then perform the following operations as needed.

- Click Read Only to set the SD card to be read only.
- Click Read & Write to set the SD card to be read and write.
- Click Hot Swap to remove or insert the SD card when the Camera is running.
- Click Format to format the SD card.


After formatting the SD card, all data on it will be cleared. Be cautious.

5.6.3.4 NAS

This function can be enabled only when NAS is selected as a destination path. Select NAS to store files on the NAS server.

Step 1 Select Setting > Storage > Destination > NAS.

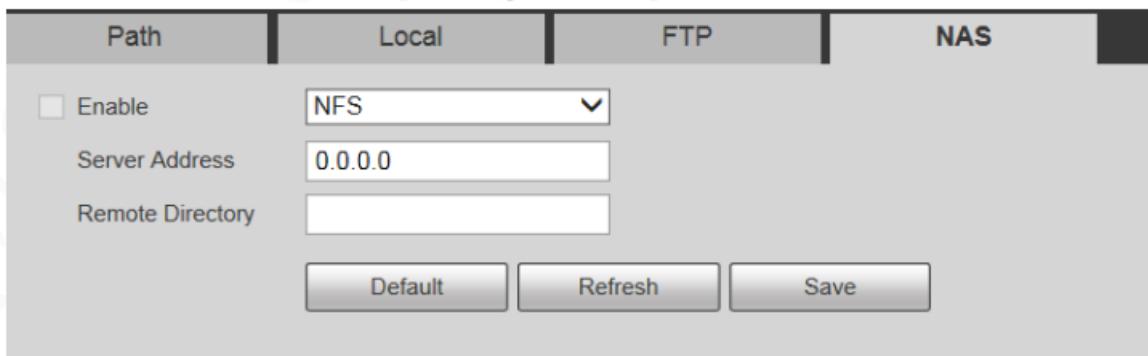Figure 5-143 NAS settings



Step 2 Configure NAS setting parameters.

Table 5-48 NAS parameter description

Parameter	Description
Enable	Select the checkbox to enable NAS function. Select NFS or SMB function. There might be risks if NFS or SMB is enabled. Think twice before enabling the function.
Server Address	The IP address of the NAS server.
Remote Directory	The destination path on the NAS server.

Step 3 Click Save.

5.6.4 Record Control

Step 1 Select Setting > Storage > Record Control.

Figure 5-144 Record control

Figure 5-144 Record control

Record Control

Pack Duration: 30 Min. (1~120)

Pre-event Record: 5 s (0~5)

Disk Full: Overwrite ▼

Record Mode: ☒ Auto ☐ Manual ☐ Off

Record Stream: Main Stream ▼

Default Refresh Save

Step 2 Configure record control parameters.

Table 5-49 Record control parameter description

Parameter	Description
Pack Duration	Set the pack duration of each recording file. It is 30 minutes by default.
Pre-event Record	<p>Set the pre-recording time. For example, if you enter 5, when an alarm is triggered, the system reads the recording of the first 5 seconds in memory, and then records it into a file.</p> <p>If alarm recording or motion detection recording occurs, if there is no recording before, the video data within N seconds before the recording is started will also be recorded into the video file.</p>

Parameter	Description
Disk Full	<p>You can select Stop or Overwrite.</p> <ul style="list-style-type: none"> ● Stop: The system stops recording when the disk is full. ● Overwrite: The system overwrites the oldest files and keeps recording when the disk is full. <p>The data will be overwritten if the disk is full. Back up the file in time as needed.</p>
Record Mode	<p>You can select Auto, Manual or Off. Select Manual mode to start recording immediately, and select Auto mode to record within the schedule.</p>
Record Stream	<p>Select Main Stream or Sub Stream.</p>

5.7 System Management

5.7.1 Device Settings

5.7.1.1 General

Step 1 Select Setting > System > General > General.

Figure 5-145 General settings

Step 2 Configure general setting parameters.

Table 5-50 Description of general setting parameter

Parameter	Description
Name	Set the device name. Different devices have different names.
Language	Select the language to be displayed.
Video Standard	Select video standard from PAL and NTSC .

5.7.1.2 Date & Time

Step 1 Select Setting > System > General > Date&Time.

Figure 5-146 Date & time

Figure 5-146 Date & time

General

Date&Time

Date Format

YYYY-MM-DD

Time Format

24-Hour

Time Zone

(UTC+06:00) Astana

Current Time

2020-02-27

09 : 15 : 10

Sync PC

☐ DST

DST Type

☒ Date

☐ Week

Start Time

Jan

1

00 : 00 : 00

End Time

Jan

2

00 : 00 : 00

☐ NTP

Server

clock.isc.org

Port

123

Interval

10

Min. (0~30)

Default

Refresh

Save

Step 2 Configure date &time parameters.

Table 5-51 Description of date & time parameter

Parameter	Description
Date Format	Select the date format. Three formats are available: YYYY-MM-DD , MM-DD-YYY Y and DD-MM-YYYY .
Time Format	Select the time format. Two formats are available: 24-Hour and 12- Hour .
Time Zone	Set the local time zone.
Current Time	The current time of the Device.
DST	Set the Start Time and End Time of DST in the Date format or Week format.
NTP	Select the NTP checkbox to enable the network time sync function.
Server	Set the address of the time server. Set the network timing function of NTP server, and the Device time will be synchronized with the server time.
Port	Set the port number of the time server.
Interval	Set the synchronization interval of the Device and the time server.


5.7.1.3 Screen Off Settings

The function is available on select models.

You can set the screen-off time of the device display.

Step 1 Select Setting > System > General > Screen Off Settings.

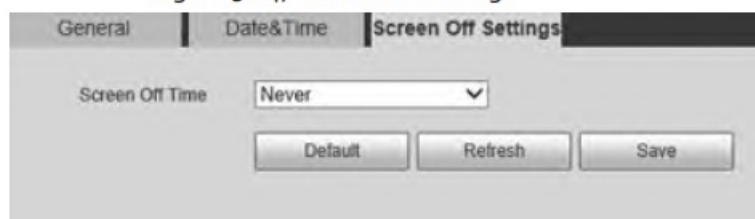Figure 5-147 Screen off settings



Step 2 Set screen-off time.

- Never: The screen is never turned off.
- Custom: Customize the screen-off time.

Step 3 Click Save.

Account Settings

5.7.2.1 Account


User management is only available for admin users.

- For Username and Group Name, the maximum length is 15 characters. Username can only consist of numbers, letters, underlines, dots and @; group name can only consist of numbers, letters and underlines.
- The password should consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special characters (excluding ' " ; : &). The confirming password shall be the same as the new password. Set a high security password according to the prompt of password strength.
- The number of users and groups is 19 and 8 respectively by default.
- User management adopts a two-level method of group and user. Neither group names nor user names can be duplicated, and a user can only belong to one group.
- Users currently logged in cannot modify their own permissions.
- The user is admin by default. The admin account is defined as high privileged user.

5.7.2.1.1 Username

Select Setting > System > Account > Account > Username to enable anonymous login, add users, delete users, modify user passwords or perform other operations.

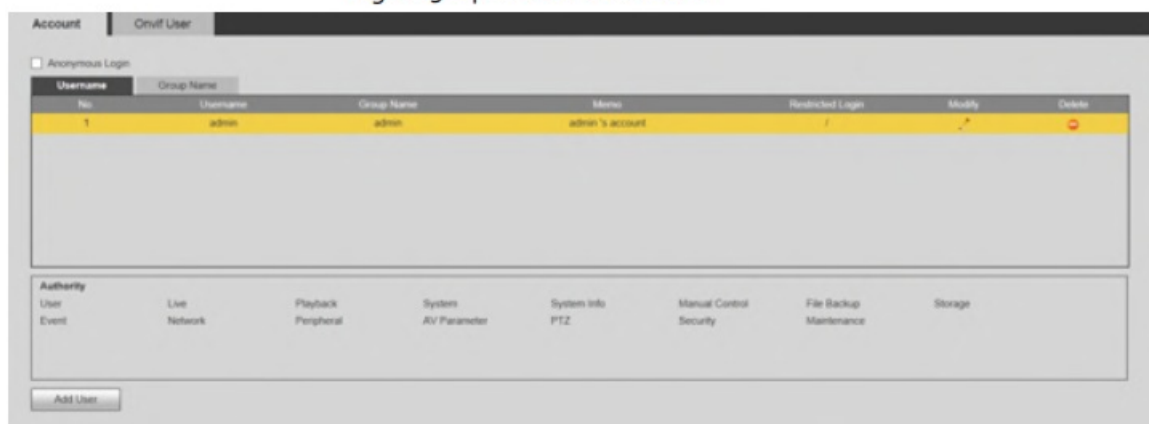Figure 5-148 Account interface



No permission is available for version information and other buttons except Relay-out, Mark, and Wiper Control on the Live interface for the time being.

Anonymous Login

Select the Anonymous Login checkbox, and you can log in to the Device anonymously without username and password after entering IP. Anonymous users only have preview permission in the permission list. In the anonymous login, click Logout to log in to the Device by using other usernames.

After Anonymous Login is enabled, the user can view audio and video data without authentication.

Think twice before enabling the function.

Adding Users

Add users in the group and set permissions.

As the default user with the highest authority, admin cannot be deleted.

Step 1 Click Add User.

Figure 5-149 Add users

Add User

Username **Must**

Password

The minimum pass phrase length is 8 characters

Confirm Password

Group Name ▼

Memo

Operation Permission **Restricted Login**

☒ All

- ☒ User
- ☒ Live
- ☒ Playback
- ☒ System
- ☒ System Info
- ☒ Manual Control
- ☒ File Backup
- ☒ Storage
- ☒ Event
- ☒ Network
- ☒ Peripheral
- ☒ AV Parameter
- ☒ PTZ
- ☒ Security
- ☒ Maintenance

Step 2 Enter Username and Password, confirm password, select Group Name, and then add Memo.

Step 3 Set Operation Permission and Restricted Login.

- Operation Permission: Click Operation Permission, and then select the operation permission of the user as needed.
- Restricted Login: Click Restricted Login, and the interface shown in Figure 5-150 is displayed. You can control login to the Device by setting the IP Address, Validity Period and Time Range.
- Once the group is selected as needed, the user permission can only be a subset of the group, and cannot exceed its permission attributes.
- It is recommended to give less permissions to general users than advanced users.

Figure 5-150 Restricted login

The 'Add User' dialog box has a 'Restricted Login' tab selected. It contains the following fields and options:

- Username:** A text input field with a red 'Must' label next to it.
- Password:** A text input field with a red note below it: 'The minimum pass phrase length is 8 characters'.
- Strength Indicators:** Three buttons labeled 'Weak', 'Medium', and 'Strong'.
- Confirm Password:** A text input field.
- Group Name:** A dropdown menu currently showing 'admin'.
- Memo:** A text input field.
- Operation Permission:** A tabbed interface with 'Restricted Login' selected.
- IP Address:** An unchecked checkbox. Below it are dropdowns for 'IPv4' and 'IP Address', followed by a field showing '1 . 0 . 0 . 1'.
- Validity Period:** An unchecked checkbox. Below it are fields for 'Begin Time' (2019-12-04, 08 : 00 : 00) and 'End Time' (2019-12-05, 08 : 00 : 00).
- Time Range:** An unchecked checkbox. Below it is a 24-hour grid (0 to 24) and a 7-day grid (Sun to Sat). Each day's grid is filled with green bars, indicating 24/7 access. To the right of each day's grid is a 'Setting' button.
- Buttons:** 'Save' and 'Cancel' buttons at the bottom.

Modifying Users

Step 1 Click corresponding to the user you want to modify.

Figure 5-151 Modify users

The 'Modify User' dialog box contains the following fields and options:

- Username:** A dropdown menu currently showing 'admin'.
- Modify Password:** An unchecked checkbox.
- Group Name:** A dropdown menu currently showing 'admin'.
- Memo:** A text input field containing 'admin 's account'.
- Authority:** A checked checkbox labeled 'All'. Below it is a list box with four items, all of which are checked: 'User', 'Live', 'Playback', and 'System'.
- Buttons:** 'Save' and 'Cancel' buttons at the bottom.

Step 2 Modify user information.

Step 3 Click Save.

Modifying Password

Step 1 Select the Modify Password checkbox.

Step 2 Enter old password and new password, and then confirm password.

Step 3 Click Save.

Deleting Users

Click corresponding to the user to be deleted, and the user can be deleted.

Users/user groups cannot be recovered after deletion. Think twice before performing the operation.

5.7.2.1.2 Group Name

Select Setting > System > Account > Account > Group Name to add groups, delete groups, modify group passwords or perform other operations.

Figure 5-152 User group settings



Configuring User Group

The default authorities of Admin group include live, playback, storage, file backup, user, system, system info, manual control, maintenance, peripheral, PTZ, security, network, event and AV parameters; the default authorities of User group include live and playback. Table 5-52 Description of user group parameters

Group Authority	Admin	User	Functions
User	YES	NA	Add, delete and check user/user group.
Live	YES	YES	Real-time stream view.
Playback	YES	YES	Playback view.

System	YES	NA	System time setting and more.
System Info	YES	NA	Version information, system logs and more.
Manual Control	YES	NA	PTZ settings.
File Backup	YES	NA	File backup.
Storage	YES	NA	Storage point configuration, snapshot recording time configuration, SFTP configuration and more.
Event	YES	NA	Video detection settings, audio detection settings, alarm settings and more.
Network	YES	NA	IP settings, SMTP settings, SNMP settings, AP Hot spot settings and more.

Peripheral	YES	NA	External light, wiper and serial port settings.
AV Parameter	YES	NA	Camera property settings, audio and video settings and more.
PTZ	YES	NA	Preset settings, tour settings and more.
Security	YES	NA	HTTPS settings, RTSP over TLS settings and more.
Maintenance	YES	NA	Automatic maintenance settings and more.

- Any user in the Admin group has User authority to modify group authority. The User group does not have this authority.
- The functions of the device correspond to the authority control respectively. Only user with specified authority can use corresponding function; the Admin group has all the authorities.

Adding Groups

For specific operations, refer to “5.7.2.1.1 Username”. Modifying Groups

For specific operations, refer to “5.7.2.1.1 Username”. Deleting Groups

For specific operations, refer to “5.7.2.1.1 Username”.


5.7.2.2 ONVIF User

On the web page, you can add ONVIF users, or modify existing users.

Procedure

Step 1 Select Setting > System > Account > Onvif User.

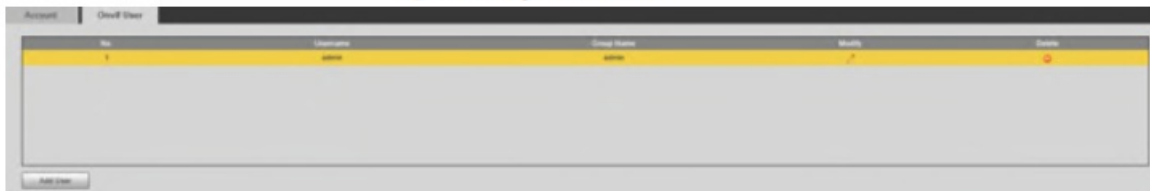Figure 5-153 Onvif user



Step 2 Click **Add User**.

Figure 5-154 Add users



A screenshot of the 'Add User' dialog box. It contains the following fields and controls:

- Username**: A text input field with a red 'Must' label to its right.
- Password**: A text input field.
- Confirm Password**: A text input field.
- Group Name**: A dropdown menu with 'admin' selected.
- Strength Indicators**: Three buttons labeled 'Weak', 'Medium', and 'Strong' are positioned between the Password and Confirm Password fields.
- Validation Message**: A red text message below the password fields states 'The minimum pass phrase length is 8 characters'.
- Buttons**: 'Save' and 'Cancel' buttons are at the bottom.

Step 3 Set the username and password, confirm password, and then select the group name.

Step 4 Click Save.

Related Operations

- Click  to modify user information.
- Click  to delete users.

Safety

5.7.3.1 RTSP Authentication

Set the authentication method for media stream.

Step 1 Select Setting > System > Safety > RTSP Authentication.

Figure 5-155 RTSP authentication

A screenshot of the 'RTSP Authentication' configuration page. It has a tabbed interface with 'RTSP Authentication', 'System Service', 'HTTPS', and 'Firewall' tabs. The 'RTSP Authentication' tab is active, showing an 'Authorize Mode' dropdown menu set to 'Digest'. Below the dropdown are three buttons: 'Default', 'Refresh', and 'Save'.

Step 2 Select the Authorize Mode.

You can select from Digest, Basic and None. It is Digest by default.

- Click Default, and Digest is selected automatically.
Select None, and “Non-authentication mode may have risk. Are you sure to enable it” prompt will be displayed.

Think twice before selecting the mode.

- Select Basic mode, and “Basic authentication mode may have risk. Are you sure to enable it?” prompt will be displayed. Think twice before selecting the mode.

System Service

You can configure system service to ensure system security. Step 1 Select Setting > System > Safety > System Service.

Figure 5-156 System service

The screenshot shows the 'System Service' configuration page. At the top, there are four tabs: 'RTSP Authentication', 'System Service' (which is selected and highlighted), 'HTTPS', and 'Firewall'. Below the tabs, the page contains several configuration items, each with a label, a checkbox, and an 'Enable' button. The items are: 'SSH' (checkbox unchecked), 'Multicast/Broadcast...' (checkbox checked), 'Password Reset' (checkbox checked) with an 'Email Address' text input field next to it, 'CGI Service' (checkbox checked), 'Onvif Service' (checkbox checked), 'Genetec Service' (checkbox checked), 'Audio and Video Tr...' (checkbox unchecked), and 'Mobile Push' (checkbox checked). A red warning message is displayed next to the 'Audio and Video Tr...' item: '*Please make sure matched device or software supports video decryption function.' At the bottom of the configuration area, there is a 'Private Protocol Aut...' label followed by a dropdown menu showing 'Security Mode (Recomi'. At the very bottom of the page, there are three buttons: 'Default', 'Refresh', and 'Save'.

Service	Enabled	Additional Info
SSH	<input type="checkbox"/>	Enable
Multicast/Broadcast...	<input checked="" type="checkbox"/>	Enable
Password Reset	<input checked="" type="checkbox"/>	Enable, Email Address: [input field]
CGI Service	<input checked="" type="checkbox"/>	Enable
Onvif Service	<input checked="" type="checkbox"/>	Enable
Genetec Service	<input checked="" type="checkbox"/>	Enable
Audio and Video Tr...	<input type="checkbox"/>	Enable, *Please make sure matched device or software supports video decryption function.
Mobile Push	<input checked="" type="checkbox"/>	Enable

Private Protocol Aut... Security Mode (Recomi ▼

Default Refresh Save

Step 2 Configure system service parameters.

Table 5-53 Description of system service parameter

Function	Description
SSH	You can enable SSH authentication to perform safety management. The function is disabled by default. It is recommended to disable SSH. If this function is enabled, there might be security risks.
Multicast/Broadcast Search	Enable this function, and when multiple users are viewing the monitoring screen simultaneously through network, they can find the Device through multicast/broadcast protocol. It is recommended to disable the multicast/broadcast search function. If this function is enabled, there might be security risks.
Password Reset	You can enable Password Reset to perform security management. The function is enabled by default.If the function is disabled, you can only reset the password after restoring the Device to factory defaults through pressing the Reset button on the device.
CGI Service	<p>You can access the Device through this protocol. The function is enabled by default.</p> <p>It is recommended to disable the function. If this function is enabled, there might be security risks.</p>

Function	Description
Onvif Service	You can access the Device through this protocol. The function is enabled by default. It is recommended to disable the function. If this function is enabled, there might be security risks.
Audio and Video Transmission Encryption	<p>Enable this function to encrypt the stream transmitted through the private protocol.</p> <ul style="list-style-type: none"> ● Make sure that the matched devices or software support video decryption function. ● It is recommended to enable the function. If the function is disabled, there might be risk of data leakage.
Mobile Push	Push the alarm snapshot triggered by the Device to the mobile phone. The function is enabled by default. It is recommended to disable the function. If this function is enabled, there might be security risks.
Private Protocol Authentication Mode	You can select Security Mode and Compatible Mode . Security mode is recommended. If you select compatibility mode, there might be security risks.

5.7.3.3 HTTPS

It is recommended to enable HTTPS service. If the service is disabled, there might be risk of data leakage. Create certificate or upload signed certificate, and then you can log in through HTTPS with your PC. HTTPS can ensure data security, and protect user information and device security with reliable and stable technology.

Step 1 Create certificate or upload the signed certificate.

- If you select Create Certificate, refer to the following steps.

1) Select Setting > System > Safety > HTTPS.

Figure 5-157 HTTPS (1)

2) Click **Create**.

Figure 5-158 HTTPS (2)

3) Enter the required information, and then click **Create**.

The entered IP or domain name must be the same as the IP or domain name of the Device.


4) Click **Install** to install the certificate on the Device.

Figure 5-159 Certificate installation

5) Click **Download** to download root certificate.

Figure 5-160 Download root certificate

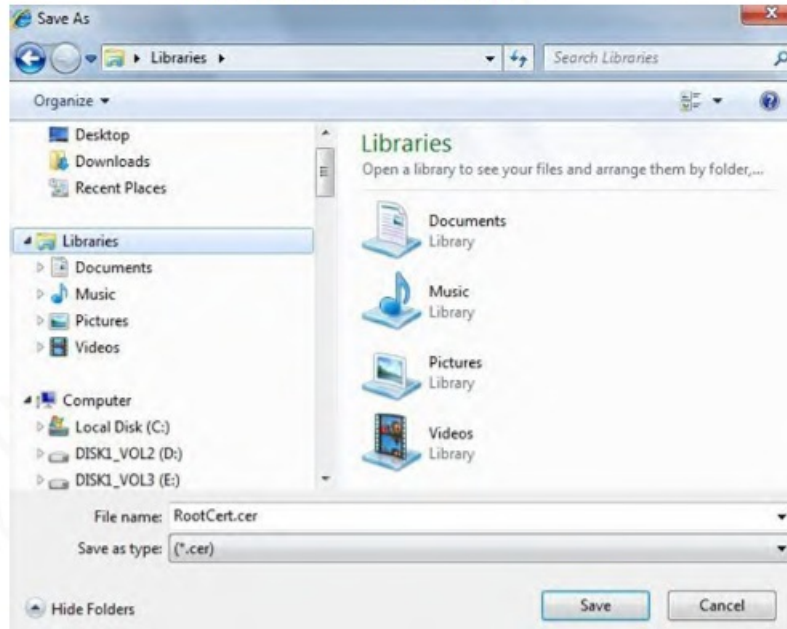
Figure 5-160 Download root certificate



6) Select storage path, and then click Save.

7) Double-click the RootCert.cer icon.

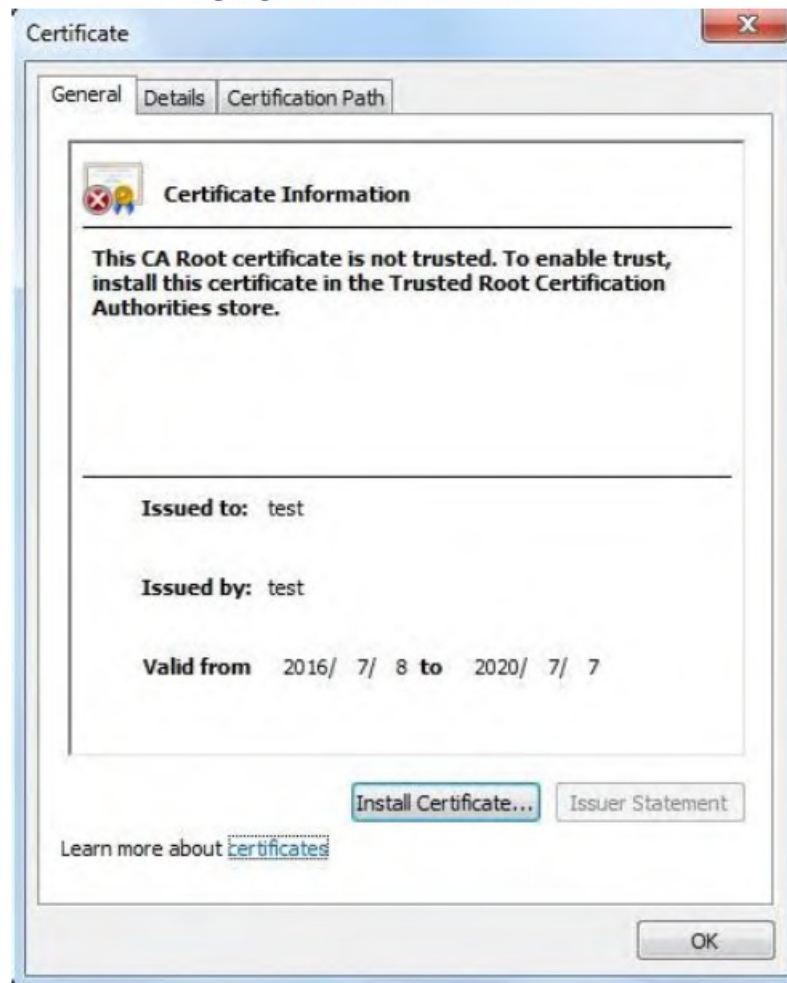Figure 5-161 Certificate information




8) Click Install Certificate.

Figure 5-162 Certificate import wizard




9) Click Next, and then select Trusted Root Certification Authorities.

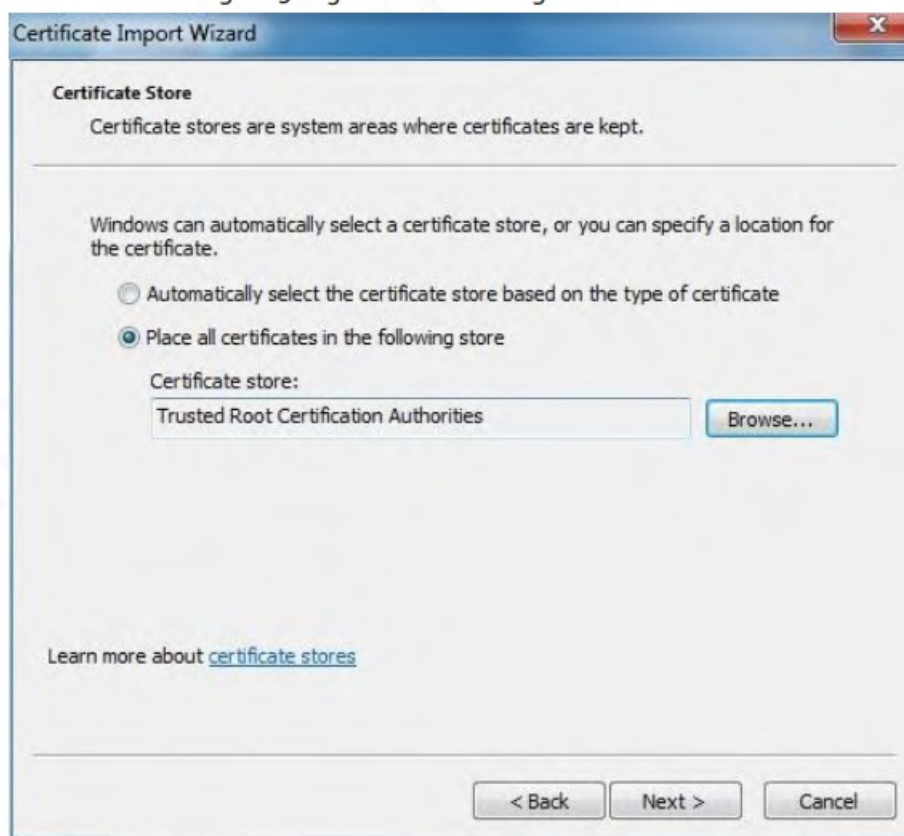Figure 5-163 Certificate storage area



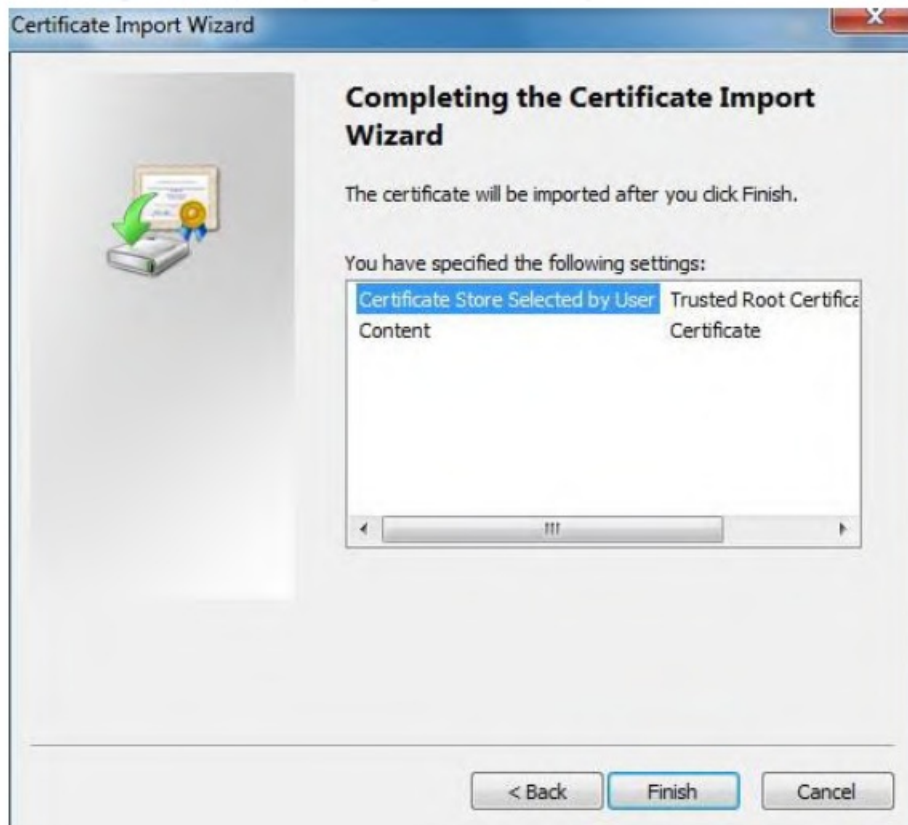10) Click Next.



11) Click Finish.

Figure 5-165 Security warning



12) Click Yes, and then click OK to complete the certificate installation.


Figure 5-166 Import success



- If you select Install Signed Certificate, refer to the following steps.

1) Select Setting > System > Safety > HTTPS.

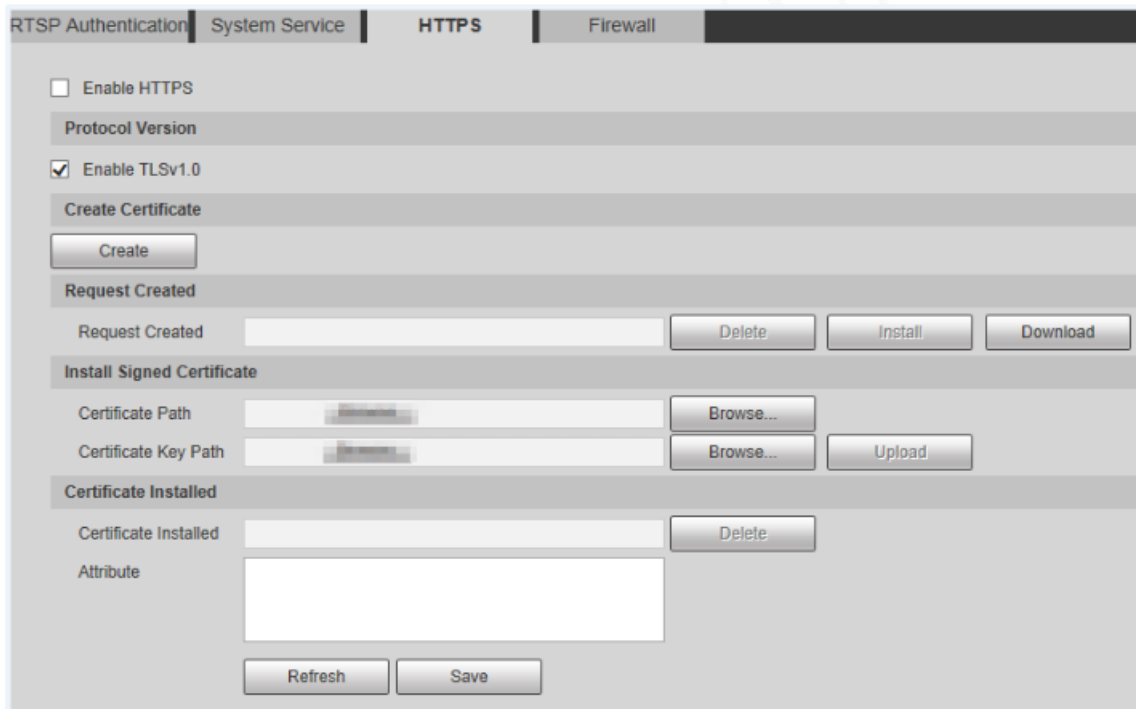Figure 5-167 Install signed certificate



2) Click Browse to upload the signed certificate and certificate key, and then click Upload.


3) Install the root certificate. For details, see 5) to 12) in Step1.

Step 2 Select Enable HTTPS, and then click Save.

The configuration takes effect after reboot.

Figure 5-168 Reboot

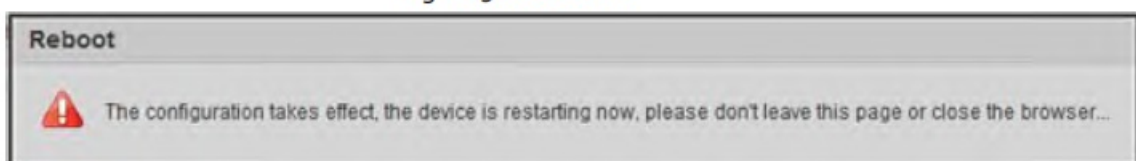Figure 5-168 Reboot




Enter <https://xx.xx.xx.xx> in the browser to open the login interface. If no certificate is installed, a certificate error prompt will be displayed.

- If HTTPS is enabled, you cannot access the Device through HTTP. The system will switch to HTTPS if you access the Device through HTTP.
- The deletion of created and installed certificates cannot be restored. Think twice before deleting them.

5.7.3.4 Firewall

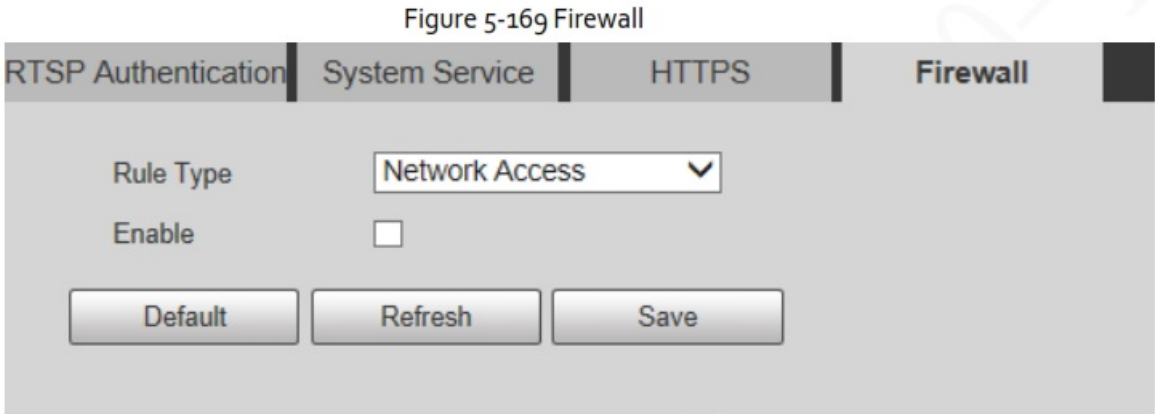Set a firewall for the Device to prevent network attacks after the Device is connected to the network.
Step 1 Select Setting > System > Safety > Firewall.



Step 2 Select the type of network attack that the firewall resists. You can select Network Access, PING Prohibited, or Prevent Semijoin.

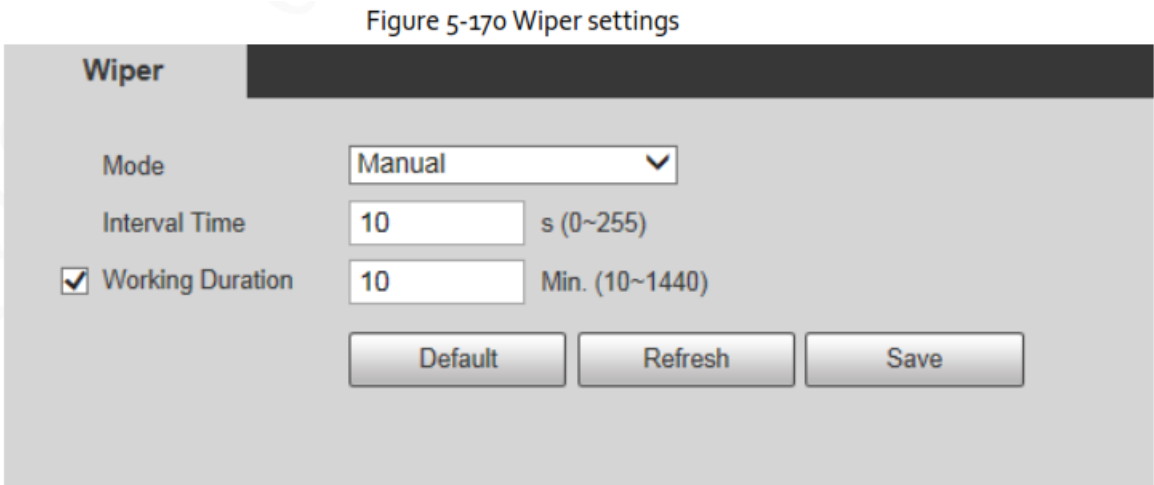
Step 3 Select Enable to enable Firewall function.

Step 4 Click Save.

5.7.4 Peripheral

The peripheral functions might vary with different models.

Step 1 Select Setting > System > Peripheral > Wiper.



Step 2 Configure wiper parameters.

Table 5-54 Description of wiper setting parameter

Parameter	Description
Mode	Set the wiper mode. It is Manual by default. In Manual mode, you need to manually start the wiper.
Interval Time	The time between wiper starting to wiper ending.
Working Duration	Set the maximum duration of the wiper operating once in Manual mode. The value ranges from 10 minutes to 1440 minutes.


Default



All information except IP address and user management will be restored to defaults. Think twice before performing the operation.

Select Setting > System > Default, and click Default to restore the Device.

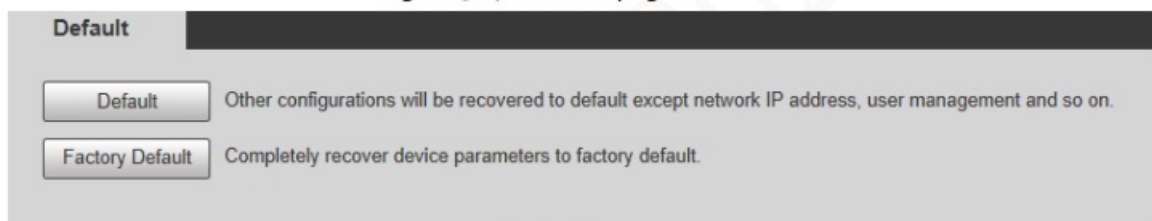Figure 5-171 Default page



Select the recovery mode.


- Default: All information except IP address and user management will be restored to defaults.
- Factory Default: The function is equivalent to the Reset button of the Device. All configuration information of the Device can be restored to the factory defaults, and the IP address can also be restored to the original IP address. After clicking Factory Default, you need to enter the password of admin user on the page displayed. The Device can be restored to factory defaults only after the system confirms that the password is correct.
- Only admin user can use this function.
- When the Device is restored to factory defaults, all information except the data in the external storage media will be erased. Delete data in external storage media by formatting and other methods.

Import/Export

When multiple devices share the same configuration methods, they can be quickly configured by importing and exporting configuration files.

Step 1 On the web page of one device, select Setting > System > Import/Export.

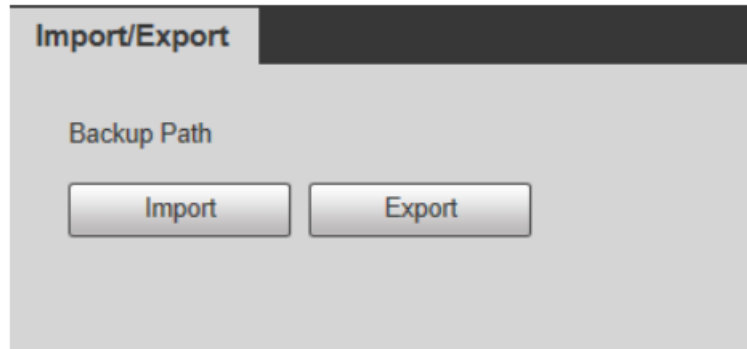Figure 5-172 Import/Export



Step 2 Click Export to export the configuration file (.backup file) to the local storage path.

Step 3 Click Import on the Import/Export page of the Device to be configured to import the configuration file, and the Device will complete the configurations.

System Maintenance


5.7.7.1 Auto Maintain

You can select Auto Reboot or Auto Delete Old Files.

- If you select Auto Reboot, the frequency and time need to be set.
- If you select Auto Delete Old Files, you need to set the time period for the files to be deleted.

Step 1 Select Setting > System > Auto Maintain.

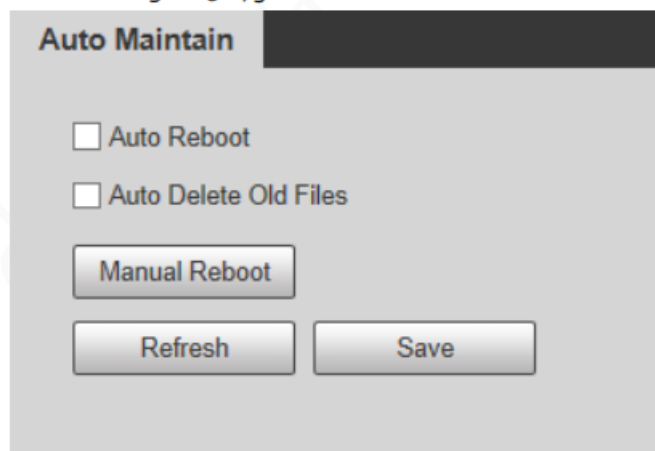Figure 5-173 Auto maintain



Step 2 Configure parameters of auto maintain.

Table 5-55 Description of auto maintain parameter

Parameter	Description
Auto Reboot	Select the checkbox to set the Device reboot time.
Auto Delete Old Files	Select the checkbox to customize the time period for the files to be deleted. The value ranges from 1 day to 31 days. When you enable the function, The deleted files cannot be recovered. Are you sure to enable this function now? prompt will be displayed. Think twice before enabling the function.

5.7.7.2 Emergency Maintenance

By enabling emergency maintenance, you can fix most issues caused by upgrade and configuration.

Step 1 Select Setting > System > Auto Maintain > Emergency Maintenance.

Figure 5-174 Auto maintain




Upgrade

Upgrade the system to improve device function and stability.

If wrong upgrade file has been used, restart the Device; otherwise some functions might not work properly. Select Setting > System > Upgrade.

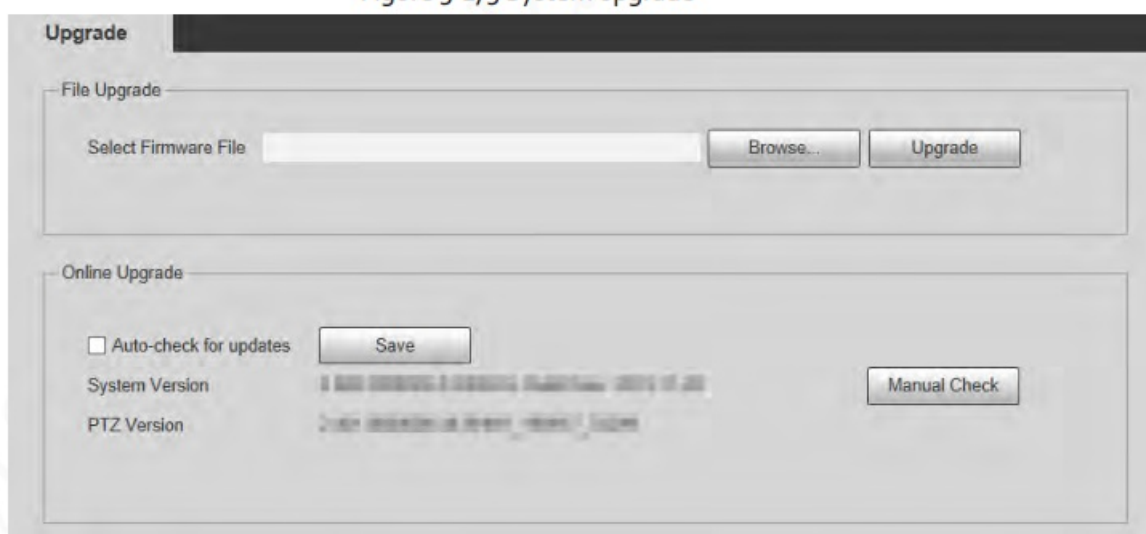Figure 5-175 System upgrade



- File Upgrade: Click Browse, select the upgrade file, and then click Upgrade to upgrade the firmware. The upgrade file is in the format of *.bin.
- Online Upgrade
 1. Select the Auto-check for updates checkbox.

This will enable the system to check for upgrade once a day automatically, and there will be system notice if any upgrade is available.

We need to collect the data such as IP address, device name, firmware version, and device serial number to perform auto-check. The collected information is only used to verify the legitimacy of the Device, and push the upgrade notification.
 2. Click Save.

Click Manual Check, and you can check for upgrade manually.

Information


You can view information such as version, online users, log, and life statistics.

5.8.1 Version

You can view information such as system hardware features, software version and release date.

Select Setting > Information > Version > Version to view the version information of current web interface.

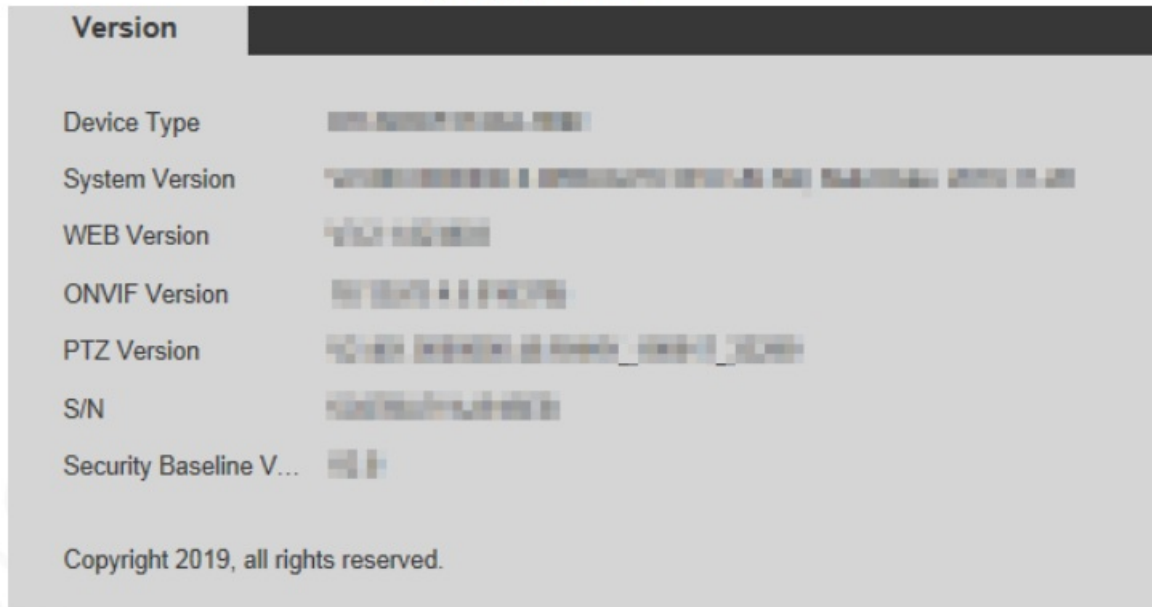Figure 5-176 Version



5.8.2 Log Information

5.8.2.1 Log

Select Setting > Information > Log > Log to view the operation information of the Device and system information.

Figure 5-177 Log

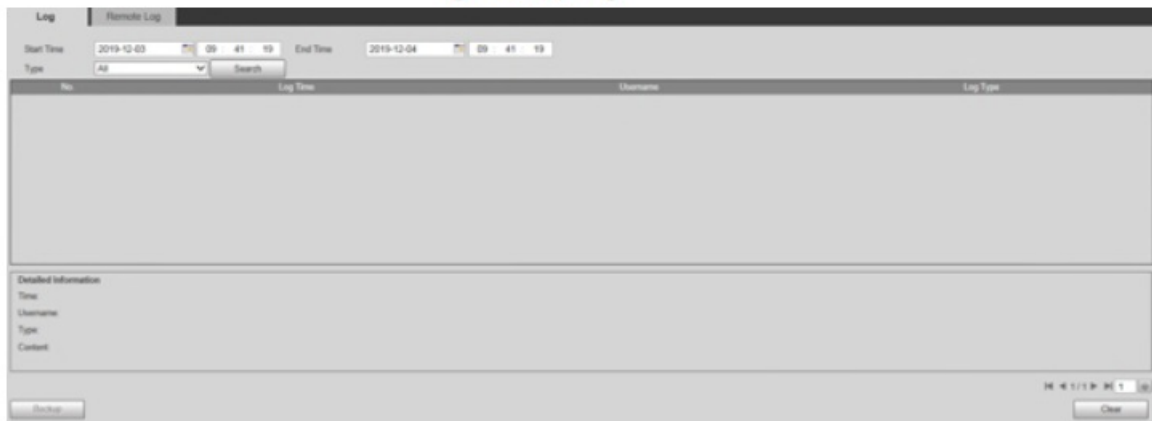


Table 5-56 Log parameter description

Parameter	Description
Start Time	The start time of the log to be searched (January 1, 2000 is the earliest time).
End Time	The end time of the log to be searched (December 31, 2037 is the latest time).
Type	The log type includes All, System, Setting, Data, Event, Record, Account, Clear Log, and Safety.
Search	Set the start time and end time of the log to be searched, select the log type, and then click Search . The searched log number and time period will be displayed.
Detailed Information	Click a log to display the details.
Clear	Clear all logs of the Device, and classified clearing is not supported.
Backup	Back up the searched system logs to the PC currently used by the user. The data will be overwritten if the disk is full. Back up the data in time as needed.

Here are the meanings of different log types.

- System: Includes program launch, force exit, exit, program reboot, device shutdown/restart, system reboot, and system upgrade.
- Setting: Includes saving configurations, and deleting configuration files.
- Data: Includes disk type configurations, data erasing, hot swap, FTP state, and recording mode.
- Event (records events such as video detection, smart plan, alarm, and abnormality): Includes starting events, and ending events.
- Record: Includes file access, file access error, and file search.
- Account (records modification of user management, login, and logout): Includes login, logout, adding user, deleting user, modifying user, adding group, deleting group, and modifying group.

- Safety: Includes security-related information.
- Clear Log: Clearing logs.

5.8.2.2 Remote Log

Upload the Device operations to the log server.

Step 1 Select Setting > Information > Log > Remote Log.

Figure 5-178 Remote log

Step 2 Select Enable to enable remote log function.

Step 3 Set the IP Address, Port and Device Number of the log server.

Click Default to restore the Device to the default settings.

5.8.3 Online User

Select Setting > Information > Online User to view online users.

Figure 5-179 Online users

No.	Username	User Login Name	IP Address	User Login Time
1	admin	admin	192.168.0.1	2021-02-23 11:53:22

5.8.4 Life Statistics

Select Setting > Information > Life Statistics to view the life statistics of the Device.

The function is available on select models.

Figure 5-180 Online users


Life Statistics	
Total Working Time	62 day(s) 1 hour(s) 0 minute(s)
Upgrade Times	20 time
Last Upgrade Date	2021-02-23 11:53:22

5.8.5 Battery Status

Select Setting > Information > Battery Status to view battery usage of the Device.

The function is available on select models.

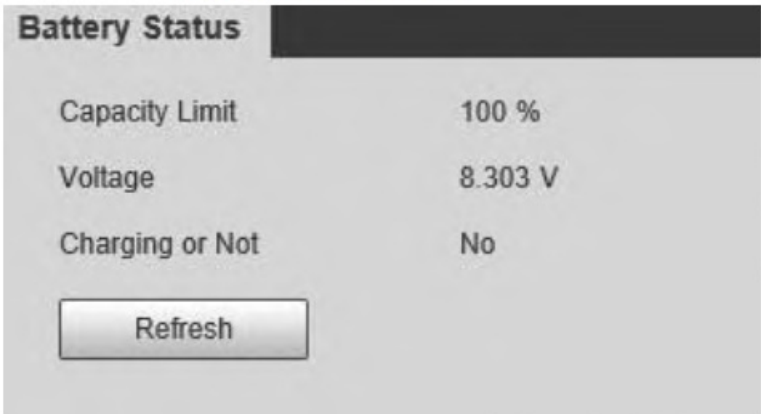
Figure 5-181 Online users



5.8.6 Legal Information

Select Setting > Information > Legal Info to view legal information of the Device. Click Open Source Software Notice to view the corresponding content.
The function is available on select models.

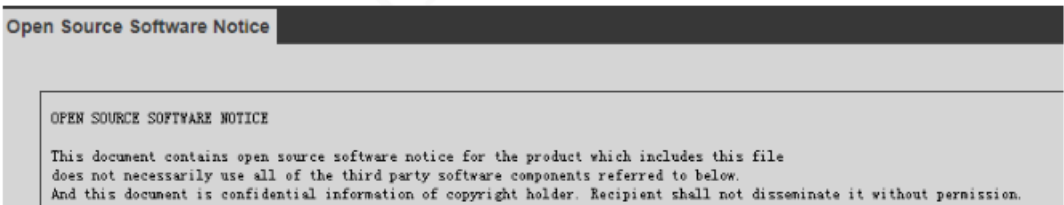Figure 5-182 Legal information



6 Alarm


You can select alarm types on the page. When the selected alarms are triggered, detailed alarm information will be displayed on the right side of the page. You can also select Prompt or Play Alarm Tone. When an alarm occurs, the alarm prompt or tone will be triggered.

Figure 6-1 Alarm setting page



Table 6-1 Description of alarm setting parameter

Category	Parameter	Description
Alarm Type	Motion Detection	Record alarm information in case of motion detection.
	Disk Full	Record alarm information in case of full disk.
	Disk Error	Record alarm information in case of disk error.
	Video Tamper	Record alarm information in case of video tampering.
	External Alarm	Record alarm information in case of an external alarm.
	Illegal Access	Record alarm information in case of illegal access.
	Audio Detection	Record alarm information in case of audio detection.
	IVS	Record alarm information in case of smart events.
	Scene Changing	Record alarm information in case of scene changing.
	Security Exception	Record alarm information in case of security exception.


Category	Parameter	Description
Operation	Prompt	<p>Select the Prompt checkbox. When you are not on the Alarm page, and the selected alarm event is triggered, the Relay-out button on the main menu will change to , and the alarm information will be automatically recorded. After you click the Alarm menu bar, the button disappears.</p> <p>If you are on the Alarm page, there will be no image prompt when the selected alarm event is triggered, but the corresponding alarm information will be recorded in the alarm list on the right.</p>
Alarm Tone	Play Alarm Tone	Select the checkbox, and then select the tone file path. When the selected alarm event is triggered, the selected tone file will be played to prompt you that an alarm event is triggered.
	Tone Path	Customize the storage path for alarm tones.

Logout

Click Logout to log out, and the login page is displayed. Enter the username and password to log in again.

Figure 7-1 Login page

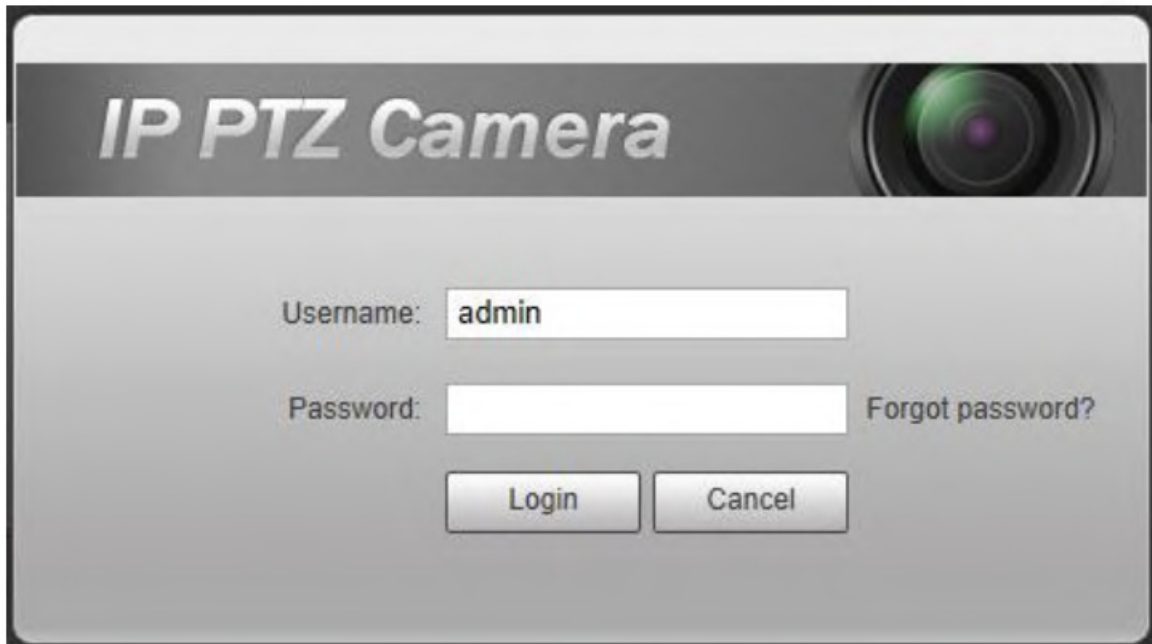Figure 7-1 Login page

The image shows a login interface for an IP PTZ Camera. At the top, the text "IP PTZ Camera" is displayed in a stylized font next to a camera lens icon. Below this, there are two input fields: "Username:" with the value "admin" and "Password:" which is empty. To the right of the password field is a link that says "Forgot password?". At the bottom, there are two buttons: "Login" and "Cancel".

IP PTZ Camera

Username:

Password: [Forgot password?](#)

Appendix 1 Cybersecurity Recommendations

Mandatory actions to be taken for basic equipment network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters.
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols.
- Do not contain the account name or the account name in reverse order.
- Do not use continuous characters, such as 123, abc, etc.
- Do not use overlapped characters, such as 111, aaa, etc.

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your equipment (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the equipment is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your equipment network security:

1. Physical Protection

We suggest that you perform physical protection to equipment, especially storage devices. For example, place the equipment in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable equipment (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. Change Default HTTP and Other Service Ports We suggest you to change default HTTP and other service ports into any set of numbers between

1024–65535, reducing the risk of outsiders being able to guess which ports you are using.

6. Enable HTTPS

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. MAC Address Binding

We recommend you to bind the IP and MAC address of the gateway to the equipment, thus reducing the risk of ARP spoofing.

8. Assign Accounts and Privileges Reasonably

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. Disable Unnecessary Services and Choose Secure Modes

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. Audio and Video Encrypted Transmission

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. Secure Auditing

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check equipment log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. Network Log


Due to the limited storage capacity of the equipment, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. Construct a Safe Network Environment

In order to better ensure the safety of equipment and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.

Documents / Resources

	Zhejiang Dahua Vision Technology DH-SD2AY Network PT Camera Web 3.0 [pdf] User Manual DH-SD2AY Network PT Camera Web 3.0, DH-SD2AY, Network PT Camera Web 3.0, PT Camera Web 3.0
---	---

References

-  [Free Dynamic DNS - Managed DNS - Managed Email - Domain Registration - No-IP](#)
-  [- PubYun](#)