



ZURN 350AST Double Check Valve Assembly Installation Guide

[Home](#) » [ZURN](#) » ZURN 350AST Double Check Valve Assembly Installation Guide 



Model 350AST
Double Check Valve Assembly

Contents

- [1 Application](#)
- [2 Materials](#)
- [3 Features](#)
- [4 Accessories](#)
- [5 Dimensions & Weights \(do not include pkg.\)](#)
- [6 Flow Characteristics](#)
- [7 Typical Installation](#)
- [8 Specifications](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

Application

Designed for installation on potable water lines to protect against both backsiphonage and backpressure of polluted water into the potable water supply. The Model 350AST shall provide protection where a potential health hazard does not exist. Ideal for use where Lead-Free* valves are required.

Standard Compliance (Horizontal and Vertical)

- ASSE® Listed 1015
 - AWWA Compliant C510 (with gates only), and C550
 - UL® Classified
 - C-UL® Classified
 - FM® Approved
 - CSA® Certified B64.5
 - cUPC® Listed
 - Approved by the Foundation for Cross Connection Control and Hydraulic Research at the University of Southern California
 - Meets the requirements of NSF/ANSI/CAN 61*
- *(0.25% MAX. WEIGHTED AVERAGE LEAD CONTENT)

Materials

Main valve body	304L Stainless steel
Access covers	304L Stainless steel
Internals	Stainless steel, 300 Series NORYL™
Fasteners and springs	Stainless Steel, 300 Series
Seal ring	EPDM (FDA approved)
O-ring	Buna Nitrile (FDA approved)

Features

Sizes: 2 1/2", 3", 4", 6", 8", 10"

Maximum working water pressure: 175 PSI

Maximum working water temperature: 140°F

Hydrostatic test pressure: 350 PSI

End connections:

(Grooved for steel pipe) AWWA C606

(Flanged) ANSI B16.42 Class 150

(SHOWN WITH OPTIONAL OSY GATE VALVES)



LEAD FREE



NSF/ANSI/CAN 61

Options (Suffixes can be combined)


... –	with flanged end NRS gate valves (standard)
... FSC –	with epoxy coated wye type strainer (flanged only)
... G –	with grooved end NRS gate valves
... GF –	with grooved inlet gate connection and flanged outlet gate connection
... FG –	with flanged inlet gate connection and grooved outlet gate connection
... OSY –	flanged end OS&Y gate valves
... OSYG –	with grooved end OS&Y gate valves
... PI –	with Post Indicator Gate Valves
... BG –	with grooved end butterfly valves with integral supervisory switches
... BF –	with flanged end butterfly valves with integral supervisory switches
... OSY –	flanged end OS&Y gate valves

*New Connected Products. Search ZCSM-PF on [Zurn.com](https://www.zurn.com) for details.

Accessories

- Connected Pressure Monitor (Model ZCSM-PF)*
- Connected Flow Meter Option (Model ZCSM-BTM must be ordered with Model ZCSM-PF)*
- Repair kit (rubber only)
- Thermal expansion tank (Model XT)
- OS & Y Gate valve tamper switch (OSY-40)


Dimensions & Weights (do not include pkg.)

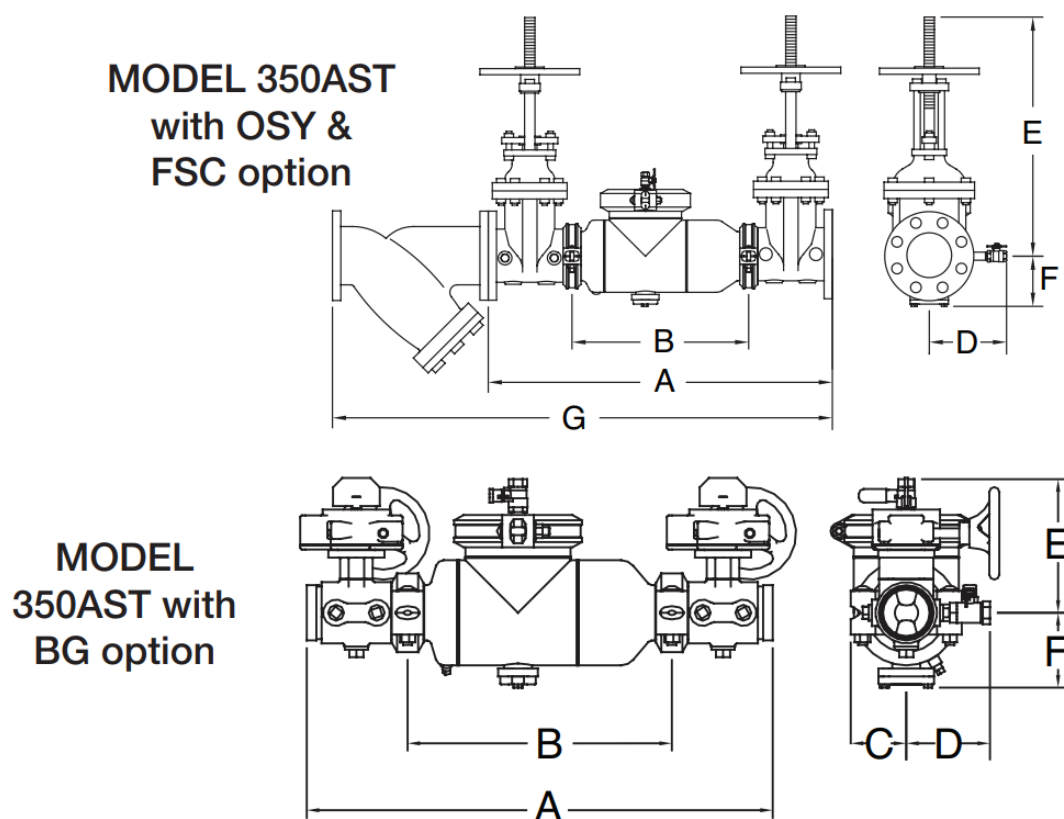

MODEL 350 AST SIZE		WEIGHT													
		WITHOUT GATES		WITH NRS GATES (G XF)		WITH OS& Y GATES (G GXF)		WITH NRS GATES (G XG)		WITH OS& Y GATES (G GXG)		WITH BUT TERFLY V ALVES (G XG)		WITH BUT TERFLY V ALVES (G XF)	
in.	mm	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg
2 1/ 2	65	33	15	94	43	112	51	86	39	104	47	79	36	89	40
3	80	34	15.4	112	51	130	60	102	46	120	54	83	38	96	44
4	100	35	15.8	168	76	204	93	142	64	184	83	87	39	109	50
6	150	63	29	280	127	338	153	250	114	308	140	150	68	180	82
8	200	177	80	565	256	647	293	525	238	593	269	347	112	393	178
10	250	177	80	769	349	865	392	717	325	807	366	443	200	501	227

MOD EL 35 0AST SIZE		DIMENSION (approximate)																					
		A		A WITH BUTTERFLY		B LES S GATE VALVES		C		D		E NRS GATE		E OS&Y OPEN		E OS&Y CLOSED		E WITH BUTTERFLY VALVES		F		G	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
2 1 / 2	65	31 7/8	81 0	28 3/4	73 0	16 5/8	42 2	4 1 / 2	11 4	7 1/4	18 4	11 1/2	29 2	17 3/4	45 1	15 3/8	39 1	8 1/4	21 0	5	12 7	42	10 67
3	80	32 7/8	83 5	29 3/8	74 6	16 5/8	42 2	4 1 / 2	11 4	7 1/4	18 4	12 3/4	32 4	20 1/4	51 4	17	43 2	8 1/4	21 0	5	12 7	43 1/2	11 05
4	10 0	34 7/8	88 6	30 1/4	76 8	16 5/8	42 2	4 1 / 2	11 4	8	20 3	14 1/2	36 8	22 1/2	57 2	18 1/4	46 4	9	22 9	5	12 7	50	12 70
6	15 0	43 1/2	11 05	36 1/2	92 7	22 1/4	56 5	5 1 / 2	14 0	1 0	25 4	18	45 7	30 1/2	77 5	24 1/4	61 6	10 1/4	26 0	6	15 2	61 5/8	15 65
8	20 0	52 3/4	13 40	45 3/4	11 62	29 1/2	74 9	9 1 / 4	23 5	1 1	27 9	21 1/8	53 7	37	94 0	28 1/2	72 4	18 1/2	47 0	8 3/8	21 3	77 1/8	19 59
1 0	25 0	55 3/4	14 16	49 3/4	12 64	29 1/2	74 9	9 1 / 4	23 5	1 2	30 5	24 3/4	62 9	45 5/8	11 59	34 3/4	88 3	18 1/2	47 0	8 3/8	21 3	85 3/8	21 69

Flow Characteristics

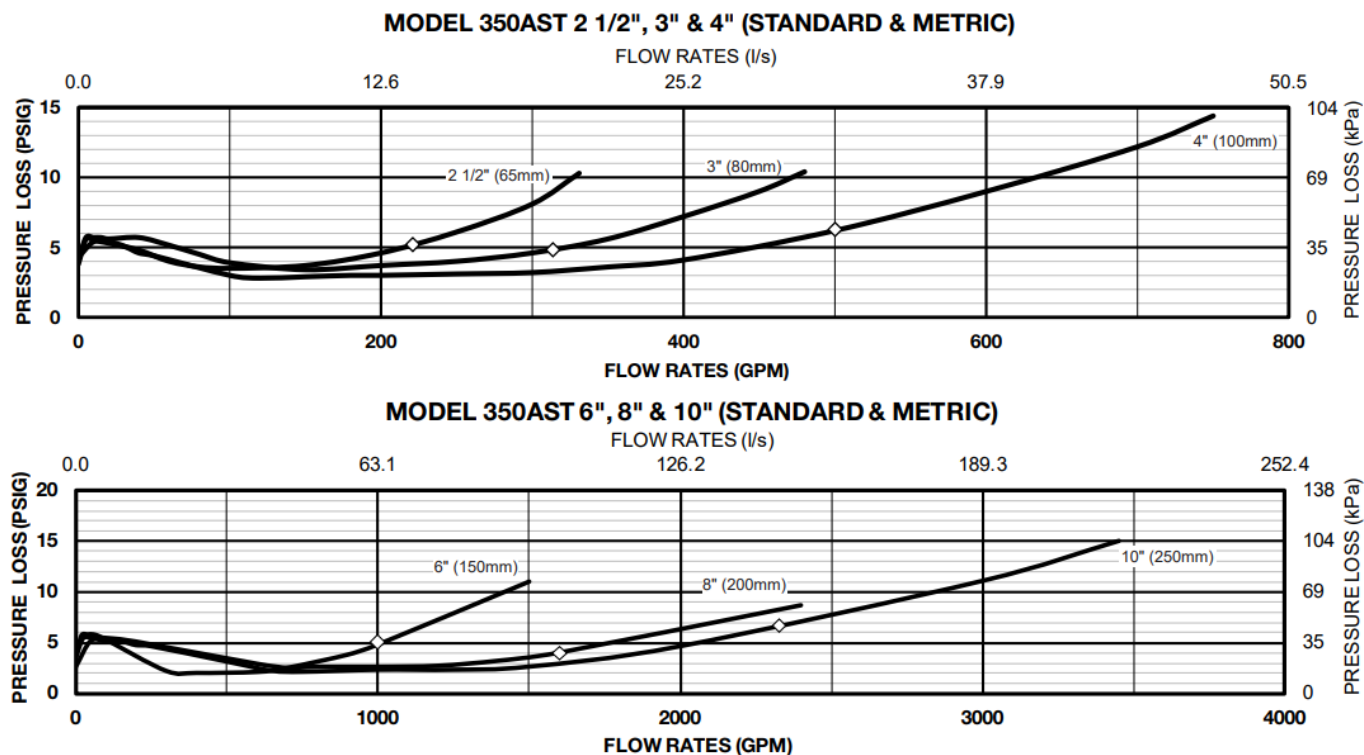

Typical Installation


Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted at a minimum of 12" (305mm) and a maximum of 30" (762mm) above adequate drains with sufficient side clearance for testing and maintenance.

The installation shall be made so that no part of the unit can be submerged.

Capacity thru Schedule 40 Pipe (GPM)				
Pipe size	5 ft/sec	7.5 ft/sec	10 ft/sec	15 ft/sec
2 1/2"	75	112	149	224
3"	115	173	230	346
4"	198	298	397	595
6"	450	675	900	1351
8"	780	1169	1559	2339
10"	1229	1843	2458	3687
12"	1763	2644	3525	5288

INDOOR INSTALLATION

(350AST with ZCSM-PF Connected Pressure Monitor and ZCSM-BTM Connected Flow Meter accessories)

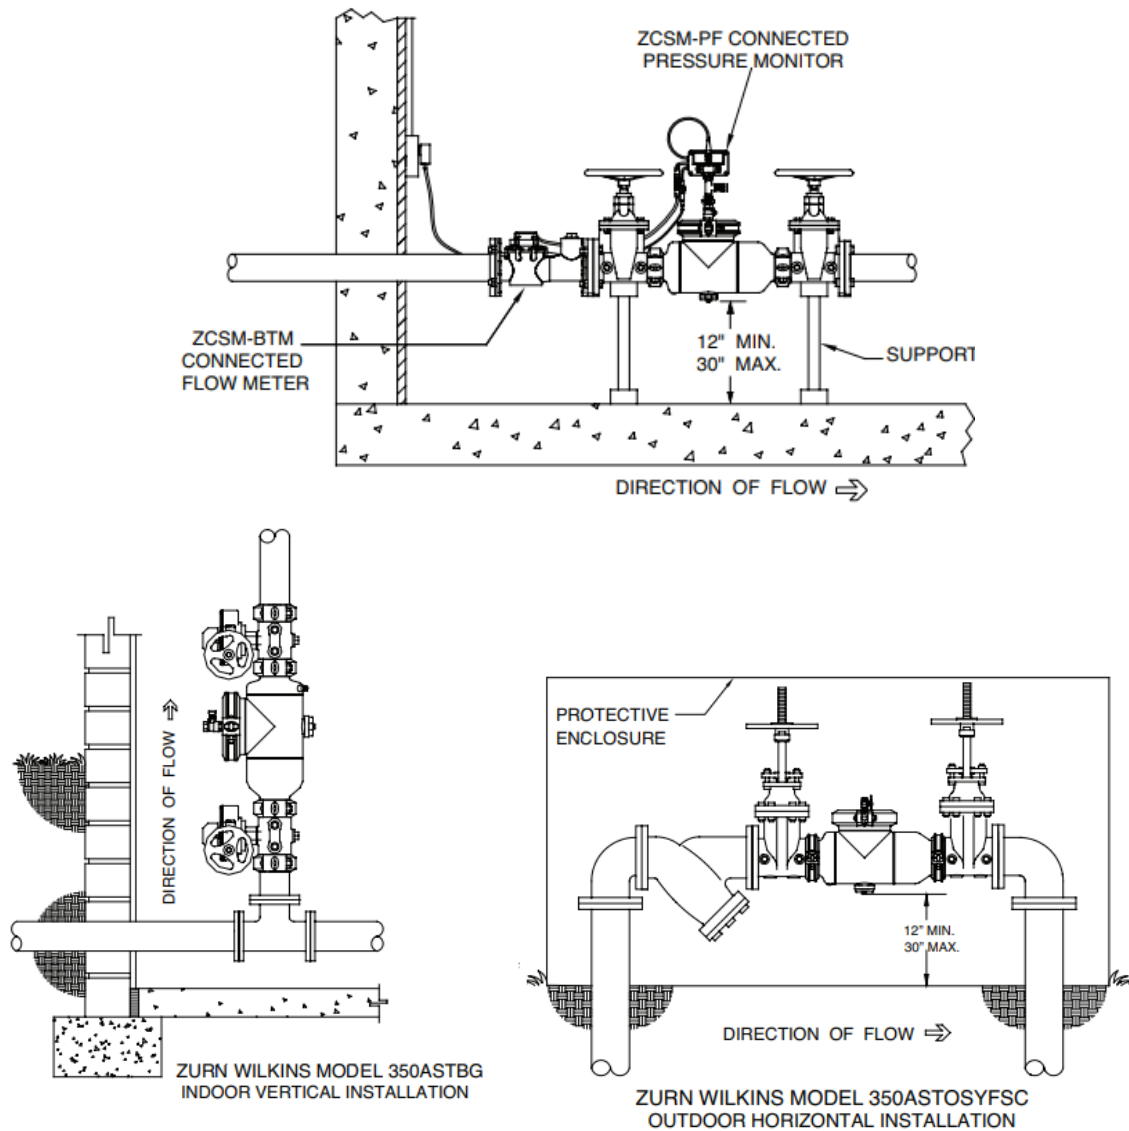

Specifications

The Double Check Backflow Prevention Assembly shall be certified to NSF/ANSI/CAN 61, ASSE® Listed 1015, and supplied with full port gate valves. The main body and access cover shall be 304L Stainless Steel, the seat ring and check valve shall be NORYL™, the stem shall be stainless steel (ASTM A 276) and the seat disc elastomers shall be EPDM. The checks shall be accessible for maintenance without removing the device from the line. The Double Check Backflow Prevention Assembly shall be a ZURN WILKINS Model 350AST.




Zurn Industries, LLC
Wilkins

1747 Commerce Way, Paso Robles, CA U.S.A. 93446 Ph. 855-663-9876, Fax 805-238-5766
In Canada

Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, 877-892-5216
www.zurn.com

Documents / Resources

	ZURN 350AST Double Check Valve Assembly [pdf] Installation Guide 350AST Double Check Valve Assembly, 350AST, Double Check Valve Assembly, Check Valve Assembly, Valve Assembly
---	---

References

- [ZURN Engineered Water Solutions | Zurn](#)
- [ZURN Engineered Water Solutions | Zurn](#)