

ZYXEL USG FLEX 700H Unified Security Gateway



ZYXEL USG FLEX 700H Unified Security Gateway User Guide


[Home](#) » [ZYXEL](#) » ZYXEL USG FLEX 700H Unified Security Gateway User Guide 

Contents

- [1 ZYXEL USG FLEX 700H Unified Security Gateway](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Preparing for the next wave of cyberattacks](#)
- [5 Zyxel security solutions](#)
- [6 License by Bundle](#)
- [7 Licensed Service by Model](#)
- [8 Specifications](#)
- [9 Wireless Specifications](#)
- [10 Compatibility & Accessories](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)



ZYXEL USG FLEX 700H Unified Security Gateway

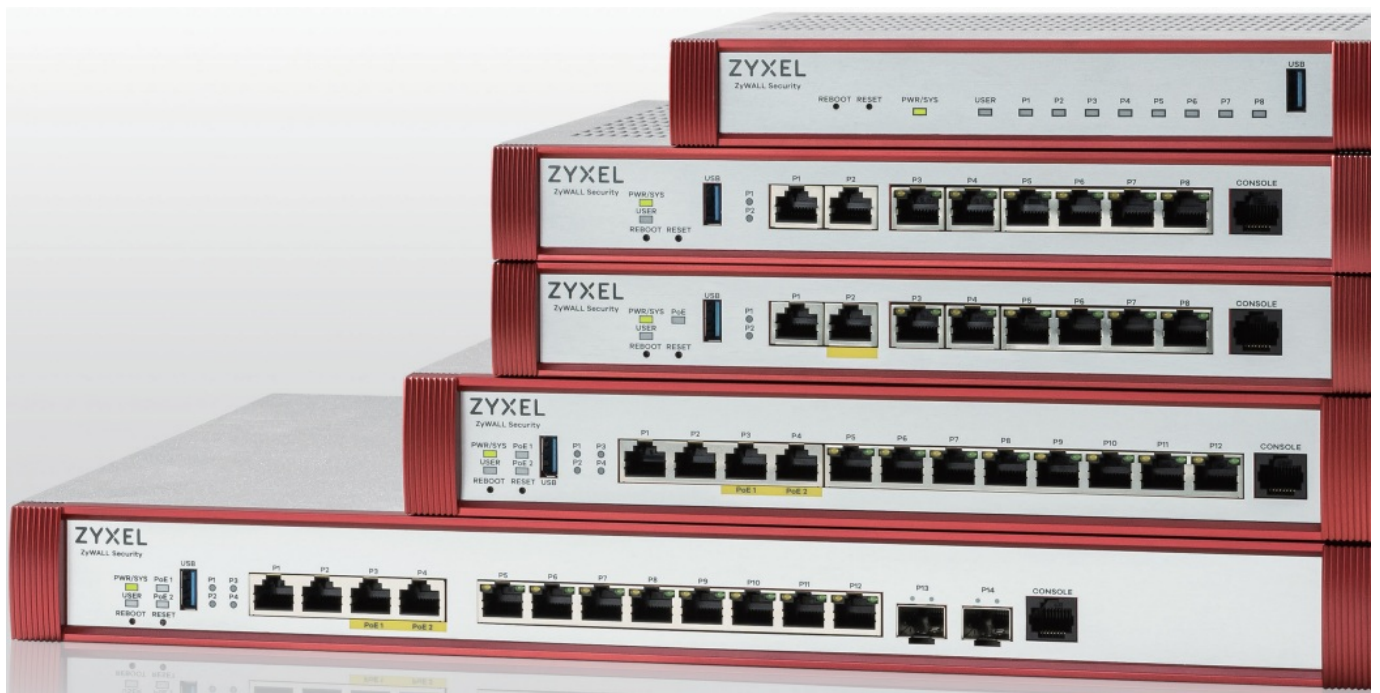

Specifications

- Model Series: USG FLEX H
- Security Bundled ATP: Yes
- Flexibility: USG FLEX
- Effortless SCR: Yes
- Maximum Throughput:
 - USG FLEX 700H ATP800: Up to 500
 - USG FLEX 700 ATP700: Up to 350
 - USG FLEX 500H ATP500: Up to 200
 - USG FLEX 200H ATP200: Up to 25
 - USG FLEX 100H ATP100: Up to 15
 - USG FLEX 50AXE: Up to 10

Product Usage Instructions

ZyXel Security Portfolio:

The ZyXel Security Portfolio includes high-performance firewalls like the USG FLEX H series, providing multi-layered protection against cyber threats and offering enterprise-grade security for small or mid-sized businesses.

ATP Firewalls

The ZyWALL ATP Firewall Series offers seamless protection against Advanced Persistent Threats with smart cloud intelligence, ensuring in-depth defense against future unknown attacks.

SCR Series:

The SCR series is a secure cloud-managed router with business-class firewall, VPN gateway, latest WiFi technology, and built-in security. It is ideal for teleworkers or small businesses seeking easy-to-manage network security.

Security Services and Licenses:

Choose from flexible licensing options tailored to your business needs. Covering security, connectivity, management, reporting, and more, these licenses provide comprehensive protection against potential security

threats.

FAQ

How can I purchase/renew licenses?

You can directly visit our new e-commerce platform Zyxel Marketplace or contact our reseller for the purchase or renewal of licenses.

What are some key features of the security services?

- Anti-Virus/Malware Protection
- Anti-Spam/Email Security
- Web Filtering
- Intrusion Prevention System (IPS)
- Application Patrol

What are the key features of the vertical solutions?

- Hotspot Management
- Managed AP Service
- Secure WiFi
- Cloud Email Security
- Single Sign-On Management

Preparing for the next wave of cyberattacks

• How Safe is Your Network?

Today, network attacks have become more sophisticated and targeted. Social networking applications have also opened up more channels for data breach than ever before. With the rise of BYOD (Bring Your Own Device), threats to business networks come from both outside and inside. It is now increasingly challenging for businesses to keep up with the changing threat landscape; and this is especially true for small-and medium-sized businesses, which do not have the staff and resources of larger corporations. Small-and medium-sized businesses need a solution that is efficient, inexpensive and provides an array of techniques to combat sophisticated network attacks.

• Network Security that Works

Businesses utilize network security appliances for two main reasons: to protect company resources from various threats and to enable secure communication between different locations via a Virtual Private Network (VPN). For several years, Zyxel's highly-acclaimed ATP and USG FLEX series have met these demands, safeguarding companies against new threats. Now, Zyxel offers a new product line, the USG FLEX H series, that provides unrivaled capacity, performance, and protection for businesses of all sizes. Additionally, the new SCR series featuring subscription-free security and built-in WiFi offers a simpler way for small businesses to establish network protection.

USG FLEX H

Secure. Fast. Protection.



2 Solution Guide Security

Zyxel Security Portfolio

	Model Series			
	High Performance	Security Bundled	Flexibility	Effortless
Users	USG FLEX H	ATP	USG FLEX	SCR
Up to 500	 USG FLEX 700H	 ATP800		
Up to 350		 ATP700	 USG FLEX 700	
Up to 200	 USG FLEX 500H	 ATP500	 USG FLEX 500	
Up to 50	 USG FLEX 200H USG FLEX 200HP	 ATP200	 USG FLEX 200	
Up to 25	 USG FLEX 100H USG FLEX 100HP	 ATP100	 USG FLEX 100 USG FLEX 100AX	
Up to 15			 USG FLEX 50 USG FLEX 50AX	
Up to 10				 SCR 50AXE

Zyxel security solutions

USG FLEX H Firewalls USG FLEX Firewalls

The high-performance USG FLEX H series provides 3x firewall/UTM/VPN throughput and PoE+ interfaces to prepare for the multi-G era. It offers multi-layered protection against cyber threats through Zyxel AI cloud and extends the same security to remote networks with enhanced SecuExtender. Get enterprise-grade security at lightning speed for your small or mid-sized business. The USG FLEX series provides cloud-based management and collaborative protection for small and mid-sized businesses. It offers powerful UTM performance with automatic responses to expand protection from firewalls to access points, all while minimizing computing power usage.

ATP Firewalls

The ZyWALL ATP Firewall Series is empowered with smart cloud intelligence giving seamless protection against all those Advanced Persistent Threats, achieving ultimate in-depth defense of future unknown attacks.

Security Router

The SCR series is a secure cloud-managed router that offers business-class firewall, VPN gateway, latest WiFi technology, and built-in security to safeguard against ransomware and other threats. It's a perfect solution for teleworkers or small businesses/offices looking for easy-to-manage and subscription-free network security.

Security Services and Licenses

Find the perfect licensing option for your security devices with our flexible options tailored to meet your business needs. Our security licenses cover a range of solutions, including security, connectivity, management, reporting, and vertical-specific licenses. With our expert guidance and support, you can rest assured that your business is fully protected from all potential security threats, now and in the future.

Security Services and Licenses

For purchase/renewal of licenses, go directly on our new e-commerce platform Zyxel Marketplace or contact our reseller.

Services	Key Features
Security Service	
Anti-Virus/Malware 	Scan files for viruses, Trojan, worms, malwares before they reach your network. • Stream-based scan technology without file size limitation • Daily data feed of top-ranked threats
Anti-Spam/Email Security 	Fast detect with cloud-based database/mail fingerprints to block spam/phishing mail with malicious contents • IP reputation filter provides low latency reaction • Support black/white listing for custom policies • Cloud-based database provide real-time protection
Web Filtering 	Cloud-based real-time access control for inappropriate, unproductive, illegal and malicious websites • Categorized website access management for increased efficiency • Granular policies controlled by IP address, user, group, or schedule
IPS 	Deep-packet inspection across all ports and protocols at gateway to against known attacks from network • Shields vulnerabilities before they can be exploited and eliminates the operational pains of emergency patching • Customized signature support to create your own rules • Constant signature auto-updates
Application Patrol 	Automatically categorize and manage the network applications usage • Granular policies control by IP address, user, group, schedule • Profile based policy to ensure network quality and easy manage business rule
Geo Enforcer 	Manage network traffic by mapping IP address to geographical regions to prevent fraud or cyber attacks • Geographical visibility for traffic statistics and logs • IPv6 address support • Automatic IP/geography database update

Security Service

Sandboxing



- Cloud-based sandbox technology against unknown threats
- Comprehensive inspection for a wide range file types
- Cloud-based sandbox provide instant protection without needing a dedicated hardware or software upgrade

Reputation Filter



- Block botnet infection and prevent drive-by download from infected websites
- IP/URL feeds to detect/block botnet commands and control activities
- Cloud-based URL feeds to block access to anomalous websites
- IP-based reputation filter
- Supports 10 Cyber Threat Categories
- Inbound & Outbound traffic filtering
- Blacklist and whitelist support

Secure WIFI



- Secure tunnel and managed AP service
- L2 access between home and office network
- Enforcing 2FA with Google Authenticator
- WPA2 Enterprise (802.1x) supported

Cloud Security Service

Astra



- Cloud-based service and email protection for Office 365, G Suite and on-premise e-mail
- Stop unwanted spam, phishing and malware with real-time threat intelligence
- No change to your existing infrastructure, zero maintenance
- Reduce management overhead and stop wasting IT admin resources
- Respond faster with web management and monitoring

Cloud Email Security



- Extend protection to mobile devices into network
- Shows brief summary about the member activities
- Monitor and analyze the usage and measure most used resources
- Stop users from unsafe websites, record every attempt, and trigger time
- Block, record all suspicious IP to get full range security monitoring and protection from online threats

Vertical Solutions

Hotspot Management



- Authentication with Wall Garden
- Advertisement and SMS billing & free time service accounting for guest
- Support SP350E printer manager support purple WiFi and third-party social log in
- Billing replenishment

Services	Key Features
Vertical Solutions	
Managed AP Service 	• Integrated AP controller as central management to provide flexible deployment options • AP auto discovery and provisioning • AP forwarding compatibility
Device High Availability Pro 	• Device failure detection and notification • Configuration auto-sync and link monitoring • Smart handover through dedicated Heartbeat Link • NAT/Firewall/VPN Sessions synchronization
VPN Client Software	
SecuExtender VPN Client 	• Providing solutions of both SSL VPN and IPSec VPN remote access • Enhanced layered security incorporating Zyxel security appliances • Easy and intelligent installation
Network Premium	
Single Sign-On 	• Simplified single sign in to multiple resources • Improved user experience without repetitive logging in between various web browsers • Login mechanism works with any protocol, not just HTTP
Management & Reporting	
Cloud CNM SecuReporter 	• Multidimensional analytics on abnormal behaviors • Cloud-based real-time monitoring and alerts • Effective event correlation and user behavior analytics • Intuitive dashboard and customizable report

Pick a bundle. No more hassle

License by Bundle

A bundle license consists of multiple services that are grouped together. They are designed for your best convenience when you need to ensure your network is empowered with holistic functionality such as seamless threat protection or full connectivity features. Pick the right bundle and experience less hassle.

		Security											Connectivity						
Pack	Firewall Series	Licensed Service											Licensed Service						
		Anti-Malware/ Virus	Web Filtering/ Content Filtering	Sandboxing	Reputation Filter	IPS/DP	Application Patrol	Email Security/ Anti-Spam	SecuReporter	Security Profile Sync	Collaborative Detection & Response	Ransomware Prevention Premium	Network Premium	Secure WIFI	Hotspot Management	Concurrent Device Upgrade	Nebula Professional Pack	Nebula Plus Pack	
																			
		Scan files at the gateway for viruses and other threats	Block access to malicious or risky web sites	Cloud-based sandbox technology against unknown threats	Block botnet infection and prevent drive-by download from infected websites via IP and URL detection	Deep-packet inspection against known attacks from network	Automatically categorize and manage the network application usage	Fast detection to block spam/ phishing mail with malicious contents	Cloud-based security analytics and report with 30-day log retention	An easy-to-use tool to help business sync up security profiles across multiple networks	Automatically contain threats at the network edge	Real-time updated threat intelligence	Simplified single sign in to multiple resources	Secure tunnel and managed AP service	Various Network Access Control	Top up allowed number of connected clients	A full feature set of cloud configuration, deployment, monitoring and management	A new feature set includes the most frequently requested advanced features	
Gold Security Pack	USG FLEX H**	●	●	●	●	●	●	●	●	●	●	●	●	●			●**4		
	ATP	●	●	●	●	●	●	●	●	●	●	●	●	●			●		
	USG FLEX**	●	●	●	●	●	●	●	●	●	●	●	●	●			●		
UTM Security Pack	USG FLEX**	●	●			●	●	●	●	●	●		●	●**2	●**2	●**2	●**2	●**2	
Content Filter Pack	USG FLEX 50(A/X)		●						●	●			●				●**2	●**2	
	USG20(W)-VPN		●						●	●			●				●**2	●**2	
3-in-1 UTM Security Pack	USG	●	●			●**1	●**1		●										
2-in-1 Nebula Security Pack	NSG	●	●			●**1	●**1										●**2	●**2	
SCR Pro Pack	SCR		●									●					●		

1. The IPS and App Patrol service would be offered for free
2. Pack Purchasing Options:
 - Secure WiFi
 - Hospitality Pack incl. Hotspot Management and Concurrent Device Upgrade
 - Nebula Professional Pack
 - Nebula Plus Pack
3. USG FLEX 50 is not supported for Gold and UTM Security Pack
4. Network Premium, Security Profile Sync, Collaborative Detection & Response, and Secure WiFi for USG FLEX H series will be available later and are subject to changes without notice.

Licensed Service by Model

Security

Compatible Security Appliances	Licensed Service										
	Web Filtering/Content Filtering	Application Patrol	Anti-Malware/Virus	IPS/IDP	Email Security/Anti-Spam	Security Profile Sync	Collaborative Detection & Response	SecuReporter	Sandboxing	Reputation Filter	SecuExtender VPN Client
											
	Block access to malicious or risky web sites	Automatically categorize and manage the network application usage	Scan files at the gateway for viruses and other threats	Deep-packet inspection against known attacks from network	Fast detection to block spam/phishing mail with malicious contents	An easy-to-use tool to help business sync up security profiles across multiple networks	Automatically contain threats at the network edge	Cloud-based security analytics and report with 30-day log retention	Cloud-based sandbox technology against unknown threats	Block botnet infection and prevent drive-by download from infected websites via IP and URL detection	SSL VPN and IPSec VPN remote access tool
USG FLEX 100H/200H/500H/700H*	•	•	•	•	•			•	•	•	•
ATP100(W)/200	•	•	•	•	•	•	•	•	•	•	•
ATP500/700/800	•	•	•	•	•	•	•	•	•	•	•
USG FLEX 50(A/X)	•					•		•			•
USG FLEX 100(A/X/W)	•	•	•	•	•	•	•	•	•	•	•
USG FLEX 200	•	•	•	•	•	•	•	•	•	•	•
USG FLEX 500/700	•	•	•	•	•	•	•	•	•	•	•
SCR 50AXE	•	•									

* Network Premium, Security Profile Sync, Collaborative Detection & Response, and Secure WiFi for USG FLEX H series will be available later and are subject to changes without notice.

Connectivity

Compatible Security Appliances	Licensed Service					
	Secure WiFi	Network Premium	Hotspot Management	Concurrent Device Upgrade	Nebula Professional Pack	Nebula Plus Pack
						
	Secure tunnel and managed AP service	Simplified single sign in to multiple resources	Various Network Access Control	Top up allowed number of connected clients	A full feature set of cloud configuration, deployment, monitoring and management	A new feature set includes the most frequently requested advanced features
USG FLEX 100H/200H/500H/700H*					•	•
ATP100(W)/200	•	•			•	
ATP500/700/800	•	•			•	
USG FLEX 50(AX)		•			•	•
USG FLEX 100(AX/W)	•	•			•	•
USG FLEX 200	•	•	•		•	•
USG FLEX 500/700	•	•	•	•	•	•
SCR 50AXE					•	

Default Support for Registered Devices

Licensed Service										
Amazon VPC	Microsoft Azure	Managed AP Service	Two-Factor Authentication	Threat Management	Geo Enforcer	SSL (HTTPS) Inspection	Device Insight	Device High Availability Pro	Zyxel One Network	Nebula Base Pack
										
Easy network integration with AWS	Easy network integration with Azure	AP auto discovery and provisioning	Add an extra layer of protection to mitigate the risk of credential leakage or brute force attack	Prevent ransomware, intrusion, exploit, dark web, ads, VPN proxy and mail fraud & phishing	Manage network traffic by mapping IP address to geographical regions	Unlock encrypted sessions, scan encrypted packets, find threats, and block them	Deploy agentless scanning of the network for discovery and classification of devices	Device failure detection and failover	A Unified installation tool for Zyxel switches, WLAN and gateways	License-free feature set with a rich set of management features
			•		•	•	•			•
•	•	•	•		•	•	•		•	
•	•	•	•		•	•	•	•	•	
•	•		•		•		•		•	•
•	•	•	•		•	•	•		•	•
•	•	•	•		•	•	•		•	•
•	•	•	•		•	•	•	•	•	•
				•	•					

*: Network Premium, Security Profile Sync, Collaborative Detection & Response, and Secure WiFi for USG FLEX H series will be available later and are subject to changes without notice.

Specifications

ZyWALL USG FLEX H Firewalls

Model		USG FLEX 100H/100HP	USG FLEX 200H/200HP	USG FLEX 500H	USG FLEX 700H
Hardware Specifications					
Interface ports		100H: 8 x 1GbE Ethernet 100HP: 1 x PoE+ Ethernet (802.3at, 30W max.)	200H: 2 x 2.5GbE Ethernet 6 x 1GbE Ethernet 200HP: 1 x PoE+ Ethernet (802.3at, 30W max.)	2 x 2.5GbE Ethernet 2 x 2.5GbE/PoE Ethernet (802.3at, total 30 W) 8 x 1GbE Ethernet	2 x 2.5GbE Ethernet 2 x 10GbE/PoE Ethernet (802.3at, total 30 W) 8 x 1GbE Ethernet 2 x 10GbE SFP+
USB 3.0 ports		1	1	1	1
Console port		Yes (RJ-45)	Yes (RJ-45)	Yes (RJ-45)	Yes (RJ-45)
Rack-mountable		-	Yes	Yes	Yes
Fanless		Yes	Yes	-	-
System Capacity & Performance^{*1}					
SPI firewall throughput (Mbps)^{*2}		3,000	5,000	10,000	15,000
VPN throughput (Mbps)^{*3}		750	1,200	2,000	3,000
IPS throughput (Mbps)^{*4}		1,500	2,000	3,500	6,300
Anti-Malware throughput (Mbps)^{*4}		750	1,500	2,500	4,000
UTM throughput (Anti-Malware and IPS)^{*4}		750	1,500	2,500	4,000
Max. TCP concurrent sessions^{*5}		300,000	600,000	1,000,000	2,000,000
Max. concurrent IPsec VPN tunnels^{*6}		50	100	300	1,000
Recommended gateway-to-gateway IPsec VPN tunnels		20	50	150	300
Concurrent SSL VPN users		25	50	150	500
VLAN interface		16	32	64	128
Max. concurrent devices logins^{*7}		64	200	300	4,000
Security Services^{*8}					
Anti-Malware		Yes	Yes	Yes	Yes
IPS		Yes	Yes	Yes	Yes
Application Patrol		Yes	Yes	Yes	Yes
Web Filtering		Yes	Yes	Yes	Yes
Reputation Filter		Yes	Yes	Yes	Yes
SecuReporter		Yes	Yes	Yes	Yes
Sandboxing		Yes	Yes	Yes	Yes
Device Insight		Yes	Yes	Yes	Yes
Secure WiFi^{*9}		Yes	Yes	Yes	Yes
Key Features					
VPN		IKEv2, IPsec, SSL	KEv2, IPsec, SSL	KEv2, IPsec, SSL	KEv2, IPsec, SSL
SSL (HTTPS) Inspection		Yes	Yes	Yes	Yes
Two-Factor Authentication		Yes	Yes	Yes	Yes
Link Aggregation (LAG)^{*10}		Yes	Yes	Yes	Yes
Power Requirements					
Power input		100H: 12 V DC, 2 A max. 100HP: 19 V DC, 3.42 A	200H: 12 V DC, 2 A max. 200HP: 19 V DC, 3.42 A	19 V DC, 4.736 A	100 - 240 V AC, 50/60 Hz, 2 A max
Max. power consumption (watt max.)		100H: 17 100HP: 51.2	200H: 22 200HP: 62	68	86.7
Heat dissipation (BTU/hr)		100H: 40.365 100HP: 194.5	200H: 58.75 200HP: 191.9	211.3	235
PoE power budget (watt max.)		-	-	30	30
Physical Specifications					
Item	Dimensions (WxDxH)(mm/in.)	216 x 143 x 33/ 8.50 x 5.80 x 1.30	272 x 187 x 36/ 10.7 x 7.36 x 1.42	300 x 182 x 43.5/ 11.81 x 7.17 x 1.71	430 x 250 x 43.5/ 16.93 x 9.84 x 1.71
	Weight (kg/lb.)	100H: 1.04/2.29 100HP: 1.05/2.31	200H: 1.52/3.34 200HP: 1.52/3.35	1.64/3.62	3.14/6.93
Packing	Dimensions (WxDxH)(mm/in.)	278 x 189 x 99/ 10.94 x 7.44 x 3.89	427 x 247 x 73/ 16.81 x 9.72 x 2.87	350 x 149 x 244/ 13.78 x 5.87 x 9.61	512 x 395 x 162/ 20.16 x 15.55 x 6.38
	Weight (kg/lb.)	100H: 1.62/3.57 100HP: 1.91/4.21	200H: 2.43/5.36 200HP: 2.68/5.92	2.93/6.46	4.90/10.81
Included accessories		• Power adapter • Power cord (100HP) • RJ-45 - RS-232 cable for console connection	• Power adapter • Power cord (200HP) • RJ-45 - RS-232 cable for console connection • Rack mounting kit (optional, by regions)	• Power adapter & power cord • RJ-45 - RS-232 cable for console connection • Rack mounting kit	• Power adapter • RJ-45 - RS-232 cable for console connection • Rack mounting kit
Environmental Specifications					
Operating	Temperature	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)		100H: 40°C/289845.2327 hr 25°C/518347.4294 hr 100HP: 40°C/291183.7887 hr 25°C/550382.5753 hr	200H: 40°C/306768.409 hr 25°C/528037.0106 hr 200HP: 40°C/227747.9662 hr 25°C/392638.3847 hr	40°C/346653.298 hr 25°C/491775.8384 hr	40°C/431877.9743 hr 25°C/669031.2966 hr
Acoustic noise		-	-	16.86 dBA on < 25°C operating temperature, 43.76 dBA on full FAN speed	16.85 dBA on < 25d°C operating temperature, 47.84 dBA on full FAN speed
Certifications					
EMC		FCC Part 15 (Class B), CE EMC (Class B), RCM (Class B), BSMI	FCC Part 15 (Class B), CE EMC (Class B), RCM (Class B), BSMI	FCC Part 15 (Class A), CE EMC (Class A), RCM (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), RCM (Class A), BSMI
Safety		LVD (EN62368-1), BSMI	LVD (EN62368-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN62368-1), BSMI

*: This matrix with firmware uOS110 or later.

*1: Actual performance may vary depending on system configuration, network conditions, and activated applications.

*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

*3: VPN throughput measurement are based on RFC 2544 (1,424-byte UDP packets); iMIX: UDP throughput based on a combination of 64 byte, 512 byte, and 1424 byte packet sizes.

*4: Anti-Malware (with Express Mode) and IPS throughput is measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

*5: Maximum sessions are measured using the industry standard IXIA IxLoad testing tool.

*6: Including Gateway-to-Gateway and Client-to-Gateway.

*7: This is the recommend maximum number of concurrent logged-in devices.

*8: With Zyxel service license to enable or extend the feature capacity.

*9: Available in Q2, 2024.

ZyWALL ATP Firewalls

Model		ZyWALL ATP100**	ZyWALL ATP100W	ZyWALL ATP200
Hardware Specifications				
Interfaces		3 x LAN/DMZ, 1 x WAN, 1 x SFP, 1 x OPT	3 x LAN/DMZ, 1 x WAN, 1 x SFP, 1 x OPT	4 x LAN/DMZ, 2 x WAN, 1 x SFP
USB 3.0 ports		1	1	2
Console port		Yes (RJ-45)	Yes (RJ-45)	Yes (DB9)
Rack-mountable		-	-	Yes
Fanless		Yes	Yes	Yes
System Capacity & Performance¹				
SPI firewall throughput (Mbps)²		1,000	1,000	2,000
VPN throughput (Mbps)³		300	300	500
IDP throughput (Mbps)⁴		600	600	1,200
AV throughput (Mbps)⁴		380	380	630
UTM throughput (AV and IDP)⁴		380	380	630
Max. TCP concurrent sessions⁵		300,000	300,000	600,000
Max. concurrent IPSec VPN tunnels⁶		40	40	100
Concurrent SSL VPN users		30	30	60
VLAN interface		8	8	16
Speedtest Performance				
SPI firewall throughput (Mbps)⁷		850	850	900
Key Features				
Security Service	Sandboxing⁸	Yes	Yes	Yes
	Web Filtering⁸	Yes	Yes	Yes
	Application Patrol⁸	Yes	Yes	Yes
	Anti-Malware⁸	Yes	Yes	Yes
	IPS⁸	Yes	Yes	Yes
	Reputation Filter⁸	Yes	Yes	Yes
	Geo Enforcer	Yes	Yes	Yes
	SecuReporter⁸	Yes	Yes	Yes
	Collaborative Detection & Response⁸	Yes	Yes	Yes
	Device Insight	Yes	Yes	Yes
	Security Profile Sync (SPS)⁸	Yes	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes	Yes
	Two-Factor Authentication	Yes	Yes	Yes
VPN Features	VPN	IKEv2, IPSec, SSL, L2TP/IPSec	IKEv2, IPSec, SSL, L2TP/IPSec	IKEv2, IPSec, SSL, L2TP/IPSec
	Microsoft Azure	Yes	Yes	Yes
	Amazon VPC	Yes	Yes	Yes
WLAN Management	Default Number of Managed AP	8	8	8
	Recommend Max. AP in 1 AP Group	10	10	20
	Secure WiFi Service⁸	Yes	Yes	Yes
	Maximum Number of Tunnel-Mode AP	6	6	10
	Maximum Number of Managed AP	24	24	40
Management & Connectivity	Nebula Cloud Mode	Yes	Yes	Yes
	Nebula Cloud Monitoring Mode	Yes	Yes	Yes
	Device HA Pro	-	-	-
	Link Aggregation (LAG)	-	-	-
	Concurrent Devices Logins (max.)	64	64	200
Power Requirements				
Power input		12 V DC, 2 A max.	12 V DC, 2 A max.	12 V DC, 2.5 A max.
Max. power consumption (watt)		12.5	12.5	13.3
Heat dissipation (BTU/hr)		42.65	42.65	45.38
Physical Specifications				
Item	Dimensions (WxDxH)(mm/in.)	216 x 143 x 33/8.50 x 5.80 x 1.30	216 x 147.3 x 33/8.50 x 5.80 x 1.30	272 x 187 x 36/10.7 x 7.36 x 1.42
	Weight (kg/lb.)	0.85/1.87	0.85/1.87	1.4/3.09
Packing	Dimensions (WxDxH)(mm/in.)	284 x 190 x 100/11.18 x 7.48 x 3.94	284 x 190 x 100/11.18 x 7.48 x 3.94	427 x 247 x 73/16.81 x 9.72 x 2.87
	Weight (kg/lb.)	1.4/3.09	1.4/3.09	2.42/5.34
Included accessories		- Power adapter - RJ-45 cable - RS-232 cable	- Power adapter - RJ-45 cable - RS-232 cable	- Power adapter - Rack mounting kit (optional, by regions)
Environmental Specifications				
Operating	Temperature	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)		989,810.8	989,810.8	529,688.2
Acoustic noise		-	-	-
Certifications				
EMC		FCC Part 15 (Class B), CE EMC (Class B), BSMI	FCC Part 15 (Class B), CE EMC (Class B), BSMI	FCC Part 15 (Class B), CE (Class B), C-Tick (Class B), BSMI
Safety		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

*: This matrix with firmware ZLD5.37 or later.

1. Actual performance may vary depending on network conditions and activated applications.
2. Maximum throughput based on RFC 2544 (1,518-byte UDP packets).
3. VPN throughput measured based on RFC 2544 (1,424-byte UDP packets).
4. AV (with Express mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

5. Maximum sessions measured using the industry standard IXIA IxLoad testing tool.
6. Including Gateway-to-Gateway and Client-to-Gateway.
7. The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.
8. Enable or extend feature capacity with Zyxel service license.
9. ATP100 rev1 is adapting new hardware design equipped with 4 x LAN/DMZ, 1 x WANZyWALL ATP Firewalls

ZyWALL ATP Firewalls

Model		ZyWALL ATP500	ZyWALL ATP700	ZyWALL ATP800
Hardware Specifications				
Interfaces		7 (configurable), 1 x SFP	12 (configurable), 2 x SFP (configurable)	12 (configurable), 2 x SFP (configurable)
USB 3.0 ports		2	2	2
Console port		Yes (DB9)	Yes (DB9)	Yes (DB9)
Rack-mountable		Yes	Yes	Yes
Fanless		-	-	-
System Capacity & Performance¹				
SPI firewall throughput (Mbps)²		2,600	6,000	8,000
VPN throughput (Mbps)³		900	1,200	1,500
IDP throughput (Mbps)⁴		1,700	2,200	2,700
AV throughput (Mbps)⁴		900	1,600	2,000
UTM throughput (AV and IDP)⁴		890	1,500	1,900
Max. TCP concurrent sessions⁵		1,000,000	1,600,000	2,000,000
Max. concurrent IPsec VPN tunnels⁶		300	1,000	1,000
Concurrent SSL VPN users		150	150	500
VLAN interface		64	128	128
Speedtest Performance				
SPI firewall throughput (Mbps)⁷		900	930	930
Key Features				
Security Service	Sandboxing⁸	Yes	Yes	Yes
	Web Filtering⁸	Yes	Yes	Yes
	Application Patrol⁸	Yes	Yes	Yes
	Anti-Malware⁸	Yes	Yes	Yes
	IPS⁸	Yes	Yes	Yes
	Reputation Filter⁸	Yes	Yes	Yes
	Geo Enforcer	Yes	Yes	Yes
	SecuReporter⁸	Yes	Yes	Yes
	Collaborative Detection & Response⁸	Yes	Yes	Yes
	Device Insight	Yes	Yes	Yes
	Security Profile Sync (SPS)⁸	Yes	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes	Yes
	Two-Factor Authentication	Yes	Yes	Yes
VPN Features	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
	Microsoft Azure	Yes	Yes	Yes
	Amazon VPC	Yes	Yes	Yes
WLAN Management	Default Number of Managed AP	8	8	8
	Recommend Max. AP in 1 AP Group	60	200	300
	Secure WiFi Service⁹	Yes	Yes	Yes
	Maximum Number of Tunnel-Mode AP	18	66	130
	Maximum Number of Managed AP	72	264	520

Management & Connectivity	Nebula Cloud Mode	Yes	Yes	Yes
	Nebula Cloud Monitoring Mode	Yes	Yes	Yes
	Device HA Pro	Yes	Yes	Yes
	Link Aggregation (LAG)	Yes	Yes	Yes
	Concurrent Devices Logins (max.)	300	1500	1500
Power Requirements				
Power input		12 V DC, 4.17 A	100 - 240 V AC, 50/60 Hz, 2.5 A max.	100 - 240 V AC, 50/60 Hz, 2.5 A max.
Max. power consumption (watt)		24.1	46	46
Heat dissipation (BTU/hr)		82.23	120.1	120.1
Physical Specifications				
Item	Dimensions (WxDxH)(mm/in.)	300 x 188 x 44/11.81 x 7.4 x 1.73	430 x 250 x 44/16.93 x 9.84 x 1.73	430 x 250 x 44/16.93 x 9.84 x 1.73
	Weight (kg/lb.)	1.65/3.64	3.3/7.28	3.3/7.28
Packing	Dimensions (WxDxH)(mm/in.)	351 x 152 x 245/13.82 x 5.98 x 9.65	519 x 392 x 163/20.43 x 15.43 x 6.42	519 x 392 x 163/20.43 x 15.43 x 6.42
	Weight (kg/lb.)	2.83/6.24	4.8/10.58	4.8/10.58
Included accessories		• Power adapter • Power cord • Rack mounting kit	• Power cord • Rack mounting kit	• Power cord • Rack mounting kit
Environmental Specifications				
Operating	Temperature	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)		529,688.2	947,736	947,736
Acoustic noise		24.5 dBA on < 25°C operating temperature, 41.5 dBA on full FAN speed	25.3 dBA on < 25°C operating temperature, 46.2 dBA on full FAN speed	25.3 dBA on < 25°C operating temperature, 46.2 dBA on full FAN speed
Certifications				
EMC		FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI
Safety		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

* This matrix with firmware ZLD5.37 or later.

*: This matrix with firmware ZLD5.37 or later.

1. Actual performance may vary depending on network conditions and activated applications.
2. Maximum throughput based on RFC 2544 (1,518-byte UDP packets).
3. VPN throughput measured based on RFC 2544 (1,424-byte UDP packets).
4. AV (with Express mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.
5. Maximum sessions measured using the industry standard IXIA IxLoad testing tool.
6. Including Gateway-to-Gateway and Client-to-Gateway.
7. The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.
8. Enable or extend feature capacity with Zyxel service license.
9. ATP100 rev1 is adapting new hardware design equipped with 4 x LAN/DMZ, 1 x WAN.

ZyWALL USG FLEX Firewalls

Hardware Specifications			
WiFi standard	N/A	802.11 ax/ac/n/g/b/a	
10/100/1000 Mbps RJ-45 ports	4 x LAN/DMZ, 1 x WAN	4 x LAN/DMZ, 1 x WAN	
USB 3.0 ports	2	2	
Console port	Yes (RJ-45)	Yes (RJ-45)	
Rack-mountable	N/A	N/A	
Fanless	Yes	Yes	
System Capacity & Performance ¹			
SPI firewall throughput (Mbps) ²	350	350	
VPN throughput (Mbps)	90	90	
VPN IMIX throughput (Mbps) ³	40	40	
Max. TCP concurrent sessions ⁴	20,000	20,000	
Max. concurrent IPsec VPN tunnels ⁵	20	20	
Recommended gateway-to-gateway IPsec VPN tunnels	5	5	
Concurrent SSL VPN users (default/max.)	5/15	15	
VLAN interface	8	8	
Speedtest Performance			
SPI firewall throughput (Mbps) ⁶	320	320	
Key Features			
Security Service	Web Filtering ⁷	Yes	Yes
	SecuReporter ⁷	Yes	Yes
	Two-Factor Authentication	Yes	Yes
	Device Insight	Yes	Yes
	Security Profile Synchronize ⁷	Yes	Yes
VPN Features	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	
	Microsoft Azure	Yes	N/A
	Amazon VPC	Yes	Yes
Management & Connectivity	Nebula Cloud Mode	Yes	Yes
	Nebula Cloud Monitoring Mode	Yes	Yes
	Easy Mode ⁸	Yes	Yes
	Concurrent Devices Logins ⁹	64	64
Power Requirements			
Power input	12 V DC, 2.0 A max.	12 V DC, 2.5 A max.	
Max. power consumption (watt max.)	12	24.3	
Heat dissipation (BTU/hr)	40.92	55.37	
Physical Specifications			
Power Requirements			
Power input	12 V DC, 2.0 A max.	12 V DC, 2.5 A max.	
Max. power consumption (watt max.)	12	24.3	
Heat dissipation (BTU/hr)	40.92	55.37	
Physical Specifications			
Item	Dimensions (WxDxH)(mm/in.)	216 x 143 x 33/8.50 x 5.63 x 1.30	216 x 149.28 x 33/8.50 x 5.88 x 1.30
	Weight (Kg/lb.)	0.88/1.94	1.00/2.20
Packing	Dimensions (WxDxH)(mm/in.)	276 x 185 x 98/10.87 x 7.28 x 3.86	276 x 185 x 98/10.87 x 7.28 x 3.86
	Weight (kg/lb.)	1.41/3.11	1.53/3.37
Included accessories		- Power adapter - RJ-45 - RS-232 cable for console connection	- Power adapter with plug - RJ-45 - RS-232 cable for console connection - Antenna
Environmental Specifications			
Operating	Temperature	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)	655,130	766,228.2	
Certifications			
EMC	FCC Part 15 (Class B), IC, CE EMC (Class B), RCM, BSMI	FCC Part 15 (Class B), IC EMC (Class B), CE EMC (Class B), RCM (Class B), BSMI	
Safety	BSMI, UL	LVD (EN62368-1), BSMI	

*: This matrix with firmware ZLD5.37 or later.

- Actual performance may vary depending on system configuration, network conditions, and activated applications.
- Maximum throughput based on RFC 2544 (1,518-byte UDP packets).
- VPN throughput measured based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte and 1424 byte packet sizes.
- Maximum sessions measured using the industry standard IXIA IxLoad testing tool.
- Including Gateway-to-Gateway and Client-to-Gateway.
- The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.
- With Zyxel service license to enable or extend the feature capacity.
- Only applicable when devices are in on-premise mode.

9. This is the recommend maximum number of concurrent logged-in devices.

ZyWALL USG FLEX Firewalls

Model		USG FLEX 100* ¹	USG FLEX 100AX
Hardware Specifications			
WiFi standard		N/A	802.11 ax/ac/n/g/b/a
10/100/1000 Mbps RJ-45 ports		4 x LAN/DMZ, 1 x WAN	4 x LAN/DMZ, 1 x WAN
USB 3.0 ports		1	1
Console port		Yes (RJ-45)	Yes (RJ-45)
Rack-mountable		N/A	N/A
Fanless		Yes	Yes
System Capacity & Performance¹			
SPI firewall throughput (Mbps) ^{*2}		900	900
VPN throughput (Mbps) ^{*3}		270	270
VPN IMIX throughput (Mbps) ^{*3}		100	100
IPS throughput (Mbps) ^{*4}		540	540
Anti-Malware throughput (Mbps) ^{*4}		360	360
UTM throughput (Anti-Malware and IPS)(Mbps) ^{*4}		360	360
Max. TCP concurrent sessions ^{*5}		300,000	300,000
Recommended gateway-to-gateway IPsec VPN tunnels		20	20
Max. concurrent IPsec VPN tunnels ^{*5}		50	50
Concurrent SSL VPN users		30	30
VLAN interface		8	8
Speedtest Performance			
SPI firewall throughput (Mbps) ^{†1}		848	848
Key Features			
Security Service	Sandboxing ^{*7}	Yes	Yes
	Web Filtering ^{*7}	Yes	Yes
	Application Patrol ^{*7}	Yes	Yes
	Anti-Malware ^{*7}	Yes	Yes
	IPS ^{*7}	Yes	Yes
	Reputation Filter ^{*7}	Yes	Yes
	Geo Enforcer ^{*7}	Yes	Yes
	SecuReporter ^{*7}	Yes	Yes
	Collaborative Detection & Response ^{*7}	Yes	Yes
	Device Insight	Yes	Yes
	Security Profile Sync ^{*7}	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes
	Two-Factor Authentication	Yes	Yes
VPN Features	Email Security	Yes	Yes
	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
	Microsoft Azure	Yes	Yes
WLAN Management	Amazon VPC	Yes	Yes
	Default Number of Managed AP	8	8
	Recommend Max. AP in 1 AP Group	10	10
	Secure WiFi Service ^{*7}	Yes	Yes
	Maximum Number of Tunnel-Mode AP	6	6
Management & Connectivity	Maximum Number of Managed AP	24	24
	Nebula Cloud Mode	Yes	Yes
	Nebula Cloud Monitoring Mode	Yes	Yes
	Device HA Pro	N/A	N/A
	Link Aggregation (LAG)	N/A	N/A
	Hotspot Management ^{*7}	N/A	N/A
	Ticket Printer Support ^{*3} /Support Q'ty (max.)	N/A	N/A
Concurrent Devices Logins (default/max.) ^{*7*8}		64	64
Power Requirements			
Power input		12 V DC, 2 A max.	12 V DC, 2.5 A max.
Max. power consumption (watt Max.)		12.5	24.3
Heat dissipation (BTU/hr)		42.65	55.37
Physical Specifications			
Item	Dimensions (WxDxH)(mm/in.)	216 x 147.3 x 33/8.50 x 5.80 x 1.30	216 x 149.28 x 33/8.50 x 5.88 x 1.30
	Weight (Kg/lb.)	0.85/1.87	1.00/2.20
Packing	Dimensions (WxDxH)(mm/in.)	284 x 190 x 100/11.18 x 7.48 x 3.94	284 x 190 x 100/11.18 x 7.48 x 3.94
	Weight (kg/lb.)	1.40/3.09	1.53/3.37
Included accessories		- Power adapter - RJ-45 - RS-232 cable for console connection	- Power adapter with plug - RJ-45 - RS-232 cable for console connection - Antenna
Environmental Specifications			
Operating	Temperature	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)		989,810.8	766,228.2
Certifications			
EMC		FCC Part 15 (Class B), CE EMC (Class B), BSMI	FCC Part 15 (Class B), CE EMC (Class B), C-Tick (Class B), BSMI
Safety		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

*: This matrix with firmware ZLD5.37 or later.

1. Actual performance may vary depending on system configuration, network conditions, and activated applications.
2. Maximum throughput based on RFC 2544 (1,518-byte UDP packets).
3. VPN throughput measurement are based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte, and 1424 byte packet sizes.
4. AV (with Express Mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.
5. Maximum sessions measured using the industry standard IXIA IxLoad testing tool.
6. Including Gateway-to-Gateway and Client-to-Gateway.
7. With Zyxel service license to enable or extend the feature capacity.
8. This is the recommend maximum number of concurrent logged-in devices.
9. With Hotspot Management license support.
10. The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.
11. USG FLEX 100 rev1 is adopting a new hardware design equipped with 4 x LAN/DMZ, 1 x WAN.

ZyWALL USG FLEX Firewalls

Model		USG FLEX 200	USG FLEX 500	USG FLEX 700
Hardware Specifications				
10/100/1000 Mbps RJ-45 ports		4 x LAN/DMZ, 2 x WAN, 1 x SFP	7 (configurable), 1 x SFP (configurable)	12 (configurable), 2 x SFP (configurable)
USB 3.0 ports		2	2	2
Console port		Yes (DB9)	Yes (DB9)	Yes (DB9)
Rack-mountable		Yes	Yes	Yes
Fanless		Yes	N/A	N/A
System Capacity & Performance[†]				
SPI firewall throughput (Mbps) ^{*2}		1,800	2,300	5,400
VPN throughput (Mbps) ^{*3}		450	810	1,100
VPN IMIX throughput (Mbps) ^{*3}		160	240	550
IPS throughput (Mbps) ^{*4}		1,100	1,500	2,000
Anti-Malware throughput (Mbps) ^{*4}		570	800	1,450
UTM throughput (Anti-Malware and IPS)(Mbps) ^{*4}		550	800	1,350
Max. TCP concurrent sessions ^{*5}		600,000	1,000,000	1,600,000
Recommended gateway-to-gateway IPsec VPN tunnels		50	150	250
Max. concurrent IPsec VPN tunnels ^{*6}		100	300	500
Concurrent SSL VPN users		60	150	150
VLAN interface		16	64	128
Speedtest Performance				
SPI firewall throughput (Mbps) ^{††}		931	935	934
Key Features				
Security Service	Sandboxing ^{*7}	Yes	Yes	Yes
	Web Filtering ^{*7}	Yes	Yes	Yes
	Application Patrol ^{*7}	Yes	Yes	Yes
	Anti-Malware ^{*7}	Yes	Yes	Yes
	IPS ^{*7}	Yes	Yes	Yes
	Reputation Filter ^{*7}	Yes	Yes	Yes
	Geo Enforcer ^{*7}	Yes	Yes	Yes
	SecuReporter ^{*7}	Yes	Yes	Yes
	Collaborative Detection & Response ^{*7}	Yes	Yes	Yes
	Device Insight	Yes	Yes	Yes
	Security Profile Sync ^{*7}	Yes	Yes	Yes
	SSL (HTTPS) Inspection	Yes	Yes	Yes
	Two-Factor Authentication	Yes	Yes	Yes
	Email Security	Yes	Yes	Yes
VPN Features	VPN	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec	IKEv2, IPsec, SSL, L2TP/IPsec
	Microsoft Azure	Yes	N/A	N/A
	Amazon VPC	Yes	Yes	Yes
WLAN Management	Default Number of Managed AP	8	8	8
	Recommend Max. AP in 1 AP Group	20	60	200
	Secure WiFi Service ^{*7}	Yes	Yes	Yes
	Maximum Number of Tunnel-Mode AP	10	18	130
Maximum Number of Managed AP		40	72	520

Management & Connectivity	Nebula Cloud Mode	Yes	Yes	Yes
	Nebula Cloud Monitoring Mode	Yes	Yes	Yes
	Device HA Pro	N/A	Yes	Yes
	Link Aggregation (LAG)	N/A	Yes	Yes
	Hotspot Management^{*7}	Yes	Yes	Yes
	Ticket Printer Support^{*9}/Support Q'ty (max.)	Yes (SP350E)/10	Yes (SP350E)/10	Yes (SP350E)/10
	Concurrent Devices Logins (default/max.)^{*7**}	200	200/300	500/2000
Power Requirements				
Power input		12 V DC, 2.5 A max.	12 V DC, 4.17 A	100-240 V AC, 50/60 Hz, 2.5 A max.
Max. power consumption (watt Max.)		13.3	24.1	46
Heat dissipation (BTU/hr)		45.38	82.23	120.1
Physical Specifications				
Item	Dimensions (WxDxH)(mm/in.)	272 x 187 x 36/10.7 x 7.36 x 1.42	300 x 188 x 44/16.93 x 7.4 x 1.73	430 x 250 x 44/16.93 x 9.84 x 1.73
	Weight (Kg/lb.)	1.4/3.09	1.65/3.64	3.3/7.28
Packing	Dimensions (WxDxH)(mm/in.)	427 x 247 x 73/16.81 x 9.72 x 2.87	351 x 152 x 245/13.82 x 5.98 x 9.65	519 x 392 x 163/20.43 x 15.43 x 6.42
	Weight (kg/lb.)	2.23 (W/O bracket) 2.42 (W/ bracket)	2.83/6.24	4.8/10.58
Included accessories		• Power adapter • Rack mounting kit	• Power adapter • Power cord • Rack mounting kit	• Power cord • Rack mounting kit
Environmental Specifications				
Operating	Temperature	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
MTBF (hr)		529,688.2	529,688.2	947,736
Acoustic Noise		N/A	24.5 dBA on < 25°C operating temperature, 41.5 dBA on full FAN speed	24.5 dBA on < 25°C operating temperature, 41.5 dBA on full FAN speed
Certifications				
EMC		FCC Part 15 (Class B), CE EMC (Class B), C-Tick (Class B), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI
Safety		LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

Safety

This matrix with firmware ZLD5.37 or later.

- Actual performance may vary depending on system configuration, network conditions, and activated applications.
- Maximum throughput based on RFC 2544 (1,518-byte UDP packets).
- VPN throughput measurement are based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte, and 1424 byte packet sizes.
- AV (with Express Mode) and IDP throughput measured using the industry standard HTTPc performance test (1,460-byte HTTP packets). Testing done with multiple flows.
- Maximum sessions measured using the industry standard IXIA IxLoad testing tool.
- Including Gateway-to-Gateway and Client-to-Gateway.
- With Zyxel service license to enable or extend the feature capacity.
- This is the recommend maximum number of concurrent logged-in devices.
- With Hotspot Management license support.
- The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.
- USG FLEX 100 rev1 is adopting a new hardware design equipped with 4 x LAN/DMZ, 1 x WAN.

SCR

Model		SCR 50AXE
Hardware Specifications		
CPU		Dual-core, 1.00 GHz, Cortex A53
RAM/FLASH		1 GB/256 MB
10/100/1000 Mbps RJ-45 ports		(1) WAN: 1 GbE RJ-45 port (4) LAN: 1 GbE RJ-45 ports
Fanless		Yes
System Capacity & Performance		
SPI firewall throughput LAN to WAN (Mbps)		900
Threat mgmt ON/App mgmt OFF (Mbps)		900
Wireless Specifications		
Standard compliance		IEEE 802.11 ax 6 GHz IEEE 802.11 ax/ac/n/a 5 GHz IEEE 802.11 ax/n/b/g 2.4 GHz
Wireless security		WPA2-PSK, WPA3-PSK
Wireless frequency		2.4/5/6 GHz
Radio		3
SSID number		4
WPS		Yes
No. of antenna		4 (internal)
Antenna gain		2.0 dBi @2.4 GHz 3.0 dBi @5 GHz 3.5 dBi @6 GHz
Data rate		2.4 GHz: up to 575 Mbps 5 GHz: up to 2400 Mbps 6 GHz: up to 2400 Mbps
Security Features		
Ransomware/Malware Prevention		Yes
Intrusion Blocker		Yes
Dark Web Blocker		Yes
Stop Mail Fraud & Phishing		Yes
Block Ads		Yes
Block VPN Proxy		Yes
Content Filter*		Yes
Firewall		Yes
Country Restriction (GeoIP)		Yes
Exception List		Yes
Custom Allowed/Blocked Domain		Yes
Traffic Management (Applications & Clients)		Yes
Security Event Analytics		Threat Management Report
VPN Features		
Site2site VPN		IPSec (site-to-site, spoke only)
Networking		
WAN type		DHCP/Static IP/PPPoE/PPPoE with static IP
Networking features		NAT - Virtual server DHCP IP/MAC binding Block clients Guest network**
IPTV passthrough		IGMP Proxy
Management		
Site-wide SSID management		Nebula
Multi-site management		Nebula
Topology*		Nebula
Diagnostics		Yes
Remote support**		Yes
Onboarding WAN setting method		WiFi
Power Requirements		
Power input		12 V DC, 2.0 A
Max. power consumption (watt max.)		21 W
Physical Specifications		
Item	Dimensions (WxDxH)(mm/in.)	178.0 x 54.6 (stand 68.2) x 242.2/7.00 x 2.14 (stand 2.68) x 9.54
	Weight (g/lb.)	651/1.44 (with stand)
Environmental Specifications		
Operating	Temperature	0°C to 40°C/32°F to 104°F
	Humidity	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 95% (non-condensing)
Certifications		
Certifications		CE, FCC, BSMI

*: Requiring SCR Pro Pack license.

**: Available in Q3 2023.

Wireless Specifications

Model	ZyWALL USG FLEX Firewalls		SCR
	USG FLEX 50AX	USG FLEX100AX	SCR 50AXE
Standard compliance	802.11 ax/ac/n/g/b/a	802.11 ax/ac/n/g/b/a	802.11 ax/ac/n/g/b/a
Wireless frequency	2.4/5 GHz	2.4/5 GHz	2.4/5/6 GHz
Radio	2	2	3
SSID number	4	4	4
Maximum transmit power (Max. total channel)	- US (FCC) 2.4 GHz: 29.8 dBm, 2 antennas - US (FCC) 5 GHz: 32.6 dBm, 2 antennas - EU (ETSI) 2.4 GHz: 19.93 dBm (EIRP), 2 antennas - EU (ETSI) 5 GHz: 22.99 dBm (EIRP), 2 antennas	- US (FCC) 2.4 GHz: 29.8 dBm, 2 antennas - US (FCC) 5 GHz: 32.6 dBm, 2 antennas - EU (ETSI) 2.4 GHz: 19.93 dBm (EIRP), 2 antennas - EU (ETSI) 5 GHz: 22.99 dBm (EIRP), 2 antennas	- US (FCC) 2.4 GHz: 26.5 dBm, 2 antennas - US (FCC) 5 GHz: 29.5 dBm, 2 antennas - US (FCC) 6 GHz: 24.5 dBm, 2 antennas - EU (ETSI) 2.4 GHz: 19.31 dBm (EIRP), 2 antennas - EU (ETSI) 5 GHz: 25.24 dBm (EIRP), 2 antennas - EU (ETSI) 6 GHz: 22.26 dBm (EIRP), 2 antennas
No. of antenna	2 detachable antennas	2 detachable antennas	4 internal antennas
Antenna gain	3 dBi @2.4 GHz/5 GHz	3 dBi @2.4 GHz/5 GHz	2 dBi @2.4 GHz 3 dBi @5 GHz 3.5 dBi @6 GHz
Data rate	2.4 GHz: up to 600 Mbps 5 GHz: up to 1200 Mbps	2.4 GHz: up to 600 Mbps 5 GHz: up to 1200 Mbps	2.4 GHz: up to 575 Mbps 5 GHz: up to 2400 Mbps 6 GHz: up to 2400 Mbps
Frequency band	2.4 GHz (IEEE 802.11 b/g/n) - USA (FCC): 2.412 to 2.462 GHz - Europe (ETSI): 2.412 to 2.472 GHz - TWN (NCC): 2.412 to 2.462 GHz 5 GHz (IEEE 802.11 a/n/ac/ax) - USA (FCC): 5.150 to 5.250 GHz; 5.725 to 5.850 GHz - Europe (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz - TWN (NCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz	2.4 GHz (IEEE 802.11 b/g/n) - USA (FCC): 2.412 to 2.462 GHz - Europe (ETSI): 2.412 to 2.472 GHz - TWN (NCC): 2.412 to 2.462 GHz 5 GHz (IEEE 802.11 a/n/ac) - USA (FCC): 5.150 to 5.250 GHz; 5.725 to 5.850 GHz - Europe (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz - TWN (NCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz	2.4 GHz (IEEE 802.11 b/g/n/ax) - USA (FCC): 2.412 to 2.462 GHz - Europe (ETSI): 2.412 to 2.472 GHz - TWN (NCC): 2.412 to 2.462 GHz 5 GHz (IEEE 802.11 a/n/ac/ax) - USA (FCC): 5.150 to 5.250 GHz; 5.250 to 5.350 GHz; 5.470 to 5.725 GHz; 5.725 to 5.850 GHz - European (ETSI): 5.150 to 5.350 GHz; 5.470 to 5.725 GHz - TWN (NCC): 5.150 to 5.250 GHz; 5.250 to 5.350 GHz; 5.470 to 5.725 GHz; 5.725 to 5.850 GHz 6 GHz (IEEE 802.11 ax) - USA (FCC): 5.925 to 7.125 GHz - European (ETSI): 5.925 to 6.425 GHz
Receive sensitivity	2.4 GHz: 11 Mbps ≤ -99 dBm 54 Mbps ≤ -95 dBm - HT20, MCS7 ≤ -90 dBm - HT40, MCS7 ≤ -86 dBm 5 GHz: 54 Mbps ≤ -90 dBm - HT20, MCS7 ≤ -85 dBm - HT40, MCS7 ≤ -81 dBm - VHT20, MCS8 ≤ -90 dBm +/- 2 dBm - VHT40, MCS9 ≤ -85 dBm +/- 2 dBm - VHT80, MCS9 ≤ -68 dBm +/- 2 dBm - HE20, MCS11 ≤ -61 dBm +/- 2 dBm - HE40, MCS11 ≤ -58 dBm +/- 2 dBm - HE80, MCS11 ≤ -55 dBm +/- 2 dBm	2.4 GHz: 11 Mbps ≤ -99 dBm 54 Mbps ≤ -95 dBm - HT20, MCS7 ≤ -90 dBm - HT40, MCS7 ≤ -86 dBm 5 GHz: 54 Mbps ≤ -90 dBm - HT20, MCS7 ≤ -85 dBm - HT40, MCS7 ≤ -81 dBm - VHT20, MCS8 ≤ -90 dBm +/- 2 dBm - VHT40, MCS9 ≤ -85 dBm +/- 2 dBm - VHT80, MCS9 ≤ -68 dBm +/- 2 dBm - HE20, MCS11 ≤ -61 dBm +/- 2 dBm - HE40, MCS11 ≤ -58 dBm +/- 2 dBm - HE80, MCS11 ≤ -55 dBm +/- 2 dBm	2.4 GHz: 11 Mbps ≤ -82 dBm 54 Mbps ≤ -69 dBm - HT20, MCS7 ≤ -68 dBm - HT40, MCS7 ≤ -67 dBm - VHT20, MCS8 ≤ -64 dBm +/- 2 dBm - VHT40, MCS9 ≤ -62 dBm +/- 2 dBm - HE20, MCS11 ≤ -58 dBm +/- 2 dBm - HE40, MCS11 ≤ -55 dBm +/- 2 dBm 5 GHz: 54 Mbps ≤ -72 dBm - HT20, MCS7 ≤ -71 dBm - HT40, MCS7 ≤ -68 dBm - HT80, MCS7 ≤ -65 dBm - VHT20, MCS8 ≤ -65 dBm +/- 2 dBm - VHT40, MCS9 ≤ -62 dBm +/- 2 dBm - VHT80, MCS9 ≤ -59 dBm +/- 2 dBm - HE20, MCS11 ≤ -60 dBm +/- 2 dBm - HE40, MCS11 ≤ -58 dBm +/- 2 dBm - HE80, MCS11 ≤ -55 dBm +/- 2 dBm - HE (80+80), MCS11 ≤ -52 dBm +/- 2 dBm 6 GHz: - HE20, MCS11 ≤ -61 dBm +/- 2 dBm - HE40, MCS11 ≤ -58 dBm +/- 2 dBm - HE80, MCS11 ≤ -55 dBm +/- 2 dBm - HE160, MCS11 ≤ -52 dBm +/- 2 dBm

Compatibility & Accessories

Access Point

Product	Unified AP	Unified Pro AP
Models	• NWA5123-AC • NWA5123-AC HD* • WAC5302D-S • WAC5302D-Sv2	• WAX510D* • WAC500* • WAC500H* • WAX300H
		• WAC6103D-I • WAC6303D-S • WAC6502D-E • WAC6502D-S • WAC6503D-S • WAC6552D-S • WAC6553D-E
		• WAX650S* • WAX610D • WAX630S • WAX640S-6E • WAX620D-6E • WAX655E
Functions		
Central management	Yes	Yes
Auto provisioning	Yes	Yes
Data forwarding	Local bridge	Local bridge/Data tunnel
ZyMesh	Yes	Yes

*: Support both local bridge and data tunnel for data forwarding

Service Gateway Printer

Model	Feature	Supported Model
SP350E	• Buttons: 3 • Paper roll width: 58 (+0/-1) mm • Interface: 10/100 Mbps RJ-45 port • Power input: 12 V DC, 5 A max. • Item dimensions (WxDxH): 176 x 111 x 114 mm (6.93" x 4.37" x 4.49") • Item weight: 0.8 kg (1.76 lb.)	• USG FLEX 200 • USG FLEX 500 • USG FLEX 700 • VPN50 • VPN100 • VPN300 • VPN1000 • USG60(W) • USG110 • USG210 • USG310 • USG1100 • USG1900 • USG2200 Series • ZyWALL 110 • ZyWALL 310 • ZyWALL 1100

1: Hotspot management licenses required

Model	Speed	Connector	Wavelength	Max. Distance	Optical Fiber Type	DDMI
SFP10G-SR*	10-Gigabit SFP+	Duplex LC	850 nm	300 m/328 yd	Multi Mode	Yes
SFP10G-LR*	10-Gigabit SFP+	Duplex LC	1310 nm	10 km/10936 yd	Single Mode	Yes
SFP-1000T	Gigabit	RJ-45	-	100 m/109 yd	Multi Mode	-
SFP-LX-10-D	Gigabit	Single LC	1310 nm	10 km/10936 yd	Single Mode	Yes
SFP-SX-D	Gigabit	Single LC	850 nm	550 m/601 yd	Multi Mode	Yes
SFP-BX1310-10-D*	Gigabit	Single LC	1310 nm (TX) 1490 nm (RX)	10 km/10936 yd	Single Mode	Yes
SFP-BX1490-10-D*	Gigabit	Single LC	1490 nm (TX) 1310 nm (RX)	10 km/10936 yd	Single Mode	Yes

*: Only USG2200-VPN supports 10-Gigabit SFP+

*t: SFP-BX1310-10-D and SFP-BX1490-10-D are must used in pairs.

VPN Client Subscription

Item	Description	Supported OS
SecuExtender Zero Trust IPSec/SSL VPN Client Subscription*	SecuExtender supports popular VPN protocols including IKEv2/EAP, SSL VPN. Building secure tunnel with industry-leading strong cipher, the SecuExtender guarantees your confidentiality and data integrity.	• Windows 10 64-bit • Windows 11 64-bit • macOS 10.15 or above

*: One subscription license to activate IPSec or SSL VPN from selected OS Windows/macOS.

Corporate Headquarters

- Zyxel Networks Corp.
- Tel: +886-3-578-3942
- Fax: +886-3-578-2439
- Email: sales@zyxel.com.tw
- www.zyxel.com
- Europe

Zyxel Belarus

- Tel: +375 25 604 3739 Email: info@zyxel.by www.zyxel.by

- Zyxel BeNeLux
- Tel: +31 23 555 3689
- Fax: +31 23 557 8492 Email: sales@zyxel.nl www.zyxel.nl
- www.zyxel.be
- Zyxel Bulgaria
- (Bulgaria, Macedonia, Albania, Kosovo)
- Tel: +3592 4443343 Email: info@cz.zyxel.com www.zyxel.bg
- Zyxel Czech Republic Tel: +420 241 091 350 Hotline: +420 241 774 665 Fax: +420 241 091 359 Email: sales@cz.zyxel.com www.zyxel.cz
- Zyxel Denmark A/S
- Tel: +45 39 55 07 00
- Fax: +45 39 55 07 07 Email: sales@zyxel.dk www.zyxel.dk
- Zyxel Finland
- Tel: +358 9 4780 8400 Email: myynti@zyxel.fi www.zyxel.fi
- Zyxel France
- Tel: +33 (0)4 72 52 97 97 Fax: +33 (0)4 72 52 19 20 Email: info@zyxel.fr www.zyxel.fr
- Zyxel Germany GmbH Tel: +49 (0) 2405-6909 0 Fax: +49 (0) 2405-6909 99 Email: sales@zyxel.de www.zyxel.de
- Zyxel Hungary & SEE
- Tel: +36 1 848 0690 Email: info@zyxel.hu www.zyxel.hu
- Zyxel Iberia
- Tel: +34 911 792 100 Email: ventas@zyxel.es www.zyxel.es
- Zyxel Italy
- Tel: +39 011 230 8000 Email: info@zyxel.it www.zyxel.it
- Zyxel Norway
- Tel: +47 22 80 61 80
- Fax: +47 22 80 61 81 Email: salg@zyxel.no www.zyxel.no
- Zyxel Poland
- Tel: +48 223 338 250 Hotline: +48 226 521 626 Fax: +48 223 338 251 Email: info@pl.zyxel.com www.zyxel.pl
- Zyxel Romania
- Tel: +40 31 0809 888 Fax: +40 31 0809 890 Email: info@cz.zyxel.com www.zyxel.ro
- Zyxel Russia
- Tel: +7 499 705 6106 Email: info@zyxel.ru www.zyxel.ru
- Zyxel Slovakia
- Tel: +421 220 861 847 Hotline: +421 220 861 848 Fax: +421 243 193 990 Email: info@cz.zyxel.com <http://www.zyxel.sk>
- Zyxel Sweden A/S
- Tel: +46 8 55 77 60 60 Fax: +46 8 55 77 60 61 Email: sales@zyxel.se www.zyxel.se
- Zyxel Switzerland
- Tel: +41 (0)44 806 51 00 Fax: +41 (0)44 806 52 00 Email: info@zyxel.ch www.zyxel.ch
- Zyxel Turkey A.S.
- Tel: +90 212 314 18 00 Fax: +90 212 220 25 26 Email: bilgi@zyxel.com.tr www.zyxel.com.tr

- Zyxel UK Ltd.
- Tel: +44 (0) 118 9121 700 Fax: +44 (0) 118 9797 277 Email: sales@zyxel.co.uk www.zyxel.co.uk
- Zyxel Ukraine
- Tel: +380 89 323 9959 Email: info@zyxel.eu www.zyxel.ua

Asia

- Zyxel China (Shanghai) China Headquarters
- Tel: +86-021-61199055 Fax: +86-021-52069033 Email: sales@zyxel.cn www.zyxel.cn
- Zyxel China (Beijing)
- Tel: +86-010-62602249 Email: sales@zyxel.cn www.zyxel.cn
- Zyxel China (Tianjin)
- Tel: +86-022-87890440 Fax: +86-022-87892304 Email: sales@zyxel.cn www.zyxel.cn
- Zyxel India
- Tel: +91-11-4760-8800 Fax: +91-11-4052-3393 Email: info@zyxel.in
- www.zyxel.in
- Zyxel Kazakhstan
- Tel: +7 727 350 5683 Email: info@zyxel.kz www.zyxel.kz
- Zyxel Korea Corp.
- Tel: +82-2-890-5535
- Fax: +82-2-890-5537 Email: sales@zyxel.kr www.zyxel.kr
- Zyxel Malaysia
- Tel: +603 2282 1111
- Fax: +603 2287 2611
- Email: sales@zyxel.com.my www.zyxel.com.my
- Zyxel Middle East FZE
- Tel: +971 4 372 4483
- Cell: +971 562146416
- Email: sales@zyxel-me.com www.zyxel-me.com
- Zyxel Philippine
- Email: sales@zyxel.com.ph www.zyxel.com.ph
- Zyxel Singapore
- Tel: +65 6339 3218
- Hotline: +65 6339 1663
- Fax: +65 6339 3318
- Email: sales@zyxel.com.sg www.zyxel.com.sg
- Zyxel Taiwan (Taipei)
- Tel: +886-2-2739-9889
- Fax: +886-2-2735-3220 Email: sales_tw@zyxel.com.tw www.zyxel.com.tw
- Zyxel Thailand
- Tel: +66-(0)-2831-5315
- Fax: +66-(0)-2831-5395 Email: info@zyxel.co.th
- www.zyxel.co.th
- Zyxel Vietnam

- Tel: (+848) 35202910
- Fax: (+848) 35202800
- Email: sales_vn@zyxel.com.tw www.zyxel.com/vn/vi/

The Americas

- Zyxel USA
- North America Headquarters Tel: +1-714-632-0882
- Fax: +1-714-632-0858
- Email: sales@zyxel.com
- us.zyxel.com
- Zyxel Brazil
- Tel: +55 (11) 3373-7470
- Fax: +55 (11) 3373-7510
- Email: comercial@zyxel.com.br www.zyxel.com/br/pt/

For more product information, visit us on the web at www.zyxel.com

Copyright © 2023 Zyxel and/or its affiliates. All rights reserved.

All specifications are subject to change without notice.



Documents / Resources

	ZYXEL USG FLEX 700H Unified Security Gateway [pdf] User Guide USG FLEX 700H Unified Security Gateway, USG FLEX 700H, Unified Security Gateway, Security Gateway, Gateway
---	--

References

- [!\[\]\(07929003c057e55bca40fcc7e42910ee_img.jpg\) iCloud](#)
- [!\[\]\(8d9a6952b9fb8de2104cbe836d43bc80_img.jpg\) Zykel](#)
- [!\[\]\(661fefe957c8a20214f8f1b6e8d0d087_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(b6f1e6d90aef4fdb8e7a844386772852_img.jpg\) Zykel - лидер в областта на сигурните мрежови облачни решения с изкуствен интелект](#)
- [!\[\]\(36c8b318389ada86c8eb8fc59017e2b2_img.jpg\) Zykel – лидер в области безопасных облачных сетевых решений](#)
- [!\[\]\(77ec43b12940ab3a70b6114d7a2010b4_img.jpg\) Zykel ist ein führender Hersteller von sicheren, KI-gestützten Cloud-Netzwerk-lösungen](#)
- [!\[\]\(0d22177746126e6b65c20f2e19ecd814_img.jpg\) Zykel Networks, Your Networking Ally | Zykel Networks](#)
- [!\[\]\(8e463e80109a6dccdcd70af4654bdd87_img.jpg\) Zykel – !\[\]\(f90ca66d33983dfe2919a3d2527b1e2a_img.jpg\) Cloud !\[\]\(084d1750fda89fd3c43360e3d25bc891_img.jpg\)
!\[\]\(32d6fa7961e2e0d171b3ff5f3d77f8f6_img.jpg\) AI](#)
- [!\[\]\(b0a84b812bce4594ed22f20fd8d7c3d4_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(a1eacd89c07e1d64141b13e3129b057d_img.jpg\) Zykel](#)
- [!\[\]\(4e67b3d81f74ea892e70ff32c56f8828_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(14f863297209afe5763a41fed805f681_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(a9951c66bfb8c43077bb798dcdcf7937_img.jpg\) Zykel –](#)
- [!\[\]\(f0e6074b489748445f5102656d2769db_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(63dbf5f5aff0fd68553c9b31ee2b1dc4_img.jpg\) Zykel – Đúng đầu trong giải pháp Mạng đám mây kết hợp AI và Bảo mật](#)
- [!\[\]\(e3462497b90ac5a0eb5a4cb9535fe835_img.jpg\) \[zyxel.cz\]\(#\)](#)
- [!\[\]\(02dc975e8bede1bdd03b0dc1b5ad658f_img.jpg\) Zykel ist ein führender Hersteller von sicheren, KI-gestützten Cloud-Netzwerk-lösungen](#)
- [!\[\]\(3dfdb3405a776e4ba77c562998e81f74_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(eb25c7924df5889f4b005143e2a86702_img.jpg\) Zykel - Líder en soluciones de seguridad y redes gestionadas en la nube y basadas en AI](#)
- [!\[\]\(76a03cbb7848c49b8c44de7dffb6be9a_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(07b8bd32bb6e4c91cc8cc45c8cc5a4cb_img.jpg\) Zykel est leader dans les solutions réseau cloud sécurisées et alimentées par l'IA](#)
- [!\[\]\(18b3167bc425e004ee00244fce08041c_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(2ebc18c98715d51df709ffd4bee6a449_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(4c0f1d748427f762b804dbc6cf93e347_img.jpg\) !\[\]\(b1acde0756b489b81efa2270d099e188_img.jpg\)](#)
- [!\[\]\(8420d78d101989c8af4360a02f4b5e50_img.jpg\) Особое сообщение](#)
- [!\[\]\(3665ecba5475543c6fd97bc1e7e74c3c_img.jpg\) Zykel - Leider in veilige, AI-gestuurde Cloud Netwerkoplossingen](#)
- [!\[\]\(729da7935c4147635f4d270ccfe86c97_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(c8efce44eaa945741d2175c82d4773e4_img.jpg\) \[zyxel.pl\]\(#\)](#)
- [!\[\]\(6a69aad9f5df58fc9759692f17cfa3bc_img.jpg\) Zykel – Leader in Secure, AI-Powered Cloud Networking Solutions](#)
- [!\[\]\(a3c952fdae00e9802686276bae77d3f7_img.jpg\) Zykel – лидер в области безопасных облачных сетевых решений](#)
- [!\[\]\(1b30314970cd8c48cd9bbd5e8f393be1_img.jpg\) \[zyxel.sk\]\(#\)](#)
- [!\[\]\(b5244531c8006ebb0187ef129a50cb9f_img.jpg\) Zykel – лідер у галузі безпечних хмарних мережових рішень](#)
- [!\[\]\(fd194f3e2f99816aa3ee6d163bed4bca_img.jpg\) Zykel](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.