

Contents [[hide](#)]

- [1 AJAZZ AK35I V3 MAX BT Tripe Mode Mechanical Keyboard](#)
- [2 Product Specification](#)
- [3 Description](#)
- [4 FUNCTIONS](#)
- [5 Screen Display and Settings](#)
- [6 Instructions Operation Steps](#)
- [7 FCC Warning](#)
- [8 Frequently Asked Questions](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)




AJAZZ AK35I V3 MAX BT Tripe Mode Mechanical Keyboard




Thankyou very much for purchasing our AJAZZ AK351 PRO V2. This product has various cool functions and lighting effects. I hope it can bring you a new operating

experience. For more operations, please visit AJAZZ official website to download the driver.

Product Specification

- **Product brand:**  AJAZZ
- **Product model:** AJAZZ AK351 V3 MAX
- **Transmission method:** USB wired +2.4G wireless + BT 5.1
- **Interface type:** Type-C interface
- **Product size:** 448* 148*23mm
- **Product weight:** \approx 1230g
- **Battery capacity:** 8000mAh
- **Shell material:** ABS injection molding
- **Keycaps profile:** Cherry profile
- **Lighting effect:** 20 modes RGB lighting effects
- **Layout:** 104 keys with metal volume knob
- **Product structure:** Gasket structure
- **Anti-ghosting:** all key
- **Support system:** Windows Vista /7/8/10/11, MAC, Android

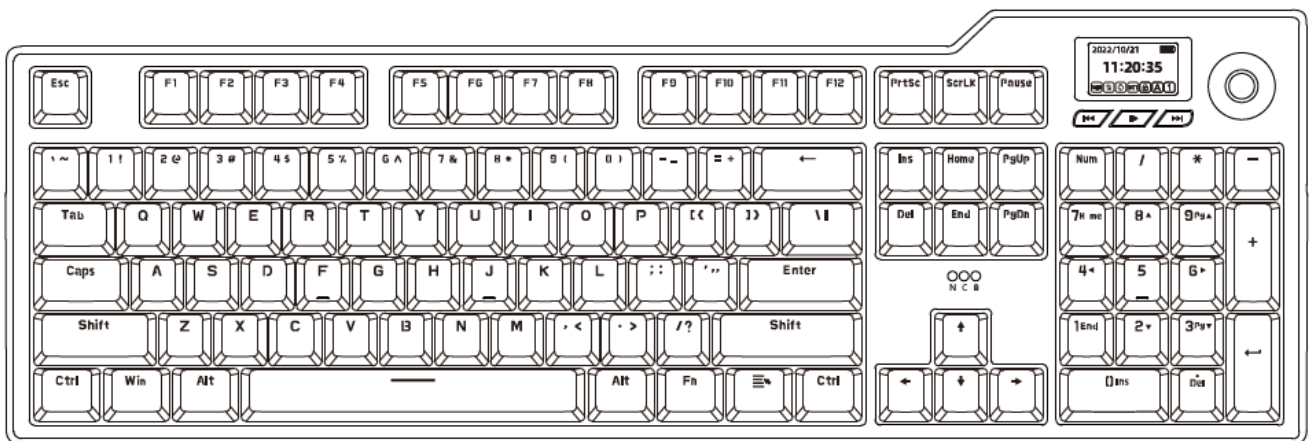


Description

Switch/Light Description

Switch Description

- **TYPE-C:** USB mode Type-C interface

- **2.4G:** 2.4G mode, toggle the switch to the right
- **USB:** wired mode (default), toggle the switch to the middle
- **BT:** BT mode, toggle the switch to the left
- **Mac:** Mac system, toggle the switch to the right
- **Win:** Win system (default), toggle the switch to the left

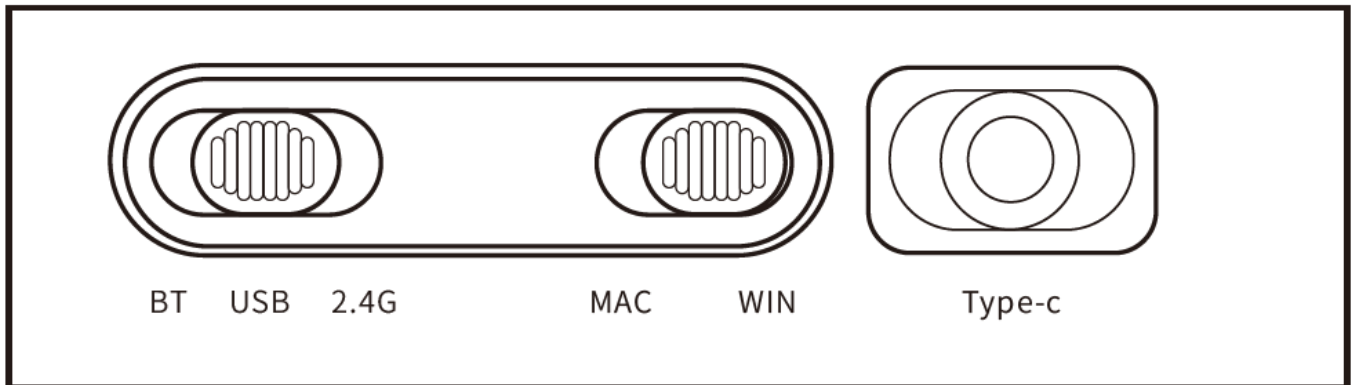

Indicator Light Description

1. Num lock switch indicator light

The white light is always on when it is pressed, and the white light is off when it is pressed again to unlock.

2. Indicator light “C”: Caps lock switch indicator light

The white light of Caps lock is always on when the lock is opened, and the white light is off when the Caps lock is closed

3. Low voltage indicator light

The red light flashes when low voltage, the red light is always on when charging, and the red light is off when it is fully charged.



Sleep Mechanism / Low Power State Bright

Sleep mode

1. **Power-saving sleep state:** the back light will be turned off after 5 minutes without key operation on the keyboard, press any button to wake up the back light of the keyboard and connect back to BT/2.4G;
2. **Deep mode status:** Deep standby after 30 minutes of no key operation on the keyboard, BT is disconnected and sleeps, press any key to wake up the keyboard backlight and connect back to BT/2.4G;

Low Power State

1. **Low power status:** the battery icon on the screen displays zero grids (red light flashes when the indicator light 3 is low voltage)
2. **Charging status:** The battery icon on the screen displays five grids, and there is a lightning mark next to it to indicate (indicator 3 is always red when charging)
3. **Fully charged state:** the fully charged indicator light is off

Mode Connection Description

BT mode connection: switch to BT position

BT Name

1. BT channel 1 BT 5.1 Ak35i BT -1
2. BT channel 2 BT 5.1 AK35i BT -2
3. BT channel 3 BT 5.1 AK35i BT -3

BT channel 1:

- **Switching method:** Short press the FN+Q combination key to switch the BT channel, the light of the Q button flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
- **Pairing method:** Long press the FN+Q combination key for 3 seconds to pair, the Q key light (corresponding to blue) will flash quickly to enter the code pairing mode, and the light will return to normal light effect after the connection is successful.

BT channel 2:

- **Switching method:** Short press the FN+W combination key to switch the BT channel, the light of the W key flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
- **Pairing method:** Long press the FN+W combination key for 3 seconds to pair, the W key light (corresponding to cyan) will flash quickly to enter the code pairing mode, and the light will return to normal light effect after the connection is successful

BT channel 3:

- **Switching method:** Short press the FN+E combination key to switch the BT channel, the light of the E key flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
- **Pairing method:** Long press the FN+E key combination for 3 seconds to pair, the E key light (corresponding to purple) will flash quickly to enter the code pairing mode, and the light will return to normal light effect after the connection is successful.

2.4G mode connection: switch to 2.4G

- **Switching method:** switch to the 2.4G gear, the R key light flashes slowly (up to 30 seconds), insert the receiver to enter the 2.4G connection mode.

- **Pairing method:** long press FN+R for 3 seconds to force enter the 2.4G code pairing mode, the R button light (green light) flashes quickly, stops flashing after the code pairing is completed (for after-sales), exits the code pairing after the pairing is successful, and the light returns normal light effect*

Wired mode connection: Wired mode switching method:

Switching method: switch to the wired position, plug in the USB data cable to connect

Note: The wired mode is the charging mode.

FUNCTIONS

Lighting switch combination key description

- **FN+I:** Lighting effect switching, 20 kinds of lighting effects cycle in turn
- **FN+ ↑:** light brightness + (six levels, the default factory maximum brightness) when adjusted to the limit, the overall backlight flashes 3 times to indicate
- **FN+ ↓** light brightness – (six gears) when the overall backlight is turned off when it is adjusted to the limit
- **FN+ ← →:** Light effect direction adjustment (press once to the left, then press to the right)
- **F N +4:** Switch the backlight color (the order is: RGB red orange yellow green blue purple white RGB)
- **FN + _ . Lighting speed** – (six gears, factory default three gears) when adjusted to the limit, the overall backlight flashes 3 times to indicate
- **FN “=+”** When the light speed + (six gears) is adjusted to the limit, the overall backlight flashes 3 times to indicate
- **FN+X:** turn off the light\turn on the light
- **FN + Space bar:** Press and hold for 3-5 seconds, the keyboard backlight will flash 3 times, and the factory settings will be restored

Turn on light recording mode:

1. **FN+I! /2@/3#**, three sets of game lighting effects can be customized (all white lights are preset)

2. **FN+I!** Default FPS mode: W/A/S/D/ t /
3. **FN+2@** Default LOL mode: Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc
4. **FN+ Record/save** the lighting mode for the lighting effects of the above three game modes. When recording, press the button once for a color, a total of 8 colors (the order is: red, orange, yellow, green, blue, purple, white)


Clear light recording: Reset to clear light recording.

Multimedia Composite Function Description

Combination key	WIN System	MAC System	Combination key	WIN System	MAC System
FN+F1	Media Player	Screen brightness -	FN+F7	Play / Pause	Last Song
FN+F2	Volume -	Screen brightness +	FN+F8	Next Song	Play / Pause
FN+F3	Volume +	Mission control	FN+F9	Email	Next Song/Mute
FN+F4	Mute	Mission control	FN+F10	Browser	Mute
FN+F5	Player stop/play	Keyboard backlight brightness+	FN+F11	My computer	Volume -
FN+F6	Last Song	Keyboard backlight brightness+	FN+F12	Calculator	Volume +
FN+ Win	Lock the Win key, the small lock icon on the Win key screen will light up after locking, and then press to unlock				

Description of the scroll wheel function keys

- **Turn right:** volume +
- **Turn Left:** Volume –
- **Press:** Mute

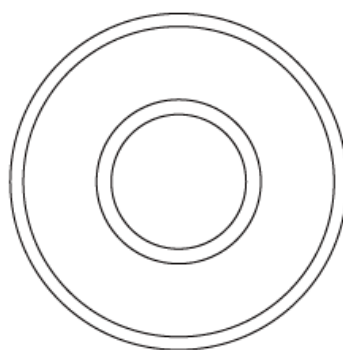

Screen Display and Settings


Key Operation Instructions

- **FN+knob:** Enter the setting page, turn left or right to control the direction, such as left or right, press FN+knob again, the knob exits the screen setting function.
- **FN+Prtsc:** Tap to open the animation, then press to return to the main page.

- **FN+scrk**: Press to turn off the screen display, then press to turn on.
- **FN+C**: Screen language switching in Chinese
- **FN+V** : Screen language switching English

The main page shows:

1. Date display
2. Power display (full charge green display, 20%-80% yellow display, 20% red display)
3. Time display
4. Connect to MAC/WIN system display
5. Connect to BT/2.4G/USB wired mode display
6. Lock WIN display
7. Uppercase and lowercase switching display
8. Digital area switch display

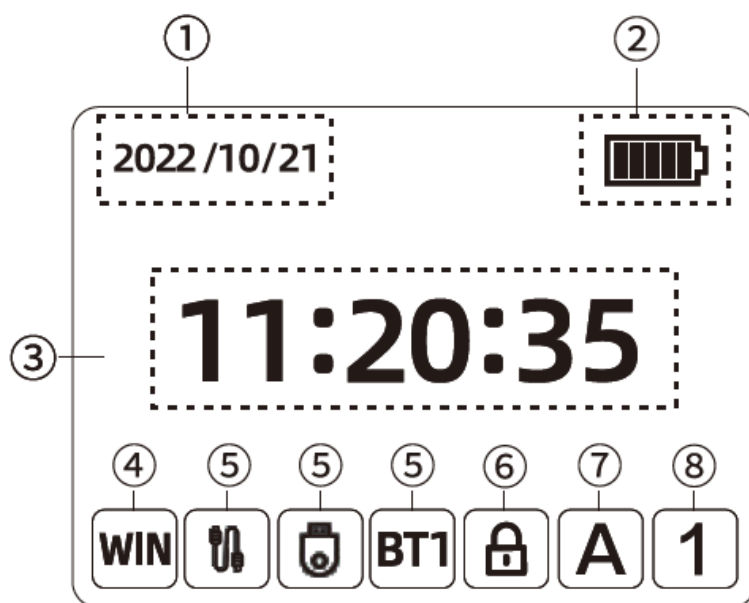

Settings page display


Lighting effect adjustment: (Enter the setting page, the knob controls the left and right directions, press the knob to confirm)




Lighting color adjustment: (Enter the setting page, the knob controls the left and right direction, press the knob to confirm)




Light brightness adjustment: (enter the setting page, the knob controls the left and right directions, press the knob to confirm)

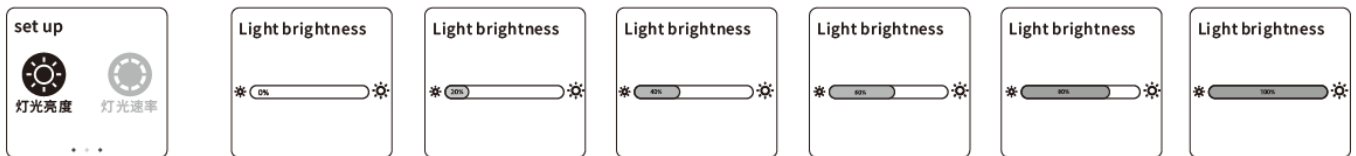

Light rate adjustment: (enter the setting page, the knob controls the left and right direction, press the knob to confirm)

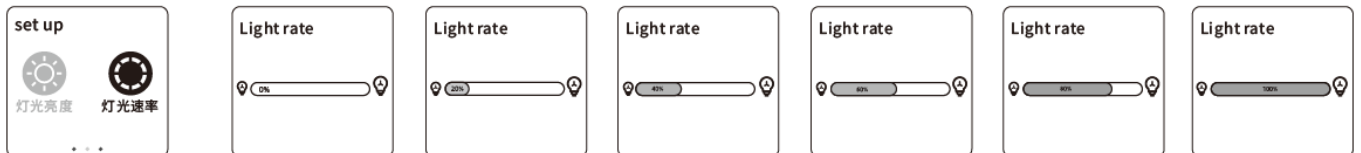

Screen language switching: (enter the setting page, the knob controls the left and right directions, press the knob to confirm)


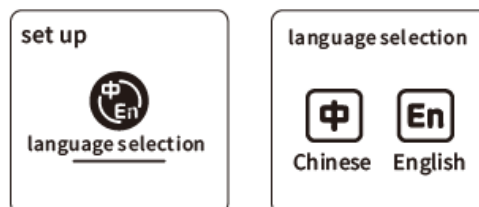


Instructions Operation Steps



Instructions for Hot Plug Operation Steps

Hot-swappable: You can replace different switches, customize your favorite tactile and auditory feed back, and the 3/5 pin shaft base is compatible with most mechanical bodies. (The picture is for reference only, the actual product shall prevail)

1. pull out the keycap with a key puller
2. Use a shaft puller to clamp the buckles on the upper and lower sides of the bottom of the shaft body, and then pull the shaft up and out

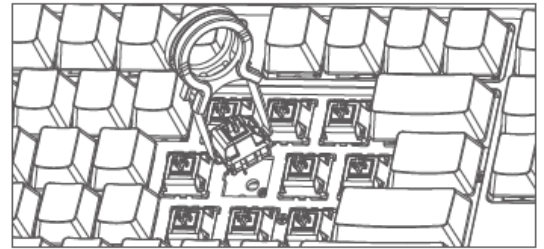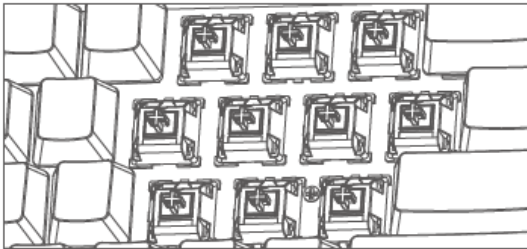

3. New switch calibration pins and holes
4. Vertical flip switch

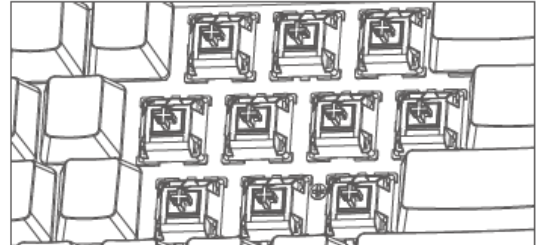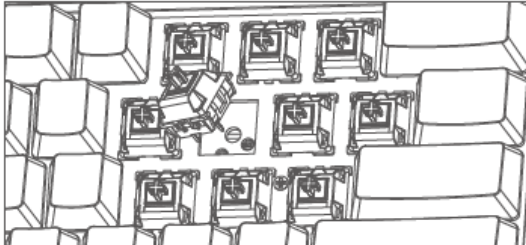

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna,
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the

receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.


NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Frequently Asked Questions

- **Q: How do I switch between MAC and Windows systems?**
 - A: Use the Combination keys WIN System MAC System to switch between MAC and Windows systems.
- **Q: How do I adjust the keyboard backlight brightness?**
 - A: Use the FN keys along with F5 and F6 to adjust the keyboard backlight brightness levels.
- **Q: What does the FN key do?**
 - A: The FN key, used in combination with other keys, allows you to access various functions such as volume control, media playback, and more.

Documents / Resources

	AJAZZ AK35I V3 MAX BT Tripe Mode Mechanical Keyboard [pdf] User Manual AK35IV3, 2AY3H-AK35IV3, 2AY3HAK35IV3, AK35I V3 MAX BT Tripe Mode Mechanical Keyboard, AK35I V3 MAX, BT Tripe Mode Mechanical Keyboard, Tripe Mode Mechanical Keyboard, Mode Mechanical Keyboard, Mechanical Keyboard, Keyboard
---	--

References

- [User Manual](#)

💎 2AY3H-AK35IV3, 2AY3HAK35IV3, aJAZZ, AK35I V3 MAX, AK35I V3 MAX BT Tripe Mode Mechanical Keyboard, AK35IV3, BT Tripe Mode Mechanical Keyboard, Keyboard, Mechanical keyboard, Mode Mechanical Keyboard, TRIPE MODE Mechanical KeyBoard

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.