



Contents [[hide](#)]

[1 ALTA LABS ROUTE10 High Performance 10 Gbps Router](#)

[2 Before You Begin](#)

[3 Package Contents](#)

[4 Installation Requirements](#)

[5 Hardware Overview](#)

[5.1 Top](#)

[5.2 Bottom](#)

[5.3 Front](#)

[5.4 Reset Button](#)

[5.5 Back](#)

[6 Hardware Installation](#)

[6.1 Mounting On A Wall](#)

[7 Set Up Your Device](#)

[8 Route10 Specifications](#)

[9 Specifications](#)

[10 Compliance](#)

[11 FCC Caution](#)

[12 CAN ICES-003\(B\) / NMB-003\(B\)](#)

[13 FAQ](#)

[13.1 Q: How do I change the LED color on top of the device?](#)

[13.2 Q: What do I do if I forget my Alta account login information?](#)

[13.3 Q: Can I connect devices with different connection speeds to the SFP+ Ports?](#)

[14 Documents / Resources](#)

[14.1 References](#)

[15 Related Posts](#)


ALTA LABS ROUTE10 High Performance 10 Gbps Router



USER GUIDE

Before You Begin

Create your free Alta account to manage your Alta devices. Visit manage.alta.inc or download the Alta Networks app.

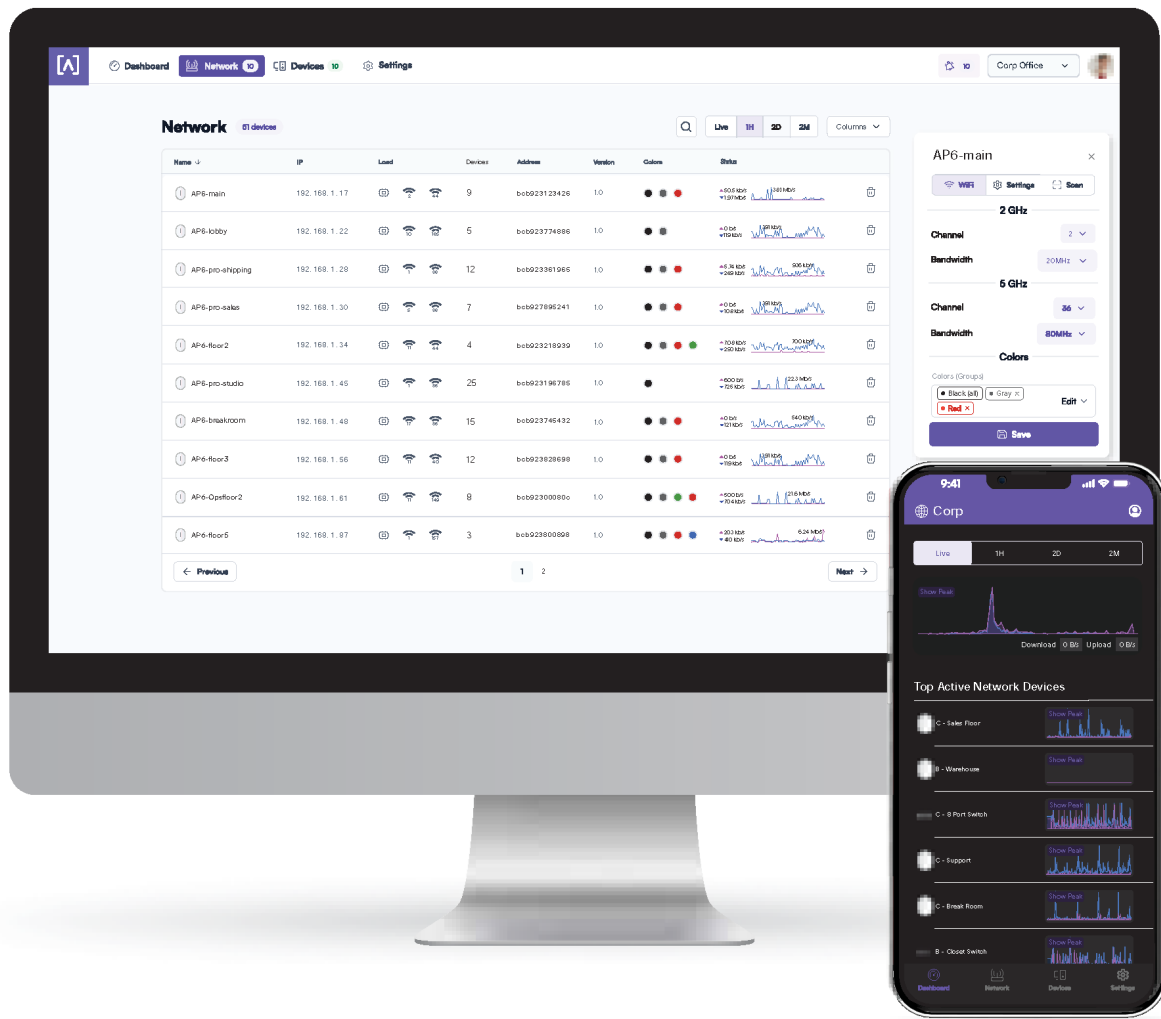

Package Contents



Route10



Mounting Bracket



Mounting Screws
(M3x20mm, Qty. 2)



Anchors
(Qty. 2)



Power Supply

Note: We recommend using the included mounting hardware for product installation.

Installation Requirements

- Ethernet cabling (CAT 5 or above)
- Phillips screwdriver (for mounting)
- Pencil (for marking mounting template)
- Drill and drill bit (for mounting)

Hardware Overview

Top



The Alta Labs logo LED on top of the device flashes as the unit is powered up. Once fully booted, the LED will remain lit unless turned off in the UI. The LED color can also be changed in the management interface.

Bottom



The bottom of the device has padding for desktop placement and notches for mounting.

Front



Reset Button

Press down for 10 seconds until the LED begins flashing to reset the router to factory defaults.



Ports 1-4 are standard Gigabit Ethernet ports that support 10/100/1000/2500 Mbps connections.

The Link LED on the left indicates a 10/100 Mbps connection when amber and blue indicates a 1 Gbps connection. For 2.5 Gbps connections, the LED on the right will illuminate white. If neither port LED is illuminated, then the connection is down.

Ports 2 and 3 support 802.3at PoE+ with up to 30W per port and a PoE budget of 40 Watts.

The PoE LEDs are located below ports 2 & 3 with the icon next to them. They will illuminate amber when a device connected to the port is being powered via Ethernet.



The SFP+ Ports support fiber optic and Ethernet transceivers with 1 Gbps, 2.5 Gbps, 5 Gbps, or 10 Gbps connections.

The Link LED on the left will illuminate blue when there is a 1 Gbps, 2.5 Gbps, or 5 Gbps connection, it will illuminate white with a 10 Gbps connection.

The Activity LED on the right flashes blue when there is activity on a 1 Gbps, 2.5 Gbps,

or 5 Gbps connection. It will flash white if there is 10 Gbps network activity.

Back




Power Port Be sure to use the included power cord to connect power.


Hardware Installation

Mounting On A Wall

1. Locate the template included with the Quick Start Guide and Safety document.

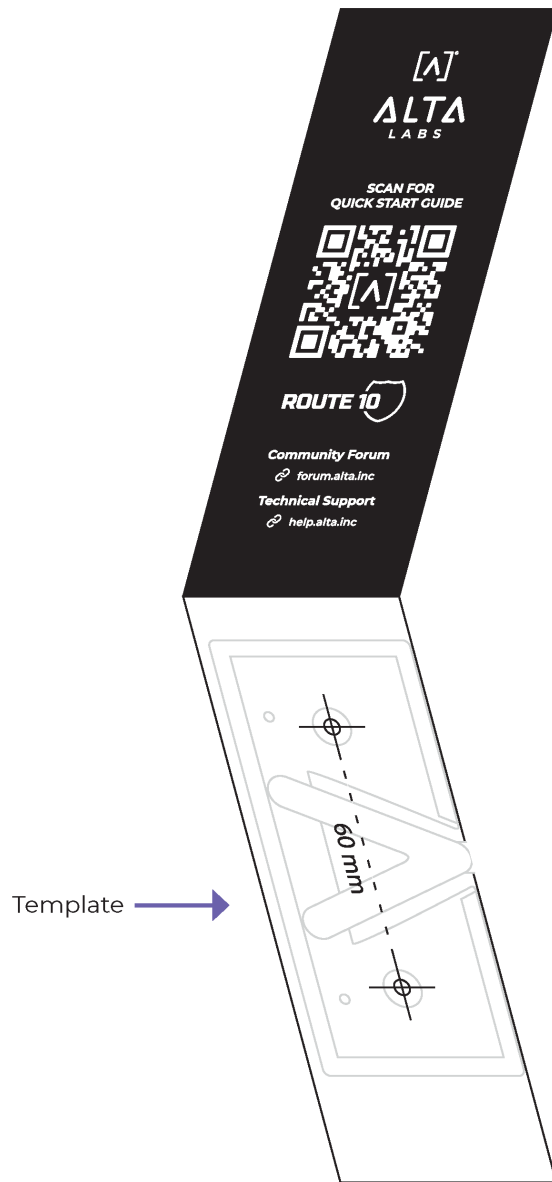


2. Position the template in the desired location and use a pencil to mark the holes.

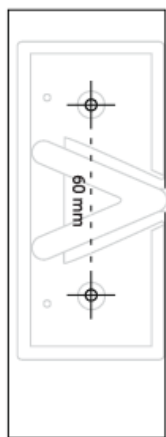

Vertical Mount


or

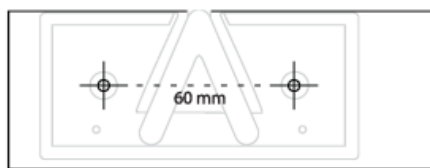

Horizontal Mount


3. Secure the Mounting Bracket to the wall using the Mounting Screws and a Phillips screwdriver. Be sure to use the screws included with the product.

If mounting on drywall, use the anchors to ensure secure mounting. Use a 6 mm drill bit to drill the holes for the anchors and insert them in the wall.

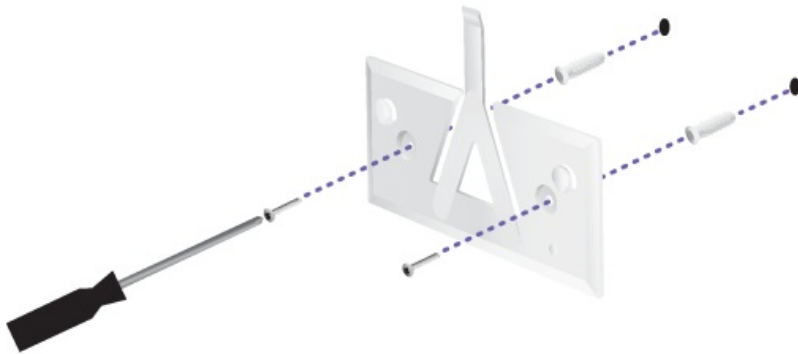

4. Align the router with the Mounting Bracket.


Note: the Alta Labs A logo should be facing the same position on the mount and the router. Slide the notches over the tabs to lock Route10 into place.

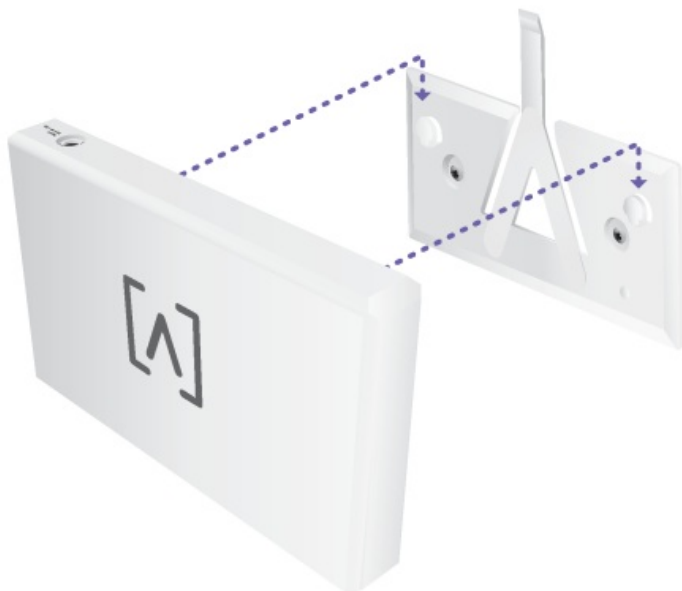

5. Connect the Power Supply to the Route10 and the other end to a power outlet.




Connect a computer or switch to your Route10 using a CAT 5 (or above) Ethernet cable.

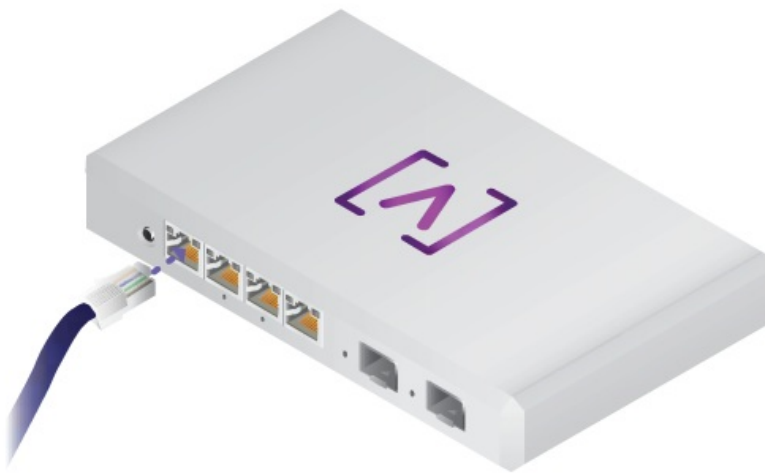

Set Up Your Device

Follow the instructions in the Alta app or management interface to set up your Route10.

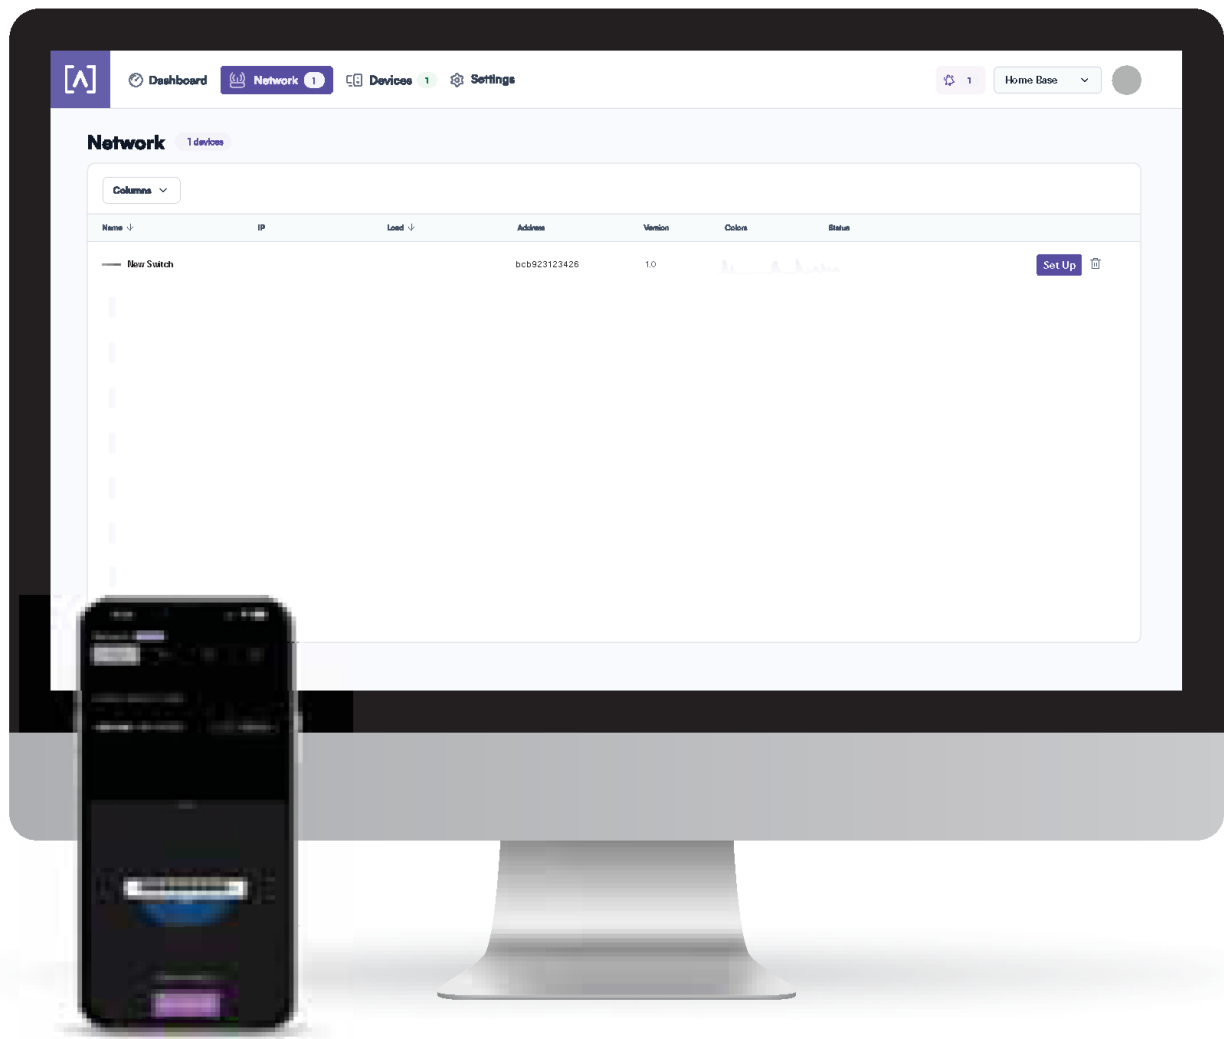

Route10 Specifications

Mechanical	
Dimensions	180 x 110 x 29.8 mm (7.09 x 4.33 x 1.17")
Weight	0.46 kg (1.01 lbs)
Enclosure Material	Top cover: polycarbonate Bottom cover: milled aluminum
Material Finish	Matte
Color	White
Mount Material	Injection Molded Plastic
Ports	

Network Interface	Ethernet, Bluetooth
Management Interface	(4) Autosensing 2500/1000/100/10 Mbps RJ45 Ports, (2) 10 Gbps/1.25 Gbps SFP+ Ports
LEDs	
PoE	Amber
RJ45	Amber (Left LED): 10/100 Mbps Blue (Left LED): 1 Gbps White (Right LED): 2.5 Gbps
SFP+	Blue: < 10 Gbps White: 10 Gbps
Status	RGB/Multi-Color
Hardware	
Processor	Quad-core Qualcomm 2.2 GHz
Button	Reset/Factory Reset
Network Interface	Ethernet, Bluetooth
Power	
Power Supply	Universal AC, 100 – 240VAC 50-60Hz External
Maximum Power Consumption	70W
POE Budget	40W
Per-Port PoE	(2) 802.3at POE+, PoE+ (54VDC, 0.6A Max)
PoE Ports	2
Power	

Bluetooth Version	BLE
Total Bluetooth Power	5 dBm EIRP
Bluetooth Gain	3 dBi
MAC Table Size	4k
Environmental	
Mounting	Locking Wallmount, Desktop
Operating Temperature	-5 to 50° C (23 to 122° F) With (1) 2W SFP+ Module: 45° C (113° F) With (2) 2W SFP+ Modules: 40° C (104° F)
Operating Humidity	5 to 95% Noncondensing
Certifications	CE, FCC, IC
RJ45 Port Surge Protection	12kV for ESD – Contact, 25kV for ESD – Air
Software	
VLAN	802.1Q
Easily Scale from Home to SMB to Stadium	Yes
Seamless Per- Client Settings	Yes
VPN Server	Yes, Multiple, Hardware-Accelerated
Actual Total Throughput	25 Gbps Combined Upload/Download

RADIUS Authentication	Yes
Deep-Packet Inspection	Yes
Intrusion Detection and Prevention Systems	Yes, at 10 Gbps
WAN Failover and Load-Balancing	Yes

Specifications

- Model: Route10
- DC Input / DC: 5V 1.827A
- Manufacturer: Soundvision Technologies, dba Alta Labs
- SN: ROUTE10ASXXWWXXXXXXXXXXXXXX
- FCC ID: 2A8MT-ROUTE10
- IC: 29180-ROUTE10

Compliance

Federal Communication Commission

Interference Statement

This product has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the

user will be required to correct the interference at his own expense.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This device is restricted to indoor use.

Non-Modification Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

CAN ICES-003(B) / NMB-003(B)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

ISED Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



Community Forum forum.alta.inc

Technical Support help.alta.inc

All specifications are subject to change without notice.

Alta Labs products are sold with a limited warranty:
alta.inc/warranty

© 2024 Soundvision Technologies. All rights reserved.
Alta Labs is a trademark of Soundvision Technologies.

FAQ

Q: How do I change the LED color on top of the device?

A: The LED color can be changed in the management interface of the device.


Q: What do I do if I forget my Alta account login information?

A: You can initiate a password reset on the Alta Networks app or website to regain access to your account.

Q: Can I connect devices with different connection speeds to the SFP+ Ports?

A: Yes, the SFP+ Ports support various connection speeds including 1 Gbps, 2.5 Gbps, 5 Gbps, and 10 Gbps.

Documents / Resources

	ALTA LABS ROUTE10 High Performance 10 Gbps Router [pdf] User Guide ROUTE10, ROUTE10 High Performance 10 Gbps Router, High Performance 10 Gbps Router, 10 Gbps Router, Router
--	---

References

- [User Manual](#)

Related Posts



[ALTA LABS ROUTE 10 High Performance Gbps User Guide](#)

ALTA LABS ROUTE 10 High Performance Gbps Before You Begin Create your free Alta account to manage

your...



[MoFiNetwork Advanced High Performance Router User Manual](#)

MoFiNetwork Advanced High Performance Router User Manual - Download [optimized] MoFiNetwork Advanced



Fee:...

[ALTA LABS Self Hosted Controller Software User Guide](#)

ALTA LABS Self Hosted Controller Software Product Information Specifications Controller Versions: Self-hosted, Cloud, Coming Soon Hardware Cost/License



[ALTA LABS AP6Pro WiFi Solution Instructions](#)

ALTA LABS AP6Pro WiFi Solution Instructions Alta Labs Connects Youth at Intermediate School in Vietnam Albert Einstein School...

ALTA LABS

10 Gbps Router, ALTA LABS, High Performance 10 Gbps Router, ROUTE10, ROUTE10 High Performance 10 Gbps Router, router

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.