



BLACK BOX KV6222DP Dual-Monitor DP 1.2 USB 3 KVM Switch User Guide

[Home](#) » [BLACK BOX](#) » BLACK BOX KV6222DP Dual-Monitor DP 1.2 USB 3 KVM Switch User Guide 

Contents

1 BLACK BOX® KV6222DP Dual-Monitor DP 1.2 USB 3 KVM Switch User Guide

- 1.1 WHAT'S INCLUDED
- 1.2 INSTALLATION STEPS
- 1.3 OPERATION COMMANDS QUICK REFERENCE CHART
- 1.4 SPECIFICATIONS
- 1.5 OVERVIEW
 - 1.5.1 INTRODUCTION
 - 1.5.2 FEATURES
 - 1.5.3 WHAT'S INCLUDED
 - 1.5.4 HARDWARE DESCRIPTION
- 1.6 INSTALLATION
- 1.7 OPERATION
- 1.8 A.1 FCC STATEMENT
- 1.9 A.2 CE STATEMENT
- 1.10 A.3 ROHS
- 1.11 B.1 DISCLAIMER
- 1.12 B.2 TRADEMARKS USED IN THIS MANUAL

2 Documents / Resources

2.1 References

3 Related Posts

BLACK BOX® KV6222DP Dual-Monitor DP 1.2 USB 3 KVM Switch User Guide

KV6222DP, KV6224DP

24/7 TECHNICAL SUPPORT AT 1.877.877.2269 OR VISIT BLACKBOX.COM



WHAT'S INCLUDED

Your package should include the following items. If anything is missing or damaged, contact Black Box Technical Support at 877-877-2269 or info@blackbox.com

- (1) KV6222DP or KV6224DP unit
- (1) 12-VDC power adapter

INSTALLATION STEPS

1. Power up your KVM Switch by connecting the external power adapter to it.
2. Connect the shared USB keyboard, mouse, two monitors, speaker/headphone and microphone to corresponding ports on console section of the KVM Switch.

NOTE: The two left-side white USB ports are for keyboard and mouse and the two blue USB 3.0 ports are for other USB devices.

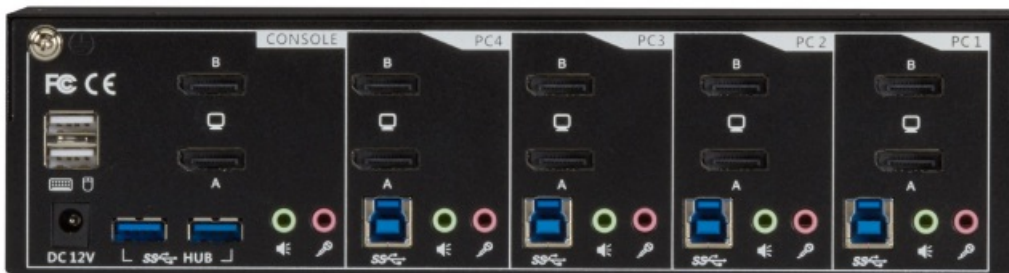


FIGURE 3-1. KV6224DP – REAR VIEW

3. Connect each KVM PC port to a computer, using two DisplayPort 1.2 video cables (male-to-male), one USB cable (type A to type B), and one audio and mic combo cable (male-to-male).
4. Connect each of your USB devices to the USB hub ports (on the left).

You can now begin to use the KVM switch.

OPERATION COMMANDS QUICK REFERENCE CHART

OPERATION COMMANDS FOR HOTKEYS/FRONT-PANEL BUTTONS

COMMAND	HOTKEYS ¹	FRONT-PANEL BUTTON	DESCRIPTION
Select PC Port ² (Jointly select PC port/ hub port control/ audio and mic, if binding is enabled)	Scr-Lock, Scr-Lock + "X" X = 1-2 or 1-4 PC port Number	Press the corresponding button to select the active PC port.	Select the active PC port (Jointly select PC port/ hub port control/ audio and mic, if binding is enabled)
Select Hub Port Control ² (Jointly select PC and hub port control, if binding is enabled)	Scr-Lock, Scr-Lock + "Fx" Fx = F1-F2 (Fx is a Function Key) x = 1-2 or 1-4 for Hub port number	Press the button to toggle the specific PC + USB hub port control. (It works only if PC port/ hub port control binding is enabled.)	Select the PC port that control all USB hub ports (Jointly select PC and hub port control, if PC/hub port control binding is enabled)
COMMAND	HOTKEYS ¹	FRONT-PANEL BUTTON	DESCRIPTION
Select Audio and Mic Port ³ (Jointly select PC port and audio and mic, if binding is enabled)	Scr-Lock, Scr-Lock + "Fy" Fy = F5-F6/F5-F8 (Fy is a Function Key) y = 5-6/5-8 for Audio and Mic number	—	Select the active audio and mic port (Jointly select PC and audio and mic port, if binding is enabled)
Bind PC and Hub Port Control Switching ² [Default]	Scr-Lock, Scr-Lock + "Z"	—	Enable the binding of PC port and hub port control (Once this feature is enabled, any pc and/or hub port control switching is bound together) (factory default)
Unbind PC and Hub Port Control Switching ² [Default]	Scr-Lock, Scr-Lock + "X"	—	Disable the binding of PC port and hub port control switching
Bind PC and Audio and Mic Switching ³ [Default]	Scr-Lock, Scr-Lock + "Q"	—	Enable the binding of PC port and audio and mic switching. (Once this feature is enabled, any PC and/or audio and mic switching is bound together) (factory default)
Unbind PC and Audio and Mic Switching ³ [Default]	Scr-Lock, Scr-Lock + "W"	—	Disable the binding of PC port and audio and mic
Previous PC port ² (Jointly select PC/ hub port control, if binding is enabled)	Scr-Lock, Scr-Lock + "" (Arrow Up)	—	Select the previous connected PC port (Jointly select PC/ hub port control, if binding is enabled)
Next PC port ²	Scr-Lock, Scr-Lock + "" (Arrow Down)	—	Select the next connected PC port (Jointly select PC/ hub port control, if binding is enabled)
Previous PC port	Scr-Lock, Scr-Lock + "" (Backspace)	—	Toggle between the previous port and current port
Beep Sound On/Off	Scr-Lock, Scr-Lock + "B"	—	Toggle on/off the beep sound
Define Hotkey Preceding	Scr-Lock, Scr-Lock + "H" + "y" y=Scroll Lock, Caps Lock, ESC, F12, Num Lock	Press and hold down last button (Button 2) till two beeps, release the button, then press (y)	Select the hotkey preceding sequence among 5 alternative keys
Autoscan	Scr-Lock, Scr-Lock + "S"	—	Autoscan through every connected port for quick screen browsing of each port (scan delay = 5 sec.)
Autoscan with Programmable Delay	Scr-Lock, Scr-Lock + "H" + "z" z = 1>10', 2>20', 3>30', 4>40', 5>50', 6>60', 7>70', 8>80', 9>90', 0>100'	—	Autoscan with a user-defined delay time within a range of 10 to 100 seconds
Stop Auto Scan	Press any key on keyboard	Press any button	Terminate Autoscan activity

NOTES:

1. The USB keyboard hotkeys allow you a faster and broader control for your KVM switching operation in addition to the front-panel button. If you have configured a hotkey preceding sequence other than two consecutive scroll locks, here you should change your hotkey sequence accordingly. (For preceding sequence key configuration, please refer to "Define Hotkey Preceding Sequence" in above table.)
2. When the binding of PC and USB hub port control switching is enabled by the hotkey sequence: ScrLk + ScrLk + Z, any PC and hub port control switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + X.

3. When the binding of PC and audio and mic switching is enabled by the hotkey sequence: ScrLk + ScrLk + Q, any PC and audio and mic switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + W.

CHAPTER 1: SPECIFICATIONS

SPECIFICATIONS

TABLE 1-1. SPECIFICATIONS

SPECIFICATION	KV6222DP	KV6224DP
Number of Ports	(2)	(4)
Number of Consoles	(2)	(2)
PC Keyboard/Mouse Connectors	(2) USB Type B female	(4) USB Type B female
PC Video Connectors	(4) DisplayPort 1.2 female	(8) DisplayPort 1.2 female
PC Audio/Mic	(4) 3.5-mm audio/mic Jack female	(8) 3.5-mm audio/mic jack female
Console Keyboard Connector	(1) USB Type A female	(1) USB Type A female
Console Mouse Connector	(1) USB Type A female	(1) USB Type A female
Console Monitor Connector	(2) DisplayPort 1.2 female	(2) DisplayPort 1.2 female
USB Hub Ports	(2) USB 3.0 Type A female (up to 5 Gbps data transfer rates)	(2) USB 3.0 Type A female (up to 5 Gbps data transfer rates)
PC Selection	Pushbuttons/Hotkeys	Pushbuttons/Hotkeys
Beeper	Yes	Yes
PC Port LEDs	2 (Green)	4 (Green)
Hub Port LEDs	2 (Red)	4 (Red)
Digital Display Resolution	3840 x 2180 @ 60 Hz	3840 x 2180 @ 60 Hz
Keyboard and Mouse Emulation	Yes (TTU)	Yes (TTU)
Autoscan Delay Time	10 to 60 sec.	10 to 60 sec.
Power Adapter	12 VDC, 2A	12 VDC, 2A
Weight	1.6 lb. (0.75 kg)	2.6 lb. (1.2 kg)
Dimensions	2.6" H x 3.9" W x 6.4" D (6.6 x 10.0 x 16.3 cm)	2.6" H x 3.9" W x 9.9" D (6.6 x 10.0 x 25.3 cm)
Safety/Emissions	FCC, CE	FCC, CE

OVERVIEW

INTRODUCTION

The KV6222DP/KV6224DP 2-Port/4-Port Dual-Monitor DisplayPort 1.2 USB 3.0 (5 Gbps data transfer rates), Audio KVM Switch is designed specifically for sharing two 4K monitors between two/four multimedia computers with dual-monitor DisplayPort enabled displays. It is the perfect integration solution for dual monitor DisplayPort enabled workstations.

With KV6222DP/KV6224DP, you can fully control two or four dual-monitor PCs using only one keyboard, mouse and two 4K monitors; essential for saving valuable desktop space.

These dual-monitor DisplayPort 1.2 KVM switches support two monitors at 3840 x 2160/4K 60 Hz

resolution for maximum convenience in adapting to your display requirements.

True Transparent USB Emulation Technology allows complete versatility in dealing with the advanced functional requirements of today's keyboards and mice. From gaming mice/keyboards to advanced business mice/keyboards, users will appreciate what this technology can do for them.

Share all your USB peripheral devices with ease using the separate built-in 2-port USB 3.0 hub (5 Gbps data transfer rates) between each connected computer. The USB hub automatically switches the connected USB peripheral to the selected computer, saving you the cost of adding additional peripherals.

Independent audio switching lets users freeze audio while simultaneously working on a different system. With 3.5-mm stereo audio input for each channel, two-way audio support for speakers and microphone is available; perfect for sound design or editing applications.

Two models are available:

- 2-Port Dual-Monitor DP 1.2 USB 3 KVM Switch (KV6222DP)
- 4-Port Dual-Monitor DP 1.2 USB 3 KVM Switch (KV6224DP)

FEATURES

- 2- or 4-port dual-monitor DisplayPort 1.2 USB 3.0 KVM switch with audio and microphone switching
- (2) additional USB 3.0 hub ports (5 Gbps data transfer rates) for sharing high-speed USB devices
- True Transparent USB (TTU) emulation technology full driver supports advanced USB keyboards and mice
- USB 3.0/USB 2.0/USB 1.1 specification compliant (up to 5 Gbps data transfer rates)
- Support digital video resolution up to 3840 x 2160 at 60 Hz (dual monitors)
- Independent/simultaneous PC/hub/audio and mic port selection
- Multi-platform support for Windows® XP/7/8/10, Linux®, and Mac® OS
- Switching by front-panel pushbuttons and keyboard hotkeys
- Two-channel stereo audio
- Low power consumption
- Firmware upgradable via USB port
- TAA compliant

WHAT'S INCLUDED

Your package should include the following items. If anything is missing or damaged, contact Black Box Technical Support at 877-877-2269 or info@blackbox.com

- (1) Switch
- (1) 12V Power Supply with US, UK, EU, and AU adapters

HARDWARE DESCRIPTION

2.4.1 KV6222DP

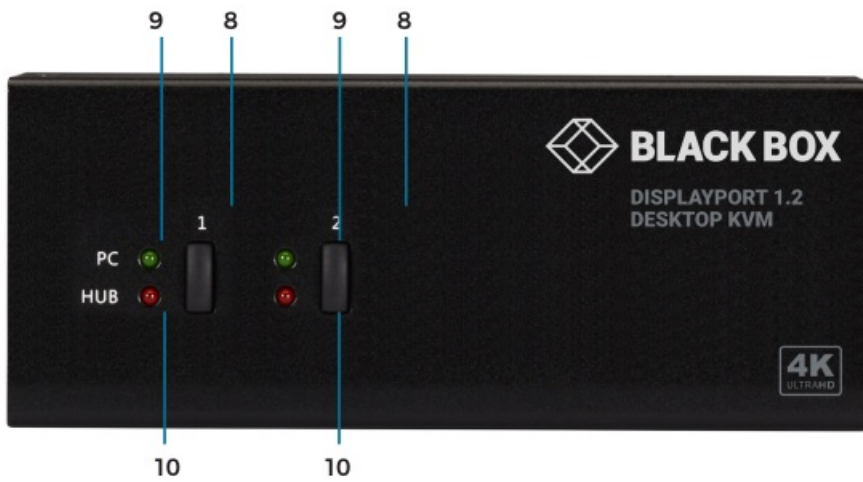


FIGURE 2-1. FRONT PANEL OF THE KV6222DP

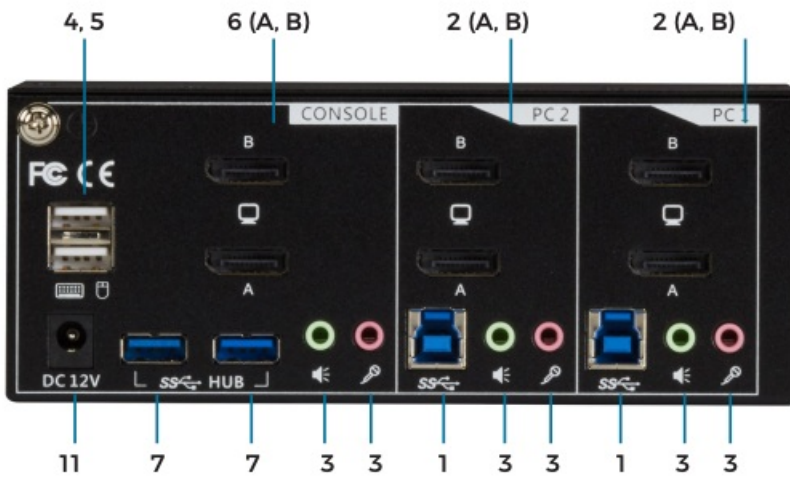


FIGURE 2-2. BACK PANEL OF THE KV6222DP

CHAPTER 2: OVERVIEW

TABLE 2-1. KV6222DP COMPONENTS

NUMBER IN FIGURE 2-1 OR 2-2	COMPONENT	DESCRIPTION
1	PC Keyboard/Mouse Connectors	(2) USB Type B female
2	PC Video Connectors	(4) DisplayPort 1.2 female
3	PC Audio/Mic	(4) 3.5-mm audio/mic jack female
4	Console Keyboard Connector	(1) USB Type A female
5	Console Mouse Connector	(1) USB Type A female
6	Console Monitor Connector	(2) DisplayPort 1.2 female
7	USB Hub Ports	(2) USB 3.0 Type A female (up to 5 Gbps data transfer rates)
8	PC Selection	(2) Pushbuttons/Hotkeys
9	PC Port LEDs	(2) (Green)
10	Hub Port LEDs	(2) (Red)
11	Barrel connector	(1) 12-VDC power

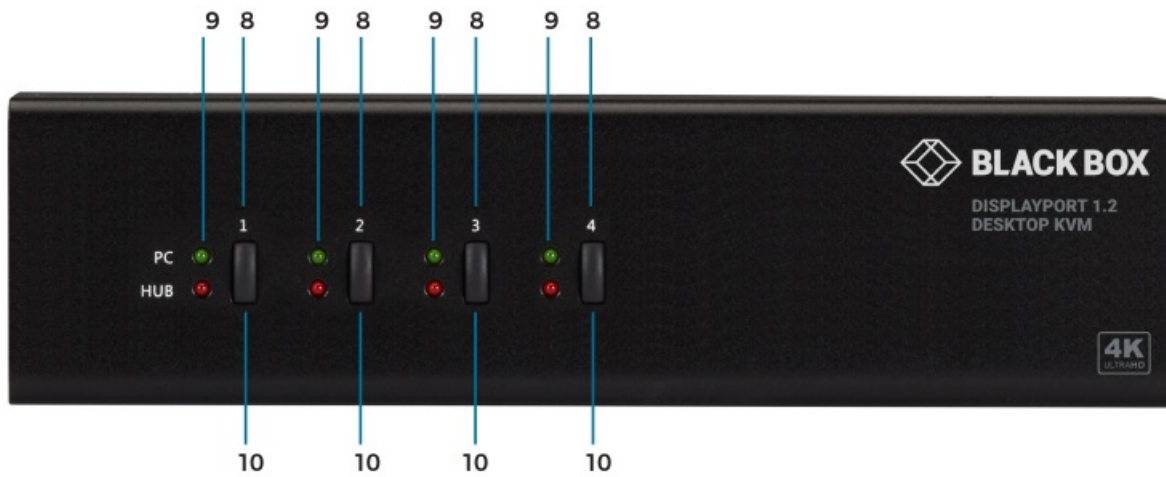


FIGURE 2-3. FRONT PANEL OF THE KV6224DP

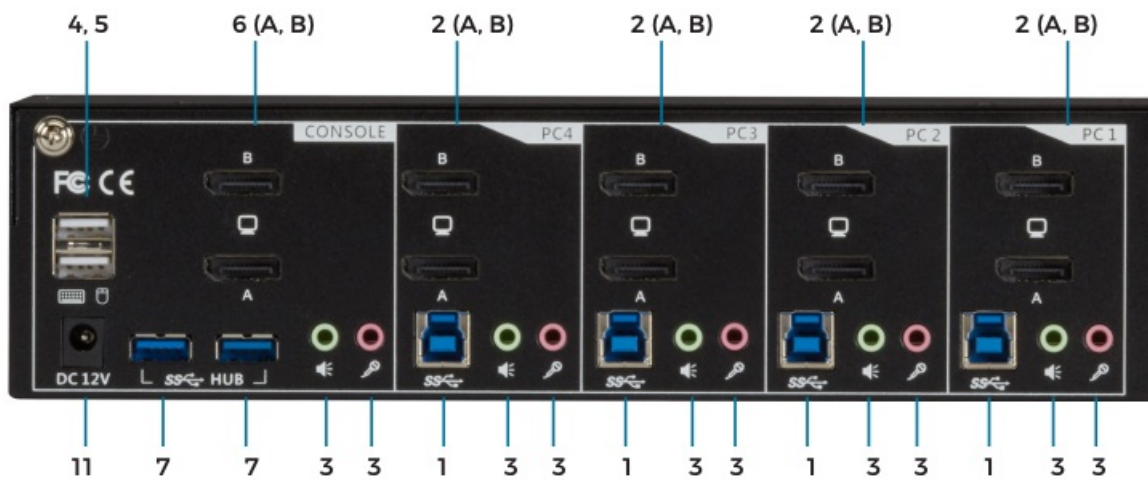


FIGURE 2-4. BACK PANEL OF THE KV6224DP

TABLE 2-2. KV6224DP COMPONENTS

NUMBER IN FIGURE 2-3 OR 2-4	COMPONENT	DESCRIPTION
1	PC Keyboard/Mouse Connectors	(2) USB Type B female
2	PC Video Connectors	(8) DisplayPort 1.2 female
3	PC Audio/Mic	(8) 3.5-mm audio/mic jack female
4	Console Keyboard Connector	(1) USB Type A female
5	Console Mouse Connector	(1) USB Type A female
6	Console Monitor Connector	(2) DisplayPort 1.2 female
7	USB Hub Ports	(2) USB 3.0 Type A female (up to 5 Gbps data transfer rates)
8	PC Selection	(4) Pushbuttons/Hotkeys
9	PC Port LEDs	(4) (Green)
10	Hub Port LEDs	(4) (Red)
11	Barrel connector	(1) 12-VDC power

CHAPTER 3: INSTALLATION

INSTALLATION

1. Power up your KVM Switch by connecting the external power adapter to it.
 2. Connect the shared USB keyboard, mouse, two monitors, speaker/headphone and microphone to corresponding ports on console section of the KVM Switch.
- NOTE: The two left-side white USB ports are for keyboard and mouse and two blue USB 3.0 ports are for other USB devices.

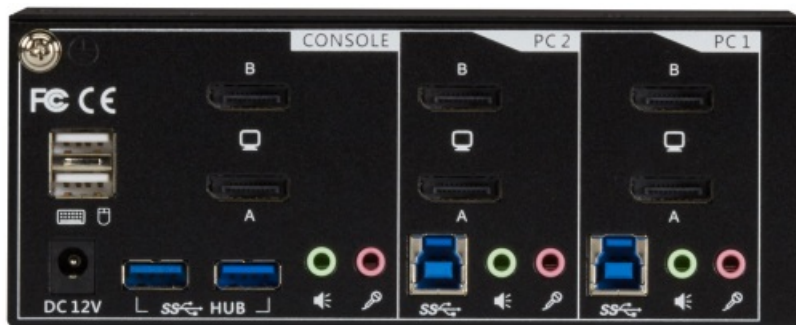


FIGURE 3-1. KV6222DP - REAR VIEW

3. Connect each KVM PC port to a computer, using one HDMI 2.0 video cable (male-to-male) and one DP 1.2 video cable (male-to-male), one USB cable (type A to type B), and one audio and mic combo cable (male-to-male).
4. Connect each of your USB devices to the USB hub ports (on the left). You can now begin to use the KVM switch.

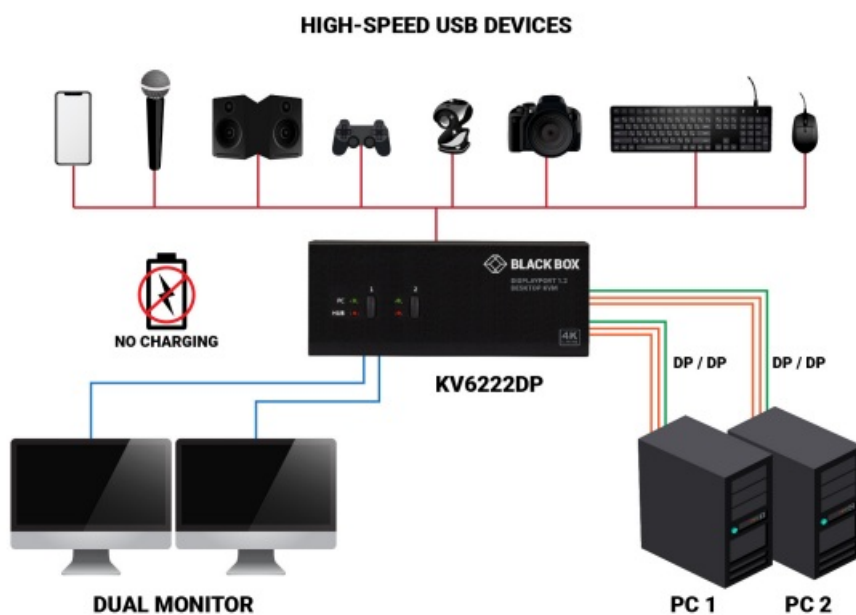


FIGURE 3-2. CONNECTION ILLUSTRATION

CHAPTER 4: OPERATION

OPERATION

A keyboard hotkey sequence consists of at least three specific keystrokes:

Hotkey sequence = [ScrLk]* + [ScrLk] * + Command key(s)

* User-definable = SCROLL LOCK, CAPS, ESC, F12 or NUM LOCK

Hotkey preceding sequence configuration: For users who want to use a preceding sequence other than two consecutive Scroll Locks, there is also one convenient way to configure it.

1. Press ScrollLock + ScrollLock + H, then two beeps will signal readiness for new preceding sequence selection (or Press and hold down the last front-panel button [Button 2 or Button 4] until you hear two beeps, then release the button.)
2. Select and press the key you would like to use as your preceding sequence (SCROLL LOCK, CAPS, ESC, F12 or NUM LOCK keys are available for selection) and you'll hear a beep for selection confirmation. Now you can use the new preceding sequence to execute your hotkey commands.

NOTE: Press each keystroke within a hotkey sequence within 2 seconds. Otherwise, the hotkey sequence will not be validated.

NOTE: Hotkey sequence = [ScrLk]* + [ScrLk] * + Command key(s)

* User-definable Preceding sequence = SCROLL LOCK, CAPS, ESC, F12, or NUM LOCK

TABLE 4-1. OPERATION COMMANDS FOR HOTKEYS/FRONT-PANEL BUTTONS

COMMAND	HOTKEYS ¹	FRONT-PANEL BUTTON	DESCRIPTION
Select PC Port ² (Jointly select PC port/ hub port control/ audio and mic, if binding is enabled)	Scr-Lock, Scr-Lock + "X" X = 1-2 / 1-4 PC port Number	Press the corresponding button to select the active PC port.	Select the active PC port (Jointly select PC port/ hub port control/ audio and mic, if binding is enabled)
Select Hub Port Control ² (Jointly select PC and hub port control, if binding is enabled)	Scr-Lock, Scr-Lock + "Fx" Fx = F1-F2/F1-F4 (Fx is a Function Key) x = 1-2/1-4 For Hub port number	Press the button to toggle the specific PC + USB hub port control. (It works only if PC port/ hub port control binding is enabled.)	Select the PC port that control all USB hub ports (Jointly select PC and hub port control, if PC/hub port control binding is enabled)
Select Audio and Mic Port ³ (Jointly select PC port and audio and mic, if binding is enabled)	Scr-Lock, Scr-Lock + "Fy" Fy = F5-F6/F5-F8 (Fy is a Function Key) y = 5-6/5-8 for Audio and Mic number	—	Select the active audio and mic port (Jointly select PC and audio and mic port, if binding is enabled)
Bind PC and Hub Port Control Switching ² [Default]	Scr-Lock, Scr-Lock + "Z"	—	Enable the binding of PC port and hub port control (Once this feature is enabled, any pc and/ or hub port control switching is bound together) (factory default)

NOTES:

1. The USB keyboard hotkeys allow you a faster and broader control for your KVM switching operation in addition to the front-panel button. If you have configured a hotkey preceding sequence other than two consecutive scroll locks, here you should change your hotkey sequence accordingly. (For preceding sequence key configuration, please refer to "Define Hotkey Preceding Sequence" in above table.)
2. When the binding of PC and USB hub port control switching is enabled by the hotkey sequence: ScrLk + ScrLk + Z, any PC and hub port control switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + X.
3. When the binding of PC and audio and mic switching is enabled by the hotkey sequence: ScrLk + ScrLk + Q,

any PC and audio and mic switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + W.

TABLE 4-1 (CONTINUED). OPERATION COMMANDS FOR HOTKEYS/FRONT-PANEL BUTTONS

COMMAND	HOTKEYS ¹	FRONT-PANEL BUTTON	DESCRIPTION
Unbind PC and Hub Port Control Switching ² [Default]	Scr-Lock, Scr-Lock + "X"	—	Disable the binding of PC port and hub port control switching
Bind PC and Audio and Mic Switching ³ [Default]	Scr-Lock, Scr-Lock + "Q"	—	Enable the binding of PC port and audio and mic switching. (Once this feature is enabled, any PC and/or audio and mic switching is bound together) (factory default)
Unbind PC and Audio and Mic Switching ³ [Default]	Scr-Lock, Scr-Lock + "W"	—	Disable the binding of PC port and audio and mic
Previous PC port ² (Jointly select PC/ hub port control, if binding is enabled)	Scr-Lock, Scr-Lock + "" (Arrow Up)	—	Select the previous connected PC port (Jointly select PC/ hub port control, if binding is enabled)
Next PC port ²	Scr-Lock, Scr-Lock + "" (Arrow Down)	—	Select the next connected PC port (Jointly select PC/ hub port control, if binding is enabled)
Previous PC port	Scr-Lock, Scr-Lock + " " (Backspace)	—	Toggle between the previous port and current port
Beep Sound On/Off	Scr-Lock, Scr-Lock + "B"	—	Toggle on/off the beep sound
Define Hotkey Preceding	Scr-Lock, Scr-Lock + "H" + "Y" y=Scroll Lock, Caps Lock, ESC, F12, Num Lock	Press and hold down last button (Button 2/Button 4) till two beeps, release the button, then press (y)	Select the hotkey preceding sequence among 5 alternative keys
Autoscan	Scr-Lock, Scr-Lock + "S"	—	Autoscan through every connected port for quick screen browsing of each port (scan delay = 5 sec.)
Autoscan with Programmable Delay	Scr-Lock, Scr-Lock + "H" + "Z" z = 1>10', 2>20', 3>30', 4>40', 5>50', 6>60', 7>70', 8>80', 9>90', 0>100'	—	Autoscan with a user-defined delay time within a range of 10 to 100 seconds
Stop Auto Scan	Press any key on keyboard	Press any button	Terminate Autoscan activity

NOTES:

1. The USB keyboard hotkeys allow you a faster and broader control for your KVM switching operation in addition to the front-panel button. If you have configured a hotkey preceding sequence other than two consecutive scroll locks, here you should change your hotkey sequence accordingly. (For preceding sequence key configuration, please refer to "Define Hotkey Preceding Sequence" in above table.)
2. When the binding of PC and USB hub port control switching is enabled by the hotkey sequence: ScrLk + ScrLk + Z, any PC and hub port control switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + X.
3. When the binding of PC and audio and mic switching is enabled by the hotkey sequence: ScrLk + ScrLk + Q, any PC and audio and mic switching are bound together. To remove this binding, use the hotkey sequence: ScrLk + ScrLk + W.

APPENDIX A: REGULATORY INFORMATION

A.1 FCC STATEMENT

This equipment has been tested and found to comply with the regulations for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with this Quick Installation Guide, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case, the user will be required to correct the interference at his/her own expense.

A.2 CE STATEMENT

This is a Class B product in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

A.3 ROHS

This product is RoHS compliant.

APPENDIX B: DISCLAIMER/TRADEMARKS

B.1 DISCLAIMER

Black Box Corporation shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Corporation may revise this document at any time without notice.

B.2 TRADEMARKS USED IN THIS MANUAL

Black Box and the Black Box logo type and mark are registered trademarks of Black Box Corporation.

Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

NEED HELP?

LEAVE THE TECH TO US

LIVE 24/7 TECHNICAL SUPPORT

1.877.877.2269



© COPYRIGHT 2021, 2022. BLACK BOX CORPORATION. ALL RIGHTS RESERVED.
KV6222DP_KV6224DP_QSG_USER_REV2.PDF

Documents / Resources



[BLACK BOX KV6222DP Dual-Monitor DP 1.2 USB 3 KVM Switch](#) [pdf] User Guide
KV6222DP, KV6224DP, Dual-Monitor DP 1.2 USB 3 KVM Switch

References

- [Global IT Products & Network Solutions Provider | Black Box](#)