

BrosTrend®
AX1500 6
Universal WiFi to
Ethernet Adapter



BrosTrend AX1500 6 Universal WiFi to Ethernet Adapter Installation Guide

[Home](#) » [BrosTrend](#) » BrosTrend AX1500 6 Universal WiFi to Ethernet Adapter Installation Guide 

Contents

- [1 BrosTrend AX1500 6 Universal WiFi to Ethernet Adapter](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 LED indicator](#)
- [5 Set up as a WiFi Extender](#)
- [6 Set up as a Universal WiFi to Ethernet Adapter](#)
- [7 Set up as a Wireless Access Point](#)
- [8 FAQ](#)
- [9 FCC Statement](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

BrosTrend®

BrosTrend AX1500 6 Universal WiFi to Ethernet Adapter



Product Information

Specifications:

- **Model:** E2/AX2
- **Functionality:** AX1500 WiFi 6 Range Extender and Gigabit Ethernet Adapter
- **LED Indicator:** Provides visual feedback on signal strength and setup status
- **Ports:** Gigabit Ethernet port for wired device connection

Product Usage Instructions

Working Mode 1: Set up as a WiFi Extender

Power On

Plug the extender into a power outlet in the same room as your existing WiFi router. Wait until the LED indicator blinks red slowly.

Connect to Your Existing WiFi Network

Method 1: Set up via Web Management Interface

1. Connect your WiFi device to the default WiFi network of the extender: BroTrend_EXT, or connect your computer to the Ethernet port of the extender with an Ethernet cable.
2. Open a web browser, type <http://brostrendwifi.com> or 192.168.0.254 in the address bar to access the web

UI.

3. Create a login password for future logins and click Next.
4. Select Extender Mode / WiFi to Ethernet Adapter Mode and click Next.
5. Choose the WiFi network(s) you want to extend, enter the correct WiFi password(s), then click OK.
6. Customize the extended WiFi names (SSID) and passwords, then click Extend.
7. Check if the extender connects to your WiFi network successfully according to the status of the LED indicator.

Frequently Asked Questions (FAQ)

Q1: I cannot access the provided websites for setup. What should I do?

If you are unable to access <http://brostrendwifi.com> or 192.168.0.254, please check your internet connection and ensure that you are connected to the extender's network. You can also try resetting the extender and attempting the setup process again.

AX1500 WiFi 6 Range Extender

AX1500 WiFi to Gigabit Ethernet Adapter

Video Installation Guide is available via this link: <https://www.brostrend.com/pages/video-guide>

support@brostrend.com

LED indicator

Solid Green:

This extender/adaptor is in a proper position and receiving strong signal from your router.

Solid Yellow:

This extender/adaptor is receiving good signal from your router.

Solid Red:


This extender/adaptor is receiving weak signal from your router. Please relocate it closer to your router for better performance.

Blinking Red Slowly:

This extender/adaptor is powered on, while setup is not completed or fails to receive any signal from your router. Please relocate it closer to your router or set it up again.

Blinking Green Fast:

This extender/adaptor is pairing with your existing router via WPS method. Please wait until the pairing completes.

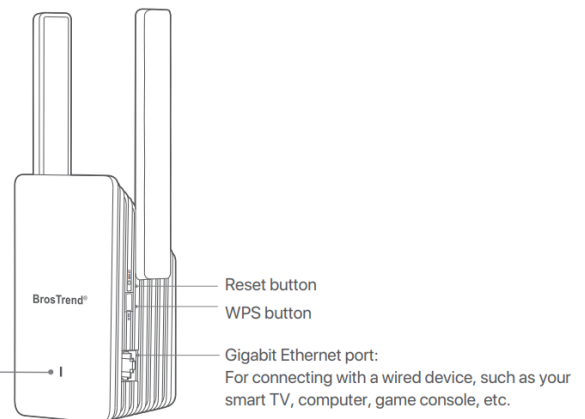


Set up as a WiFi Extender

We here set up on a mobile phone as an example. Actual setup steps on a desktop or tablet could be slightly different.

Power on

Plug the extender into a power outlet in the same room as your existing WiFi router. Wait until the LED indicator blinks red slowly.

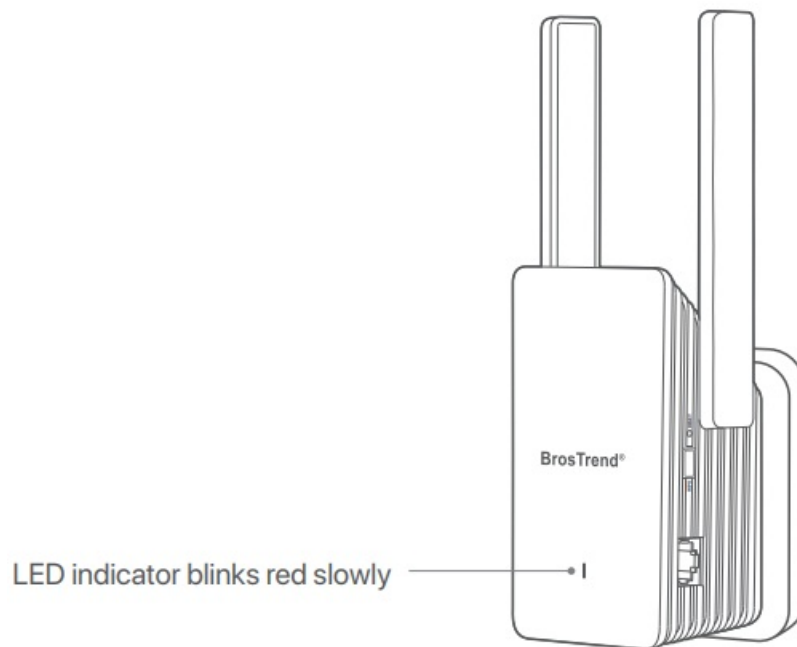

Connect to Your Existing WiFi Network

Method 1: Set up via Web Management Interface

1. Connect your WiFi device to the default WiFi network of the extender:
BrosTrend_EXT, or connect your computer to the Ethernet port of the extender with an Ethernet cable.




2. Open a web browser, type <http://brostrendwifi.com> or 192.168.0.254 in the address bar (NOT in the search box) to access the web UI.



If the websites are inaccessible, please refer to Q1 in FAQ.

3. Create a login password for future logins (recommended). Then click Next.

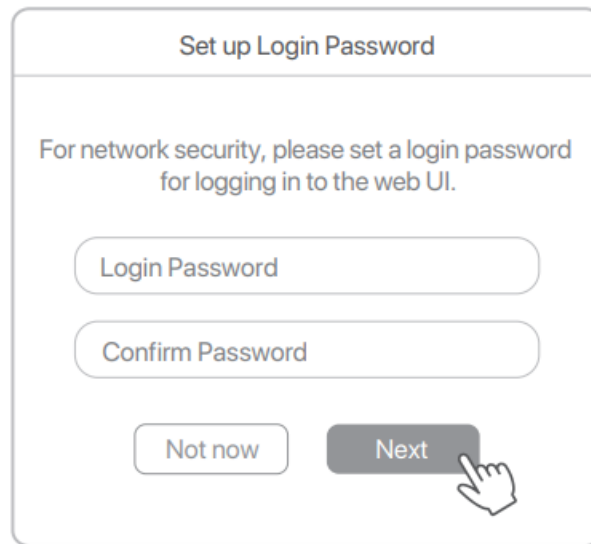

Set up Login Password

For network security, please set a login password for logging in to the web UI.


Login Password

Confirm Password

Not now Next

This screen is titled "Set up Login Password". It contains a message: "For network security, please set a login password for logging in to the web UI." Below the message are two input fields: "Login Password" and "Confirm Password". At the bottom, there are two buttons: "Not now" and "Next". A hand icon is pointing at the "Next" button.

4. Select Extender Mode / WiFi to Ethernet Adapter Mode and click Next.

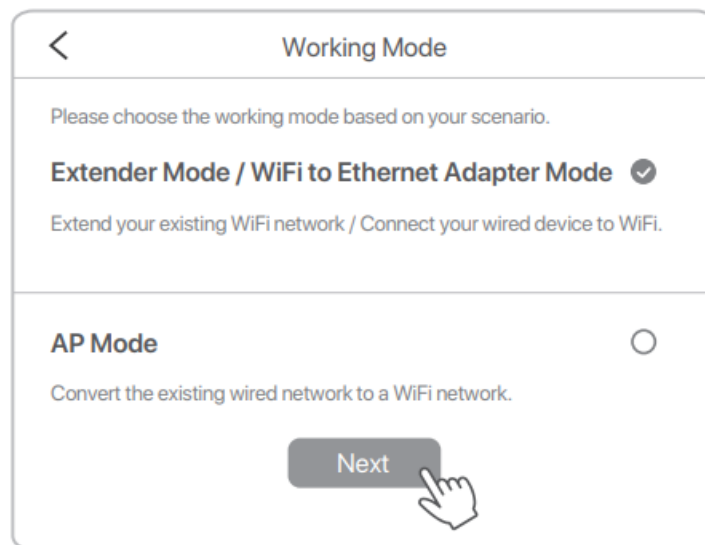

Working Mode

Please choose the working mode based on your scenario.

Extender Mode / WiFi to Ethernet Adapter Mode ☒

Extend your existing WiFi network / Connect your wired device to WiFi.


AP Mode ☐

Convert the existing wired network to a WiFi network.

Next

This screen is titled "Working Mode". It contains a message: "Please choose the working mode based on your scenario." Below the message are two radio button options. The first option is "Extender Mode / WiFi to Ethernet Adapter Mode" with a checked radio button. Below it is the description: "Extend your existing WiFi network / Connect your wired device to WiFi." The second option is "AP Mode" with an unchecked radio button. Below it is the description: "Convert the existing wired network to a WiFi network." At the bottom, there is a "Next" button. A hand icon is pointing at the "Next" button.

5. Choose the WiFi network(s) you want to extend, enter the correct WiFi password(s), then click OK.

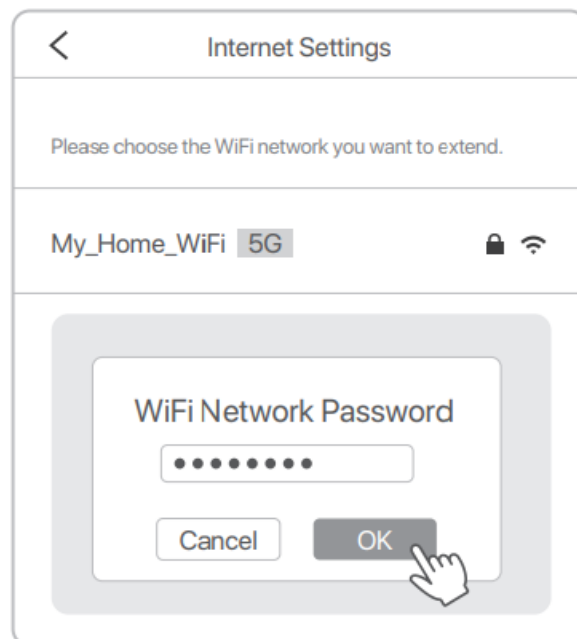

Internet Settings

Please choose the WiFi network you want to extend.

My_Home_WiFi 5G

WiFi Network Password

.....

Cancel OK

This screen is titled "Internet Settings". It contains a message: "Please choose the WiFi network you want to extend." Below the message is a list of available WiFi networks. The first network is "My_Home_WiFi" with a signal strength indicator of "5G". To the right of the network name are icons for a lock and a WiFi signal. Below the list of networks is a "WiFi Network Password" dialog box. The dialog box has a title "WiFi Network Password" and a password input field with a masked password ".....". Below the input field are two buttons: "Cancel" and "OK". A hand icon is pointing at the "OK" button.

6. Customize the extended WiFi names (SSID) and passwords, then click Extend.


The screenshot shows the 'Internet Settings' app interface. At the top, there's a back arrow and the title 'Internet Settings'. Below this, the 'Upstream WiFi Name' is set to 'My_Home_WiFi' with a '5G' label. The '2.4 GHz Extended WiFi Name' is 'My_Home_WiFi_EXT' with a '2.4G' label. The '2.4 GHz Extended WiFi Password' is shown as a series of dots, with a checked option 'Same as the upstream WiFi password'. Similarly, the '5 GHz Extended WiFi Name' is 'My_Home_WiFi_5GEXT' with a '5G' label, and the '5 GHz Extended WiFi Password' is also shown as dots with a checked option 'Same as the upstream WiFi password'. At the bottom, there is an 'Extend' button with a hand icon pointing to it.

7. Check if the extender connects to your WiFi network successfully according to the status of the LED indicator.

LED indicator lighting solid on indicates a successful extension. You can connect to the following WiFi networks to access the Internet.

2.4 GHz WiFi Name: My_Home_WiFi_EXT
2.4 GHz WiFi Password: XXXXXXXX


5 GHz WiFi Name: My_Home_WiFi_5GEXT
5 GHz WiFi Password: XXXXXXXX



- Solid green: Strong signal
- Solid yellow: Good signal. Recommended to move the extender closer to the router
- Solid red: Weak signal. Please move the extender closer to the router for better performance

LED indicator blinking red indicates the extension failed. Please connect to the following network to extend again.

WiFi Name: BrosTrend_EXT




- Blinking red: Extension failed. Please connect to the WiFi network of the extender (BrosTrend_EXT) and set up again

Method 2: Set up via WPS button

This method is applicable if your router has a WPS button. Otherwise, use Method 1.

1. Power on: Plug the extender into a power outlet in the same room as your existing router. Wait until the LED indicator blinks red.
2. Press the WPS button on your router.
3. Within 2 minutes, press the WPS button on the extender, the LED indicator on extender will start to blink green fast.
4. Wait until the LED indicator turns solid on, which indicates a successful connection with your router.

After the WPS pairing, for network security, please connect your wireless device to the newly extended WiFi and visit <http://brostrendwifi.com> on a browser to set up a login password for your newly extended WiFi. Otherwise, the Web UI will be open to any devices connected to the extended WiFi.

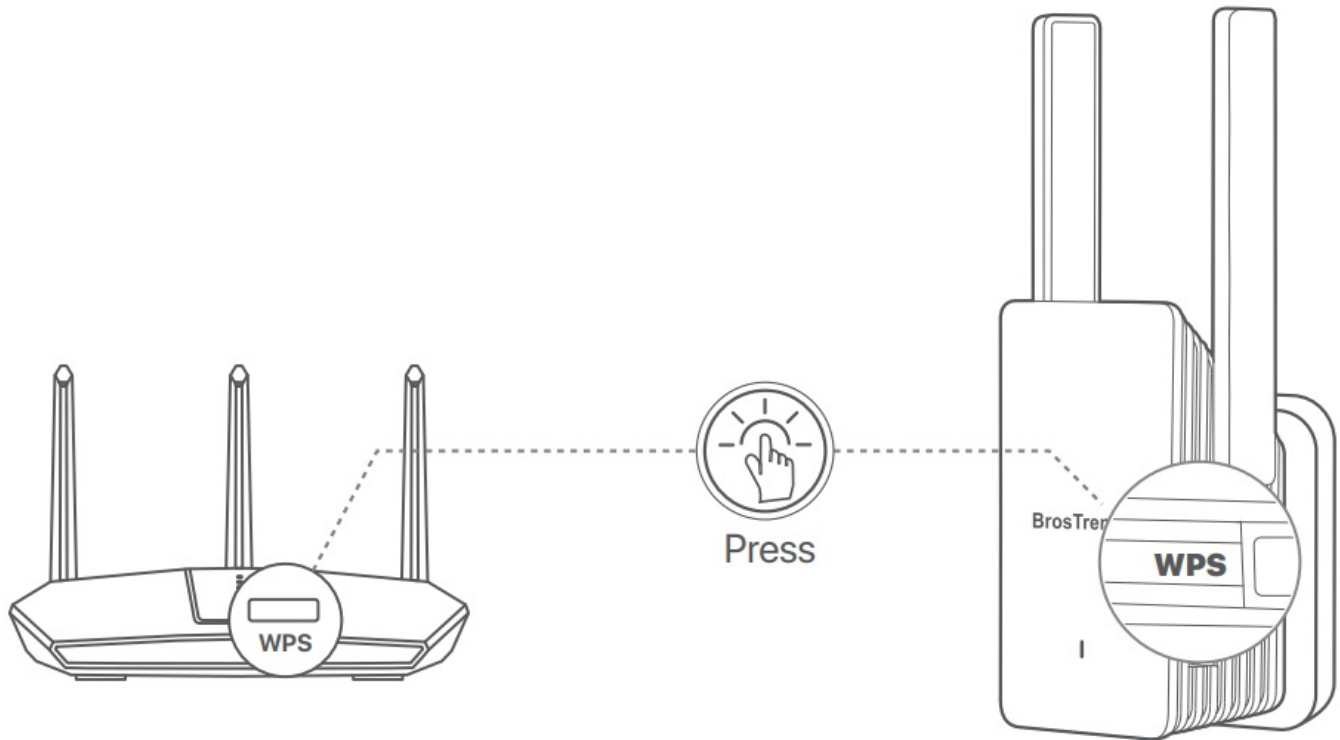

Extended WiFi Names:

XXXXXX_EXT or XXXXXX_5GEXT


(XXXXXX: the WiFi name of your router)

Password:

The same as the WiFi password of your existing router.


Relocate

Plug the extender into an electrical outlet halfway between your WiFi router and the WiFi dead zone.

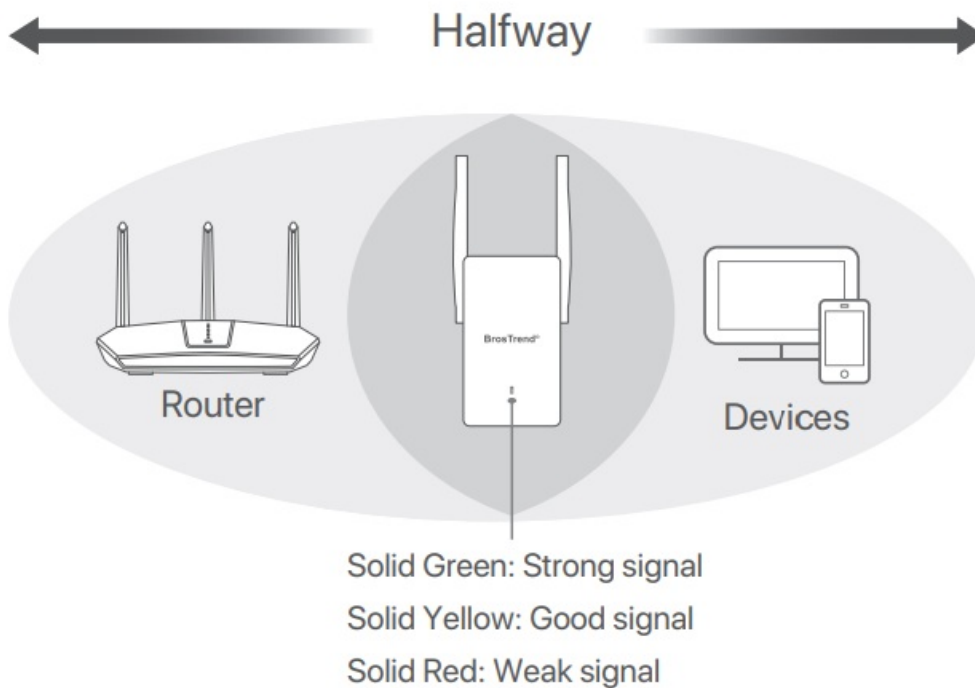

To ensure the signal quality of the extender


- The extender must be installed within the range of your WiFi router.
- Please keep the extender away from working electrical appliances with strong interference, such as microwave oven, induction cooker, and refrigerator, etc.

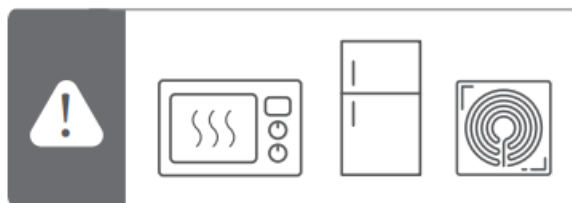

Set up as a Universal WiFi to Ethernet Adapter

1. Please refer to Working Mode 1: Set up as a WiFi Extender to set up the adapter first.
2. Then connect your wired device to this adapter with an Ethernet cable.

Setup completed !

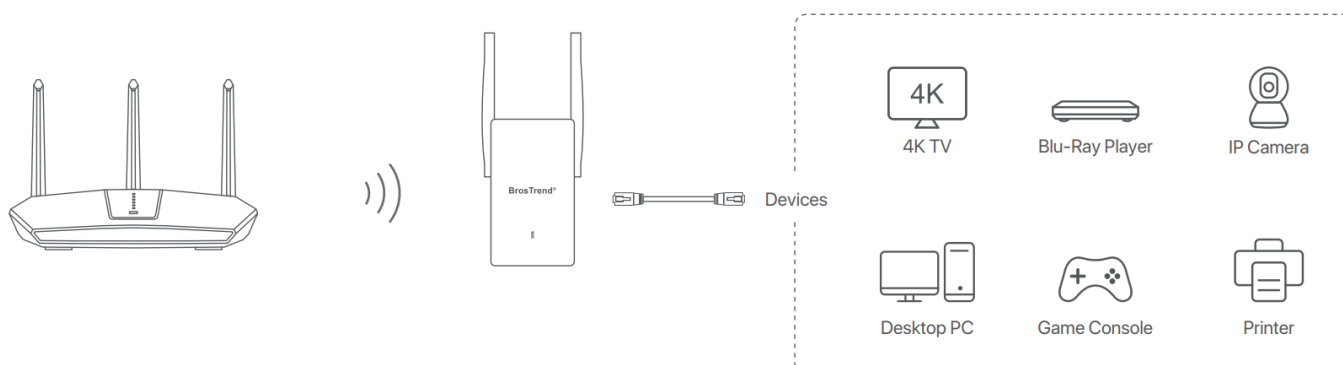

In this case, you need to configure the IP Address and DNS server address of these devices as AUTO OBTAIN.

Obtain an IP address automatically

Use the following IP address:

- IP address:
- Subnet mask:
- Default gateway:

Obtain DNS server address automatically

Use the following DNS server address


- Preferred DNS server:
- Alternate DNS server:

Set up as a Wireless Access Point

We here set up on a mobile phone as an example. Actual setup steps on a desktop or tablet could be slightly different.

Power on

Plug the access point into a power outlet. Wait until the LED indicator blinks red slowly.

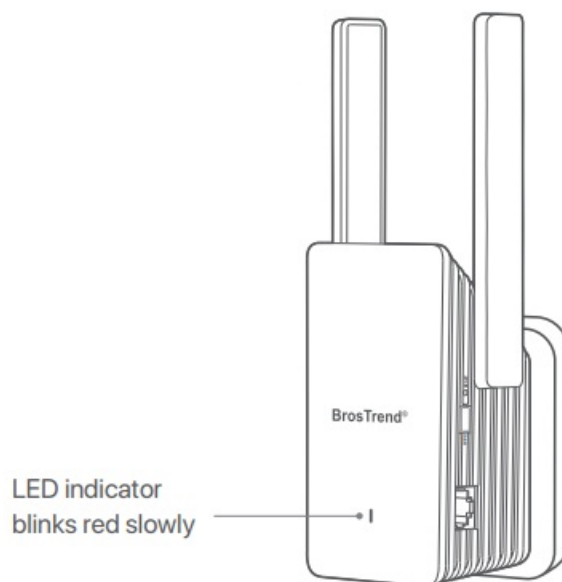

Create Your Wireless Access Point Network

1. Connect your WiFi device to the default WiFi network of this access point: BrosTrend_EXT, or connect your computer to the Ethernet port of this access point with an Ethernet cable.



2. Open a web browser, type <http://brostrendwifi.com> or 192.168.0.254 in the address bar (NOT in the search box) to access the web UI.



If the websites are inaccessible, please refer to Q1 in FAQ.

3. Create a login password for future logins (recommended). Then click Next.

Set up Login Password

For network security, please set a login password for logging in to the web UI.

Login Password

Confirm Password

Not now

Next

4. Select AP Mode and click Next.

Working Mode

Please choose the working mode based on your scenario.

Extender Mode / WiFi to Ethernet Adapter Mode ☐

Extend your existing WiFi network / Connect your wired device to WiFi.

AP Mode ☒

Convert the existing wired network to a WiFi network

Next

5. Customize the WiFi names and WiFi passwords, click Save. Then wait about 1 minute until the LED blinks red

slowly.

WiFi Settings

2.4 GHz WiFi Name 2.4G
BrosTrend_2.4G

2.4 GHz WiFi Password
••••••••


5 GHz WiFi Name 5G
BrosTrend_5G

5 GHz WiFi Password
••••••••

Save

Connect to the Internet

Connect the access point to an Internet-enabled Ethernet port or LAN port of your router with an Ethernet cable. Setup completed!

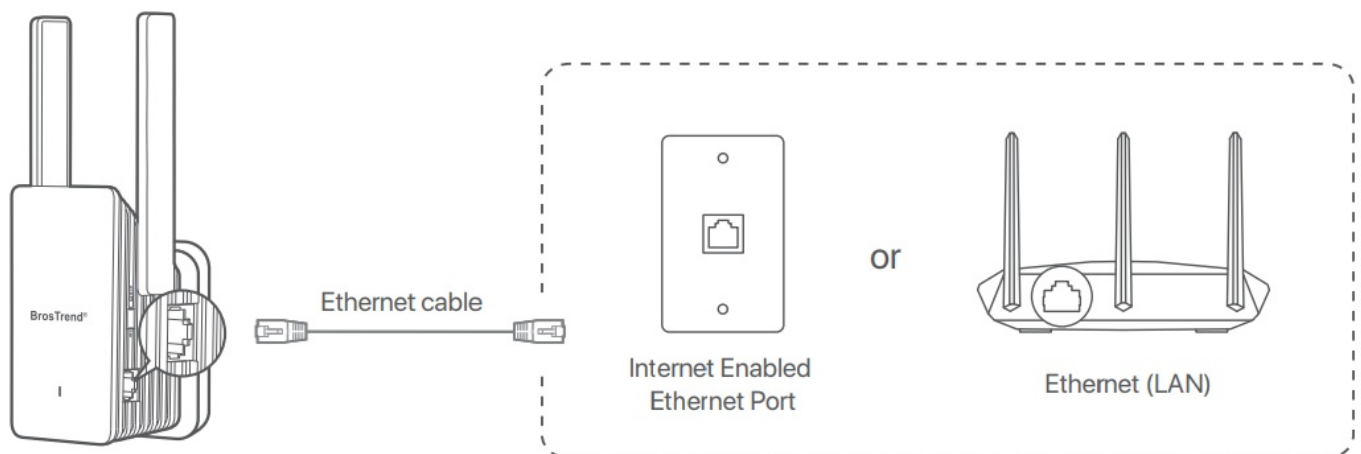

The LED indicator lighting solid green indicates a successful Internet connection. Otherwise, please refer to Q4 in FAQ to reset this access point and try again.

FAQ

Q1: I cannot log into the Web UI of the extender. What should I do?

A1: Please try the following methods:

- For initial setup, make sure your wireless device (e.g., smartphone) is connected to the extender's default network, BrosTrend_EXT, and disable Mobile Data if enabled. If BrosTrend_EXT does not appear in the WiFi

list, please refer to Q4 to reset the extender to its factory default settings and then set up again.

- If the extender has been set up successfully, make sure your wireless device is connected to the extender's newly extended network before logging into the web UI..
- Verify that <http://brostrendwifi.com> is correctly entered in your browser's address bar (NOT in the search box).
- Clear your browser cache and try again.
- If you are setting up using a wired device (e.g., a computer), make sure that your computer is set to Obtain an IP address automatically and Obtain DNS server address automatically.

Q2: The extender cannot find my router's WiFi network. What should I do?

A2: Please try the following methods:

- Ensure your router's WiFi networks are available on other wireless devices.
- Change your router's WiFi channel and try again.
- Change your router's encryption type to WPA-PSK, WPA2-PSK or WPA/WPA2-PSK and try again.

Q3: Configuration was successful, but it keeps indicating that the password "isn't correct" when trying to connect to the extended WiFi network. What should I do?

A3: The password might have been entered incorrectly during the setup. Please try to connect to the extended network on the other WiFi band using the same password. If the issue persists, please refer to Q4 to reset the extender, then set up the extender again.

Q4: How to reset the extender back to factory default setting?

A4: Plug the extender into a power outlet and wait for 1 minute until it fully powers on, then press the RESET button on the right side of the extender using a needle-like object for 1-3 seconds. The LED indicator will blink fast in yellow at first, then after 1 minute, it will blink slowly in red, indicating a successful reset.

Q5: What should I do if I forgot my web UI login password?

A5: Please refer to Q4 to reset the extender first. Then connect to the default WiFi network BrosTrend_EXT and then visit <http://brostrendwifi.com> on a web browser to create a new web UI login password. This time, it is recommended to note down your login password for future logins.

Q6: What should I do if I forgot the extended WiFi networks' passwords?

A6: If you have a computer, you can find or change the passwords by following these steps:

- Connect your computer to the extender using an Ethernet cable.
- Open a web browser and enter <http://brostrendwifi.com> in the address bar to access the web UI.
- Navigate to WiFi Settings, where you'll find the passwords for your extended networks.

If you don't have a computer, please refer to Q4 to reset the extender. then set up the extender again, and this time, it's recommended to note down the passwords.

If you need any assistance, please send an email to support@brostrend.com together with your on-line order number. We will reply to you within 24 hours.

Manufacturer: BrosTrend Technology LLC

Address: 8 The Green, Suite A, Dover City, DE, U.S.A., Zip code 19901 Website: www.brostrend.com

Telephone: +86-17796126768
Email address: support@brostrend.com

For EU/EFTA, this product can be used in the following countries:

Authorized European Representative Information Name: Apex CE Specialists GmbH
Address: Ravalzhauser str.31a 63543 Neuberg Germany Contact: Wells
Telephone No.: +353212066339
E-Mail: info@apex-ce.com

Authorized U.K. Representative Information

Name: APEX CE SPECIALISTS LIMITED
Address: 89 Princess Street, Manchester, M1 4HT, UK Contact: Wells
Telephone No.: 00441616371080
E-Mail: info@apex-ce.com

CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Operations in the 5.15-5.25GHz band are restricted to indoor use only.

This equipment should be installed and operated with minimum distance 20cm between the device and your body. The mains plug is used as disconnect device, the disconnect device shall remain readily operable. For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use.

NOTE:

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

Declaration of Conformity

Hereby, BrosTrend Technology LLC declares that the radio equipment type E2/AX2 are in compliance with Directive 2014/53/EU and 2014/30/EU. The full text of the EU declaration of conformity is available at the following Internet address: <https://brostrend.me/regulatory>

Operating Frequency:

2.4GHz: EU/2412-2472 MHz

5 GHz: EU/5151-5250 MHz

EIRP Power (Max.):

2.4GHz: < 20dBm

5 GHz: < 23dBm

Software Version: V16.04.41.16_multi

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all. The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

This License applies to any program or other work which contains a notice placed by the copyright holder saying it

may be distributed under the terms of this General Public License. The “Program”, below, refers to any such program or work, and a “work based on the Program” means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term “modification”.) Each licensee is addressed as “you”.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the

Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program’s source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to

it and “any later version”, you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

3. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software

Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

4. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
5. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED

INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

GB Note on environmental protection:

After the implementation of the European Directive 2012/19/EU and 2006/66/EU in the national legal system, the following applies: Electric and electronic devices as well as batteries must not be disposed of with household waste. Consumers are obliged by law to return electrical and electronic devices as well as batteries at the end of their service lives to the public collecting points set up for this purpose or point of sale. Details to this are defined by the national law of the respective country. This symbol on the product, the instruction manual or the package indicates that a product is subject to these regulations. By recycling, reusing the materials or other forms of utilising old devices/Batteries, you are making an important contribution to protecting our environment.

You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

one line to give the program’s name and an idea of what it does.

Copyright (C) yyyy name of author

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software

Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

GNU General Public License Notice

This product includes software code developed by third parties, including software code subject to the GNU General Public License

("GPL"). For GPL inquiries, please contact us at support@brostrend.com or 8 The Green, Suite A, Dover City, DE, U.S.A., Zip code 19901. Additionally, BrosTrend provides for a GPL-Code-Center under <https://brostrend.me/gpl> where machine readable copies of the GPL source codes used in BrosTrend products are available for free to download. Please note, that the GPL-Code-Center is only provided as a courtesy to BrosTrend's customer but may neither offer a full set of source codes used in all products nor always provide for the latest or actual version of such source codes.

The GPL Code used in these products is distributed WITHOUT ANY WARRANTY and is subject to the copyrights of one or more authors.

Please refer to the following GNU Public License for further information.

You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items—whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a “copyright disclaimer” for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright
interest in the program `Gnomovision'

(which makes passes at compilers) written
by James Hacker.

signature of Ty Coon, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device is restricted to be used in the indoor.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules.

This equipment should be installed and operated with minimum distance 20cm between the device and your body.

Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE:

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only

way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.


If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

Documents / Resources



[BrosTrend AX1500 6 Universal WiFi to Ethernet Adapter](#) [pdf] Installation Guide
AX1500, AX1500 6 Universal WiFi to Ethernet Adapter, 6 Universal WiFi to Ethernet Adapter, W
iFi to Ethernet Adapter, Ethernet Adapter, Adapter

References

- brostrendwifi.com
- ce.com
- **B** [Reliable Networking For You – BrosTrend Direct](#)
- **B** [Video Guide – BrosTrend Direct](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.