

**BrosTrend®**  
**AX3000 WiFi 6**  
**Access Point**



## BrosTrend AX3000 WiFi 6 Access Point Installation Guide

[Home](#) » [BrosTrend](#) » BrosTrend AX3000 WiFi 6 Access Point Installation Guide 

### Contents

- 1 BrosTrend AX3000 WiFi 6 Access Point
- 2 Product Information
- 3 Product Usage Instructions
- 4 LED indicator
- 5 Working Mode
  - 5.1 Set up as a Wireless Access Point
  - 5.2 Set up as a WiFi Extender
- 6 FAQ
- 7 Note on environmental protection
- 8 FCC Statement
- 9 Declaration of Conformity
- 10 TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION
- 11 Documents / Resources
  - 11.1 References
- 12 Related Posts

# BrosTrend®

**BrosTrend AX3000 WiFi 6 Access Point**



## Product Information

### Specifications:

- **Model:** A3
- **Product:** AX3000 WiFi 6 Wireless Access Point
- **LED Indicator:** Yes
- **Working Modes:** AP Mode, Extender Mode
- **Ports:** Gigabit Ethernet port

## Product Usage Instructions

### Working Mode 1: Set up as a Wireless Access Point

#### 1. Power on:

- Plug the access point into a power outlet.
- Wait until the LED indicator blinks red slowly.

#### 2. Create Your Wireless Access Point Network:

1. Connect your WiFi device to the default WiFi network: BrosTrend\_EXT.
2. Open a web browser and access <http://brostrendwifi.com> or 192.168.0.254.
3. Create a login password for future logins.
4. Select AP Mode and proceed.

#### 3. Connect to the Internet:

- Connect the access point to an Internet-enabled Ethernet port of your router using an Ethernet cable.
- Once connected, the setup is completed.

**Extender Mode:**

To set up in Extender Mode, follow similar steps as above but choose Extender Mode during the setup process and configure settings accordingly based on your scenario.

Video Installation Guide is available via this link:

<https://www.brostrend.com/pages/video-guide>.

[support@brostrend.com](mailto:support@brostrend.com).

**LED indicator****In AP Mode**

- **Solid Blue:**

Set up successfully and working normally.

- **Solid Red:**

Starting up. Please do NOT power off the device during the process, otherwise the device may be damaged.

- **Blinking Red Slowly:**

- Set up successfully, while not connected to the Internet, please connect the access point to an Internet-enabled Ethernet port or LAN port of your router with an Ethernet cable.
- The setup failed. Please refer to Working Mode 1 to set up again.

**In Extender Mode**

- **Solid Blue:**

Receiving a strong signal from your router.

- **Solid Yellow:**

Receiving a good signal from your router.

- **Solid Red:**


Receiving a weak signal from your router. Please relocate it closer to your router for better performance.

- **Blinking Red Slowly:**

Powered on, while fails to receive any signal from your router. Please relocate it closer to your router or set it up again.

- **Blinking Blue Fast:**

Pairing with your existing router via the WPS method. Please wait until the pairing completes.

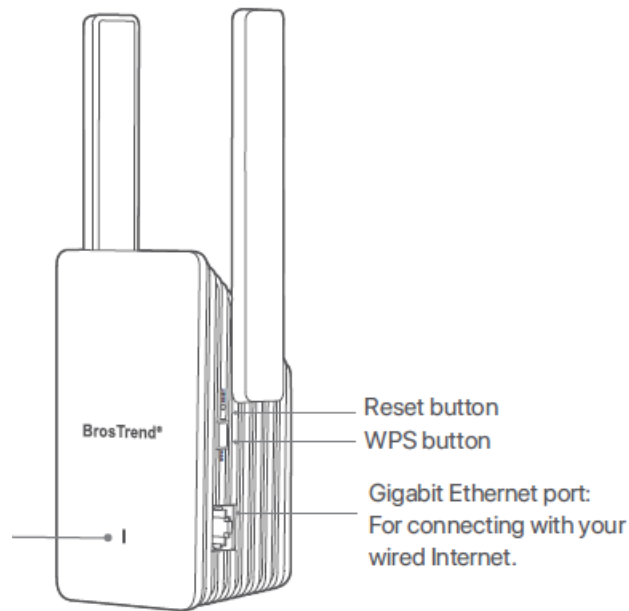

## Working Mode

### Set up as a Wireless Access Point


We here set up on a mobile phone as an example. Actual setup steps on a desktop or tablet could be slightly different.

#### 1. Power on

Plug the access point into a power outlet. Wait until the LED indicator blinks red slowly.

#### 2. Create Your Wireless Access Point Network

1. Connect your WiFi device (e.g., mobile phone, computer, or tablet) to the default WiFi network of this access point: BrosTrend\_EXT.




2. Open a web browser, and type <http://brostrendwifi.com> or 192.168.0.254 in the address bar to access the web UI.




3. Create a login password for future logins (recommended). Then click Next.

A screenshot of the 'Set up Login Password' screen in the web UI. The title is 'Set up Login Password'. Below the title is a message: 'For network security, please set a login password for logging in to the web UI.' There are two input fields: 'Login Password' and 'Confirm Password'. At the bottom, there are two buttons: 'Not now' and 'Next'. A hand icon is shown clicking the 'Next' button.

4. Select AP Mode and click Next.

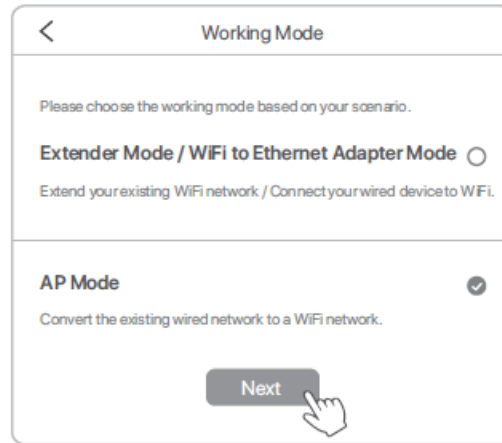


5. Customize the WiFi names and WiFi passwords, and click Save. Then wait about 1 minute until the LED blinks red slowly.

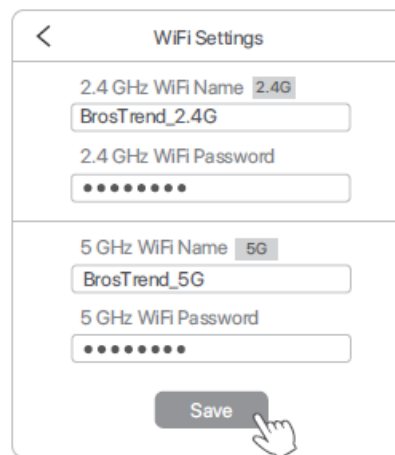

### 3. Connect to the Internet


Connect the access point to an Internet-enabled Ethernet port or LAN port of your router with an Ethernet cable. Setup completed!

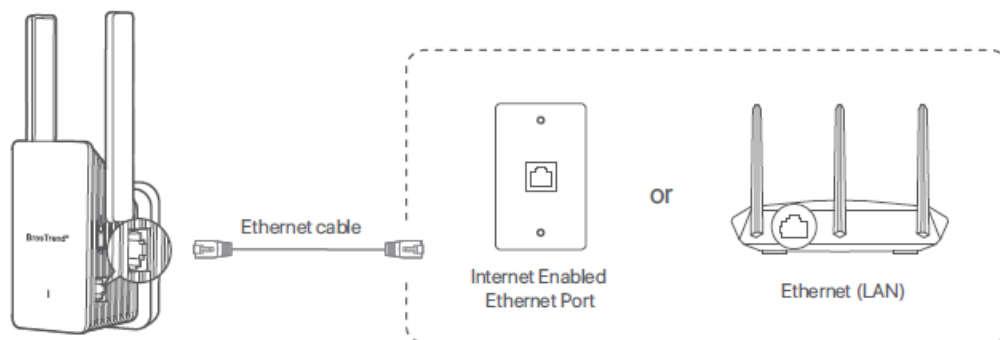

- The LED indicator lighting solid blue indicates a successful Internet connection.
- Otherwise, please refer to Q4 in the FAQ to reset this access point and try again.


### Enjoy!

Connect your devices to the access point wirelessly, and enjoy your wireless Internet!

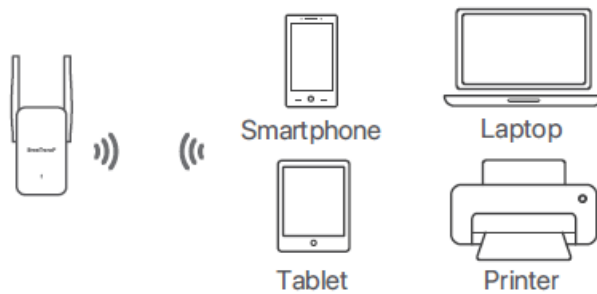

## Tips for Optimal Signal Quality

- Choose a location with fewer obstacles that may weaken the signal between the access point and your WiFi devices. A spacious location is ideal.
- Keep the access point away from working electrical appliances that may interfere with the WiFi signal such as microwave ovens, induction cookers, refrigerators, etc.

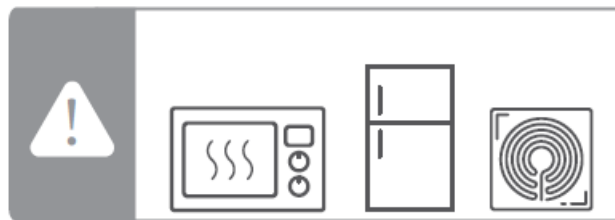

## Set up as a WiFi Extender

We here set up on a mobile phone as an example. Actual setup steps on a desktop or tablet could be slightly different.

### 1. Power on

Plug this extender into a power outlet in the same room as your existing WiFi router. Wait until the LED indicator blinks red slowly.

### 2. Connect to Your Existing WiFi Network

#### Method 1: Set up via Web Management Interface


1. Connect your WiFi device to (e.g., mobile phone, computer, or tablet) the default WiFi network of this extender: BrosTrend\_EXT.



2. Open a web browser, and type <http://brostrendwifi.com> or 192.168.0.254 in the address bar to access the web UI.



1. If the web UI is inaccessible, please refer to Q1 in the FAQ.
3. Create a login password for future logins (recommended). Then click Next.

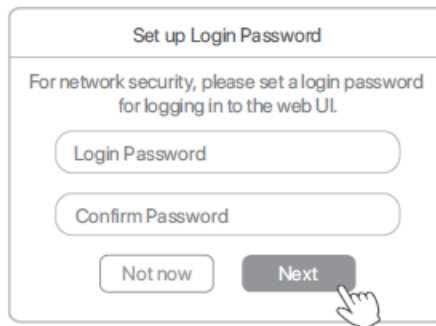

**Set up Login Password**


For network security, please set a login password for logging in to the web UI.

Login Password

Confirm Password

Not now Next

4. Select Extender Mode/WiFi to Ethernet Adapter Mode and click Next.

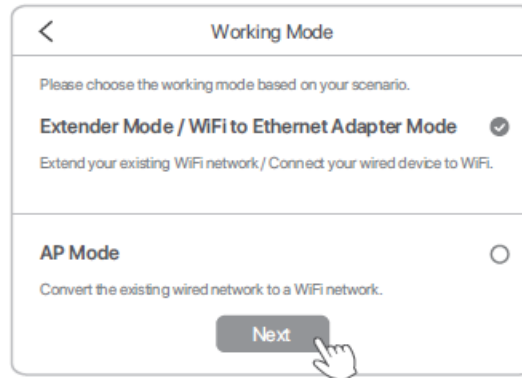

**Working Mode**

Please choose the working mode based on your scenario.

**Extender Mode / WiFi to Ethernet Adapter Mode** ✓


Extend your existing WiFi network / Connect your wired device to WiFi.

**AP Mode** ○

Convert the existing wired network to a WiFi network.

Next

5. Choose the WiFi network(s) you want to extend, enter the correct WiFi password(s), and then click OK.

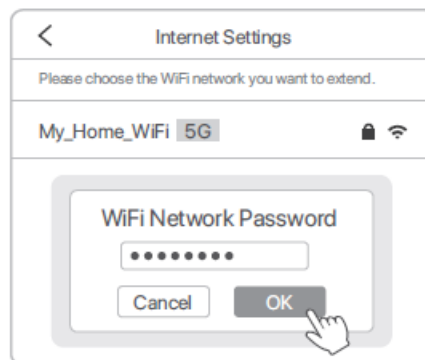

**Internet Settings**

Please choose the WiFi network you want to extend.

My\_Home\_WiFi 5G

WiFi Network Password

.....

Cancel OK

6. Customize your extended WiFi names (SSID) and passwords, then click Extend.



**Internet Settings**

Upstream WiFi Name  
My\_Home\_WiFi 5G

2.4 GHz Extended WiFi Name 2.4G  
My\_Home\_WiFi\_EXT

2.4 GHz Extended WiFi Password  
.....

✓ Same as the upstream WiFi password


5 GHz Extended WiFi Name 5G  
My\_Home\_WiFi\_5GEXT

5 GHz Extended WiFi Password  
.....

✓ Same as the upstream WiFi password

Extend

7. Check if the extender connects to your WiFi network successfully according to the status of the LED indicator.

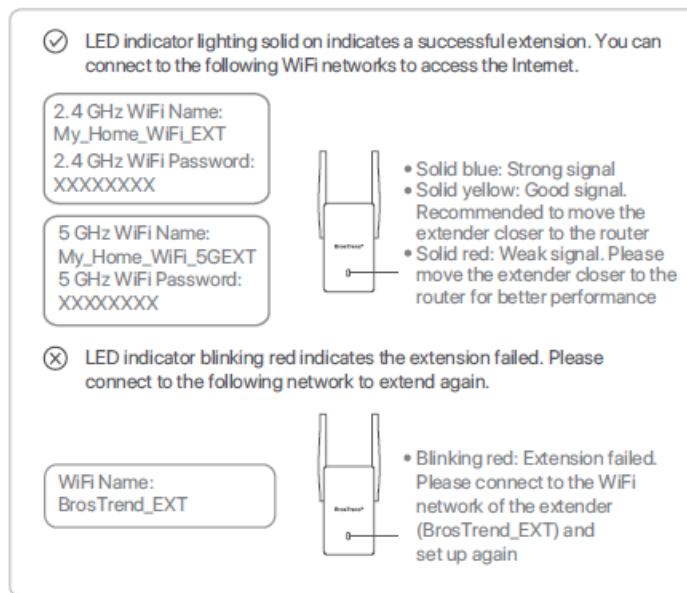

## Method 2: Set up via the WPS button

This method is applicable if your router has a WPS button. Otherwise, use Method 1.


1. Plug the extender into a power outlet in the same room as your existing router. Wait until the LED indicator blinks red.
2. Press the WPS button on your router.
3. Within 2 minutes, press the WPS button on the extender, and the LED indicator on the extender will start to blink blue fast.
4. Wait until the LED indicator turns solid, which indicates a successful connection with your router. When the WPS pairing finishes, for network security, please connect your wireless device to the newly extended WiFi and visit <http://brostrendwifi.com> on a browser to set up a web UI login password. Otherwise, the Web UI will be accessible to any devices connected to the extended WiFi.

- **Extended WiFi Names:**

Your existing router's network name with the suffix \_EXT or \_5GEXT

- **Passwords:**


The same as your existing router's WiFi passwords.

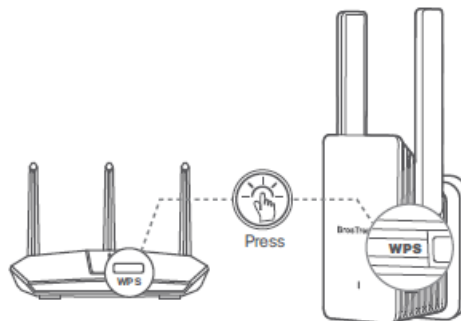

## 3. Relocate


Plug the extender into an electrical outlet halfway between your WiFi router and the WiFi dead zone.



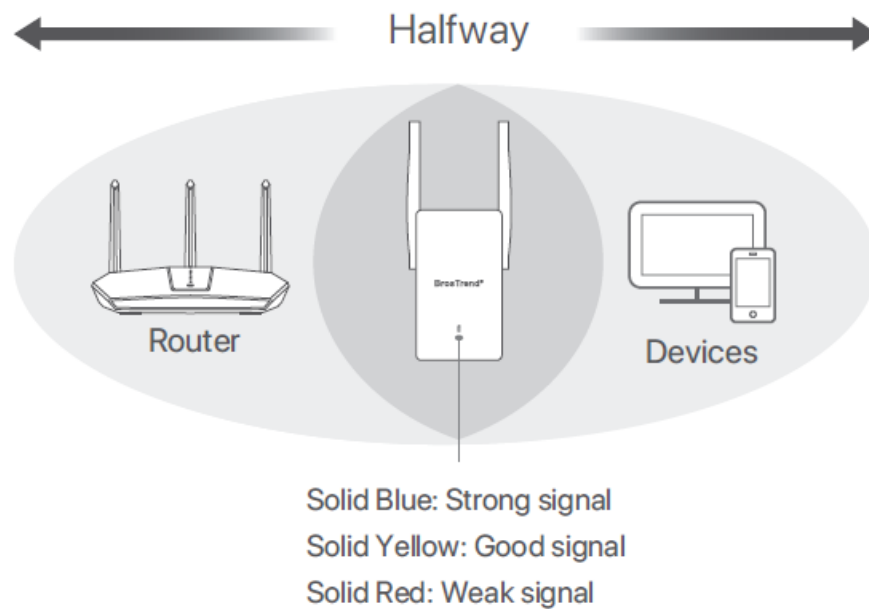


### Enjoy!

Connect your devices to the extender wirelessly, and enjoy your wireless Internet!

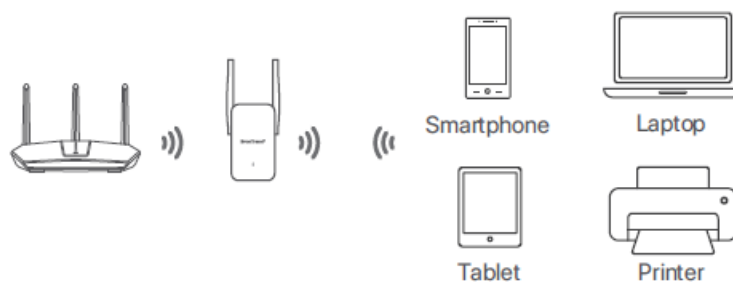

### Tips for Optimal Signal Quality

- Install the extender within the range of your WiFi router.
- Keep the extender away from working electrical appliances that may interfere with the WiFi signal such as microwave ovens, induction cookers, refrigerators, etc.

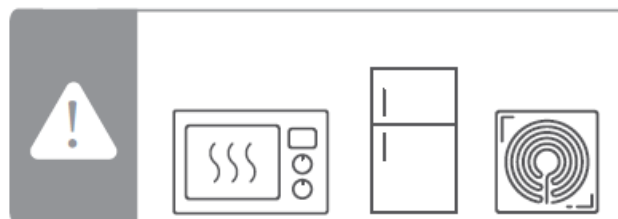

### FAQ

#### • Q1: I cannot log into the Web UI of the access point. What should I do?

**A1:** Please try the following methods:

- For initial setup, make sure your wireless device (e.g., smartphone) is connected to the access point's default network, BrosTrend\_EXT, and disable Mobile Data if enabled. If BrosTrend\_EXT does not appear in the WiFi list, please refer to Q4 to reset the access point to its factory default settings and then set it up again.
- If the access point has been set up successfully, make sure your wireless device is connected to the

access point's newly created network before logging into the web UI.

- Verify that <http://brostrendwifi.com> is correctly entered in your browser's address bar (NOT in the search box).
- Clear your browser cache and try again.
- If you are setting up using a wired device (e.g., a computer), make sure that your computer is set to Obtain an IP address automatically and Obtain DNS server address automatically.

• **Q2: What should I do if I forget my web UI login password?**

A2: Please refer to Q4 to reset the access point first. Then connect to the default WiFi network BrosTrend\_EXT and visit <http://brostrendwifi.com> on a web browser to create a new web UI login password. This time, it is recommended to note down your login password for future logins.

• **Q3: What should I do if I forget the WiFi passwords?**

A3: Please refer to Q4 to reset this access point first. Then, refer to the instructions in Working Mode 1 or Working Mode 2 to set up this access point again and create your new passwords. This time, it is recommended to note down your WiFi passwords.

• **Q4: How to reset the access point to its factory default settings?**

A4: Plug the access point into a power outlet and wait for 1 minute until it fully powers on, then press the RESET button on the right side of the access point using a needle-like object. The LED indicator will blink fast in yellow at first, then after 1 minute, it will blink slowly in red, indicating a successful reset.

If you need any assistance, please send an email to [support@brostrend.com](mailto:support@brostrend.com) together with your online order number. We will reply to you within 24 hours.

- **Manufacturer:** BrosTrend Technology LLC
- **Address:** 8 The Green, Suite A, Dover City, DE, U.S.A., Zip code 19901
- **Website:** [www.brostrend.com](http://www.brostrend.com)
- **Telephone:** +86-17796126768
- **Email address:** [support@brostrend.com](mailto:support@brostrend.com).

**For EU/EFTA, this product can be used in the following countries:**

	BE	BG	CZ	DK	DE	EE	IE	EL	ES	FR	HR	IT	CY	LV
	LT	LU	HU	MT	NL	AT	PL	PT	RO	SI	SK	FI	SE	UK(NI)

**Authorized European Representative Information**

- **Name:** Apex CE Specialists GmbH
- **Address:** Ravalzhauser str.31a 63543 Neuberg Germany
- **Contact:** Wells
- **Telephone No.:** +353212066339
- **E-Mail:** [info@apex-ce.com](mailto:info@apex-ce.com)

**Authorized U.K. Representative Information**

- **Name:** APEX CE SPECIALISTS LIMITED

- **Address:** 89 Princess Street, Manchester, M1 4HT, UK
- **Contact:** Wells
- **Telephone No.:** 00441616371080
- **E-Mail:** [info@apex-ce.com](mailto:info@apex-ce.com).

## **Note on environmental protection**

After the implementation of the European Directive 2012/19/EU and 2006/66/EU in the national legal system, the following applies: Electric and electronic devices as well as batteries must not be disposed of with household waste. Consumers are obliged by law to return electrical and electronic devices as well as batteries at the end of their service lives to the public collecting points set up for this purpose or point of sale. Details of this are defined by the national law of the respective country. This symbol on the product, the instruction manual, or the package indicates that a product is subject to these regulations. By recycling, reusing the materials, or other forms of utilizing old devices/Batteries, you are making an important contribution to protecting our environment.

## **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used by the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device is restricted to be used indoors. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

## **Radiation Exposure Statement**

- This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules.
- This equipment should be installed and operated with a minimum distance of 20cm between the device and your body.

## **Caution:**

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

**NOTE:**

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

**CE Mark Warning**

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures. Operations in the 5.15-5.25GHz band are restricted to indoor use only. This equipment should be installed and operated with a minimum distance of 20cm between the device and your body. The mains plug is used as a disconnect device, the disconnect device shall remain readily operable. For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use.

**NOTE:**

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

**Declaration of Conformity**

Hereby, BrosTrend Technology LLC declares that the radio equipment type A3 is in compliance with Directive 2014/53/EU and 2014/30/EU. The full text of the EU Declaration of Conformity is available at the following Internet address: <https://brostrend.me/regulatory>.

- **Operating Frequency:**
  - 2.4GHz: EU/2412-2472 MHz (CH1-CH13)
  - 5GHz: 5180-5825 MHz (CH36-CH165)
- **EIRP Power (Max.):**
  - **2.4GHz:** < 20dBm
  - **5GHz:** < 21dBm
- **Software Version:** V16.03.19.06\_multi

**IC RSS warning****Industry Canada(RSS-Gen Issue 4)**

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

**Operation is subject to the following two conditions:**

1. This device may not cause interference; and
2. This device must accept any interference, including interference that may cause undesired operation of the device.


**IC Radiation Exposure Statement:**

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This

equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

- **Operating Temperature:** 0°C – 40°C
- **Operating Humidity:** (10% – 90%) RH, non-condensing

Producto	NOMBRE DEL PRODUCTO: Punto de acceso inalámbrico MODELO: A3	
Alimentador de Energía: Alimentación: Salida:		
PAIS DE ORIGEN: CHINA		

### GNU General Public License Notice

This product includes software code developed by third parties, including software code subject to the GNU General Public License ( "GPL" ). For GPL inquiries, please contact us at [support@brostrend.com](mailto:support@brostrend.com) or 8 The Green, Suite A, Dover City, DE, U.S.A., Zip code 19901. Additionally, BrosTrend provides for a GPL-Code-Center under <https://brostrend.me/gpl> where machine-readable copies of the GPL source codes used in BrosTrend products are available for free to download. Please note, that the GPL-Code-Center is only provided as a courtesy to BrosTrend's customers but may neither offer a full set of source codes used in all products nor always provide for the latest or actual version of such source codes.

The GPL Code used in these products is distributed WITHOUT ANY WARRANTY and is subject to the copyrights of one or more authors.

Please refer to the following GNU Public License for further information.

### GNU GENERAL PUBLIC LICENSE

#### Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

#### Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, and that you can change the software or use pieces of it in new free programs; and that you know you can do these things. To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions

translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

### **We protect your rights with two steps:**

1. copyright the software, and
2. offer you this license which gives you legal permission to copy, distribute, and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution, and modification follow.

## **TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION**

**0.** This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution, and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.
2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
  - You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
  - You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms

of this License.

- If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)
  - These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to every part regardless of who wrote it.
  - Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.
  - In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- Accompany it with the information you received as to the offer to distribute the corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, by Subsection b above.)
  - The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control the compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.
  - If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this

License. Any attempt otherwise to copy, modify, sublicense, or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing, or modifying the Program or works based on it.
6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute, or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement, or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program. If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest the validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.
8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version but may differ in detail to address new problems or concerns.  
  
Each version is given a distinguishing version number. If the Program specifies a version number of this License that applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.
10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are



different, write to the author to ask for permission. For software that is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and promoting the sharing and reuse of software generally.

### **NO WARRANTY**

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

### **How to Apply These Terms to Your New Programs**

- If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software that everyone can redistribute and change under these terms.
- To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty, and each file should have at least the "copyright" line and a pointer to where the full notice is found.
- one line to give the program's name and an idea of what it does. Copyright (C) yyyy name of author
- This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.
- This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.
- You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.


Also, add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:  
Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

- The hypothetical commands `show w` and `show c` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w` and `show c`; they could even be mouse-clicks or menu items—whatever suits your program.
- You should also get your employer (if you work as a programmer) or your school, if any, to sign a “copyright disclaimer” for the program, if necessary. Here is a sample; alter the names:
  - Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.
  - signature of Ty Coon, 1 April 1989 Ty Coon, President of Vice.

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

## Documents / Resources

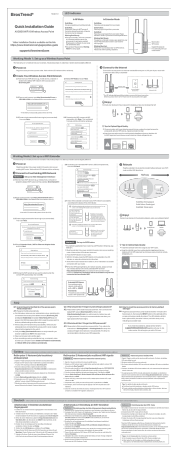	<p><a href="#">BrosTrend AX3000 WiFi 6 Access Point</a> [pdf] Installation Guide          AX3000, AX3000 WiFi 6 Access Point, WiFi 6 Access Point, Access Point, Point</p>
--	--

## References

- [brostrendwifi.com](https://brostrendwifi.com)
- [ce.com](https://ce.com)
- **B** [Reliable Networking For You – BrosTrend Direct](#)
- **B** [Video Guide – BrosTrend Direct](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.